MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

Wayne Dalton a Div. of Overhead Door Corporation
3395 Addison Drive
Pensacola, FL 32514

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas, where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Models 8600/8650/5150/5200/TM515/TM525 Insulated Steel Sectional Garage Door up to 16ft.-2in. Wide with Optional Impact Resistant Glazing

APPROVAL DOCUMENT: Drawing No. **D-363475**, titled "Windload Models 8600/ 8650/ 5150/ 5200/ TM515/ TM525, +46/–52 PSF Dade County, 16'2" Max. Width", sheets 1 through 4 of 4, dated 08/28/2018, with revision **B** dated 07/15/2021, prepared by Wayne Dalton a Div. of Overhead Door Corporation, signed and sealed by Dwayne J. Kornish, P.E. on 09/03/2024, bearing the Miami-Dade County Product Control Revision stamp with the NOA number and the expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large & Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, manufacturing address, model/ series number, the positive and negative design pressure rating, indicate impact rated if applicable, installation instruction drawing reference number, approval number (NOA), the applicable test standards, and the statement reading 'Miami-Dade County Product Control Approved' is to be located on the door's sidetrack, bottom angle, or inner surface of a panel.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA # 24-0814.03** and consists of this page 1, evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**

MIAMI-DADE COUNTY APPROVED

10/15/2026

NOA-No: 26-0820.21
Expiration Date: October 10, 2029
Approval Date: October 29, 2026

Wayne Dalton a Div. of Overhead Door Corporation

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER NOA # 19-0815.07

A. DRAWINGS

1. Drawing No. **D-363475**, titled "Windload Models 4600 / 4650 / 6600 / 8300 / 8500 / 8650 / 5150 / 5200 / TM515 / TM525, +46/−52 PSF Dade County, 16'2" Max. Width", sheets 1 through 4 of 4, dated 08/28/2018, prepared by Wayne Dalton a Div. of Overhead Door Corporation, signed and sealed by Dwayne J. Kornish, P.E. on 09/24/2019.

B. TESTS

1. Test reports on 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
4) Forced Entry Test, per FBC, TAS 202-94
5) Tensile Test per ASTM E8

along with marked-up drawings of a 16'-2" Wide, 8300 Series Sectional Garage Doors, prepared by Intertek, Test Report No. **J1626.02-801-18-R0**, dated 06/24/2019, signed and sealed by Tyler Westerling, P.E.

2. Test report on Standard Test Method for Evaluation of Painted of Coated Specimens Subjected to Corrosive Environments per ASTM D1654-08(2016)-e1 and Standard Practice for Operating Salt Spray (Fog) Apparatus per ASTM B117-16 and on garage door exterior steel, prepared by Intertek, Report No. **J4650.01-106-18 R0**, dated 05/24/2019, signed by Gary T. Hartman, P.E.

C. CALCULATIONS

1. Anchorage verification calculations prepared by Overhead Door Corp., dated 06/07/2019, signed and sealed by Dwayne J. Kornish, P.E.

D. MATERIAL CERTIFICATIONS

1. Test report on Ignition Temperatures of Plastic per ASTM D1929-16 on BASF Corp. Elastopor P19670R polyurethane foam insulation, prepared by QAI Laboratories, Inc., Test Report No. **RJ6431F-1**, dated 09/28/2018, signed by Bryan Ortega.

2. Test report on Surface Burning Characteristics of Building Materials per ASTM E84-18b on BASF Corp. Elastopor P19670R polyurethane foam insulation, prepared by QAI Laboratories, Inc., Test Report No. **RJ6648F-4**, dated 12/12/2018, signed by Bryan Ortega.

3. Notice of Acceptance No. **18-0918.06,** issued to Plaskolite, LLC, for their TUFFAK Polycarbonate Sheets, approved on 11/15/2018 and expiring on 08/27/2022.

E. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

F. STATEMENTS

1. Statement letter of code conformance to the **6th edition (2017) FBC** issued by Overhead Door Corporation, dated 05/24/2019, signed and sealed by Dwayne J. Kornish, P.E.

2. No financial interest letter issued by Overhead Door Corporation, dated 08/07/2019, signed and sealed by Dwayne J. Kornish, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA-No: 26-0820.21
Expiration Date: October 10, 2029
Approval Date: October 29, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL NOA #20-1106.16

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Test report on flame spread and smoke developed of BASF polyurethane foam per ASTM E84, Test Report # RJ7233F-1, dated 10/14/2019, prepared by QAI Laboratories, Inc. and signed by Brian Ortega.

2. Test report on ignition temperature of BASF polyurethane foam per ASTM D1929, Test Report # 10399361SAT-4, dated 10/14/2019, prepared by Intertek Building & Construction (B&C), signed by Servando Romo.

F. STATEMENTS

1. Statement letter of code conformance to the 7th edition (2020) FBC, issued by Wayne Dalton a Div. of Overhead Door Corporation, dated 01/21/2021, signed and sealed by Dwayne J. Kornish P.E.



NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. EVIDENCE SUBMITTED UNDER NOA # 23-1120.10, 24-0814.03 AND NEW

A. DRAWINGS

1. Drawing No. **D-363475**, titled "Windload Models 8600/8650/5150/5200/TM515/ TM525, +46/–52 PSF Dade County, 16'2" Max. Width", sheets 1 through 4 of 4, dated 08/28/2018, with revision **B** dated 07/15/2021, prepared by Wayne Dalton a Div. of Overhead Door Corporation, signed and sealed by Dwayne J. Kornish, P.E. on 09/03/2024.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **24-0205.09** issued to **Plaskolite, LLC** for their "**TUFFAK Polycarbonate Sheets**" dated 05/09/2024 expiring on 08/27/27.

F. STATEMENTS

1. Statement letter of code conformance to the 9th edition (2026) of the FBC, including special limitation note that anchors in saltwater environment must meet corrosion resistance requirements of FBC, Chapter 17, issued by Overhead Door Corporation, dated 09/09/2026, signed and sealed by Dwayne J. Kornish, P.E.

2. Statement letter of code conformance with the 8th edition (2023) of the FBC, issued by Wayne Dalton a Div. of Overhead Door Corporation, dated 08/29/2024, signed and sealed by Dwayne J. Kornish, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA-No: 26-0820.21
Expiration Date: October 10, 2029
Approval Date: October 29, 2026


The following pages in this document were submitted by the manufacturer (third party) to represent the product being approved and establish the limits of use. The pages may include technical drawings, schematics and installation details.

NOTES: (UNLESS OTHERWISE SPECIFIED)

THE DOORS ARE DESIGNED AND MANUFACTURED TO COMPLY WITH THE 2023 FBC.

1. RATED DESIGN LOAD +46/-52 PSF.
2. SECTION HEIGHTS MAY VARY TO CREATE VARIOUS DOOR HEIGHTS, 24" MAXIMUM SECTION HEIGHT.
3. MINIMUM 1" OVERLAP ON BOTH JAMBS REQUIRED TO MEET NEGATIVE DESIGN PRESSURES.
4. TESTED IN ACCORDANCE WITH DADE COUNTY PROTOCOLS TAS 201-94, TAS 202-94, & TAS 203-94.
5. DOOR SKIN MUST BE 30,000 PSI MIN. YIELD STRENGTH.
6. JAMB LOAD CALCULATIONS:
   (1/2 DOOR WIDTH)X(1 FT OF HEIGHT)X(DESIGN PRESSURE)
   (8.08)X(1 FOOT)X(46.00 AND -52.00)X(371.68/-420.16) LB
7. JAMB FASTENER REQUIREMENTS:
   F_X =(1/2 DOOR WIDTH)X(1 FT OF HEIGHT)X(DESIGN PRESSURE)
   F_X =371 LBS.
8. DOOR SKIN MATERIAL SHALL BE GALVANIZED ACCORDING TO ASTM A-525 TO G40 MIN, WITH BAKED-ON PRIMER, AND BAKED-ON POLYESTER PAINT TOP COAT.
9. FOR ANCHORING INTO WOOD,USE ONE 5/16" LAG SCREW PER TRACK BRACKET WITH 1-1/2" EMBEDMENT INTO SOUTHERN PINE (G=0.55) OR BETTER.
10. WELD SLOT ON ANGLE 3/32" X 1" LONG ON 12" CENTERS. "IF WELDING MOUNTING OPTION IS CHOSEN."
11. LIFT UP MECHANISM-MANUAL, CHAIN LIFT, OR OPERATOR IS NOT PART OF THIS APPROVAL.
12. STANDARD LIFT, HIGH LIFT, VERTICAL LIFT, AND LOW HEADROOM TRACK IS AVAILABLE. FOR LOW HEADROOM LIFT CONDITIONS TOP BRACKET SHALL BE 13 GA LHR 7/4 TOP BRACKET WITH A MIN OF (3) 1/4 - 14 X 7/8" SELF DRILLING CRIMPTITE SCREWS IN LIEU OF THE BRACKET SHOWN ON DRAWING. U-BAR ON TOP SECTION SHALL BE INSTALLED ON TOP OF LHR TOP BRACKETS.
13. ATTACH STRUTS WITH (2) 1/4-14x7/8" SELF DRILLING CRIMPTITE SCREWS AT ALL HINGE LOCATIONS AND (2) BETWEEN EACH INTERMEDIATE HINGE.
14. KEY LOCK, OR SIDE LOCK REQUIRED.
15. IMPACT RESISTANT GLAZING OPTION- IMPACT RESISTANT GLAZING SYSTEM MAY BE INSTALLED IN TOP OR INTERMEDIATE SECTIONS. GLAZING SHALL BE 1/4" POLYCARBONATE. FASTENED WITH # 8 X 1" SMS. SEE DETAIL F-F ON SHEET 2 FOR ASSEMBLY DETAILS. MAXIMUM OF ONE GLAZED SECTION.
16. THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.
17. A 2-1/4" X 6-3/8" X 22 GA BACKER PLATE IS TO BE LOCATED AT EVERY CENTER HINGE AND 3" X 3-3/4" X 22 GA BACKER PLATE AT EACH END HINGE LOCATION. EACH IS ADHERED TO THE INTERIOR OF THE SECTION BACKER STEEL.


REVISIONS				
ER	REV	DESCRIPTION	DATE	APVL
ER	P00	NEW DRAWING	8/28/18	ESC
32442	A	ADDED IRC/IBC NOTE	8/20/20	TLC
32661	B	UPDATED MODEL NUMBERS	7/15/21	TLC



SECTION B-B
SCALE 1 : 12

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 26-0820.21
Expiration Date 10/10/2029
By
Miami-Dade Product Control


PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 24-0814.03
Expiration Date 10/10/2029
By
Miami-Dade Product Control

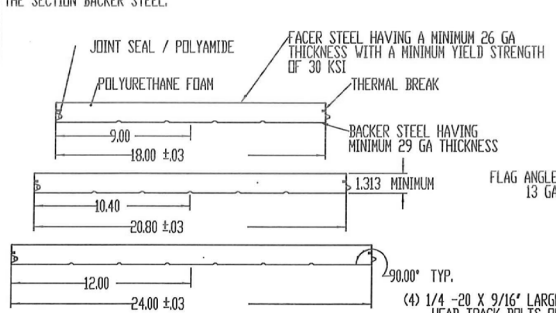


SECTION A-A
SCALE 1 : 4





SECTION A-A ENDCAP DETAIL

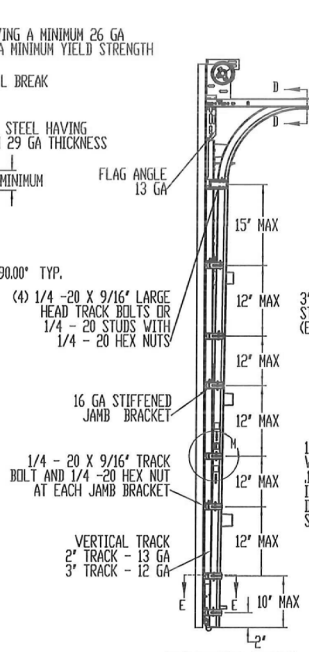

JAMB BRACKET SPACING



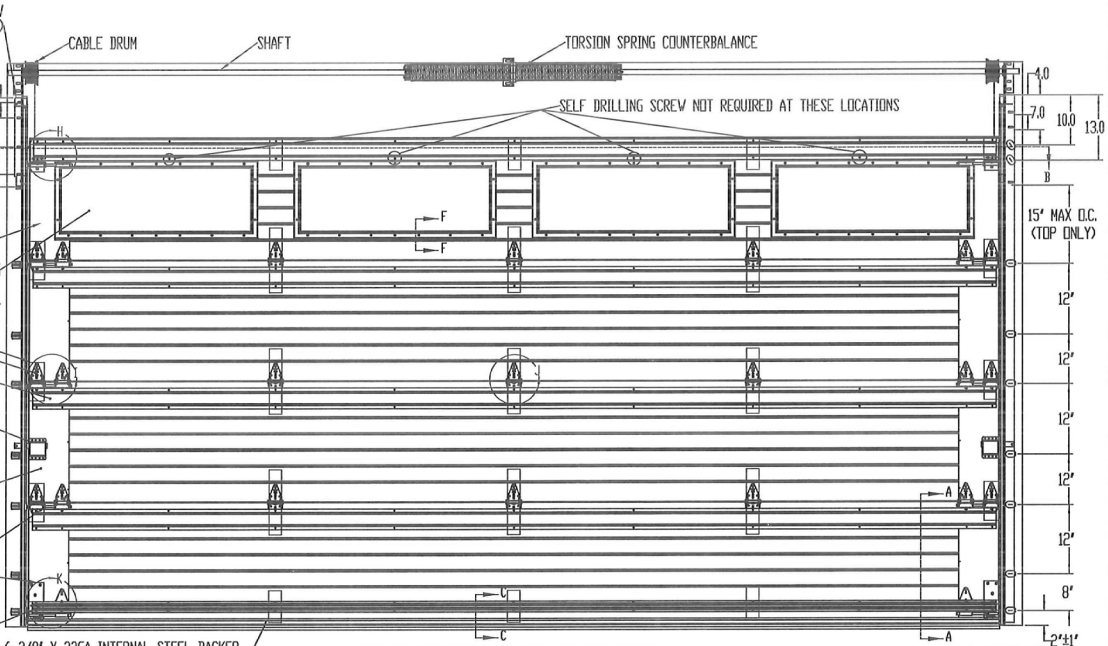

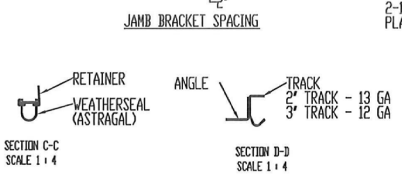

SECTION C-C
SCALE 1 : 4

SECTION D-D
SCALE 1 : 4

DWAYNE J KORNISH
LICENSE
No. 77945
STATE OF FLORIDA
PROFESSIONAL ENGINEER

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945 TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

THIRD ANGLE PROJECTION

A DIVISION OF OVERHEAD DOOR CORP
3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850)-474-9890

UNLESS OTHERWISE SPECIFIED

INTERPRET DIMS & TOLS PER ASME Y14.5M
ALL DIMS ARE IN INCHES
DO NOT SCALE
DIMS CIRCLED WITH SYMBOL ' <INSP-1BN> ' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.

TOLERANCES:
.X = ±.1
.XX = ±.03
.XXX = ±.010
ANGULAR = ±.5°
HOLES:
< Ø.251 = +.004/-.003
Ø.251-Ø.500 = +.006/-.003
> Ø.500 = +.008/-.003
ALL GEOMETRY GOVERNED BY 3D CAD DATABASE.

APPROVALS		DATE
DRAWN	E. CONRAD	8/28/18
CHECKED	D. KORNISH	-
APPROVED	-	-
MATERIAL	-	
FINISH	-	

WINDLOAD SPECIFICATION OPTION CODE 2341


Wayne Dalton GARAGE DOORS
PENSACOLA, FLORIDA

DESCRIPTION
WINDLOAD MODELS 6600/8300/8350/8500 8600/8650/5150/5200/TM515/TM525, +46/-52PSF DADE COUNTY, 16'2" MAX WIDTH


SIZE	DWG NO.	REV
D	D-363475	B

SCALE 1:12 | UOM = EA | SHEET 1 OF 4


ENG F28AM3-GTDR REV A0

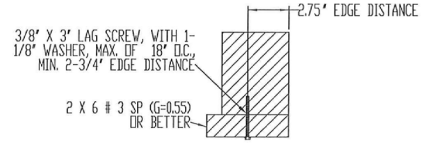


WOOD MOUNTED TO # 3 SOUTHERN PINE SUBSTRATE

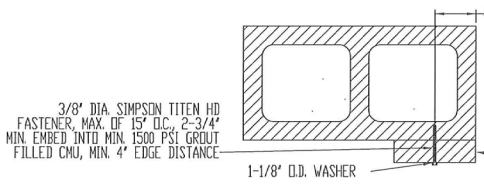

WOOD MOUNTED TO GROUT FILLED MASONRY BLOCK DETAIL

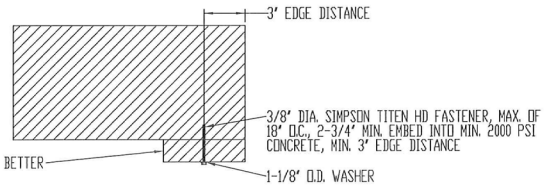


WOOD MOUNTED TO 2000 PSI CONCRETE DETAIL

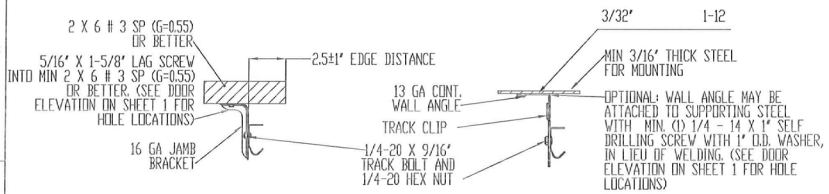


MOUNTING TO WOOD JAMB DETAIL

MOUNTING TO STEEL JAMB DETAIL

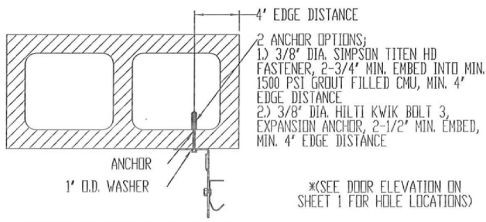


MOUNTING TO GROUT FILLED MASONRY BLOCK DETAIL

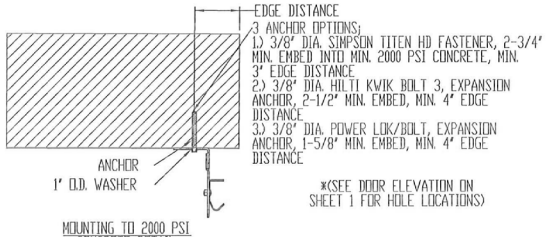


MOUNTING TO 2000 PSI CONCRETE DETAIL


SECTION E-E
SCALE 1 : 4

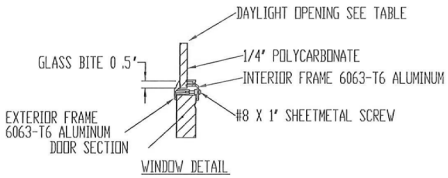

WINDOW DETAIL


SECTION F-F
SCALE 1 : 4

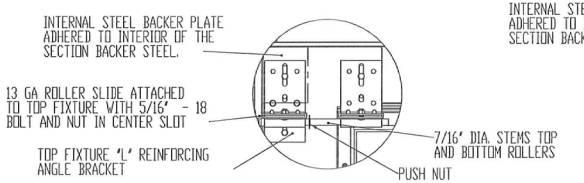

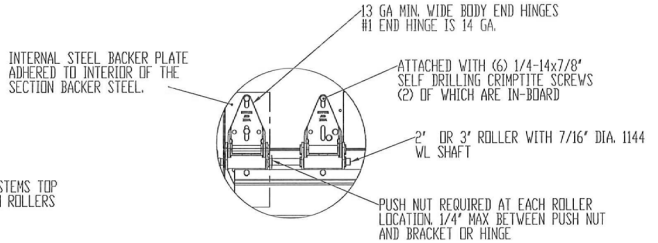


DETAIL I
SCALE 1 : 4

Impact Frame Size	Daylight Opening (DLO)	Screw Qty
15-1/4 x 19-1/8	11-1/8 x 15	10
16-7/8 x 19-7/8	12-3/4 x 15-3/4	10
16-7/8 x 42-1/8	12-3/4 x 37-7/8	14
15-1/4 x 44-1/2	11-1/4 x 40-1/8	14
12-3/4 x 40	8-5/8 x 35-7/8	14
13 x 38	8-7/8 x 33-7/8	14



DETAIL J
SCALE 1 : 4

DETAIL H
SCALE 1 : 4

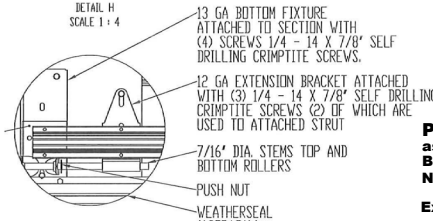

DETAIL K
SCALE 1 : 4

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 26-0820.21
Expiration Date 10/10/2029
By _____
Miami-Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 24-0814.03
Expiration Date 10/10/2029
By _____
Miami-Dade Product Control

DWAYNE J KORNISH
LICENSE
No. 77945
STATE OF FLORIDA
PROFESSIONAL ENGINEER

9/3/2024

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945 TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

THIRD ANGLE PROJECTION

A DIVISION OF OVERHEAD DOOR CORP
3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850)-474-9890

UNLESS OTHERVISE SPECIFIED

INTERPRET DIMS & TOLS PER ASME Y14.5M
ALL DIMS ARE IN INCHES
DO NOT SCALE
DIMS CIRCLED WITH SYMBOL ' (INSP-1BN) ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.

TOLERANCES:
.X = ±.1
.XX = ±.03
.XXX = ±.010
ANGULAR = ±.5°
HOLES:
< Ø.251 = +.004/-.003
Ø.251-Ø.500 = +.006/-.003
> Ø.500 = +.008/-.003
ALL GEOMETRY GOVERNED BY 3D CAD DATABASE:

APPROVALS		DATE
DRAWN	E. CONRAD	8/28/18
CHECKED	D. KORNISH	-
APPROVED	-	-
MATERIAL	-	
FINISH	-	

WINDLOAD SPECIFICATION OPTION CODE 2341

Wayne Dalton GARAGE DOORS — PENSACOLA, FLORIDA

DESCRIPTION
WINDLOAD MODELS 6600/8300/8350/8500 8600/8650/5150/5200/TM515/TM525, +46/-52PSF DADE COUNTY, 16'2" MAX WIDTH


SIZE	DWG NO.	REV
D	D-363475	B

SCALE 1:12 | UOM = EA | SHEET 2 OF 4


ENG F2084D-0FRM REV A9

NOTES: (UNLESS OTHERWISE SPECIFIED)


1.ONE 4' STRUT PER SECTION, AND ONE 3' STRUT PER BOTTOM SECTION, ATTACHED WITH 1/4-14X7/8" SELF DRILLING CRIMPTITE SCREWS.




TYPICAL TRACK AND JAMB FASTENERS DETAIL

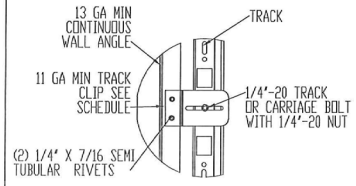

TYPICAL TRACK CLIP RIVETING DETAIL

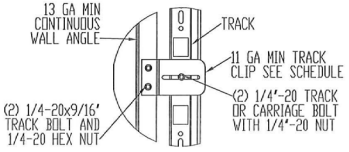


TYPICAL TRACK CLIP BOLTING DETAIL

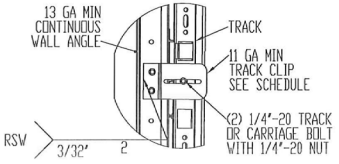

TYPICAL TRACK CLIP WELDING DETAIL


OPTIONAL WALL ANGLE TRACK

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 26-0820.21
Expiration Date 10/10/2029
By
Miami-Dade Product Control

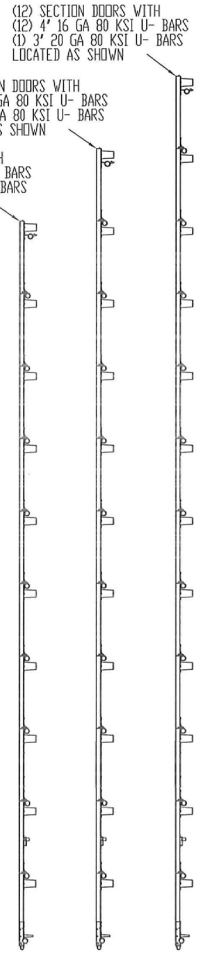


STRUT LOCATIONS SCALE 1:20

DETAIL M SCALE 1 : 4

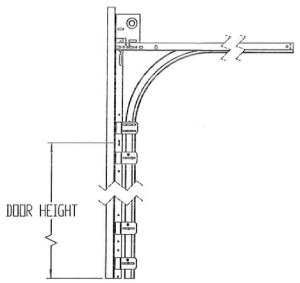


STANDARD LIFT TRACK DETAIL

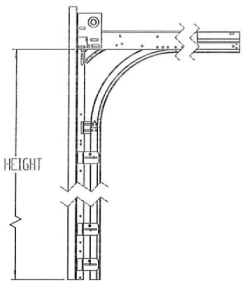

LOW HEADROOM TRACK DETAIL

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 24-0814.03
Expiration Date 10/10/2029
By
Miami-Dade Product Control



DETAIL N SCALE 1 : 4


4' STRUT OVERLAPPED ONTO HINGES, ATTACHED WITH (2) 1/4-14x7/8" SELF DRILLING CRIMPTITE SCREWS AT EACH HINGE LOCATION AND (2) BETWEEN EACH CENTER HINGE FOR EACH STRUT




DETAIL O SCALE 1 : 4

3' STRUT ATTACHED WITH (2) 1/4-14x7/8" SELF DRILLING CRIMPTITE SCREWS AT EACH HINGE LOCATION AND (2) BETWEEN EACH CENTER HINGE FOR EACH STRUT


TRACK DETAIL SCALE 1 : 12

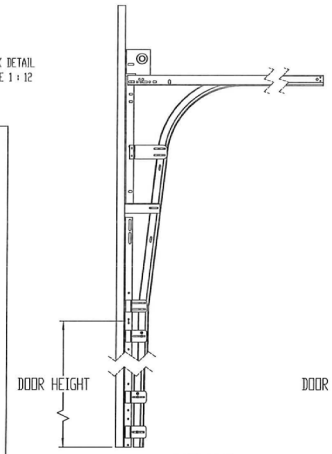

HIGH LIFT TRACK DETAIL

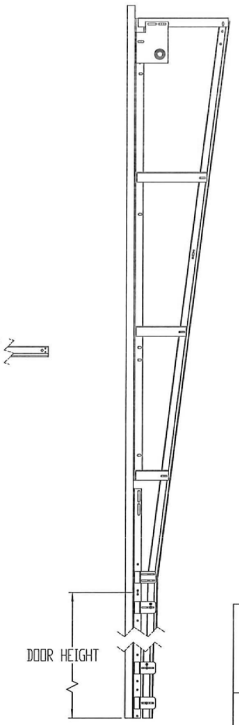

VERTICAL LIFT TRACK DETAIL

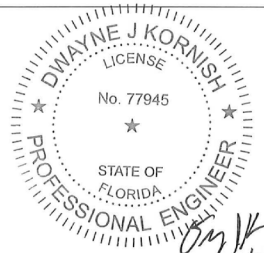

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945 TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

THIRD ANGLE PROJECTION

A DIVISION OF OVERHEAD DOOR CORP
3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850)-474-9890

UNLESS OTHERWISE SPECIFIED

INTERPRET DIMS & TOLS PER ASME Y14.5M

ALL DIMS ARE IN INCHES

DO NOT SCALE

DIMS CIRCLED WITH SYMBOL ' <INSP-IBN> ' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.

TOLERANCES:
X = ±.1
.XX = ±.03
.XXX = ±.010
ANGULAR = ±.5°

HOLES:
< Ø.251 = +.004/-.003
Ø.251-Ø.500 = +.006/-.003
> Ø.500 = +.008/-.003

ALL GEOMETRY GOVERNED BY 3D CAD DATABASE:

APPROVALS		DATE
DRAWN	E. CONRAD	8/28/18
CHECKED	D. KORNISH	-
APPROVED	-	-
MATERIAL	-	
FINISH	-	

WINDLOAD SPECIFICATION OPTION CODE 2341

Wayne Dalton GARAGE DOORS — PENSACOLA, FLORIDA

DESCRIPTION
WINDLOAD MODELS 6600/8300/8350/8500 8600/8650/5150/5200/TM515/TM525, +46/-52PSF DADE COUNTY, 16'2" MAX WIDTH

SIZE	DWG NO.	REV
D	D-363475	B

SCALE 1:12 | UOM = EA | SHEET 3 OF 4


ENG F20140D-0TORN REV A0

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. FOR DIMENSIONS AND NOTE REFERENCES, REFER TO INDIVIDUAL DRAWINGS.



TOP FIXTURE ASSY. | BASE, TOP FIXTURE 11 GA | 'L' REINFORCING ANGLE BRACKET 11 GA | ROLLER CARRIER 13 GA | LHR (7-4) 13 GA


TOP FIXTURE DETAILS

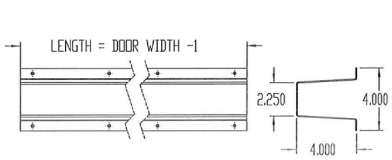

4" STRUT (UBAR)
80 KSI MIN. YIELD STRENGTH, 4" X 16 GA

3" STRUT OPEN WL (UBAR)
80 KSI MIN. YIELD STRENGTH, 3" X 20 GA


STRUT DETAILS

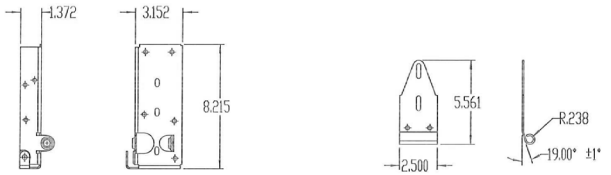

BOTTOM FIXTURE, BB-12
13 GA

BRACKET, TOP RES, LHR
12 GA


BOTTOM FIXTURE DETAILS

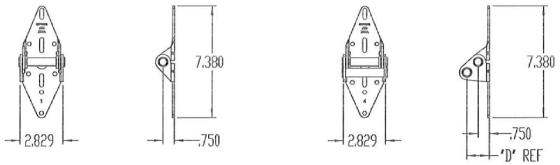

14 GA
#1 END HINGE / CENTER HINGE

13 GA
END HINGES

HINGE DETAILS

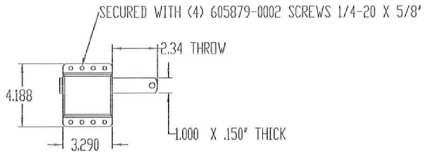


SIDE LOCK ASSY


LOCK DETAILS

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 26-0820.21
Expiration Date 10/10/2029
By _____
Miami-Dade Product Control


Ø.437

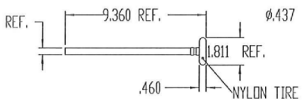

ROLLER ASSY. 2" WL 1144
(NYLON ROLLER)

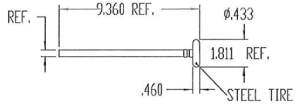


ROLLER ASSY. 2" WL 1144
(STEEL ROLLER)

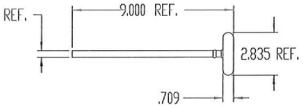


ROLLER ASSY. 3" WL 1144

ROLLER STEM ASSY DETAILS




JAMB BRACKET
16 GA

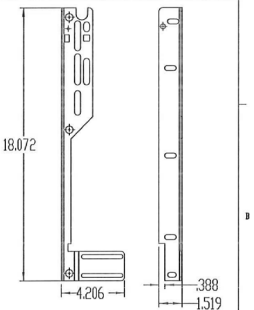

FLAG, ANGLE
13 GA

BRACKET DETAILS

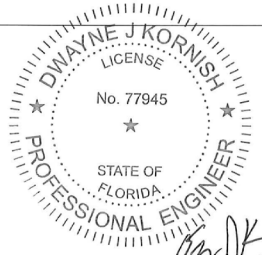

9/3/2024

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945 TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 24-0814.03
Expiration Date 10/10/2029
By _____
Miami-Dade Product Control

THIRD ANGLE PROJECTION

A DIVISION OF OVERHEAD DOOR CORP
3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850)-474-9890

UNLESS OTHERWISE SPECIFIED

INTERPRET DIMS & TOLS PER ASME Y14.5M
ALL DIMS ARE IN INCHES
DO NOT SCALE
DIMS CIRCLED WITH SYMBOL ' (INSP-1BN) ' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.

TOLERANCES:
.X = ± .1
.XX = ± .03
.XXX = ± .010
ANGULAR = ± .5°
HOLES:
(Ø.251 = +.004/-.003
Ø.251-Ø.500 = +.006/-.003
) Ø.500 = +.008/-.003
ALL GEOMETRY GOVERNED BY 3D CAD DATABASE:

APPROVALS		DATE
DRAWN	E. CONRAD	8/28/18
CHECKED	D. KORNISH	
APPROVED		
MATERIAL		
FINISH		

WINDLOAD SPECIFICATION OPTION CODE 2341

Wayne Dalton GARAGE DOORS — PENSACOLA, FLORIDA

DESCRIPTION
WINDLOAD MODELS 6600/8300/8350/8500
8600/8650/5150/5200/TM515/TM525, +46/-52PSF
DADE COUNTY, 16'2" MAX WIDTH

SIZE	DWG NO.	REV
D	D-363475	B

SCALE 1:12 | UOM = | SHEET 4 OF 4

DG F2104ID-GTDRN REV A0