MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

Clopay Corporation
8585 Duke Boulevard
Mason, OH 45040

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).
This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.
This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Full Vision W8 DP52 Aluminum Sectional Garage Door up to 9'-2" Wide with Impact Resistant Lites

APPROVAL DOCUMENT: Drawing No. **105611**, titled "M/N 904 9' Wide +52/-58 psf", sheets 1 through 4 of 4, dated 09/22/20, with revision No. **05** dated 09/26, prepared by manufacturer, signed and sealed by James D. Wheeler, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, manufacturing address, model number, the positive and negative design pressure rating, indicate impact rated if applicable, installation instruction drawing reference number, approval number (NOA), the applicable test standards, and the statement reading 'Miami-Dade County Product Control Approved' is to be located on the door's side track, bottom angle, or inner surface of a panel.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.
This NOA **revises and renews NOA No. 23-0928.60** and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.
The submitted documentation was reviewed by **Manuel Perez, P.E.**

MIAMI-DADE COUNTY APPROVED

9/22/26

NOA No. 26-0910.02
Expiration Date: September 30, 2031
Approval Date: October 01, 2026

Clopay Corporation

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

1. Manufacturer's die drawings and sections.
(Submitted under NOA No. 20-1005.01)

2. Drawing No. **105611**, titled "M/N 904 9' Wide +52/-58 psf", sheets 1 through 4 of 4, dated 09/22/20, with revision No. **04** dated 09/06/23, prepared by manufacturer, signed and sealed by Mark Westerfield, P.E.
(Submitted under NOA No. 23-0928.60)

B. TESTS

1. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
4) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94
5) Tensile Test per ASTM E8
along with marked-up drawings and installation diagram of 9'x 8', aluminum garage door Model 904W8 with windows, prepared by American Test Lab, Inc., Test Report No. **ATLNC 0606.01-22**, dated 06/13/22, signed and sealed by David W. Johnson, P.E.
(Submitted under NOA No. 22-0622.01)

2. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
4) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94
5) Tensile Test per ASTM E8
along with marked-up drawings and installation diagram of 9'2" x 8', aluminum garage door Model 904W8 with windows, prepared by American Test Lab, Inc., Test Report No. **ATLNC 0714.01-20**, dated 09/16/20, signed and sealed by David W. Johnson, P.E.
(Submitted under NOA No. 20-1005.01)

3. Addendum prepared by American Test Lab, Inc. to Test Report No. **ATLNC 0714.01-20,** dated 07/14/2021, signed and sealed by David W. Johnson, P.E.
(Submitted under NOA No. 20-1005.01)

4. Addendum 2 prepared by American Test Lab, Inc. to Test Report No. **ATLNC 0714.01-20,** dated 08/09/2021, signed and sealed by David W. Johnson, P.E.
(Submitted under NOA No. 20-1005.01).

5. Addendum 3 prepared by American Test Lab, Inc. to Test Report No. **ATLNC 0714.01-20,** dated 09/07/2021, signed and sealed by David W. Johnson, P.E.
(Submitted under NOA No. 20-1005.01).

Manuel Pérez, P.E.
Product Control Examiner
NOA No. 26-0910.02
Expiration Date: September 30, 2031
Approval Date: October 01, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

C. CALCULATIONS

1. Anchor load calculations prepared by manufacturer, dated 08/17/21, signed and sealed by Mark Westerfield, P.E.
(Submitted under NOA No. 20-1005.01)

2. Jamb anchor load calculations prepared by manufacturer, dated 09/03/20, signed and sealed by Mark Westerfield, P.E.
(Submitted under NOA No. 20-1005.01)

3. Glazing complies with **ASTM E1300-16**

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **20-0915.22** issued to Kuraray America, Inc. for their **Trosifol Ultraclear, Clear and Color PVB Glass Interlayers**, approved on 11/19/20, expiring on 07/08/24.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 7th Edition (2020)** and with **FBC 8th Edition (2023)**, dated September 15, 2023, issued by manufacturer, signed and sealed by Mark Westerfield, P.E.
(Submitted under NOA No. 23-0928.60)

2. Statement letter of independence and of no financial interest, dated September 15, 2023, issued by manufacturer, signed and sealed by Mark Westerfield, P.E.
(Submitted under NOA No. 23-0928.60)

G. OTHERS

1. Notice of Acceptance No. **22-0622.01**, issued to Clopay Corporation, for their Full Vision W8 DP52 Aluminum Sectional Garage Door up to 9'-2" Wide with Impact Resistant Lites, approved on 07/21/22 and expiring on 09/30/26.

Manuel Pérez, P.E.
Product Control Examiner
NOA No. 26-0910.02
Expiration Date: September 30, 2031
Approval Date: October 01, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **105611**, titled "M/N 904 9' Wide +52/-58 psf", sheets 1 through 4 of 4, dated 09/22/20, with revision No. **05** dated 09/26, prepared by manufacturer, signed and sealed by James D. Wheeler, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **26-0625.05** issued to **Kuraray America, Inc.** for their "**Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers**" dated 07/23/26, expiring on 07/08/29.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 9th Edition (2026)**, inclusive special limitation use of anchors for saltwater environment to comply with chapter 17; dated September 4, 2026, issued by manufacturer, signed and sealed by James D. Wheeler, P.E.

2. Statement letter of independence and of no financial interest, dated September 4, 2026, issued by manufacturer, signed and sealed by James D. Wheeler, P.E.

G. OTHERS

1. Notice of Acceptance No. **23-0928.60**, issued to Clopay Corporation, for their Full Vision W8 DP52 Aluminum Sectional Garage Door up to 9'-2" Wide with Impact Resistant Lites, approved on 12/21/23 and expiring on 09/30/26.

Manuel Pérez, P.E.
Product Control Examiner
NOA No. 26-0910.02
Expiration Date: September 30, 2031
Approval Date: October 01, 2026


The following pages in this document were submitted by the manufacturer (third party) to represent the product being approved and establish the limits of use. The pages may include technical drawings, schematics and installation details.

BRAND	MODEL
CLOPAY	904, 904U, AX, AXU
IDEAL	C4AL, C4ALU


NOTES:
1) THIS PRODUCT CONFORMS TO THE REQUIREMENTS OF 8TH AND 9TH EDITION OF THE FLORIDA BUILDING CODE (FBC).
2) FBC ANCHOR LIMITS OF USE & COMPLIANCE REQUIREMENT FOR PRODUCT INSTALLATIONS IN SALTWATER COASTAL AREAS:
WHEN THE PRODUCT SPECIFIED HERE-IN IS TO BE INSTALLED IN AREAS WITHIN 3000 FEET OF A SALTWATER COASTLINE, ALL FRAME ANCHORS SPECIFIED IN THIS APPROVAL UPLOAD INSTALLATION INSTRUCTION THAT ANCHORS WILL BE POTENTIALLY EXPOSED TO SALT AIR SHALL MEET THE SALTWATER ENVIRONMENT CORROSION RESISTANCE REQUIREMENTS OF FBC CHAPTER 17.

SHEET: 1 OF 4

REVISIONS					
REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
02		9/21		MWW	UPDATED DLO PER TEST ADDENDUM
03		4/22		MWW	SWITCH TO SNAP-IN BEAD, SB100 & 1-1/2" TEK SCREWS
04		6/24		JDW	UPDATED WINDOW RETAINERS AND SCREWS
05		9/26		JDW	REVISED FOR F.B.C. 9TH EDITION

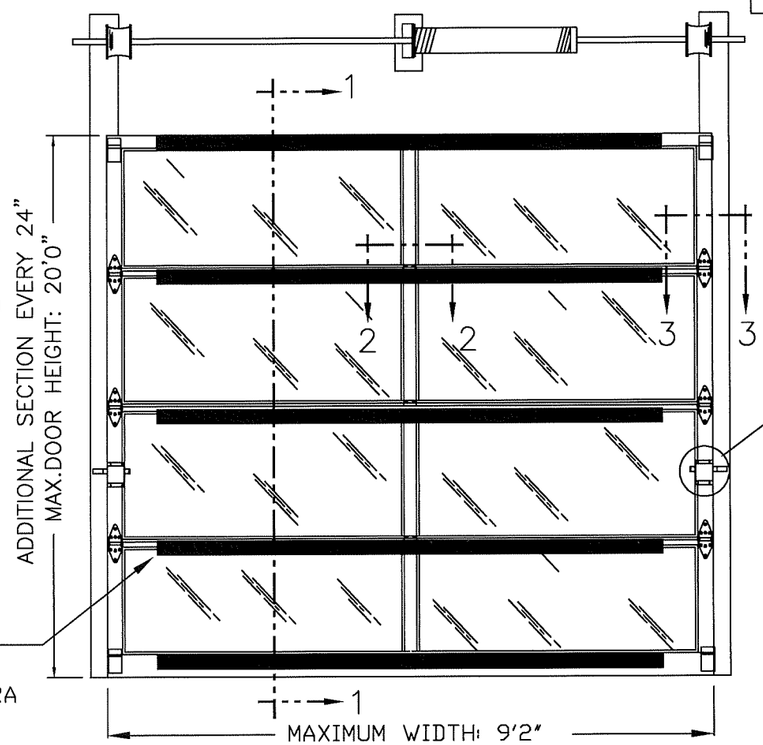


SECTION 2 - 2

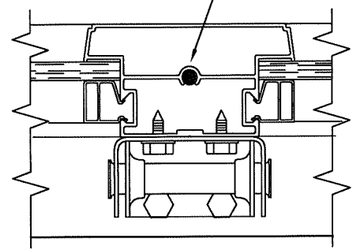


CENTER HINGES (SEE DETAILS ON PAGE 4) ATTACHED TO INTERM. BOTTOM RAIL WITH (2) #14x5/8" SMS AND TO FIN ON INTERM. TOP RAIL WITH (2) 1/4-20x1" HEX HEAD MACHINE SCREWS AND NUTS.

SECTIONS PER DOOR HEIGHT	
UP TO 6'0"	3
FROM 6'1" TO 8'0"	4
FROM 8'1" TO 10'0"	5
FROM 10'1" TO 12'0"	6
FROM 12'1" TO 14'0"	7
FROM 14'1" TO 16'0"	8
FROM 16'1" TO 18'0"	9
FROM 18'1" TO 20'0"	10

DOORS UP TO 4'8" SHALL HAVE (1) PANEL; DOORS 4'9" TO 9'2" SHALL HAVE AT LEAST (2) PANELS PER SECTION.

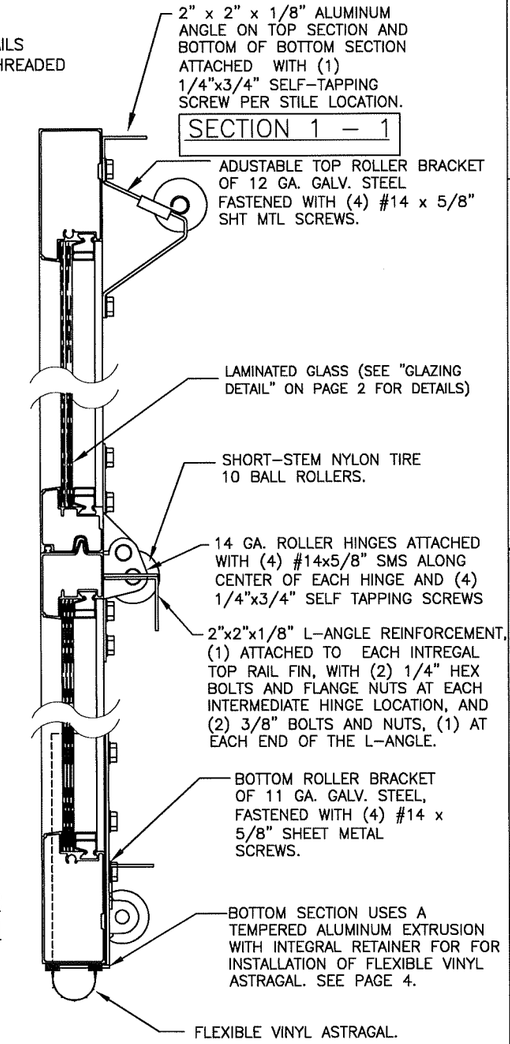


SECTION 3-3

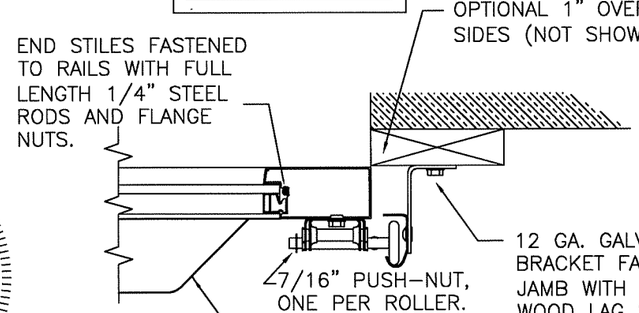

SEE PAGE 2 FOR DIFFERENT JAMB CONFIGURATIONS.

14 GAUGE ROLLER HINGE FASTENERS

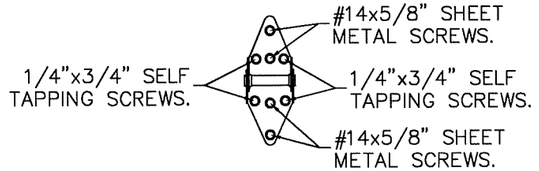

PRODUCT REVISED
As complying with the Florida Building Code
NOA-No. 26-0910.02
Expiration Date: 09/30/2031
By: Manuel Perez
Miami-Dade Product Control

JAMES D. WHEELER LICENSE No. 91932 STATE OF FLORIDA PROFESSIONAL ENGINEER

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA P.E. #91932
9/4/26


DESIGN LOADS: +52.0, -58.0 PSF

Clopay CORPORATION	8585 Duke Boulevard Mason, OH 45040 USA Tel. No. 513-770-4800 Fax No. 513-770-4853	CLOPAY WINDLOAD RATING W8	
DESCRIPTION: M/N 904 9' WIDE +52/-58 PSF			
DRAWN BY: SH	DATE: 9/22/20	SCALE:	DWG. SIZE B
CHECKED BY: MWW	DATE: 7/7/21	SHEET 1 OF 4	
DWG. NO.: 105611		VERSION: M-D	


BRAND	MODEL
CLOPAY	904, 904U, AX, AXU
IDEAL	C4AL, C4ALU

SHEET: 2 OF 4

REVISIONS					
REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
--	--	---	--	--	SEE PAGE 1 FOR REVISION DETAILS

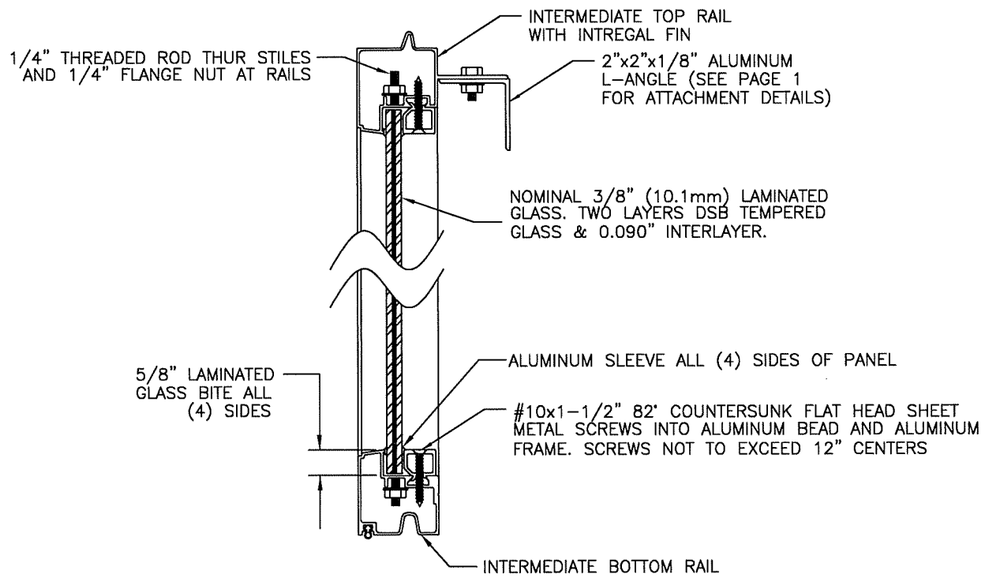

GLAZING DETAIL
INTERMEDIATE SECTION SHOWN

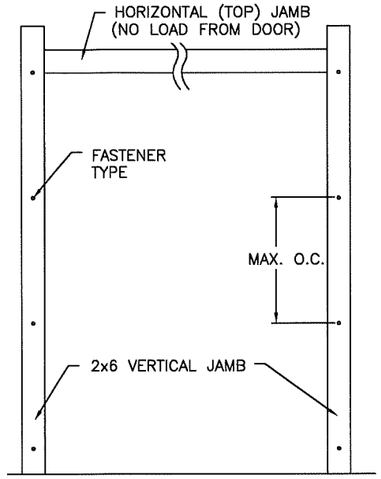

JAMB TO SUPPORTING STRUCTURE ATTACHMENT

NOTES:
1. ALL THE LOAD FROM THE DOOR IS TRANSFERRED TO THE TRACK AND THEN FROM THE TRACK TO THE 2x6 VERTICAL SYP (GRADE #2 OR BETTER) JAMBS. NO LOAD FROM THE DOOR IS TRANSFERRED TO THE HORIZONTAL (TOP) JAMB.
2. EACH VERTICAL JAMB SEES A MAXIMUM DESIGN LOAD OF +234 LB. PER LINEAR FOOT OF JAMB.
3. ALL JAMB FASTENERS MAY BE (BUT ARE NOT REQUIRED TO BE) COUNTERSUNK TO PROVIDE A FLUSH MOUNTING SURFACE.
4. A 1/3 STRESS INCREASE FOR WIND LOAD WAS NOT USED IN THE CALCULATION OF ALLOWABLE LOADS FOR ANCHORS AND FASTENERS FOR STEEL, CONCRETE AND MASONRY.

PREPARATION OF JAMBS BY OTHERS

NOTE: THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.

2x6 JAMB TO SUPPORTING STRUCTURE ATTACHMENT

(NOT TO BE USED FOR ATTACHMENT OF TRACK ANGLE TO 2x6 VERTICAL JAMBS OR SUPPORTING STRUCTURE)

BUILDING TYPE	FASTENER TYPE	MAXIMUM ON-CENTER DISTANCE BETWEEN FASTENERS*	STEEL WASHERS REQUIRED?
BLOCK WALL	1/4" x 1-1/4" EMBED ULTRACON CONCRETE ANCHOR	7"	NO
GROUT-FILLED BLOCK WALL	1/4" x 1-3/4" EMBED ULTRACON CONCRETE ANCHOR	11-3/4"	NO
2,846 PSI MIN. CONCRETE	1/4" x 1-3/4" EMBED ULTRACON CONCRETE ANCHOR	24"	NO
2,000 PSI MIN. CONCRETE	1/4" x 1-3/4" EMBED ULTRACON CONCRETE ANCHOR	22-1/2"	NO
2,500 PSI MIN. CONCRETE	3/8" x 1-3/4" EMBED ITW TRUBOLT WEDGE CONCRETE ANCHOR WITH SYP 0.55 SG	22-1/4"	1" O.D.
WOOD FRAME (SYP 0.55 SG)	1/2" x 1-1/2" EMBED LAG SCREW WITH 1-3/8" O.D. WASHER	24"	YES
14 GA MIN. STEEL JAMB	1/4" -14 ITW BUILDEX TEKS SELF-DRILLING FASTENER	12-1/4"	NO
12 GA MIN. STEEL JAMB	1/4" -14 ITW BUILDEX TEKS SELF-DRILLING FASTENER	17"	NO
1/8" MIN. STEEL JAMB	1/4" -14 ITW BUILDEX TEKS SELF-DRILLING FASTENER	20-1/4"	NO

NOTE: FOR DOORS WITH CONTINUOUS OR REVERSE ANGLE TRACK, THESE VALUES CAN BE USED TO DIRECTLY ATTACH THE TRACK TO THE WALL.

* FIRST (BOTTOM) ANCHOR STARTING AT NO MORE THAN HALF OF THE MAXIMUM ON-CENTER DISTANCE. HIGHEST ANCHOR INSTALLED AT LEAST AS HIGH AS THE DOOR OPENING.
CLOPAY DOES NOT SUPPLY JAMB ATTACHMENT FASTENERS.
MINIMUM DISTANCE BETWEEN CENTER OF ANCHOR AND EDGE OF CONCRETE BLOCK: 2-1/2"", EXCLUDING STUCCO THICKNESS.

JAMES D. WHEELER LICENSE No. 91932 STATE OF FLORIDA PROFESSIONAL ENGINEER

9/4/20

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA P.E. #91932

PRODUCT REVISED
As complying with the Florida Building Code
NOA-No. 26-0910.02
Expiration Date: 09/30/2031
By: Manuel Perez
Miami-Dade Product Control

Clopay CORPORATION	8585 Duke Boulevard Mason, OH 45040 USA Tel. No. 513-770-4800 Fax No. 513-770-4853	CLOPAY WINDLOAD RATING W8	
DESCRIPTION: M/N 904 9' WIDE +52/-58 PSF			
DRAWN BY: SH	DATE: 9/22/20	SCALE:	DWG. SIZE B
CHECKED BY: MWW	DATE: 7/7/21	SHEET 2 OF 4	
DWG. NO.: 105611		VERSION: M-D	


BRAND	MODEL
CLOPAY	904, 904U, AX, AXU
IDEAL	C4AL, C4ALU

SHEET: 3 OF 4

REVISIONS					
REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
--	--	--	--	--	SEE PAGE 1 FOR REVISION DETAILS


2" TRACK CONFIGURATION

NOTE: HORIZONTAL TRACK CONFIGURATION ABOVE THE DOOR OPENING DOES NOT AFFECT THE WIND LOAD RATING OF THIS DOOR.

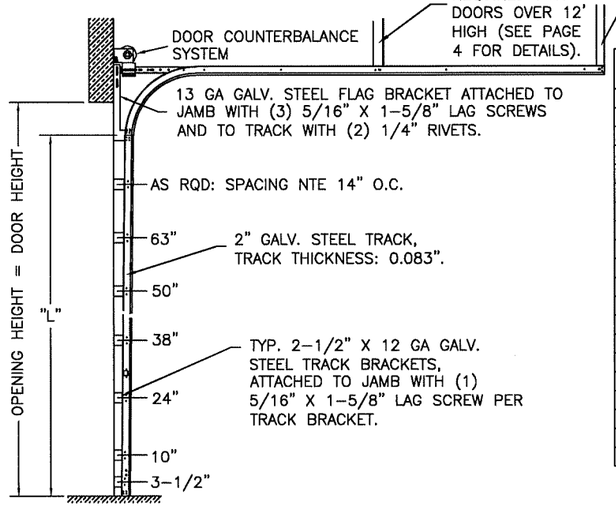

DOOR HEIGHT	"L"
6'-6"	70"
7'-0"	76"
7'-6"	82"
8'-0"	88"
8'-6"	94"
9'-0"	100"
9'-6"	106"
10'-0"	112"
10'-6"	118"
11'-0"	124"
11'-6"	130"
12'-0"	136"
12'-6"	142"
13'-0"	148"
13'-6"	154"
14'-0"	160"
14'-6"	166"
15'-0"	172"
15'-6"	178"
16'-0"	184"


JAMB CONFIGURATION DOORS WITH 2" TRACK.

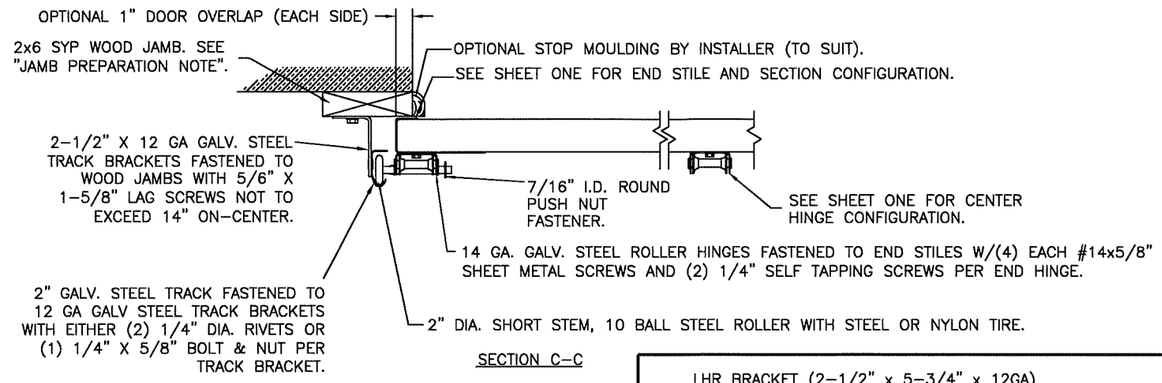

SECTION C-C

PREPARATION OF JAMBS BY OTHERS.


LHR BRACKET (2-1/2" x 5-3/4" x 12GA) ATTACHED WITH (2) 1/4" x 3/4" SELF TAPPING SCREWS. NOTE THAT LHR BRACKETS ARE ALSO USED WITH "DOUBLE END STILE" AS SHOWN IN ZONE B-3 SHEET 1.



DOUBLE TRACK
LOW HEADROOM OPTION
(AVAIL. FOR BOTH 2" AND 3" TRACK)

3" TRACK CONFIGURATION


NOTE: HORIZONTAL TRACK CONFIGURATION ABOVE THE DOOR OPENING DOES NOT AFFECT THE WIND LOAD RATING OF THIS DOOR.

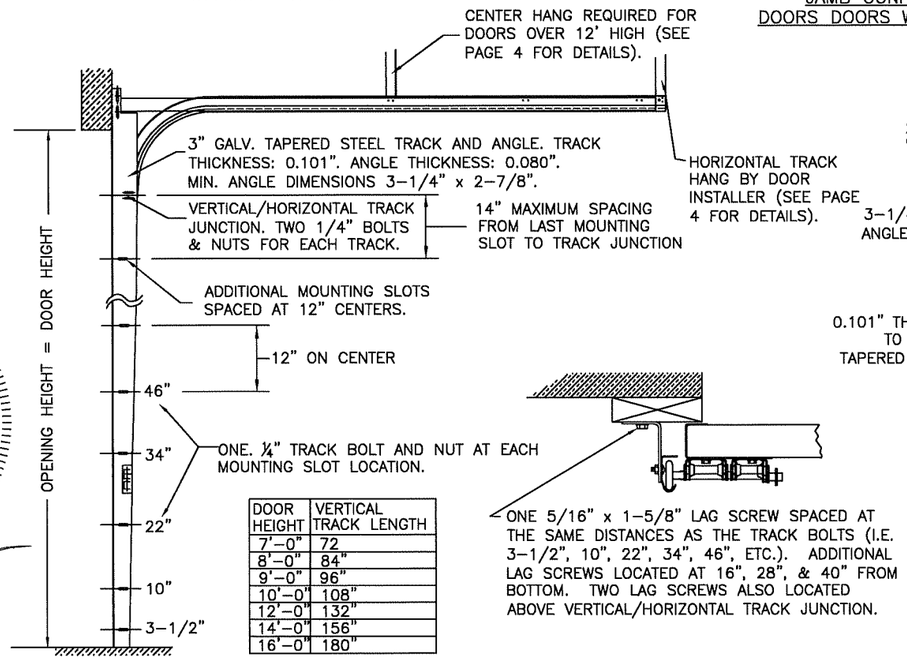

DOOR HEIGHT	VERTICAL TRACK LENGTH
7'-0"	72
8'-0"	84"
9'-0"	96"
10'-0"	108"
12'-0"	132"
14'-0"	156"
16'-0"	180"

ONE 5/16" x 1-5/8" LAG SCREW SPACED AT THE SAME DISTANCES AS THE TRACK BOLTS (I.E. 3-1/2", 10", 22", 34", 46", ETC.). ADDITIONAL LAG SCREWS LOCATED AT 16", 28", & 40" FROM BOTTOM. TWO LAG SCREWS ALSO LOCATED ABOVE VERTICAL/HORIZONTAL TRACK JUNCTION.

JAMB CONFIGURATION DOORS DOORS WITH 3" TRACK.

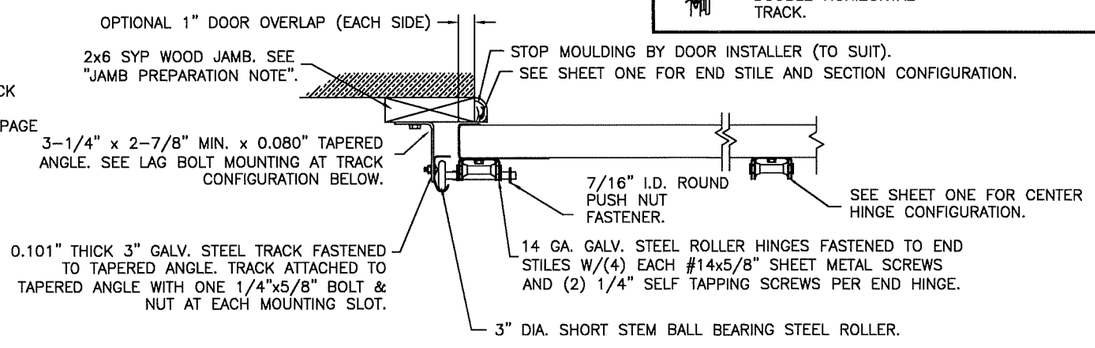

SECTION C-C

PREPARATION OF JAMBS BY OTHERS.

PRODUCT REVISED
As complying with the Florida Building Code
NOA-No. 26-0910.02
Expiration Date: 09/30/2031
By: Manuel Perez
Miami-Dade Product Control

JAMES D. WHEELER LICENSE No. 91932 STATE OF FLORIDA PROFESSIONAL ENGINEER

9/4/26

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA P.E. #91932

Clopay CORPORATION	8585 Duke Boulevard Mason, OH 45040 USA Tel. No. 513-770-4800 Fax No. 513-770-4853	CLOPAY WINDLOAD RATING W8	
DESCRIPTION: M/N 904 9' WIDE +52/-58 PSF			
DRAWN BY: SH	DATE: 9/22/20	SCALE:	DWG. SIZE B
CHECKED BY: MWW	DATE: 7/7/21	SHEET 3 OF 4	
DWG. NO.: 105611		VERSION: M-D	


BRAND	MODEL
CLOPAY	904, 904U, AX, AXU
IDEAL	C4AL, C4ALU

ALUMINUM PROFILES, HARDWARE & TRACK PARTS


SHEET: 4 OF 4

REVISIONS					
REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
--	--	---	--	--	SEE PAGE 1 FOR REVISION DETAILS


ALUMINUM PROFILES (6063-T5)

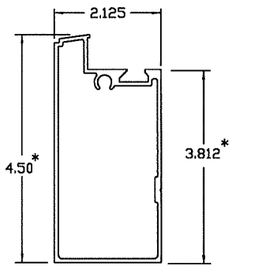


END STILE, BOTTOM & TOP RAIL
105008 – .075" WALL
* DOORS WITH 1" JAMB OVERLAP THESE END STILE DIMENSIONS ARE 1" LONGER (5.50 & 4.812)




INTER. BOTTOM RAIL
105014 – .062" WALL

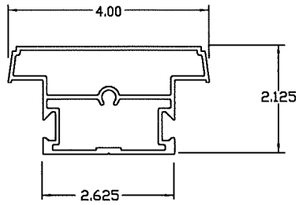


CENTER STILE
105011 – .075" WALL

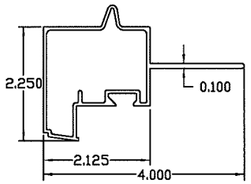


INTER. TOP RAIL W/FIN
105012 – .062" WALL




BOTTOM ASTRAGAL RETAINER
100624 – .050" WALL

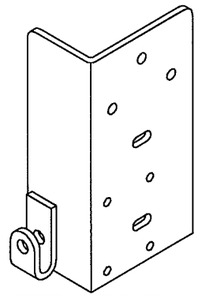


BOTTOM BRACKET
3-1/8" WIDE x 6" TALL x 1-7/8" DEEP
11 GA. GALV. STEEL (0.114" THICK)




BOTTOM BRACKET ROLLER CARRIER
2-5/16" WIDE x 2-1/2" TALL
12 GA. GALV. STEEL (0.097" THICK)

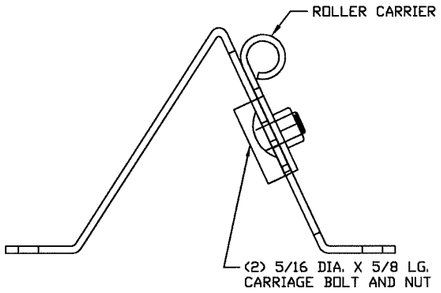


TOP ROLLER BRACKET
5-3/8" LONG x 3-1/8" TALL x 2-3/4" WIDE
MAIN PART: 12 GA. GALV STEEL (0.099")
ROLLER CARRIER: 13 GA. GALV STEEL (0.085")

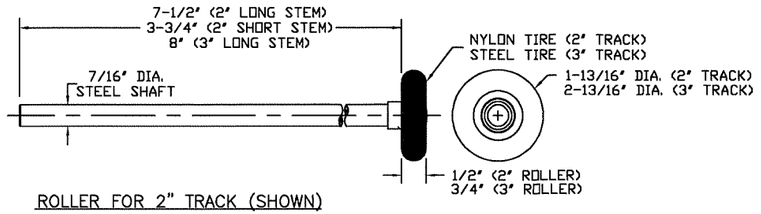


ROLLER FOR 2" TRACK (SHOWN)
ROLLER FOR 3" TRACK FOR DOORS OVER 800 LB.
OR OPTIONAL FOR DOORS LESS THAN 800 LB.

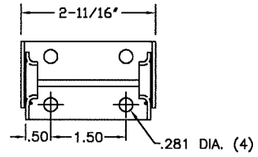


2-LEAF CENTER HINGE
14 GA. GALV. STEEL

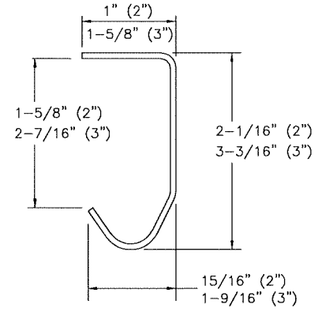


TRACK (2" AND 3")
0.075" OR 0.083" GALV. STEEL (2")
0.101" GALV. STEEL (3")

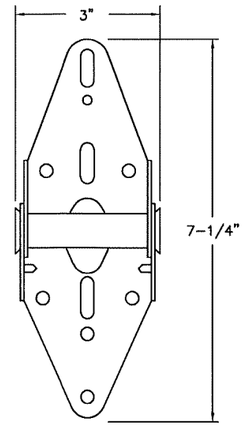


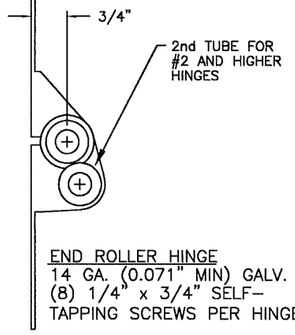

END ROLLER HINGE
14 GA. (0.071" MIN) GALV. STEEL
(8) 1/4" x 3/4" SELF-TAPPING SCREWS PER HINGE

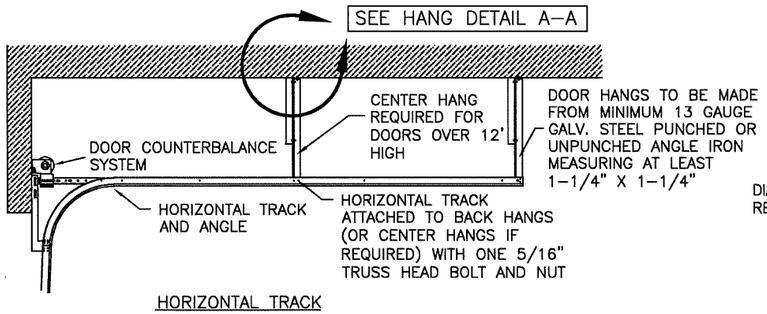


HORIZONTAL TRACK
STANDARD LIFT TRACK SHOWN.
LOW HEADROOM, HIGH LIFT AND VERTICAL LIFT TRACK ALSO AVAILABLE.

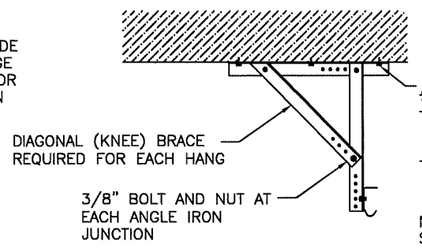


NOTE: SCREW EMBEDMENT TO EXCLUDE STUCCO OR FALSE CEILINGS.

HANG DETAIL A-A
HANGS CAN BE MOVED TO MATCH CEILING STRUCTURE

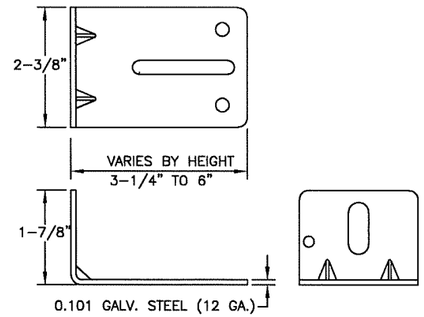

TRACK BRACKETS
ATTACHED TO VERTICAL TRACKS

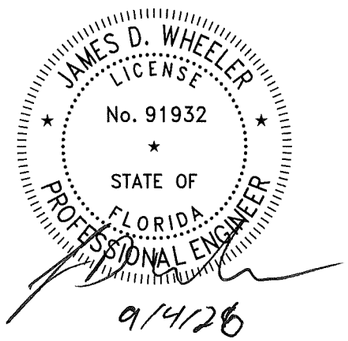

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA P.E. #91932

PRODUCT REVISED
As complying with the Florida Building Code
NOA-No. 26-0910.02
Expiration Date: 09/30/2031
By: Manuel Perez
Miami-Dade Product Control

Clopay CORPORATION
8585 Duke Boulevard
Mason, OH 45040 USA
Tel. No. 513-770-4800
Fax No. 513-770-4853

CLOPAY WINDLOAD RATING W8

DESCRIPTION: M/N 904 9' WIDE +52/-58 PSF			
DRAWN BY: SH	DATE: 9/22/20	SCALE:	DWG. SIZE B
CHECKED BY: MWW	DATE: 7/7/21	SHEET 4 OF 4	
DWG. NO.: 105611		VERSION: M-D	