



BUILDING AND NEIGHBORHOOD COMPLIANCE DEPARTMENT (BNC)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/building/

NOTICE OF ACCEPTANCE (NOA)

Guardian Building Products Distribution, Inc.
979 Batesville Rd.
Greer, SC. 29651

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County BNC - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BNC reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Guard Vent Ridge Roll (with and without Filter)

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of pages 1 through 5.
The submitted documentation was reviewed by Alex Tigera.



NOA No.: 11-0207.06
Expiration Date: 08/04/16
Approval Date: 08/04/11
Page 1 of 5

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub-Category: Roof Ventilators
Materials: Plastic
Maximum Design Pressure N/A
Fire Classification: N/A

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Guardian Vent Ridge Roll	Length: 48" Width: 14"	TAS 100	Molded plastic low profile attic ridge vent with and without a filter, for installation in shingle roof systems.

MANUFACTURING LOCATION:

1. Covington, GA.

EVIDENCE SUBMITTED:

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
PRI Construction Materials Technologies	ASTM D 2843	GMLC-005-02-04	01/12/10
PRI Construction Materials Technologies	ASTM D 1929	GMLC-005-02-04	01/12/10
PRI Construction Materials Technologies	ASTM D 635	GMLC-005-02-04	01/12/10
PRI Construction Materials Technologies	ASTM G 155	GLMC-005-02-02	09/20/10
PRI Construction Materials Technologies	TAS 100(A)	GLMC-006-02-01	03/11/10



NOA No.: 11-0207.06
Expiration Date: 08/04/16
Approval Date: 08/04/11
Page 2 of 5

APPROVED APPLICATIONS:

Slot: For truss with no ridge poll construction - Cut a maximum 1-³/₄" slot along the apex of the roof by cutting ⁷/₈" on each side of the ridge. The slot shall terminate approximately 6" from the rake edge and 12" from and hip/ridge intersection.

For ridge poll construction - Cut a maximum 3-¹/₄" slot along the apex of the roof by cutting 1-⁵/₈" on each side of the ridge. The slot shall terminate approximately 6" from the rake edge and 12" from and hip/ridge intersection.

Installation: Align the GuardVent 1" from the gable end of the roof. Center the vent over the slot and conform the vent to the ridge, making sure the vent is in contact with the roof.

Fasten with 2-1/2" ring shank galvanized nails. Start by fastening at the end of the vent and work your way down, alternating sided. Nails shall be placed 1-1/2" from the end of the vent and centered 9" o.c. along the nail line (6 nails per side).

Apply the subsequent 4' sections of GuardVent by using the alignment tabs to help keep the vent centered. The alignment tabs should be under the end laps of each vent when they are put together.

If the end of the ridge vent has to be cut, use the molded end plug that are marked on the vent.

Ridge Shingle: Nail cap shingles in place using roofing nails long enough to penetrate through the roof sheathing a minimum of ³/₁₆ of an inch. Use nail lines provided on vent. Outside edges where the vent meet the shingles are to be sealed with flashing cement.

Net Free Area: Refer to manufacturers published literature




Minimum Slope: 2:12

LIMITATIONS:

1. Refer to applicable building codes for required ventilation.
2. Vents shall not be installed on roof mean heights greater than 33 feet.
3. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 9B-72 of the Florida Administrative Code.



DETAIL DRAWINGS

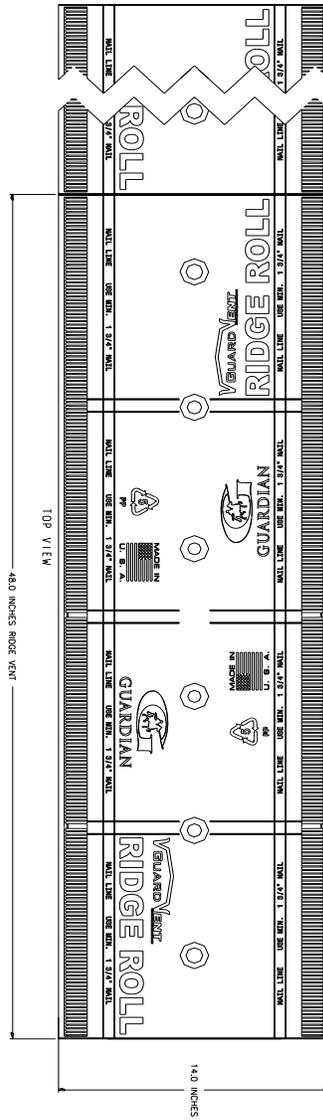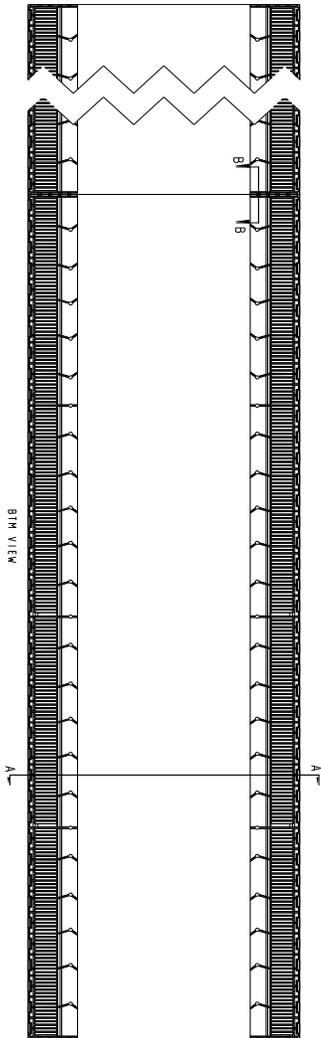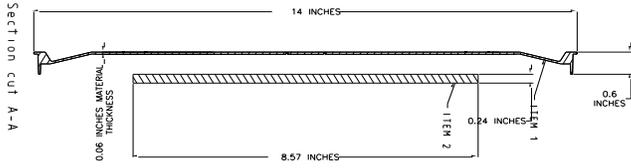


Section cut B-B
WELDED SECTION (TYP)

GUARDIAN VENT WITH FILTER



DETAILS CONTINUED

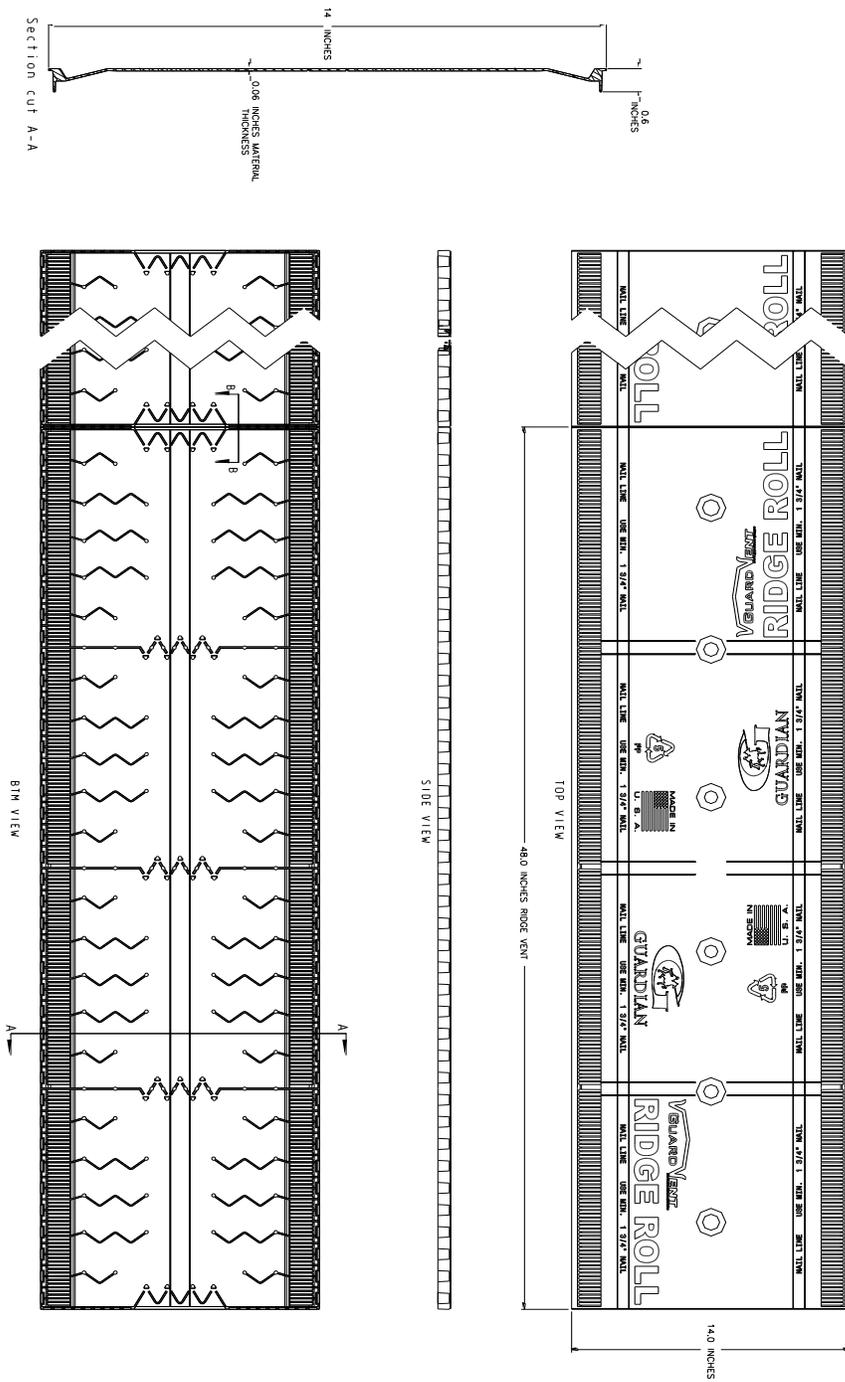

Section cut B-B
WELDED SECTION (TYP)

GUARDIAN VENT WITHOUT FILTER

END OF THIS ACCEPTANCE

