



BUILDING AND NEIGHBORHOOD COMPLIANCE DEPARTMENT (BNC)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/building

NOTICE OF ACCEPTANCE (NOA)

Overhead Door Corporation
2501 South State Highway 121, Suite 200
Lewisville, TX 75067

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County BNC -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BNC reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series 170/180, 18' Wide Steel Sectional Garage Door

APPROVAL DOCUMENT: Drawing No. 411057, titled "Series 170, 180WL WS9, 18' Max. Wide", sheets 1 through 4 of 4, dated 05/31/11, prepared by Overhead Door Corporation, signed and sealed by LeRoy Krupke, P.E., bearing the Miami-Dade County Product Control approval stamp with the NOA number and approval date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large & Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, manufacturing address, model/series number, the positive and negative design pressure rating, indicate impact rated if applicable, installation instruction drawing reference number, approval number (NOA), the applicable test standards, and the statement reading 'Miami-Dade County Product Control Approved' is to be located on the door's side track, bottom angle, or inner surface of a panel.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of this page 1, evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



[Signature]
06/20/11

NOA No: 11-0211.04
Expiration Date: June 30, 2016
Approval Date: June 30, 2011


NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **411057**, titled "Series 170, 180WL WS9, 18' Max. Wide", sheets 1 through 4 of 4, dated 05/31/11, prepared by Overhead Door Corporation, signed and sealed by LeRoy Krupke, P.E.

B. TESTS

1. Test report on: 1) Uniform Static Air Pressure Test, per FBC, TAS 202-94
2) Large Missile Impact Test, per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading Test, per FBC, TAS 203-94,
along with marked-up drawings of an 18'x 7' Model 8024/8124 Galvanized Steel Sectional Door System with an Aluminum Windload Post, prepared by Certified Testing Laboratories, Inc., Test Report No. **CTLA 2047W-1**, dated 05/17/07, signed and sealed by Ramesh Patel, P.E.
2. Test report on: 1) Uniform Static Air Pressure Test, per FBC, TAS 202-94
2) Large Missile Impact Test, per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading Test, per FBC, TAS 203-94,
along with marked-up drawings of an 18'x 7' Model 8024/8124 Galvanized Steel Sectional Door System with an Aluminum Windload Post and Impact Resistant Glazing, prepared by Certified Testing Laboratories, Inc., Test Report No. **CTLA 2049W**, dated 11/09/07, signed and sealed by Ramesh Patel, P.E.
3. Test report on Forced Entry Resistance per FBC, TAS 202-94 of a 16'x7' Series 180 Sectional Residential Steel Door, prepared by Hurricane Engineering & Testing, Inc., Test Report No. HETI-01-1016, dated 05/26/01, signed and sealed Arshad Viqar, P.E.
4. Test report on Self Ignition Temperature per ASTM D1929 of EPS foam plastic, prepared by Omega Point Laboratories, dated 05/17/91, signed by William E. Fitch, P.E.
5. Test report on Surface Burning Characteristics (Flame Spread and Smoke Density Index) per ASTM E84 of EPS foam plastic, prepared by Omega Point Laboratories, dated 07/30/01, signed by William E. Fitch, P.E.
6. Test report on: 1) Uniform Static Air Pressure Test, per FBC, TAS 202-94
2) Test report on Tensile Test, per ASTM E8
along with marked-up drawings, prepared by Certified Testing Laboratories, Inc., Report # **CTLA 1672W**, dated 05/17/07 and 05/22/07, signed and sealed by Ramesh Patel, P.E. "**Submitted under NOA # 07-0808.01**"



06/20/11

Carlos M. Utrera, P.E.

Product Control Examiner

NOA No 11-0211.04

Expiration Date: June 30, 2016

Approval Date: June 30, 2011

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

C. CALCULATIONS

1. Anchor calculations and commercial track design verification prepared by Overhead Door Engineering, dated 02/08/11, signed and sealed by LeRoy Krupke, P.E.

D. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **10-0329.03**, issued to Sheffield Plastic, Inc., for their Makrolon Polycarbonate Sheets, approved on 07/07/10 and expiring on 08/27/12.

E. QUALITY ASSURANCE

1. Miami-Dade Building and Neighborhood Compliance Department (BNC)

F. STATEMENTS

1. Statement letter of code conformance to 2007 FBC issued by Overhead Door Corporation, dated 02/08/11, signed and sealed by LeRoy Krupke, P.E.
2. No financial interest letter issued by Overhead Door Corporation, dated 05/13/11, signed and sealed by LeRoy Krupke, P.E.

G. OTHER

1. None.




06/20/11

Carlos M. Utrera, P.E.
Product Control Examiner
NOA No 11-0211.04
Expiration Date: June 30, 2016
Approval Date: June 30, 2011

REVISIONS				
REV	DESCRIPTION	DATE	APPROVAL	
500869	- RELEASE PER ER			

- NOTES:**
- IMPACT RESISTANT GLAZING SYSTEM MAY BE INSTALLED IN TOP OR INTERMEDIATE SECTION (WITH OR WITHOUT DECORATIVE INSERTS). GLAZING SHALL BE 1/4" MAKROLON-AR POLYCARBONATE (MIAMI-DADE NOA#10-0329.03) OR EQUAL. MAXIMUM GLAZING DIMENSIONS SHALL BE 18.56" x 12.26". SEE DETAIL E ON SHEET 2 FOR ASSEMBLY DETAILS.
 - VINYL OR WOOD DOOR STOP NAILED A MAXIMUM OF 6" O.C. MUST OVERLAP TOP AND BOTH ENDS OF PANELS MINIMUM 7/16" TO MEET NEGATIVE PRESSURES.
 - KEY LOCK OR SLIDE LOCKS REQUIRED.
 - SECTION STEEL TO HAVE A MINIMUM 24 GA THICKNESS WITH A MINIMUM G40 COATING AND A MINIMUM YIELD STRENGTH OF 33.8 KSI.
 - THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.
 - WOOD SUBSTRATE FOR DOOR JAMB IS TO BE MINIMUM 2x6 NO. 3 SOUTHERN PINE. REFER TO SHEET 4 FOR ATTACHMENT TO SUPPORTING STRUCTURE. FOR MOUNTING OF CONTINUOUS WALL ANGLE, SEE CONTINUOUS WALL ANGLE DETAIL SHEET 4.
 - FOR LOW HEAD ROOM LIFT CONDITIONS, TOP BRACKET SHALL BE A 13 GA LHR 7/4 TOP BRACKET WITH A MINIMUM OF (3) 1/4-14x7/8" SELF DRILLING CRIMPITE SCREWS IN LIEU OF THE BRACKET SHOWN ON THIS DRAWING. U-BAR ON TOP SECTION SHALL BE INSTALLED ON TOP OF LHR TOP BRACKETS.
 - LOUVERS MAY BE INSTALLED ON THE DOOR IF THE TOTAL AREA OF THE LOUVER DOES NOT EXCEED 120 SQUARE INCHES.
 - DOOR WITHOUT POST SYSTEM HAS BEEN TESTED TO WITHSTAND DESIGN PRESSURES CORRESPONDING TO A 75 MPH WIND SPEED (+/-14.40 PSF). POST SYSTEM SHALL BE INSTALLED WHEN WIND SPEEDS ARE EXPECTED TO EXCEED 75 MPH.
 - IN LIEU OF THE SHORT PANEL EMBOSSEMENT SHOWN, LONG PANEL EMBOSSEMENT, V12 PANEL EMBOSSEMENT OR NO EMBOSSEMENT MAY BE USED.

P3
P4
P2
P1
P4

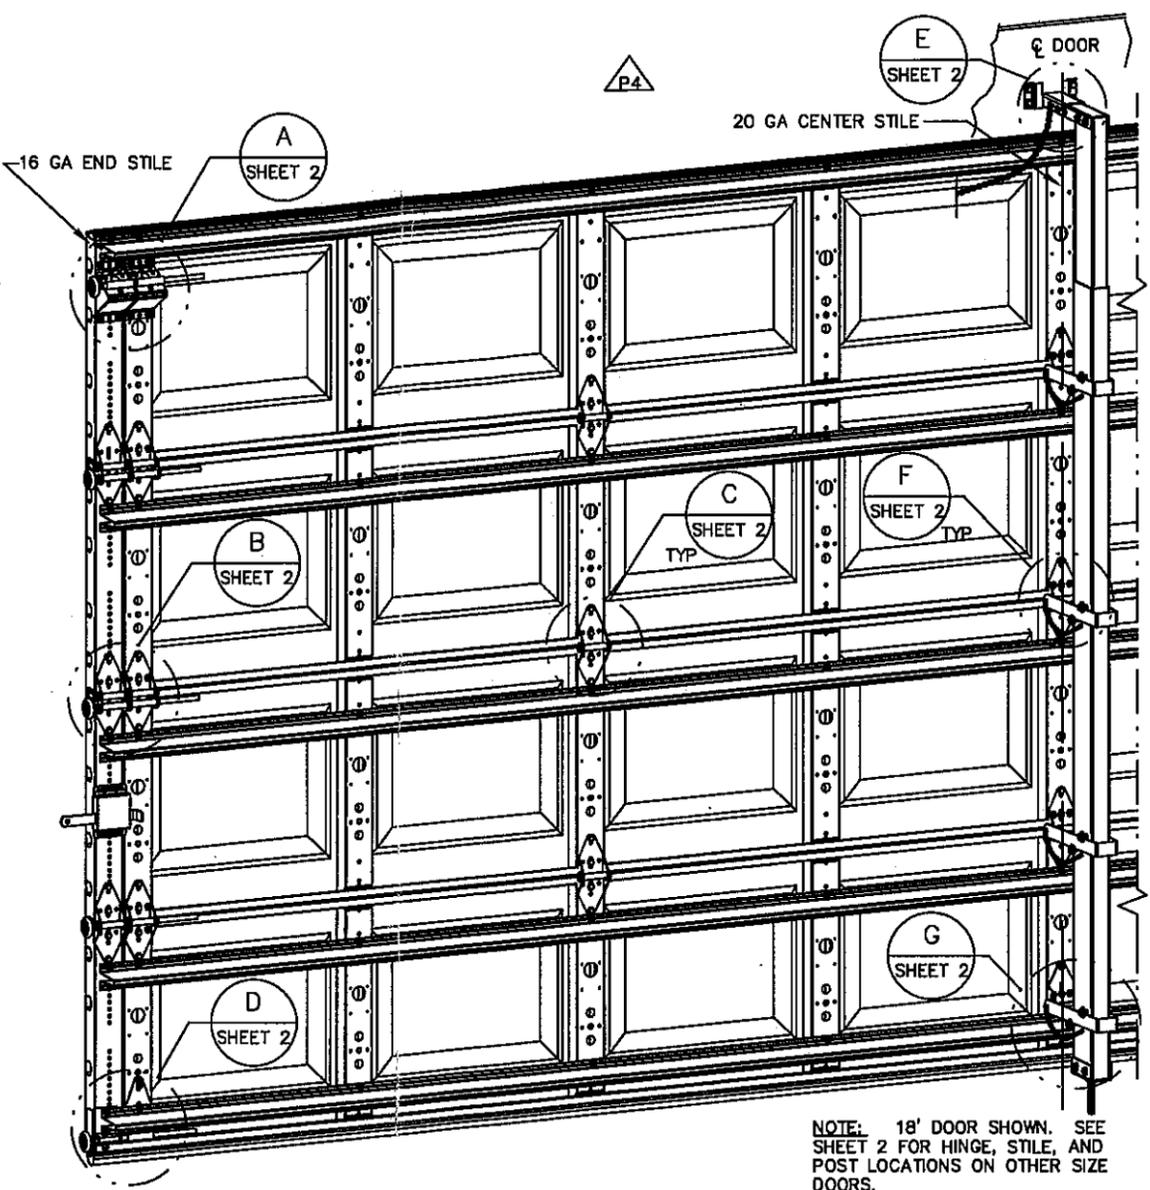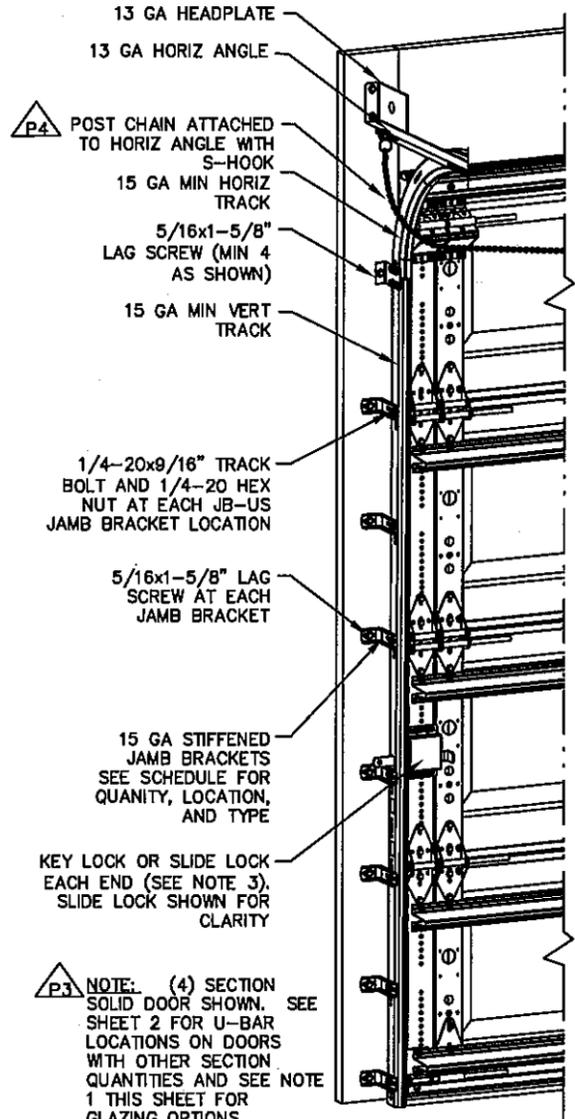

NOTE: 18' DOOR SHOWN. SEE SHEET 2 FOR HINGE, STILE, AND POST LOCATIONS ON OTHER SIZE DOORS.

P3 NOTE: (4) SECTION SOLID DOOR SHOWN. SEE SHEET 2 FOR U-BAR LOCATIONS ON DOORS WITH OTHER SECTION QUANTITIES AND SEE NOTE 1 THIS SHEET FOR GLAZING OPTIONS.

SUPERIMPOSED DESIGN PRESSURE LOADS ON SUPPORTING STRUCTURE

MAX DOOR WIDTH	MAX DOOR HEIGHT	UNIFORM LOAD EACH JAMB (PLF)	POINT LOAD AT HEADER AND SLAB AT EACH POST LOCATION (LBS)
17'-0"	7'-0"	+185.5/-209.6	+1507.4/-1712.9
	8'-0"	+185.5/-209.6	+1704.0/-1936.3
18'-0"	7'-0"	+190.7/-215.7	+1637.0/-1850.5
	8'-0"	+190.7/-215.7	+1860.3/-2102.9

DOOR HEIGHT		NO. OF SECTIONS		NO. OF JAMB BRACKETS (EACH JAMB)		LOCATION OF CENTERLINE OF JAMB BRACKETS MEASURED FROM BOTTOM OF TRACK (ALL DIMENSIONS ± 2")	
6'-6"	4	7	7	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 39" (JB-US), 48" (JB-US), 57-1/4" (JB-US)			
7'-0"	4	7	7	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 42" (JB-US), 52-1/2" (JB-US), 63-1/4" (JB-US)			
7'-6"	5	8	8	2" (JB-US), 10" (JB-US), 18-3/4" (JB-US), 26-3/4" (JB-US), 36" (JB-US), 45" (JB-US), 54-1/4" (JB-US), 74-1/2" (JB-US)			
8'-0"	5	8	8	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 39" (JB-US), 48" (JB-US), 57-1/2" (JB-US), 75-1/2" (JB-US)			

APPROVED DESIGNS	
MODEL	CONFIGURATION DESIGN (EMBOSSEMENT)
173	SHORT PANEL
174	LONG PANEL
175	FLUSH
183	SHORT PANEL- INSULATED *
184	LONG PANEL- INSULATED *
185	FLUSH - INSULATED *

* INSULATION IS EXPANDED POLYSTYRENE IN COMPLIANCE WITH 2612.3.1.1 OF THE FBC.

NOTE: (JB-US) FOLLOWING DIMENSION DENOTES SLOTTED JAMB BRACKET ATTACHED TO TRACK WITH 1/4-20x9/16" TRACK BOLT AND NUT AS SHOWN ABOVE.

ALL DOORS WITH DECORATIVE OVERLAY REQUIRE USE OF CONTINUOUS WALL ANGLE. SEE SHEET 4 FOR DETAILS.

STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): 46/-52	MAX WIDTH: 16'
IMPACT/CYCLIC RATED: YES (HVHZ)	MAX HEIGHT: 8'
	MAX SECTION HEIGHT: 21"

SERIES 173-175, 183-185

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.

REF DWG	USED ON	ASME Y14.50 AND Y14.51 APPLY UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN U.S. CUSTOMARY UNITS	HOLE DIAMETER UNDER .251 +.004/- .003 .251 TO .500 +.006/- .003 OVER .500 +.008/- .003	FRACTIONS ± 1/16	WHOLE NUMBERS ± .25 .X ± .1 .XX ± .03 .XXX ± .010 ANGLES ± .5°	FINISH N/A	UNIT OF MEASURE EACH	MATERIAL NONE	DATE 11/30/10	DRAWING TITLE SERIES 170, 180WL WS9, 18' MAX WIDE
---------	---------	--	---	---------------------	--	---------------	-------------------------	------------------	------------------	---

APPROVED BY: F. TJONG


Approved as complying with the Florida Building Code
Date 06/30/2011
NOA# 11-0211.04
Miami Door Product Control
By *[Signature]*

[Signature]
5/31/11

OVERHEAD DOOR CORPORATION
2501 S. STATE HWY 121, BUSINESS
LEWISVILLE, TX 75067
LERYD KRUPKE, FL PE 36580


NOTES

REVISIONS				
ER	REV	DESCRIPTION	DATE	APPROVAL
500869	-	RELEASE PER ER	5/31/11	SEP

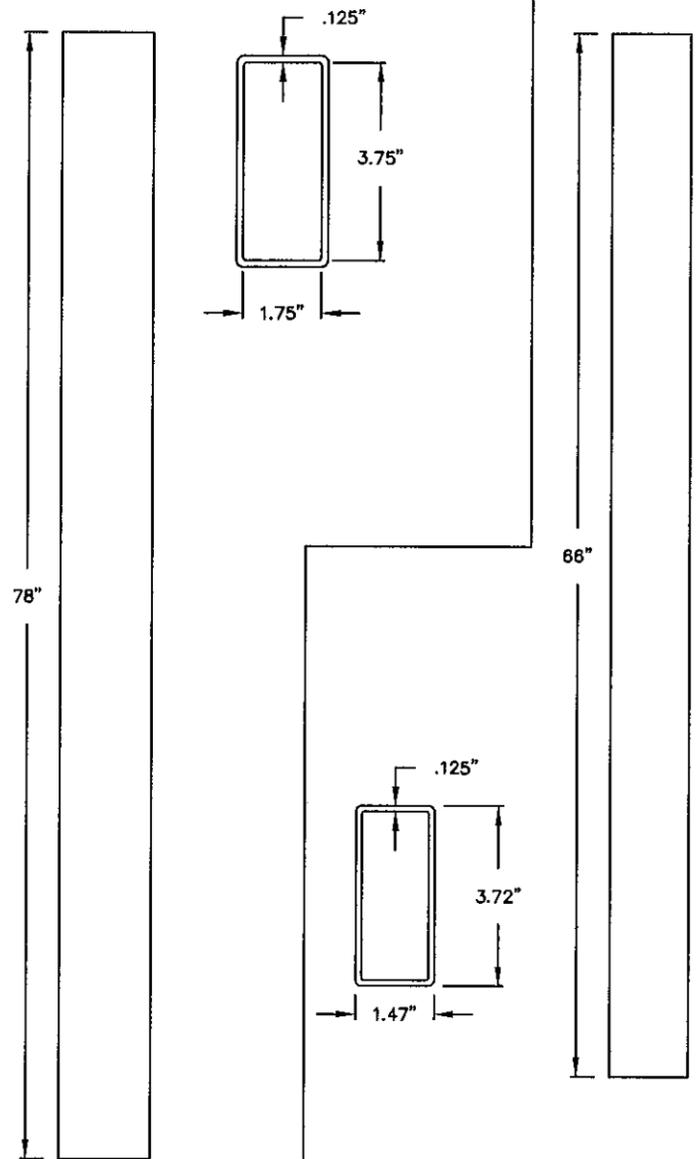


6063 T-6 ALUMINUM OUTER POST


6063 T-6 ALUMINUM INNER POST

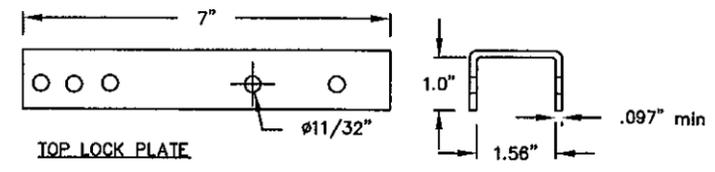


TOP LOCK PLATE

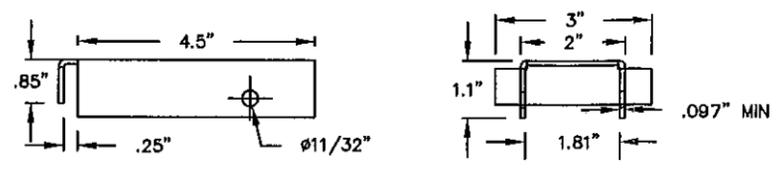


TOP PLATE EXTENSION

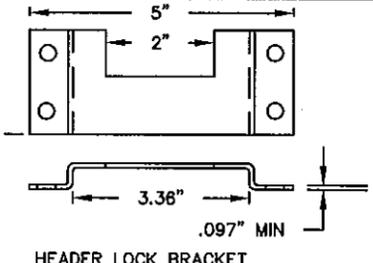


HEADER LOCK BRACKET

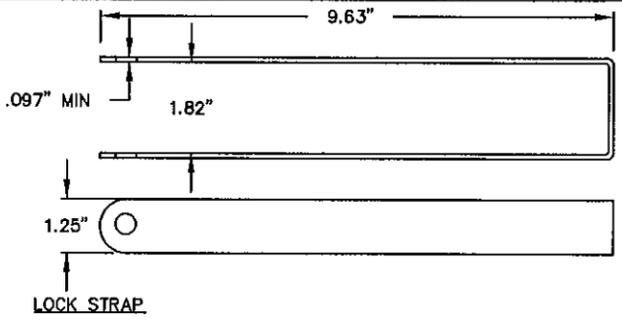


LOCK STRAP




HALF HINGE

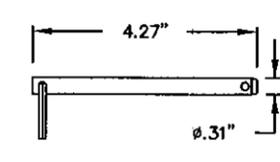

HITCH PIN

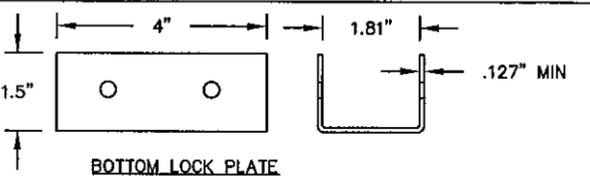

BOTTOM LOCK PLATE

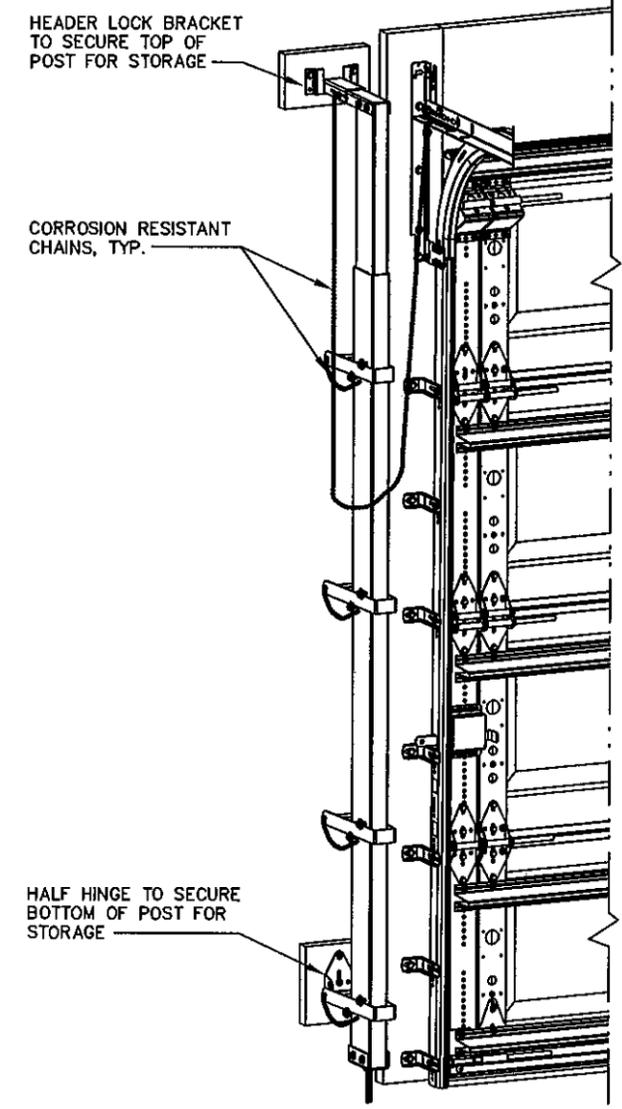

POST SYSTEM STORAGE

NOTE: POST SYSTEM SHALL BE STORED IN A CONVENIENT LOCATION AS CLOSE TO GARAGE DOOR AS POSSIBLE.



POST SYSTEM COMPONENT DETAILS

Approved as complying with the Florida Building Code
 Date 06/30/2011
 NOA# 11-0211-024
 Miami Dade Product Control
 By *[Signature]*

[Signature]
 5-31-11



OVERHEAD DOOR CORPORATION
 2501 S. STATE HWY 121, BUSINESS
 LEWISVILLE, TX 75067
 LEROY KRUPKE, FL PE 36580

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.									
REF DWG	USED ON	 ASME Y14.100 AND Y14.5 APPLY, UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN U.S. CUSTOMARY UNITS.	TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH N/A	The Genuine. The Original. LEWISVILLE, TEXAS	MATERIAL NONE	NAME M. SAWICKI DATE 11/30/10	DRAWING TITLE SERIES 170, 180WL WS9, 18' MAX WIDE
			HOLE DIAMETER	WHOLE NUMBERS					
			FRACTIONS	ANGLES				APPROVED BY F. TJONG DATE 5/31/11	SCALE 1/2
			± 1/16					SHEET 3 OF 4	


REVISIONS				
ER	REV	DESCRIPTION	DATE	APPROVAL
500869	-	RELEASE PER ER	6/30/11	SET

MAX SPACING OF ANCHORS/SCREWS PER JAMB (IN)		
3/8" SIMPSON TITEN HD SCREW ANCHOR TO MINIMUM 2000 PSI CONCRETE (SEE NOTE 1 BELOW)	3/8" SIMPSON TITEN HD SCREW ANCHOR TO MINIMUM 2000 PSI GROUT FILLED CMU (SEE NOTE 2 BELOW)	3/8" X 3" LONG LAG SCREW (SEE NOTE 3 BELOW)
24	24	24

1. BASED ON 3/8" SIMPSON TITEN HEAVY DUTY SCREW ANCHOR WITH A 1" O.D. WASHER INTO CONCRETE WITH A MINIMUM EMBEDMENT DEPTH OF 2-3/4" AND A MINIMUM EDGE DISTANCE OF 2-3/4".
2. BASED ON 3/8" SIMPSON TITEN HEAVY DUTY SCREW ANCHOR WITH A 1" O.D. WASHER INTO GROUT FILLED CMU WITH A MINIMUM EMBEDMENT DEPTH OF 2-3/4", A MINIMUM EDGE DISTANCE OF 4", AND A MINIMUM END DISTANCE OF 4". CONCRETE MASONRY UNITS SHALL CONFORM TO ASTM C90 AND GROUT SHALL CONFORM TO ASTM C476.
3. BASED ON 3/8" DIAMETER x 3" LONG LAG SCREWS WITH 1" O.D. WASHERS WITH A 1-9/32" THREAD PENETRATION INTO SEASONED DRY WOOD SUPPORTING STRUCTURE.
4. PROVIDE QUANTITY OF SCREW ANCHORS OR LAG SCREWS AS REQUIRED TO MAINTAIN MAXIMUM SPACING AS SHOWN IN TABLE WITH A MINIMUM OF THREE (3) SCREW ANCHORS OR LAG SCREWS PER JAMB. SCREW ANCHORS OR LAG SCREWS AT TOP AND BOTTOM OF JAMB SHALL BE PLACED A MAXIMUM OF 6" FROM THE END OF THE JAMB.
5. LOAD PER JAMB CALCULATED TO BE A MAXIMUM OF +207.0/-234.0 LBS PER FOOT.
6. CHART INCLUDES A SAFETY FACTOR OF 4.
7. DOOR JAMB TO BE MINIMUM 2x8 NO. 3 SOUTHERN PINE LUMBER (MIN) MOUNTED DIRECTLY TO SUPPORT STRUCTURE.
8. DESIGN OF THE SUPPORT STRUCTURE SHALL BE THE SOLE RESPONSIBILITY OF THE BUILDING DESIGNER AND SHALL BE DESIGNED FOR THE LOADS LISTED IN NOTE 5.
9. SCREW ANCHORS OR LAG SCREWS SHALL BE INSTALLED PER MANUFACTURER'S WRITTEN INSTRUCTIONS.

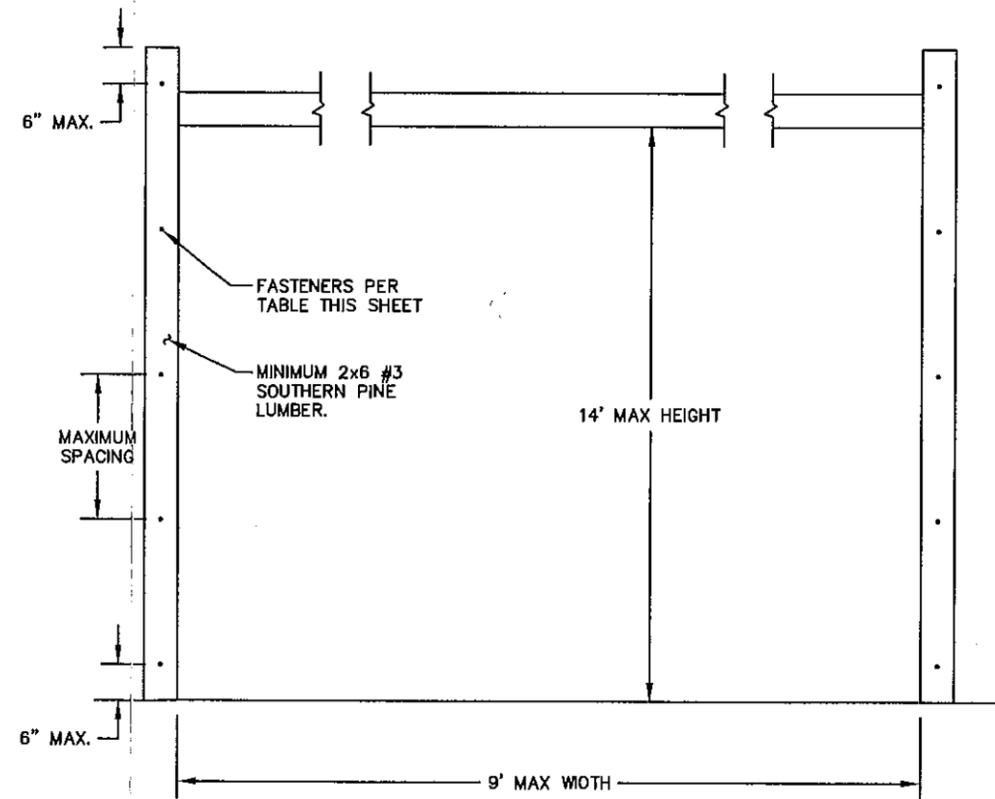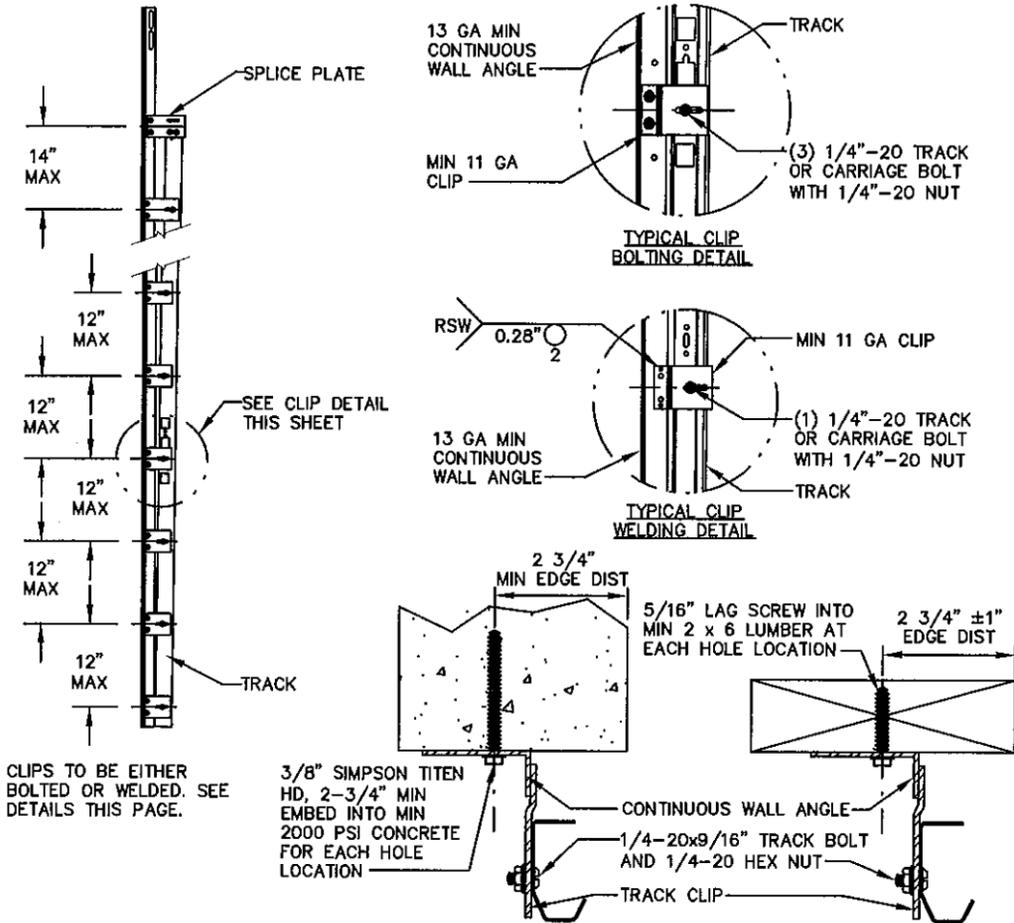

CONTINUOUS WALL ANGLE DETAILS

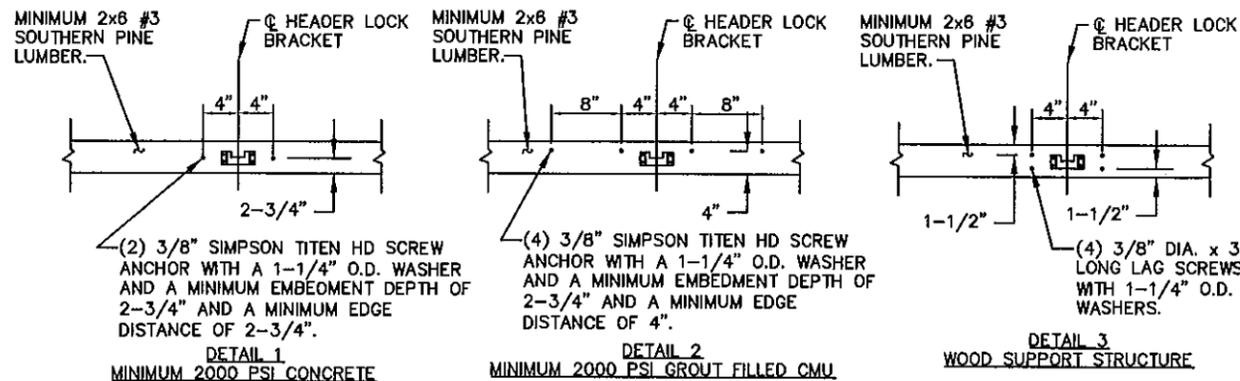

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.										
REF DWG	USED ON		TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH N/A		MATERIAL NONE	NAME M. SAWICKI	DATE 11/30/10	DRAWING TITLE SERIES 170, 180WL WS9, 18' MAX WIDE
			HOLE DIAMETER	WHOLE NUMBERS						
		ASME Y14.100 AND Y14.5 APPLY UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN U.S. CUSTOMARY UNITS	FRACTIONS	± 1/16	UNIT OF MEASURE EACH		APPROVED BY G. FINERAN	DATE 5/31/11	DRAWING NUMBER D-411057	SCALE 1/2
OVERHEAD DOOR CORPORATION 2501 S. STATE HWY 121, BUSINESS LEWISVILLE, TX 75067 LEROY KRUPKE, FL PE 36580										

Approved as complying with the Florida Building Code
 Date 06/30/2011
 NOAH 11-0211.04
 Miami Dade Product Control
 By *[Signature]*

[Signature]
 5-31-11