



DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY  
AFFAIRS (PERA)  
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY  
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208  
Miami, Florida 33175-2474  
T (786) 315-2590 F (786) 315-2599

[www.miamidade.gov/building](http://www.miamidade.gov/building)

**NOTICE OF ACCEPTANCE (NOA)**

**Barrette Outdoor Living, Inc.**  
**740 N. Main Street**  
**Bulls Gap, TN 37711**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. PERA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION:** Extruded PVC Vinyl Fencing

**APPROVAL DOCUMENT:** Drawing No. USF 11, titled "PVC Fence", sheets 1 through 11 of 11, prepared by Richard Boyette, P.E., dated August 18, 2011, signed and sealed by Richard Boyette, P.E., on August 22, 2011, bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section.

**MISSILE IMPACT RATING:** None

**LABELING:** Each fence section shall bear a permanent label with the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews** NOA # **06-0602.03** and consists of this page 1, evidence submitted pages E-1 & E-2 as well as approval document mentioned above.

The submitted documentation was reviewed by **Helmy A. Makar, P.E., M.S.**



*Helmy A. Makar*  
11/10/2011

NOA No. 11-0908.06  
Expiration Date: 12/21/2016  
Approval Date: 11/10/2011  
Page 1

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 06-0602.03**

**A. DRAWINGS**

1. *Drawing No. USF 11, titled "PVC Fence", sheets 1 through 11 of 11, prepared by Robert F. Robins, P.E., dated March 07, 2006, signed and sealed by Robert F. Robins, P.E.*

**B. TESTS**

1. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report # 73074972, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*
2. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report # 73052372, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*
3. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report # 73082172, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*
4. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report # 73073772, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*
5. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report # 73081972, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*
6. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report # 73074572, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*
7. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report #4, 3, 2 Rail, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*
8. *Test report on Uniform Static Air Pressure Test, prepared by Robins Boldso, Inc., Report # 73002147, dated January, 2006, signed and sealed by Robert F. Robins, P.E.*

**C. CALCULATIONS**

1. *None.*

**D. QUALITY ASSURANCE**

1. *By Miami-Dade County Building Code Compliance Office.*


**E. MATERIAL CERTIFICATIONS**

1. *Tensile Test Report No. 25-7579, prepared by Center For Applied Engineering, Inc., dated October 31, 1996, signed and sealed by John M. Bridenstine, P.E.*

**2. NEW EVIDENCE SUBMITTED**

**A. DRAWINGS**

1. *Drawing No. USF 11, titled "PVC Fence", sheets 1 through 11 of 11, prepared by Richard Boyette, P.E., dated August 18, 2011, signed and sealed by Richard Boyette, P.E., on August 22, 2011.*

  
Helmy A. Makar, P.E., M.S.  
PERA, Product Control Unit Supervisor  
NOA No. 11-0908.06  
Expiration Date: 12/21/2016  
Approval Date: 11/10/2011

**Barrette Outdoor Living, Inc.**

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**B. TESTS**

1. *None.*

**C. CALCULATIONS**


1. *None.*

**D. QUALITY ASSURANCE**

1. *By Miami-Dade County Department of Permitting, Environment, and Regulatory Affairs.*











**E. MATERIAL CERTIFICATIONS**

1. *None.*



---

Helmy A. Makar, P.E., M.S.  
PERA, Product Control Unit Supervisor  
NOA No. 11-0908.06  
Expiration Date: 12/21/2016  
Approval Date: 11/10/2011

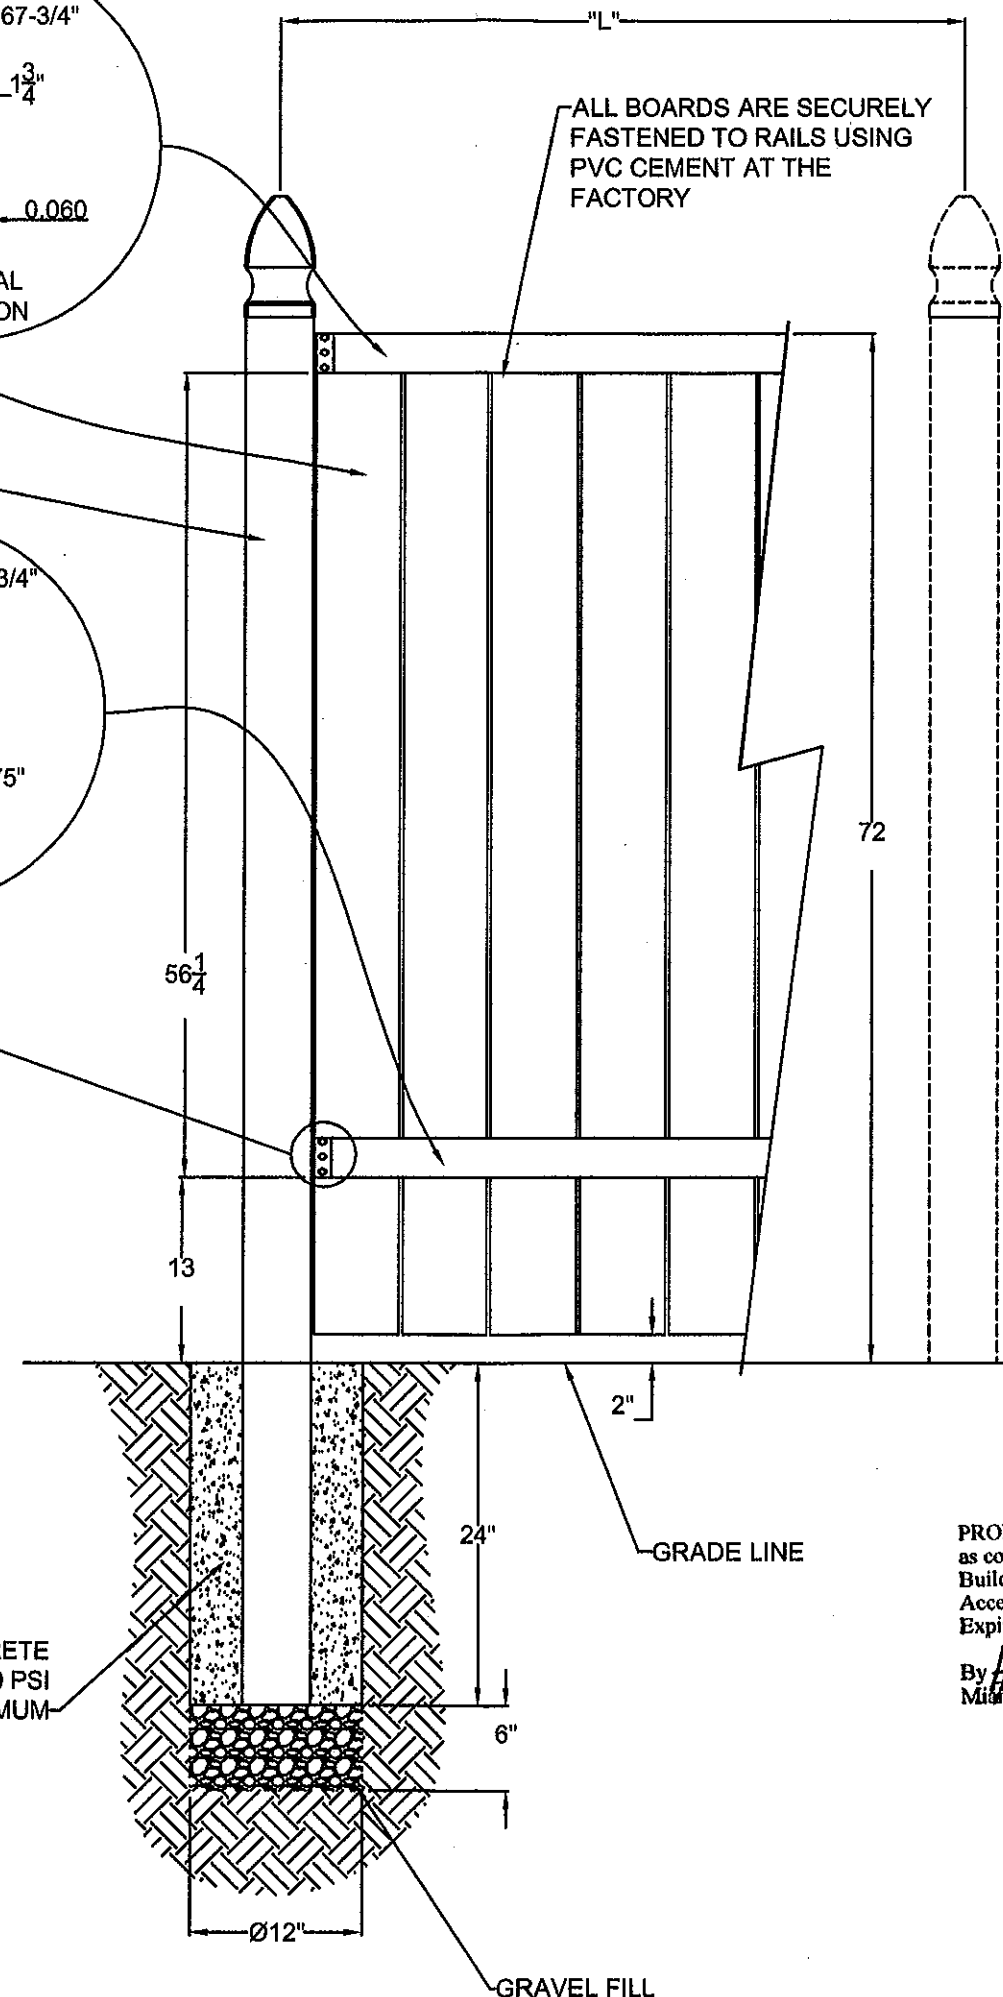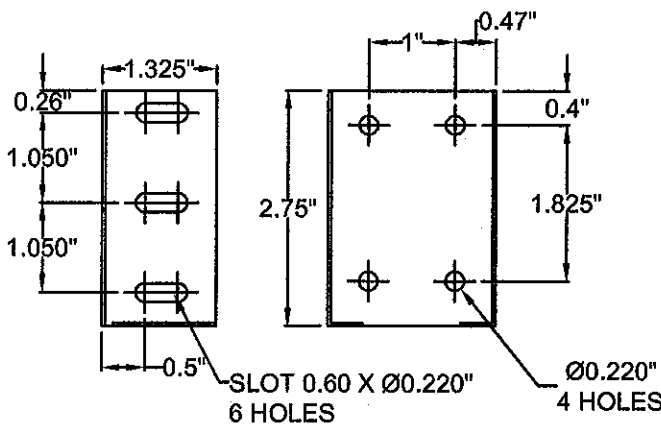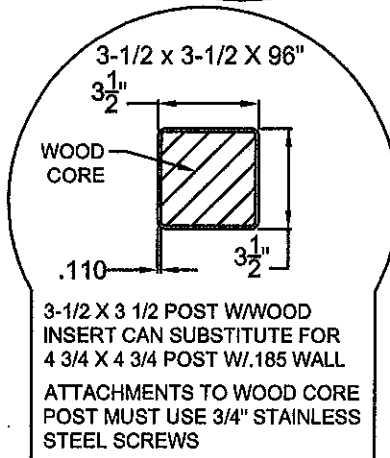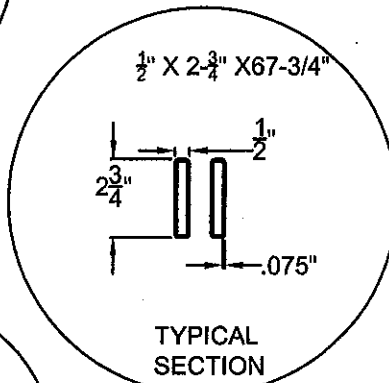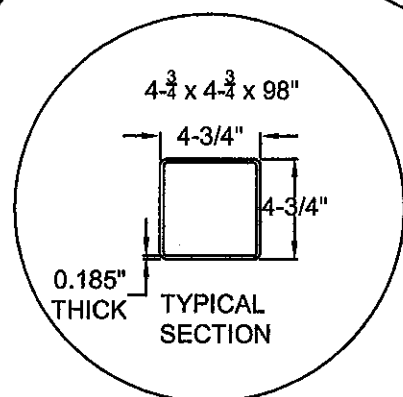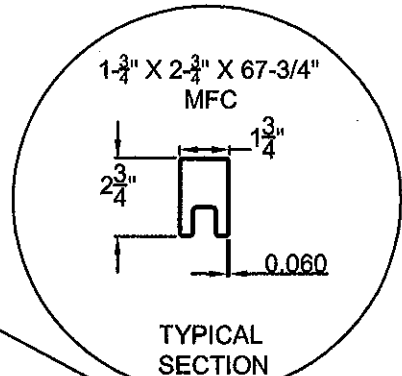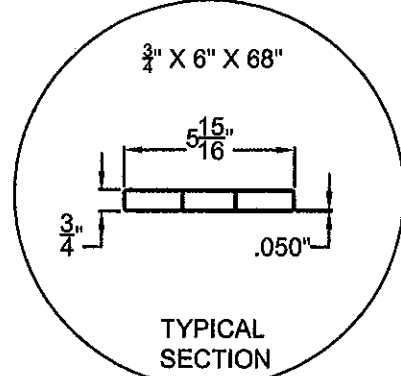

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1  
THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST)  
WHEN THE MAXIMUM POST CENTERS (L) ARE 73" ON CENTER

## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	385,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

## PVC FENCE SAVANNAH SEMI PRIVACY PANEL PANEL STYLE


DRAWING NO: USF73074972  
USF11

12-18-05 8/10/11 *JB*

Sheet # 1 of 11











Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No. 11-0908-06  
Expiration Date 12/21/2016  
By *Heather A. Miller*  
Miami Dade Product Control

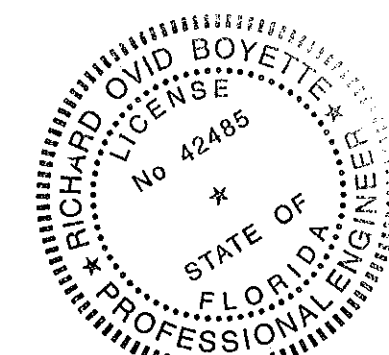

Amended w/ 2007 FBC  
*Richard Boyette*  
APPROVED AUG 22 2011

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

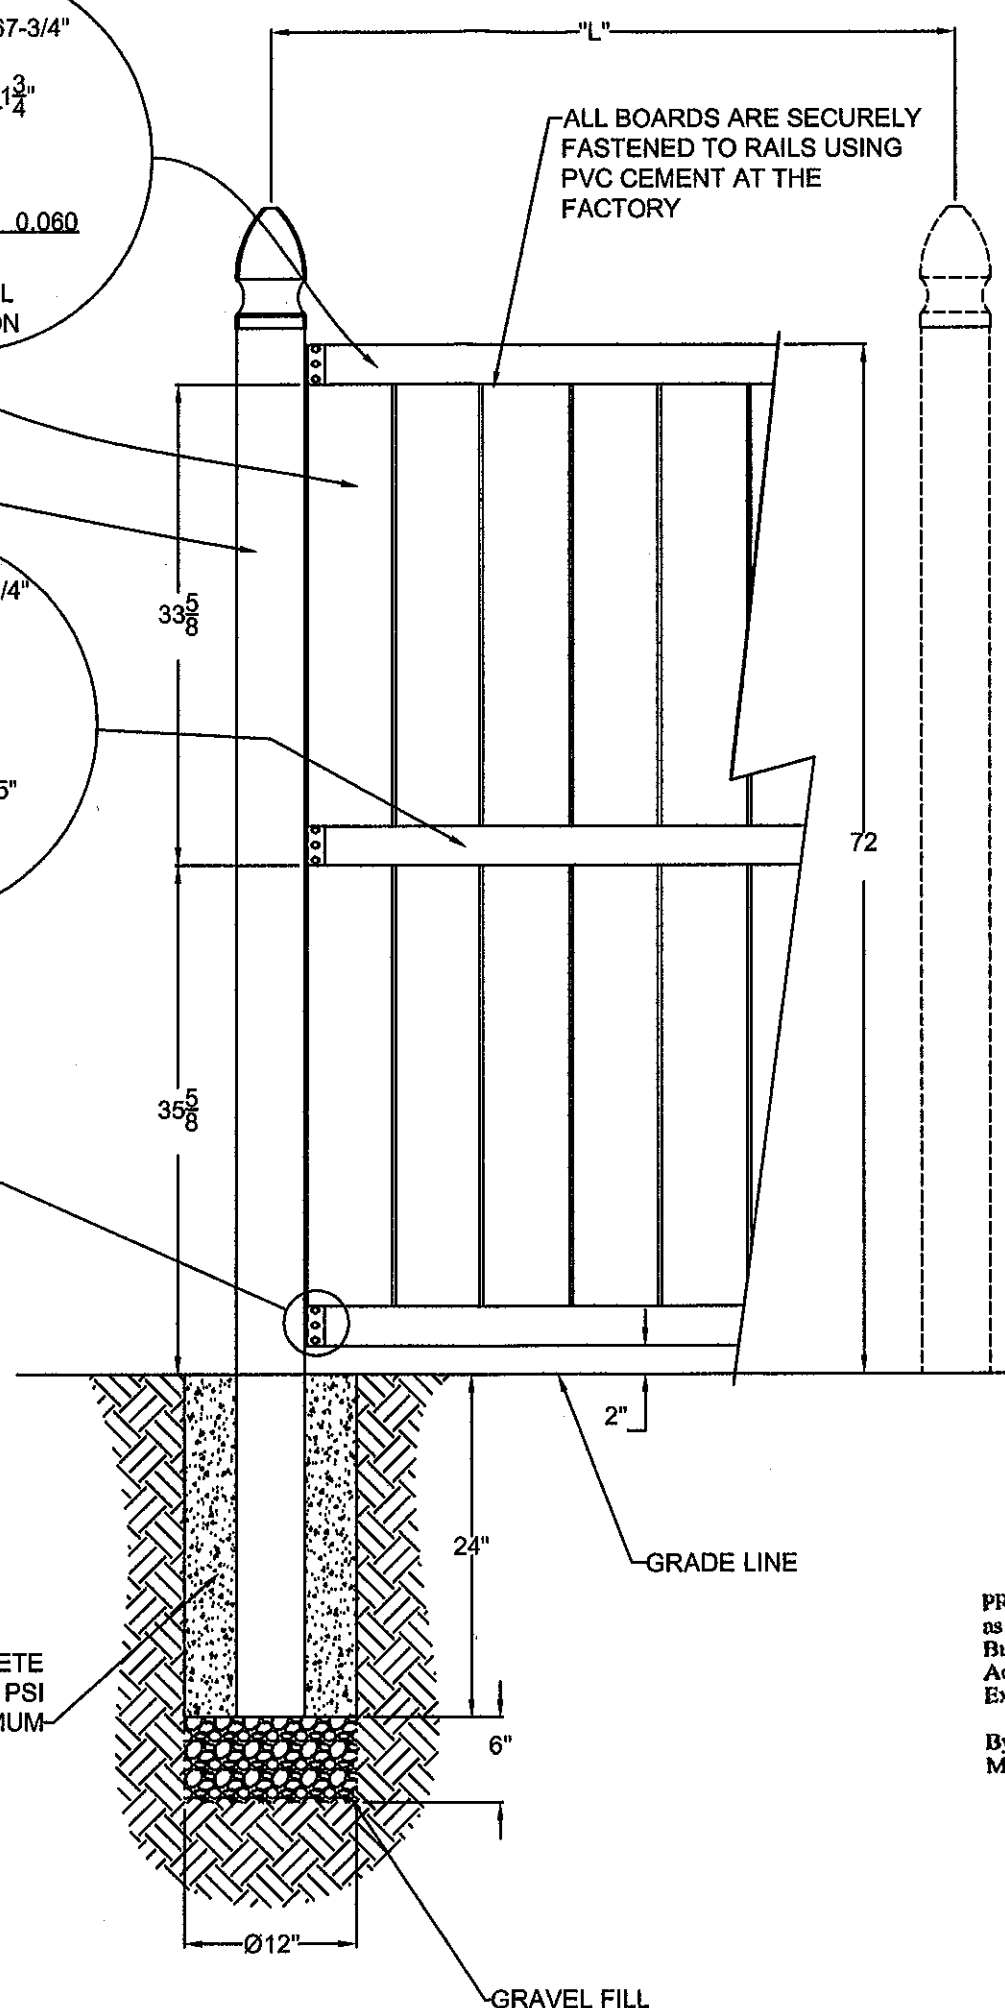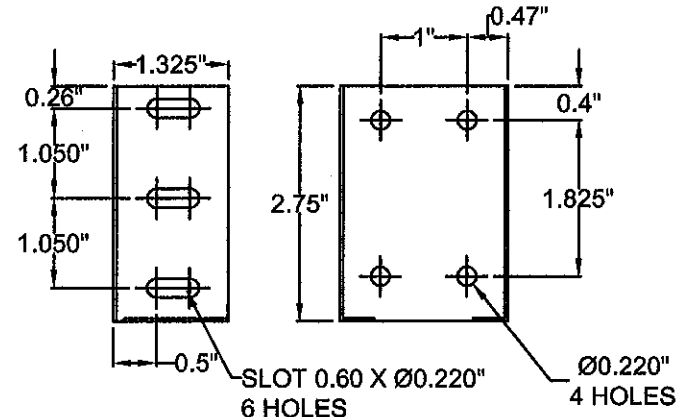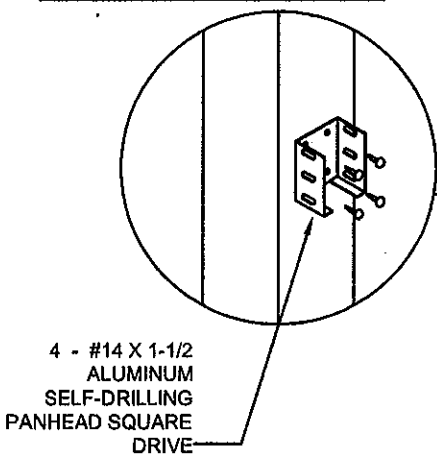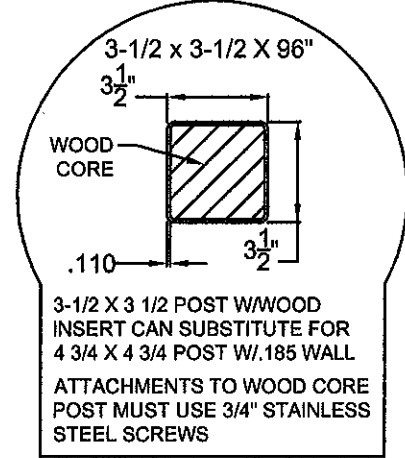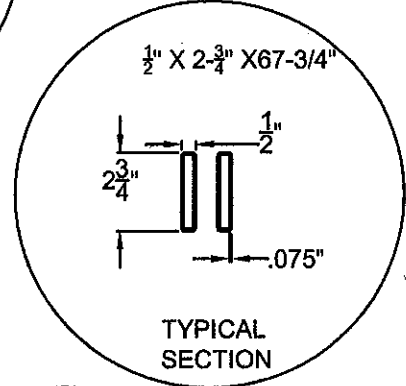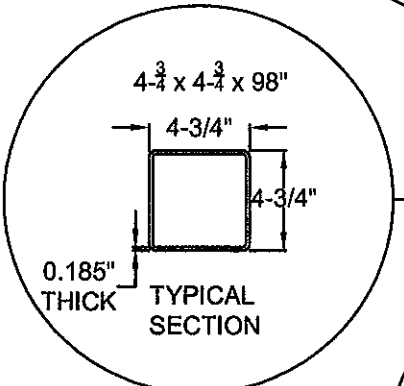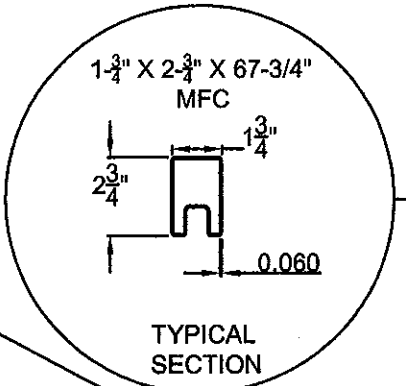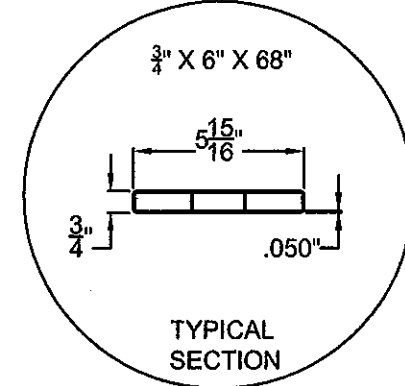

**WIND LOAD RATING**

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1 THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST) WHEN THE MAXIMUM POST CENTERS (L) ARE 73" ON CENTER

**PVC MATERIAL SPECIFICATIONS**

ASTM Cell Classification	1-40323-13-0101 (D4216)	
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,00	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

**PVC FENCE  
GETTYSBURG SEMI PRIVACY PANEL  
PANEL STYLE**

DRAWING NO: ~~USF73052872~~  
USF11  
12-10-05 8/18/11 *AB*  
Sheet # 2 of 11

Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908-06  
Expiration Date 12/21/2016  
By *Heather A. Webb*  
Miami Dade Product Control

**RICHARD OVID BOYETTE**  
LICENSE  
No 42485  
STATE OF  
FLORIDA  
PROFESSIONAL ENGINEER  
COMPLIES WITH 2007 FBC  
*Richard Boyette*  
APPROVED AUG 22 2011

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1 THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST) WHEN THE MAXIMUM POST CENTERS (L) ARE 71.25" ON CENTER

## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity ( $\pm 0.02$ ) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

## PVC FENCE LANCASTER PANEL PRO-SERIES STYLE


DRAWING NO: USF73002172

12-10-05 8/18/11

Sheet # 3 of 11


Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908.06  
Expiration Date 12/21/2016  
By *Heather H. Mohr*  
Miami Dade Product Control

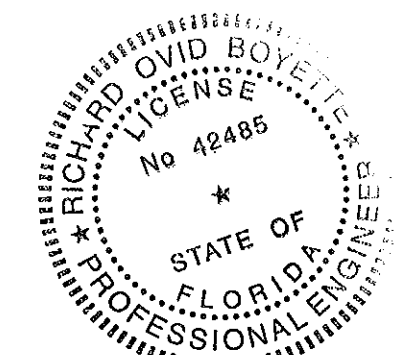

COMPLIES w/ 2007 FBC  
*Richard Boyette*  
APPROVED AUG 22 2011

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

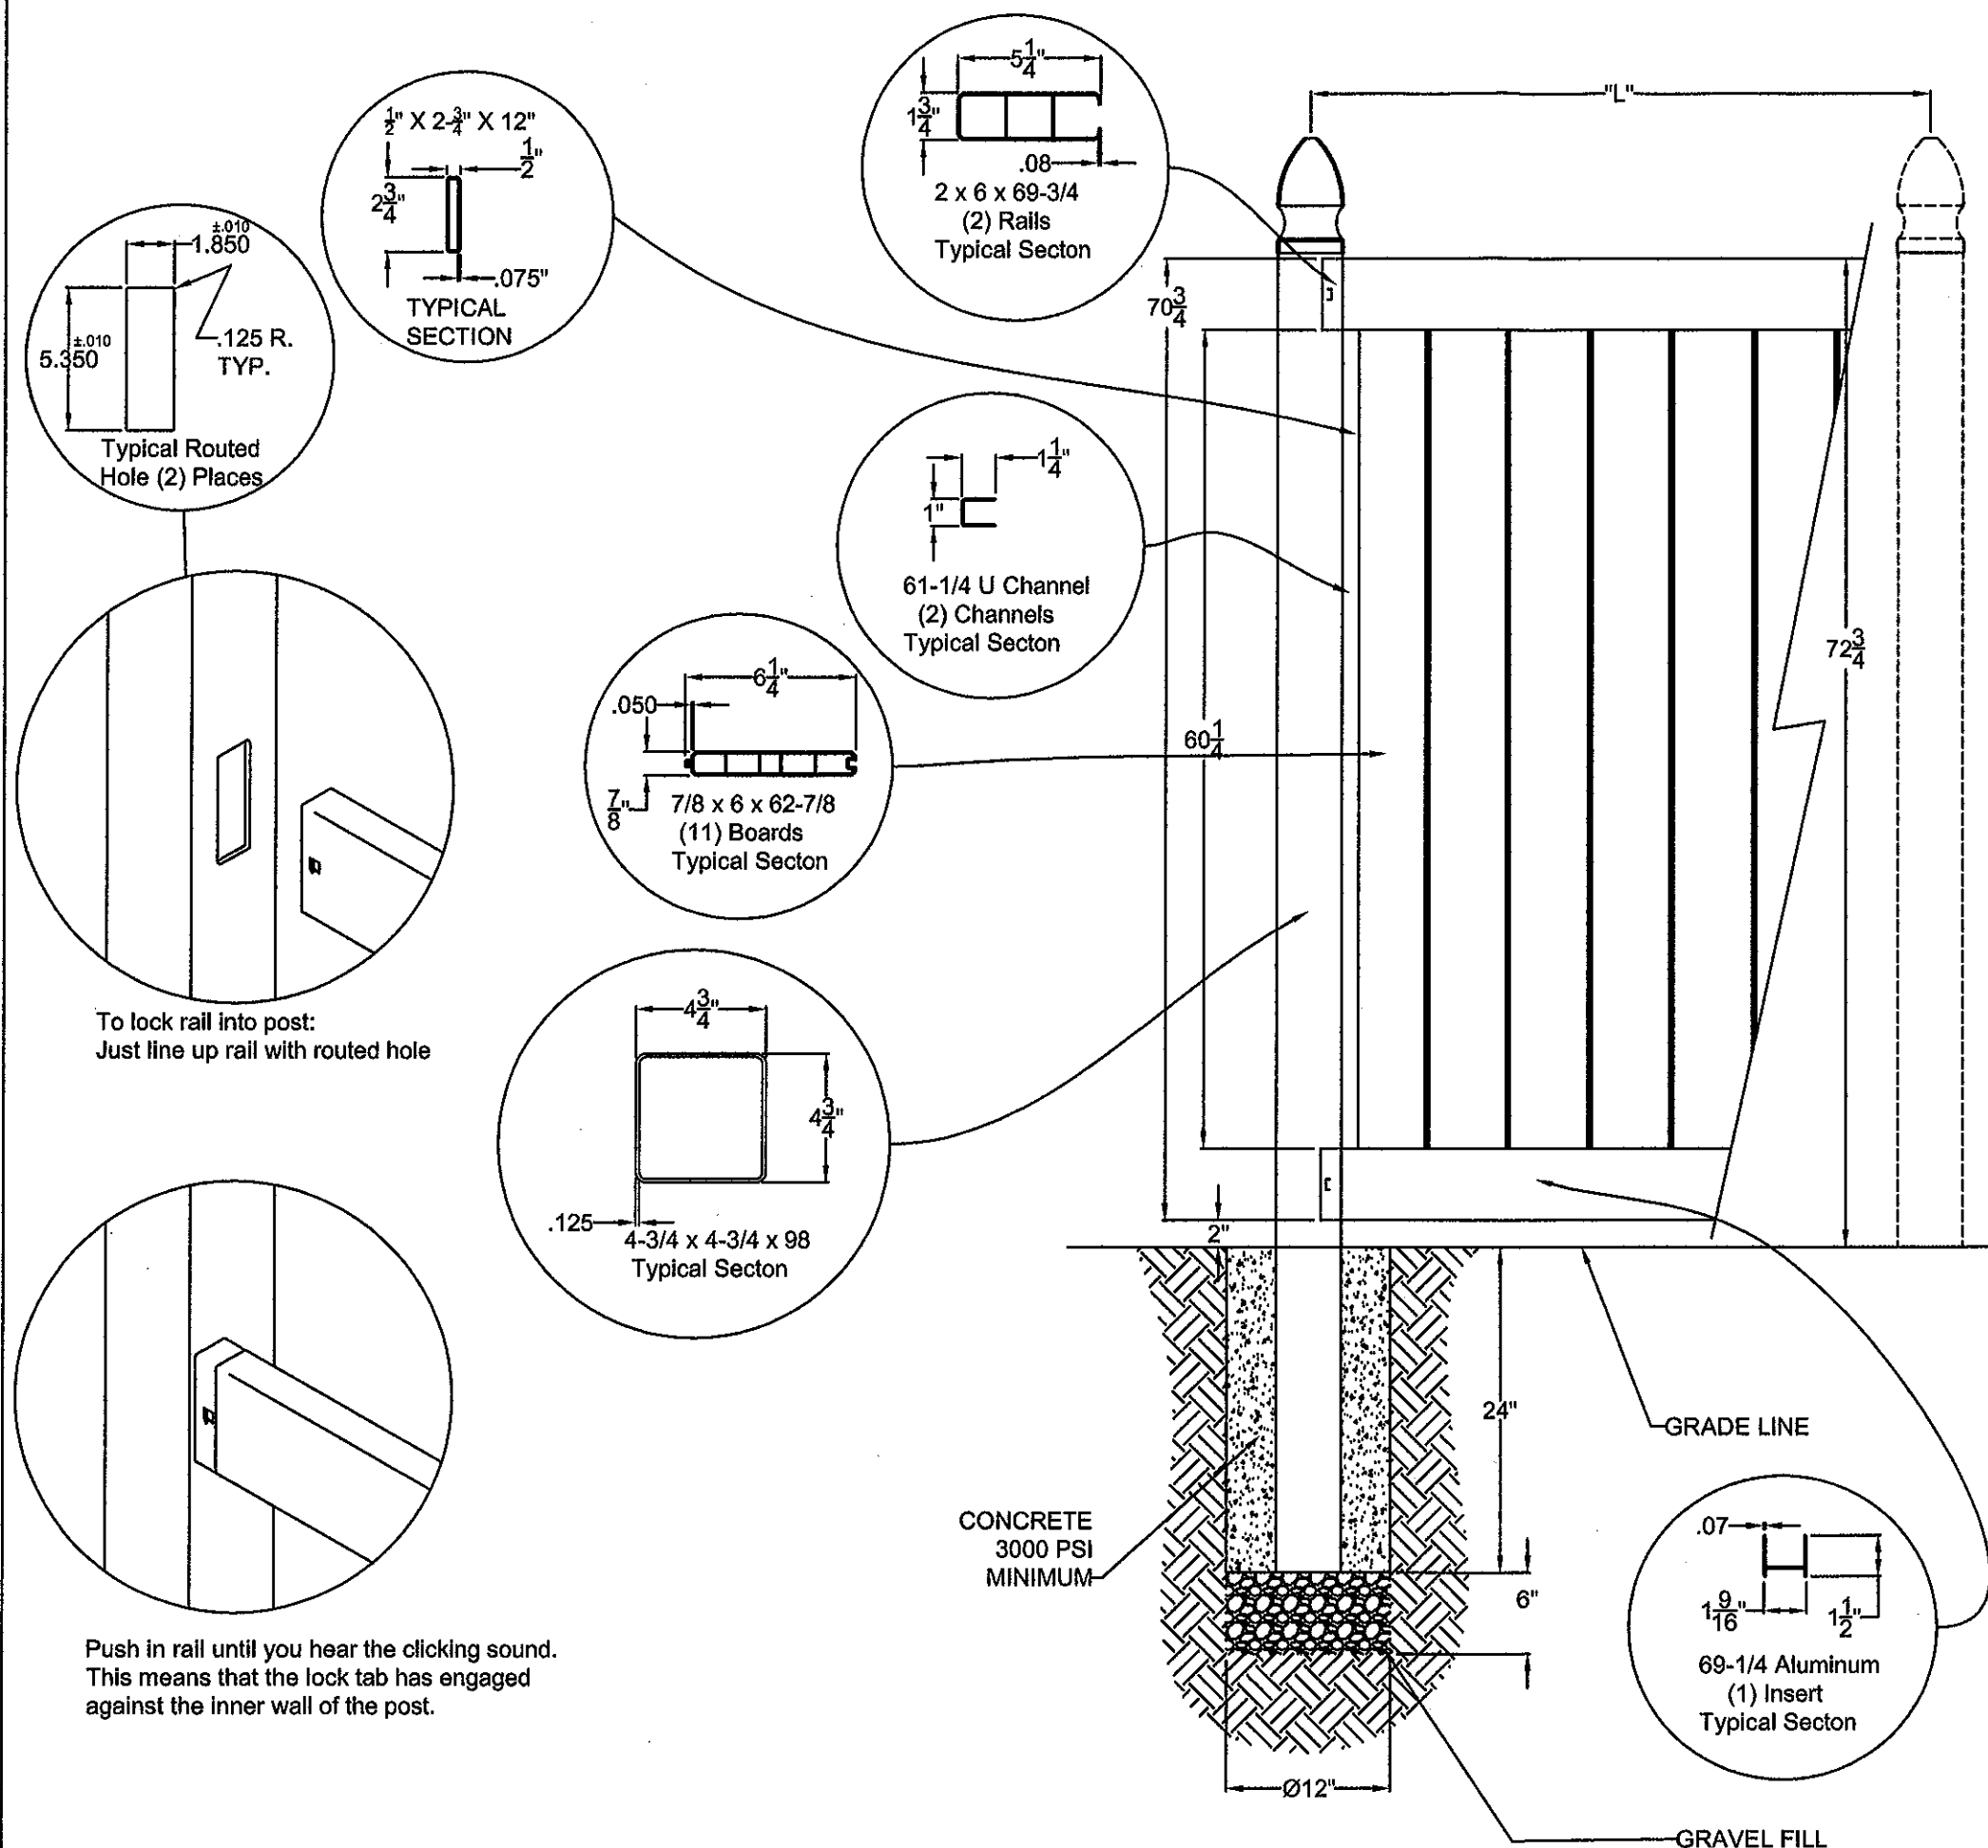

Push in rail until you hear the clicking sound. This means that the lock tab has engaged against the inner wall of the post.

To lock rail into post: Just line up rail with routed hole

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1  
THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST)  
WHEN THE MAXIMUM POST CENTERS (L) ARE 70.25" ON CENTER

## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,00	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

## PVC FENCE STATESVILLE PANEL PRO-SERIES STYLE


DRAWING NO: USF73073572

12-16-05 8/18/11  
USE 12  
RUB

Sheet # 4 of 11

Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908.06  
Expiration Date 12/21/2016  
By *Heather A. Nelson*  
Miami Dade Product Control

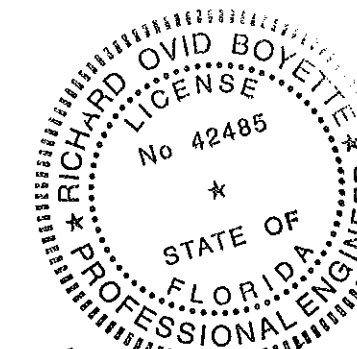

APPROVED AUG 22 2011

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

61-1/4 U Channel  
(2) Channels  
Typical Section

2 x 6 x 69-3/4  
(2) Rails  
Typical Section

7/8 x 8 x 62-7/8  
(8) Boards  
Typical Section

4-3/4 x 4-3/4 x 98  
Typical Section

69-1/4 Aluminum  
(1) Insert  
Typical Section

CONCRETE  
3000 PSI  
MINIMUM

GRADE LINE

GRAVEL FILL

Typical Routed  
Hole (2) Places

To lock rail into post:  
Just line up rail with routed hole

Push in rail until you hear the clicking sound.  
This means that the lock tab has engaged  
against the inner wall of the post.

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1 THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST) WHEN THE MAXIMUM POST CENTERS (L) ARE 70.25" ON CENTER

## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101 (D4216)	
Specifications	Value	ASTM
Specific Gravity ( $\pm 0.02$ ) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-


## PVC FENCE BELLHAVEN LATTICE PANEL PRO-SERIES STYLE

DRAWING NO: USF73073772

12-16-05  
8/18/11  
Sheet # 5 of 11


Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908.06  
Expiration Date 12/21/2016  
By *Helmut A. Mohr*  
Miami Dade Product Control

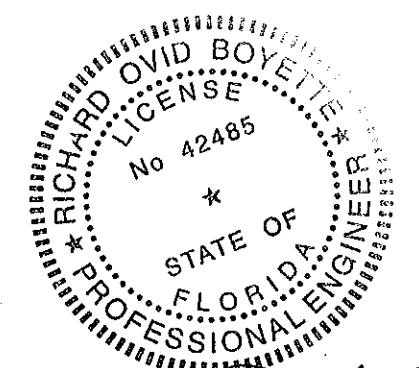

*Richard Boyette*  
APPROVED AUG 22 2011  
complies w/ 2007 FBC

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

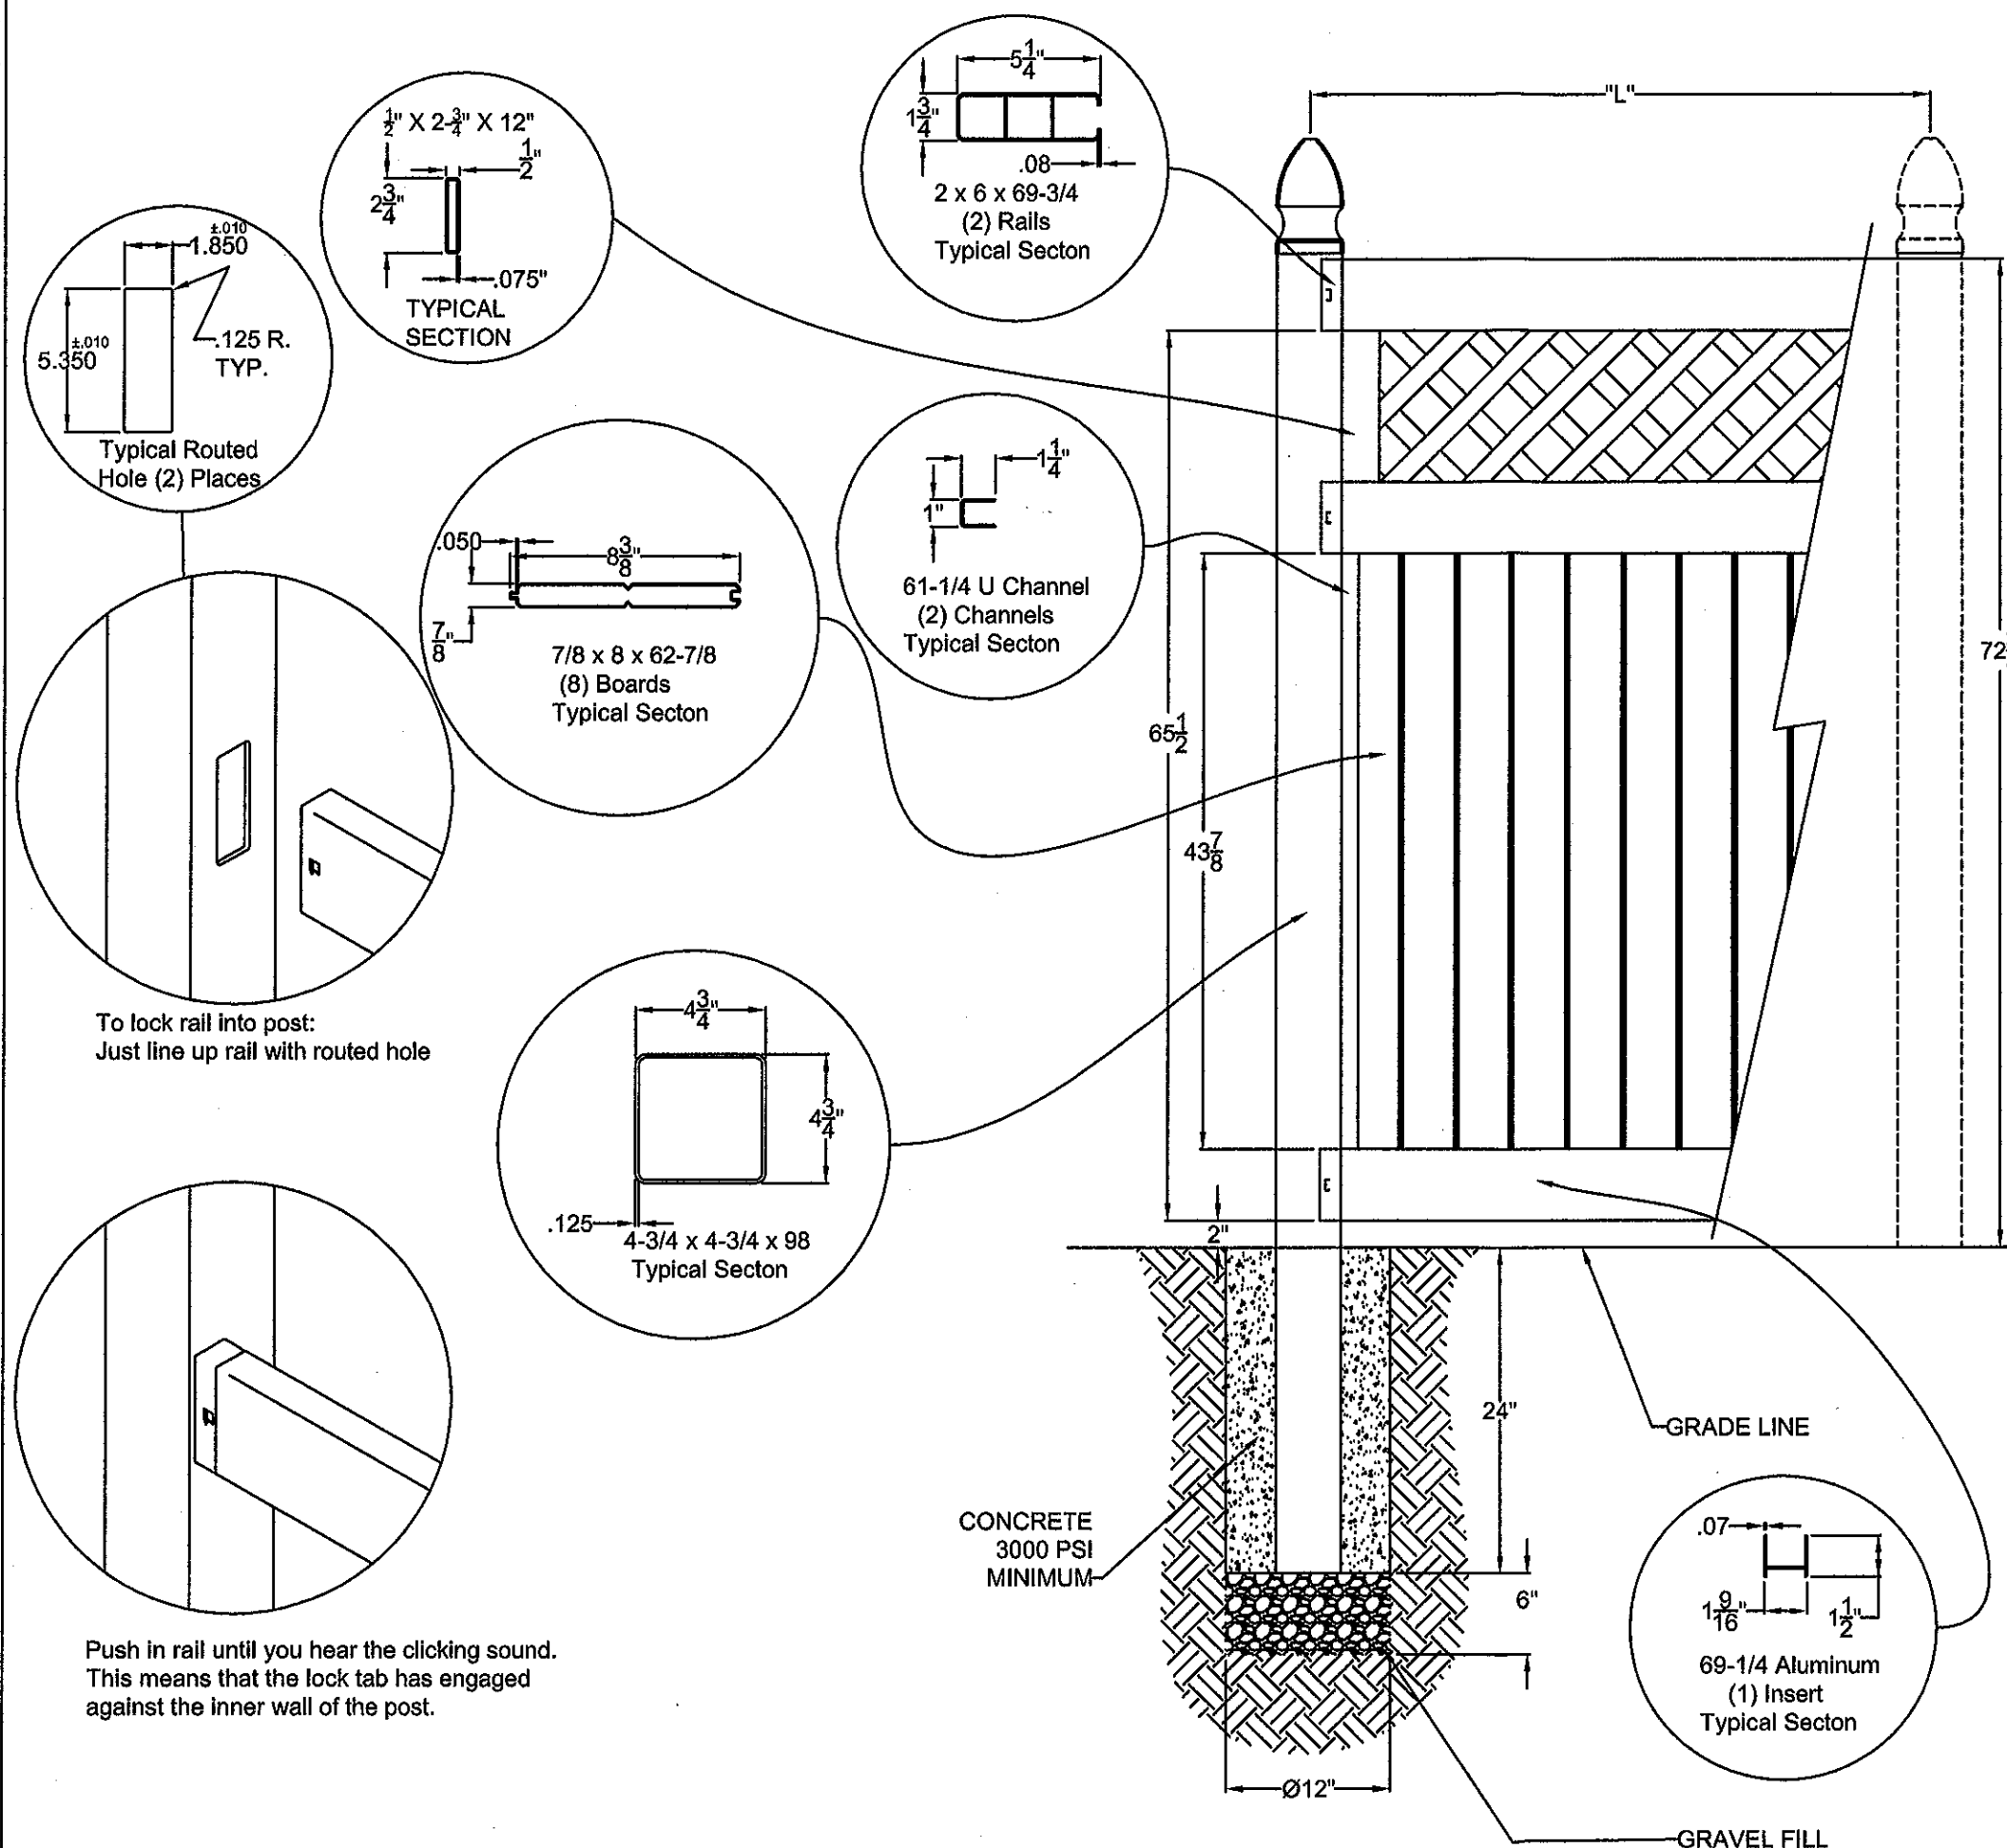



# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1 THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST) WHEN THE MAXIMUM POST CENTERS (L) ARE 71.25" ON CENTER

## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity ( $\pm 0.02$ ) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL @ 264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

## PVC FENCE GRAND HAVEN LATTICE PANEL PRO-SERIES STYLE


DRAWING NO: USF73082372

12-18-05 8/18/11 USE 11

Sheet # 6 of 11


Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908.06  
Expiration Date 12/21/2016  
By *Heather A. Miller*  
Miami Dade Product Control

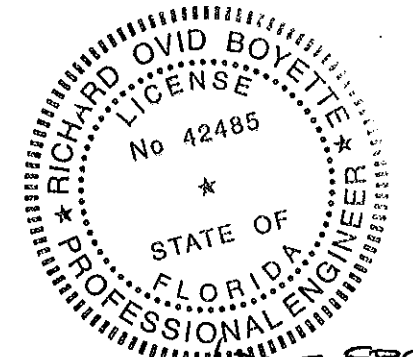

COMPLIES WITH 2007 FBC  
*[Signature]*  
APPROVED AUG 22 2011

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

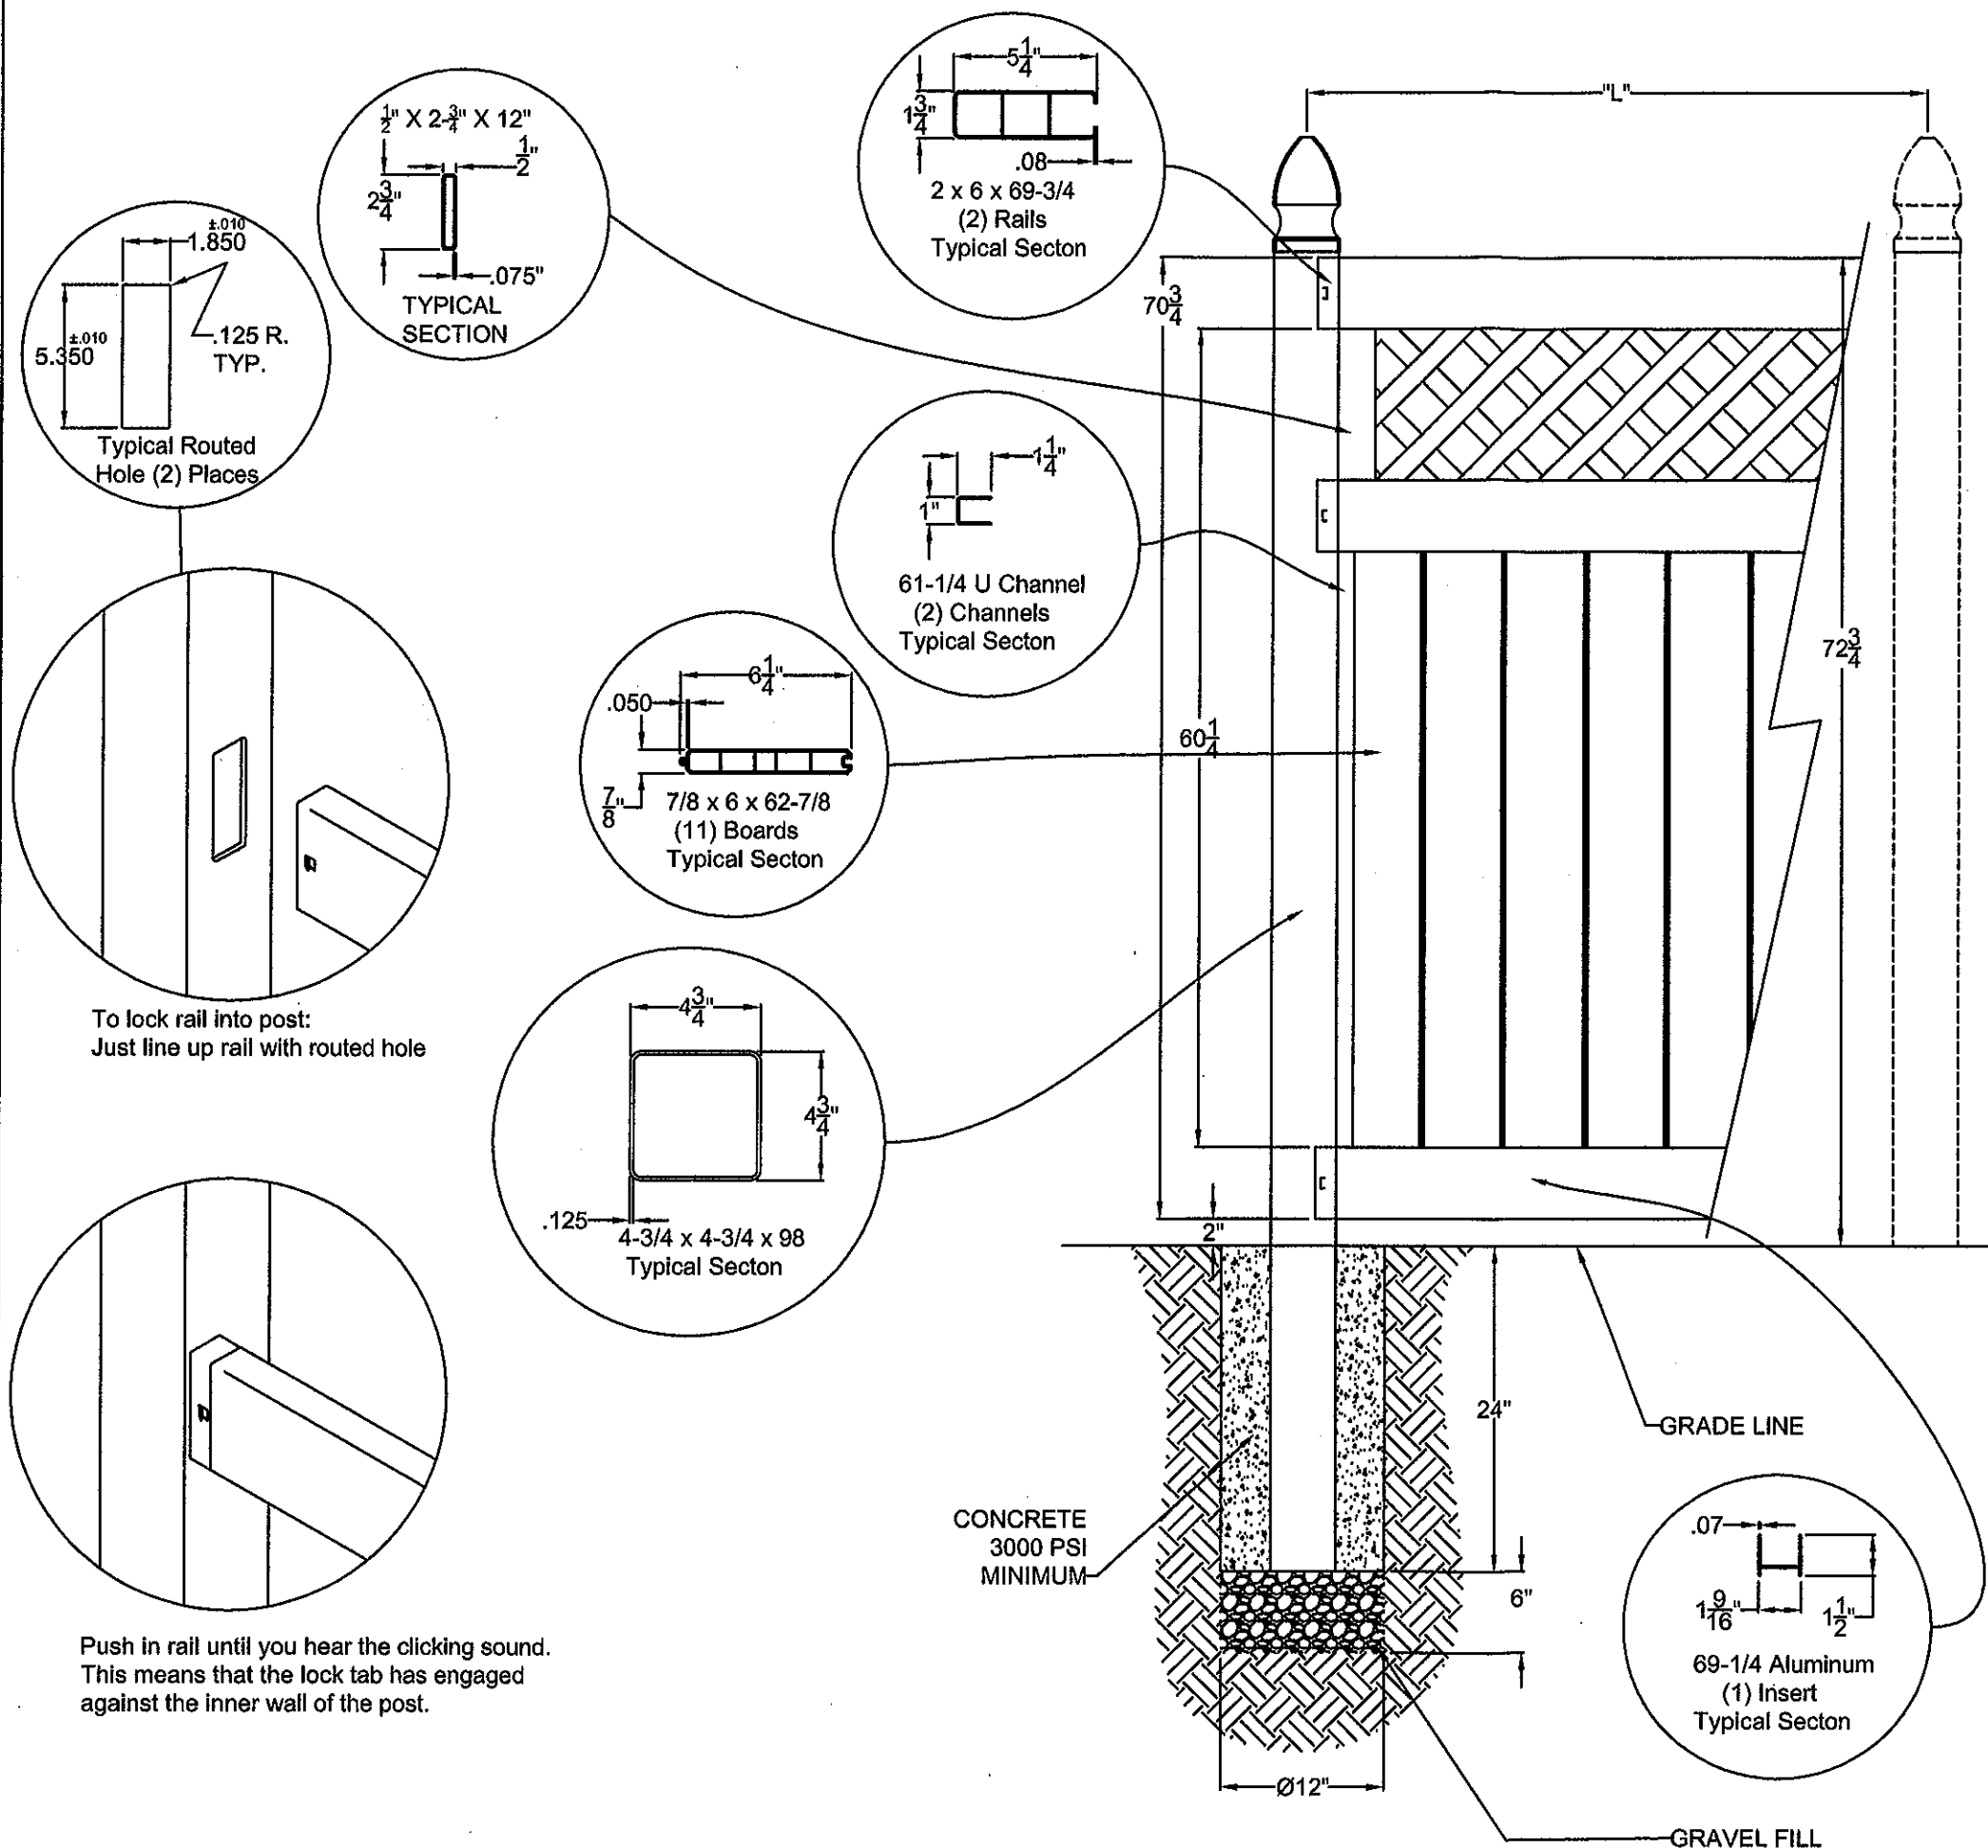

**WIND LOAD RATING**


THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS  
ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1  
THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND  
VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST)  
WHEN THE MAXIMUM POST CENTERS (L) ARE 95" ON CENTER

### PVC MATERIAL SPECIFICATIONS


**PVC FENCE  
ARLINGTON POOL FENCE  
PRO-SERIES STYLE**

12-18-05 8/18/11 USF32  
Sheet # 7 of 11

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908.06  
Expiration Date 12/21/2016  
By H. L. J. M. M.  
Miami Dade Product Control



BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

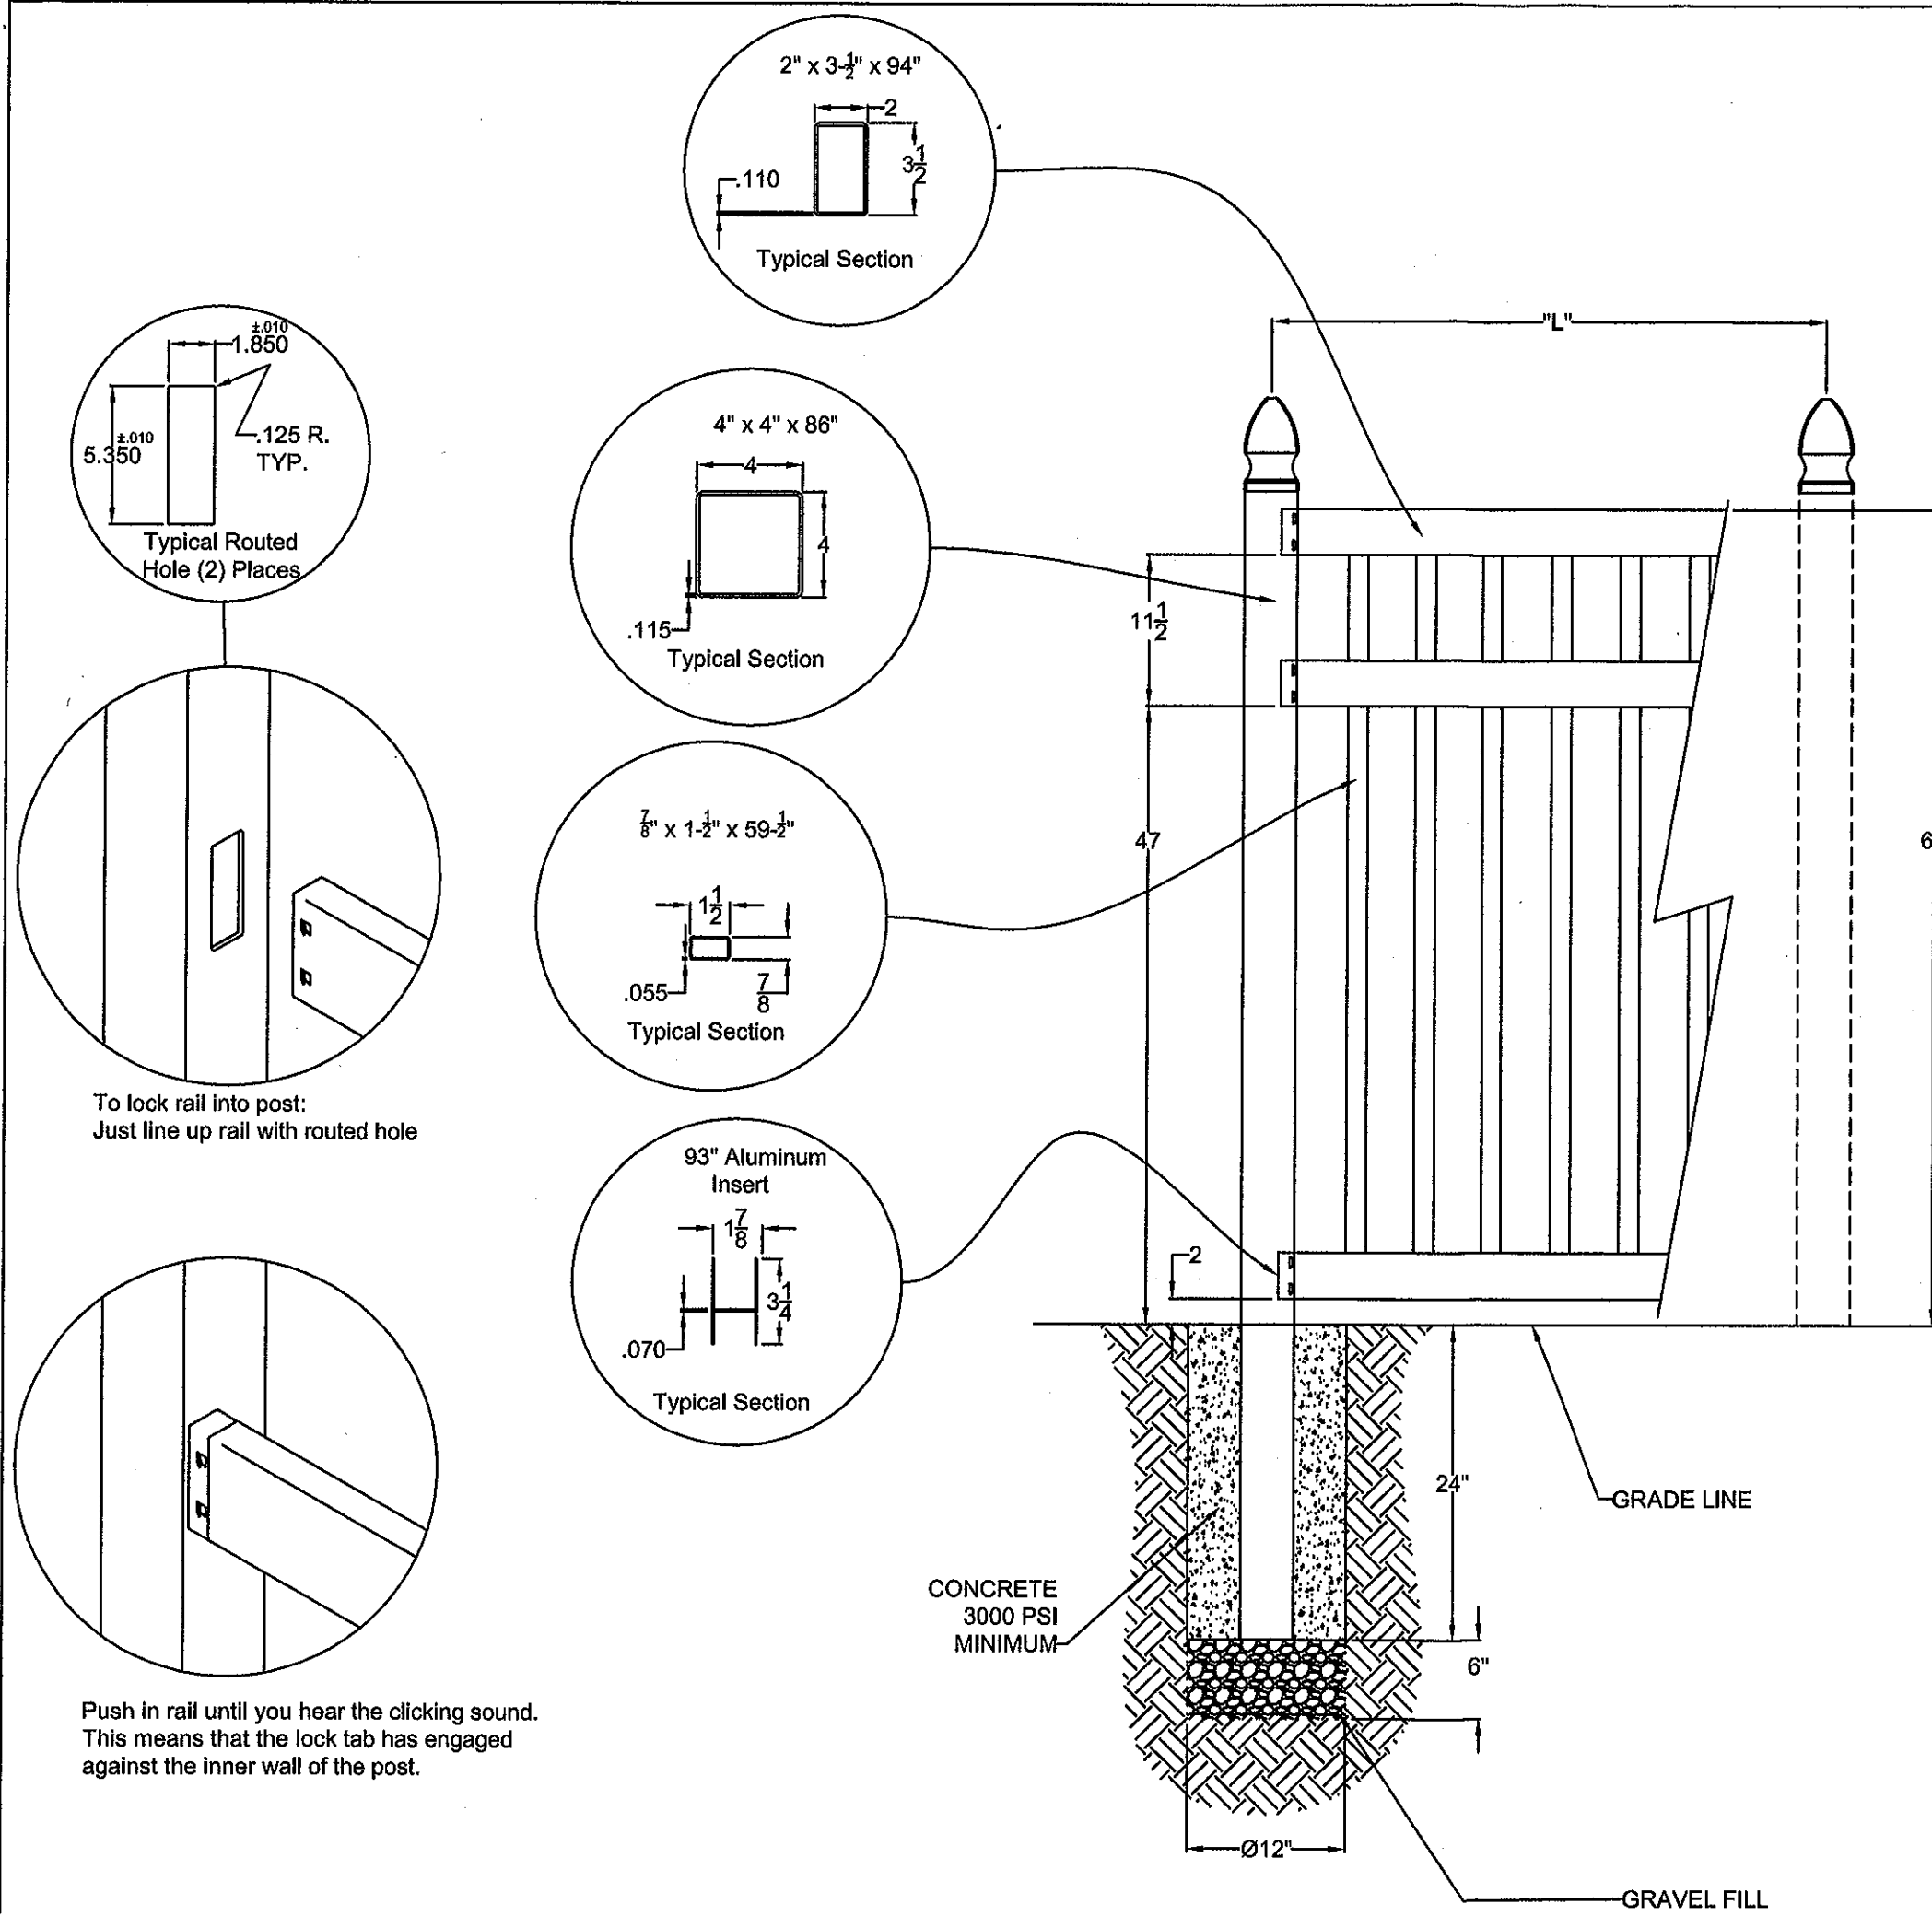

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1  
THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST)  
WHEN THE MAXIMUM POST CENTERS (L) ARE 95" ON CENTER

## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	385,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,00	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

## PVC FENCE WATERTOWN POOL FENCE PRO-SERIES STYLE


DRAWING NO: ~~USF79074572~~

12-16-05 8/18/11

Sheet # 8 of 11









Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908-06  
Expiration Date 12/21/2016  
By *Heather A. Mohr*  
Miami Dade Product Control

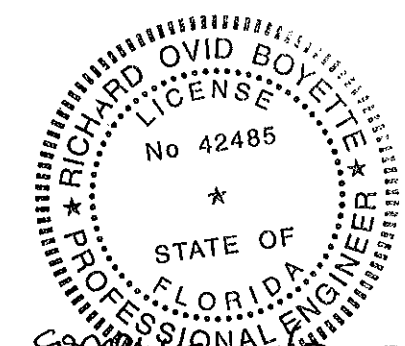

*Approved*  
APPROVED AUG 28 2011

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

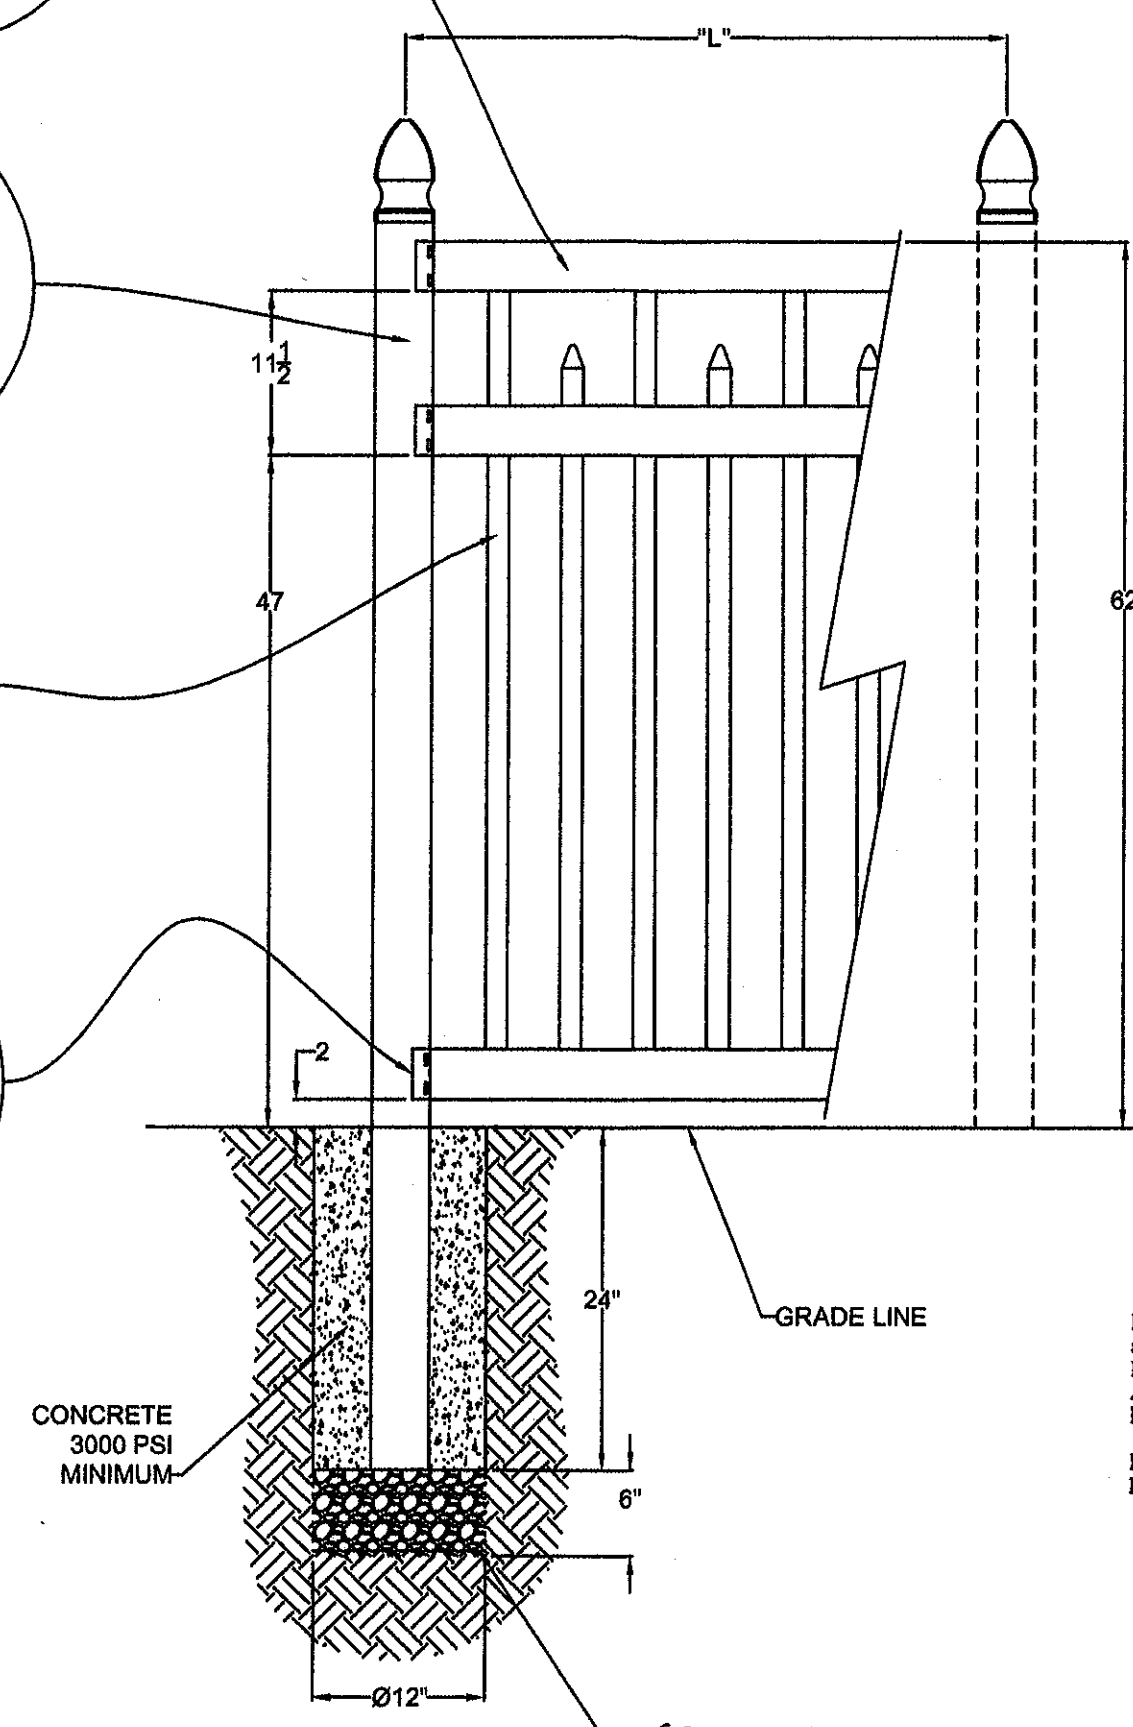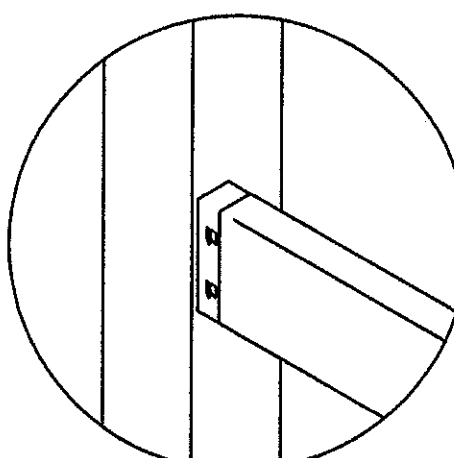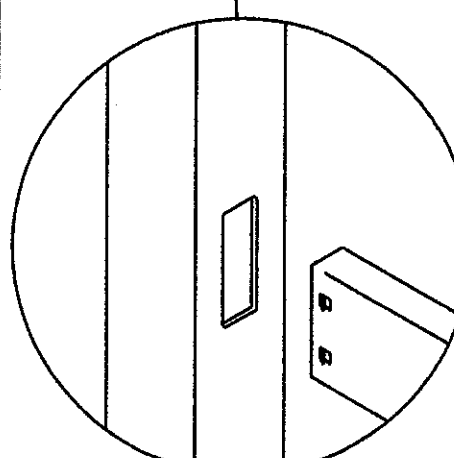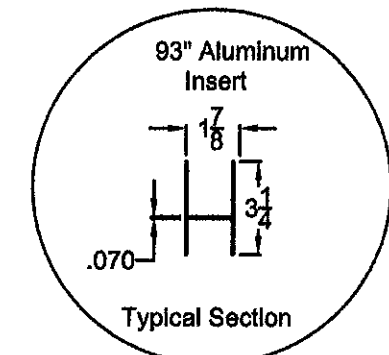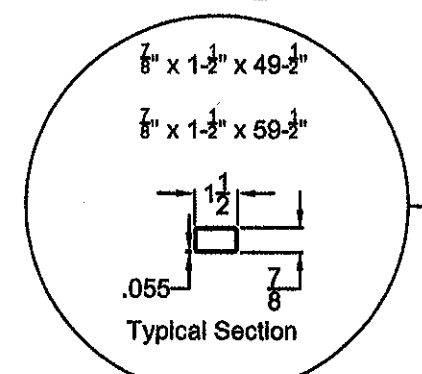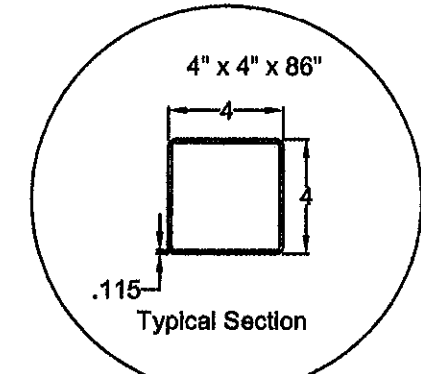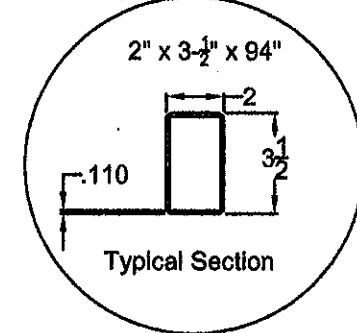

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1 THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST) WHEN THE MAXIMUM POST CENTERS (L) ARE 96" ON CENTER

## PVC MATERIAL SPECIFICATIONS


ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,00	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

## PVC FENCE 4 RAIL FENCE POST-N-RAIL







DRAWING NO: ~~USF4RAIL~~  
12-16-07 8/18/11 *JS*  
Sheet # 9 of 11

Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908-06  
Expiration Date 12/21/2016  
By *Heather A. Walker*  
Miami Dodge Product Control

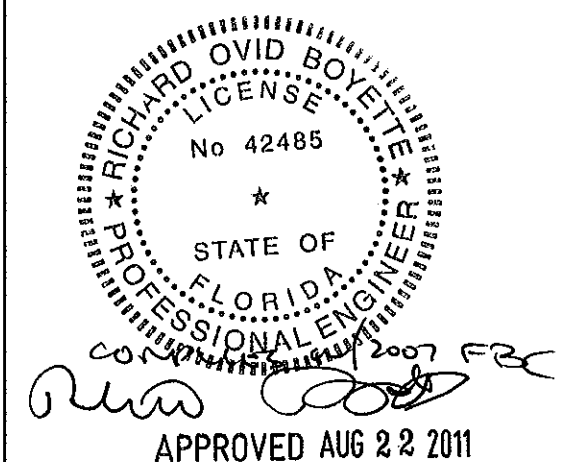

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

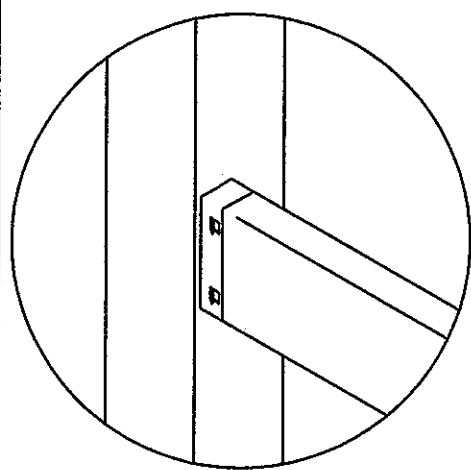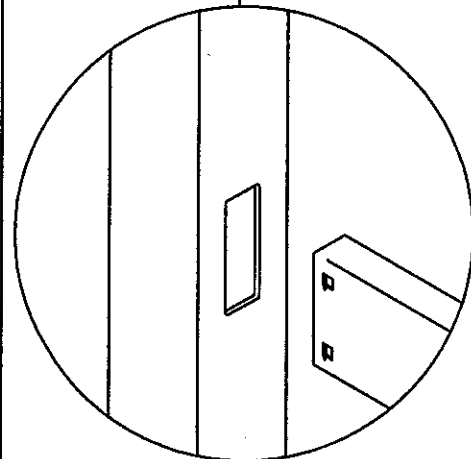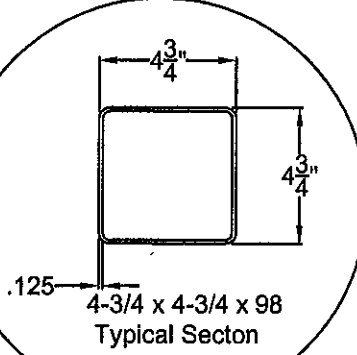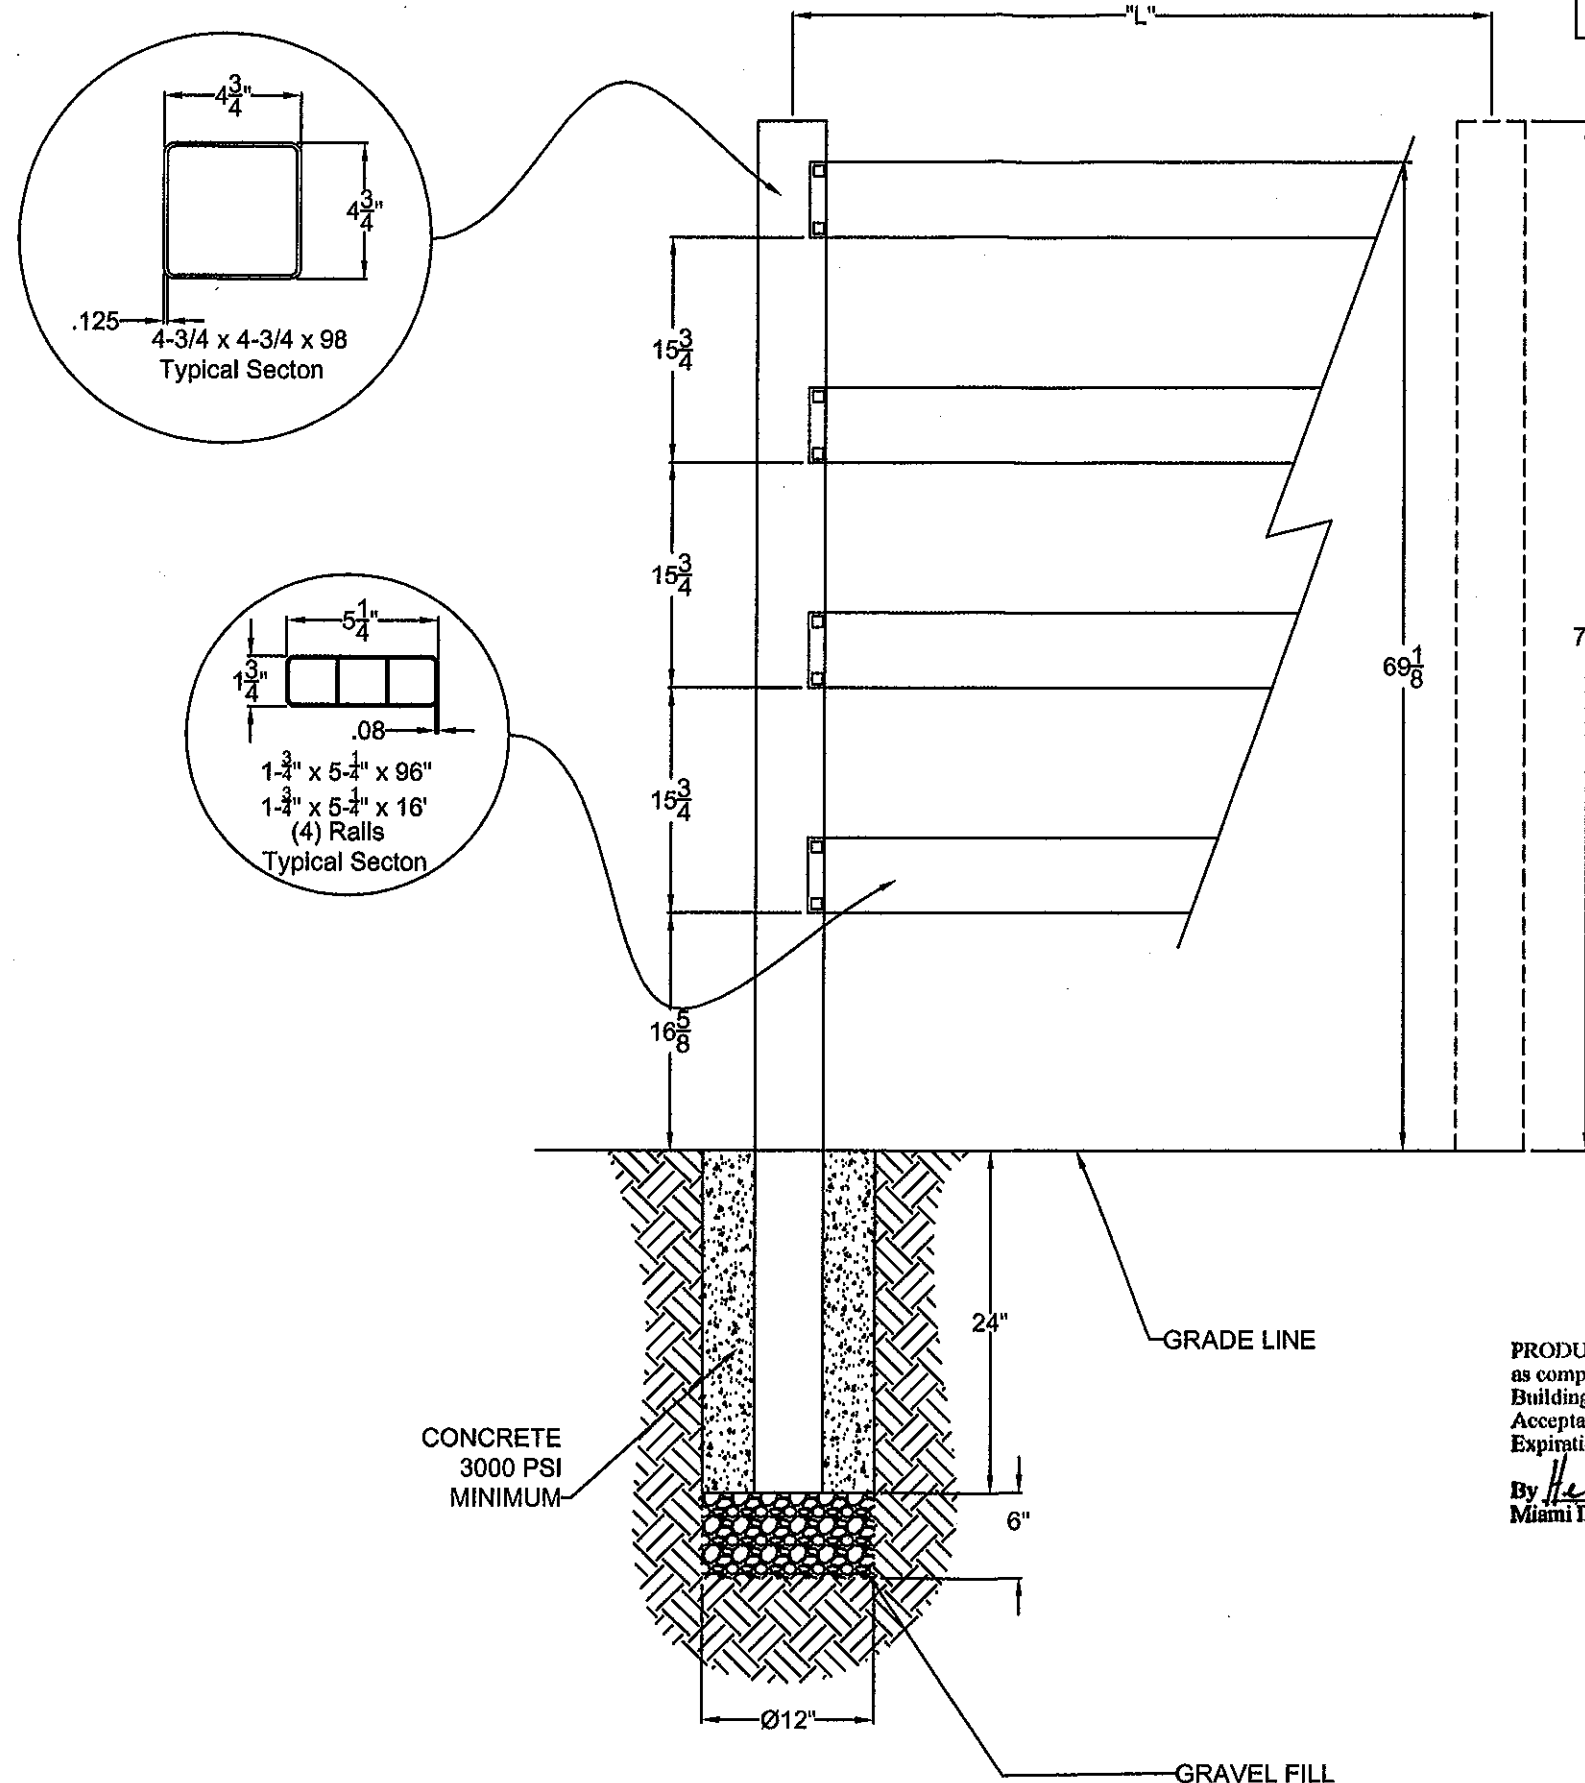

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1  
THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST)  
WHEN THE MAXIMUM POST CENTERS (L) ARE 96" ON CENTER





## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,00	D-790
DTUL@264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-

## PVC FENCE 3 RAIL FENCE POST-N-RAIL

DRAWING NO: USF3RAIL-  
12-16-05 8/18/11  
Sheet # 10 of 11


Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

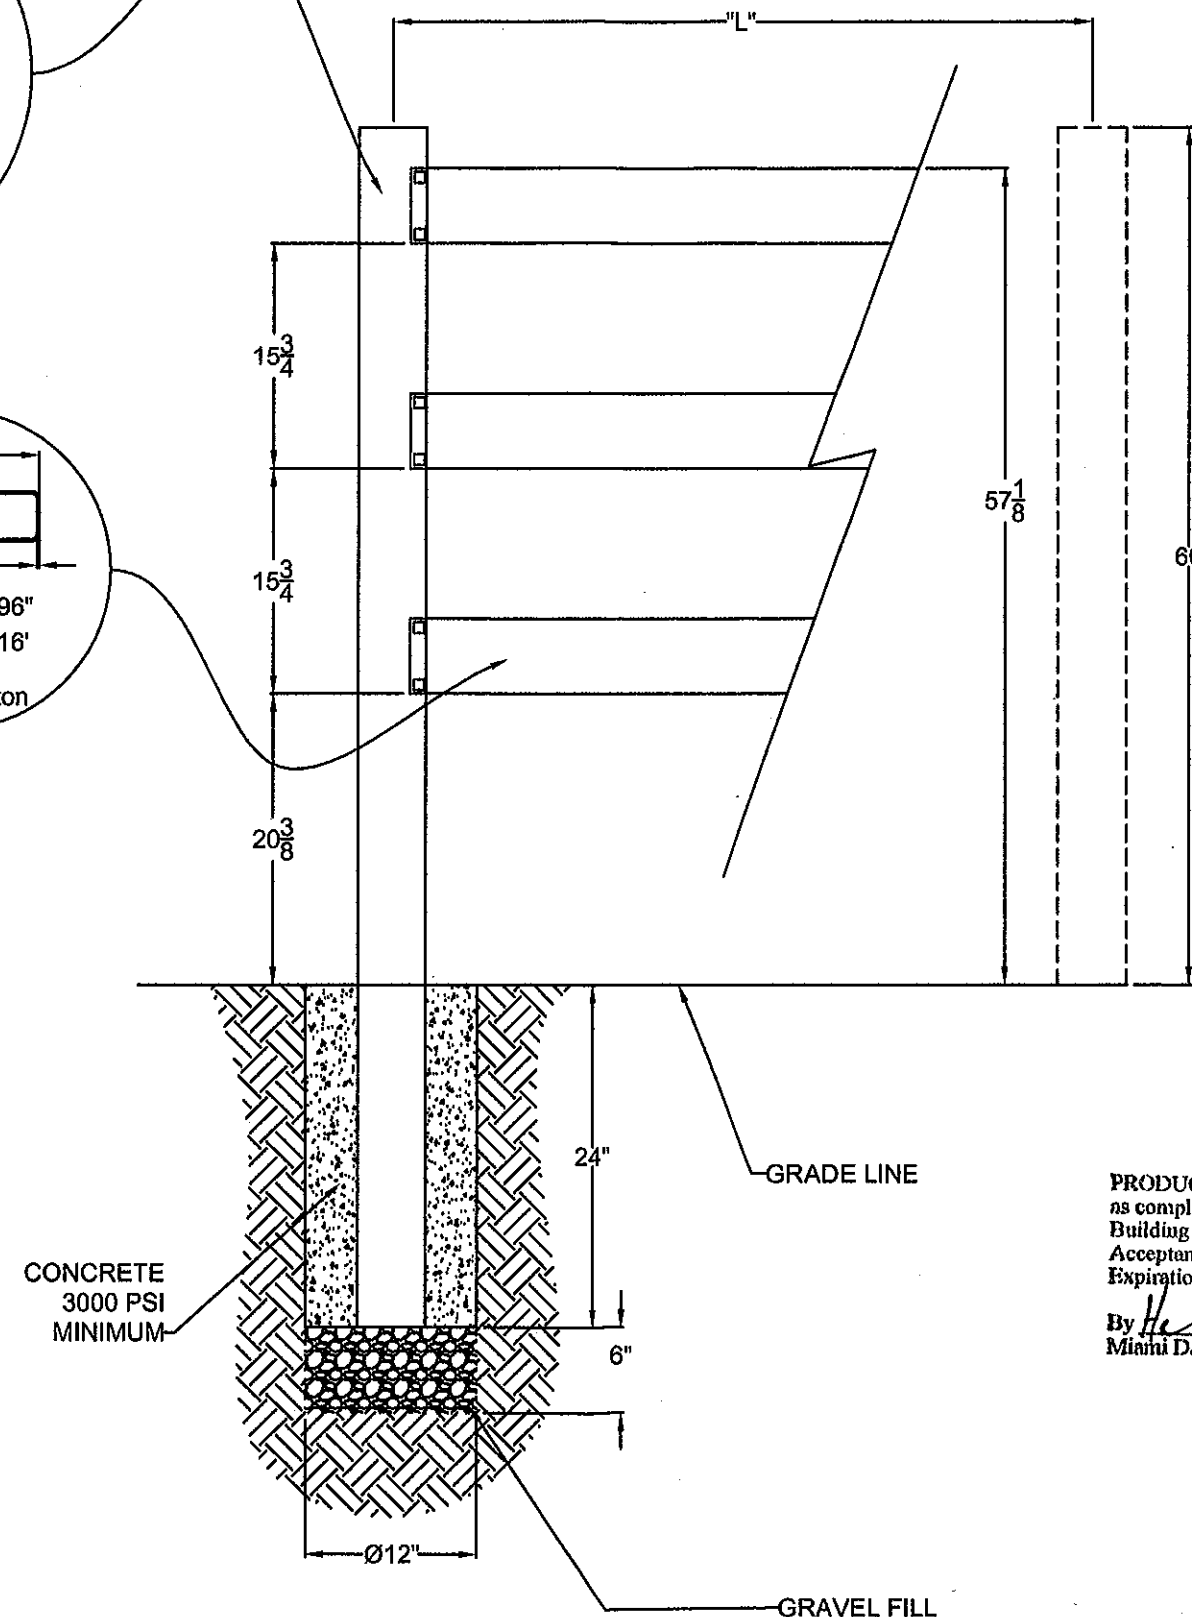

To lock rail into post:  
Just line up rail with routed hole

Push in rail until you hear the clicking sound.  
This means that the lock tab has engaged  
against the inner wall of the post.

PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908.06  
Expiration Date 12/21/2016  
By *Heather A. Walker*  
Miami Dade Product Control

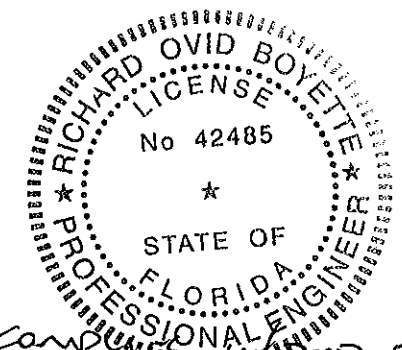

APPROVED AUG 22 2011

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

# WIND LOAD RATING

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH FLORIDA BUILDING CODE R44003.2.1  
THIS FENCE IS APPROVED FOR MAXIMUM SUSTAINED WIND VELOCITY OF 75 MPH (90 MPH 3-SECOND GUST)  
WHEN THE MAXIMUM POST CENTERS (L) ARE 96" ON CENTER


## PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40323-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.45	D-792
Izod Impact FT*lbs/in notch	17.0	D-256
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	385,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,00	D-790
DTUL @264 PSI, Degrees Celsius	72	D-648
TiO2 - Titanium Dioxide UV Inhibitor	10/100	-


## PVC FENCE 2 RAIL FENCE POST-N-RAIL

DRAWING NO: ~~USF2RAIL~~  
12-16-05 8/18/11 *USF12*  
Sheet # 11 of 11




Richard Boyette, FL P.E. 42485  
Rick Boyette Consulting, Inc. CoA #9707  
4031 Coconut Boulevard  
Royal Palm Beach, Florida 33411  
(561) 790-5766

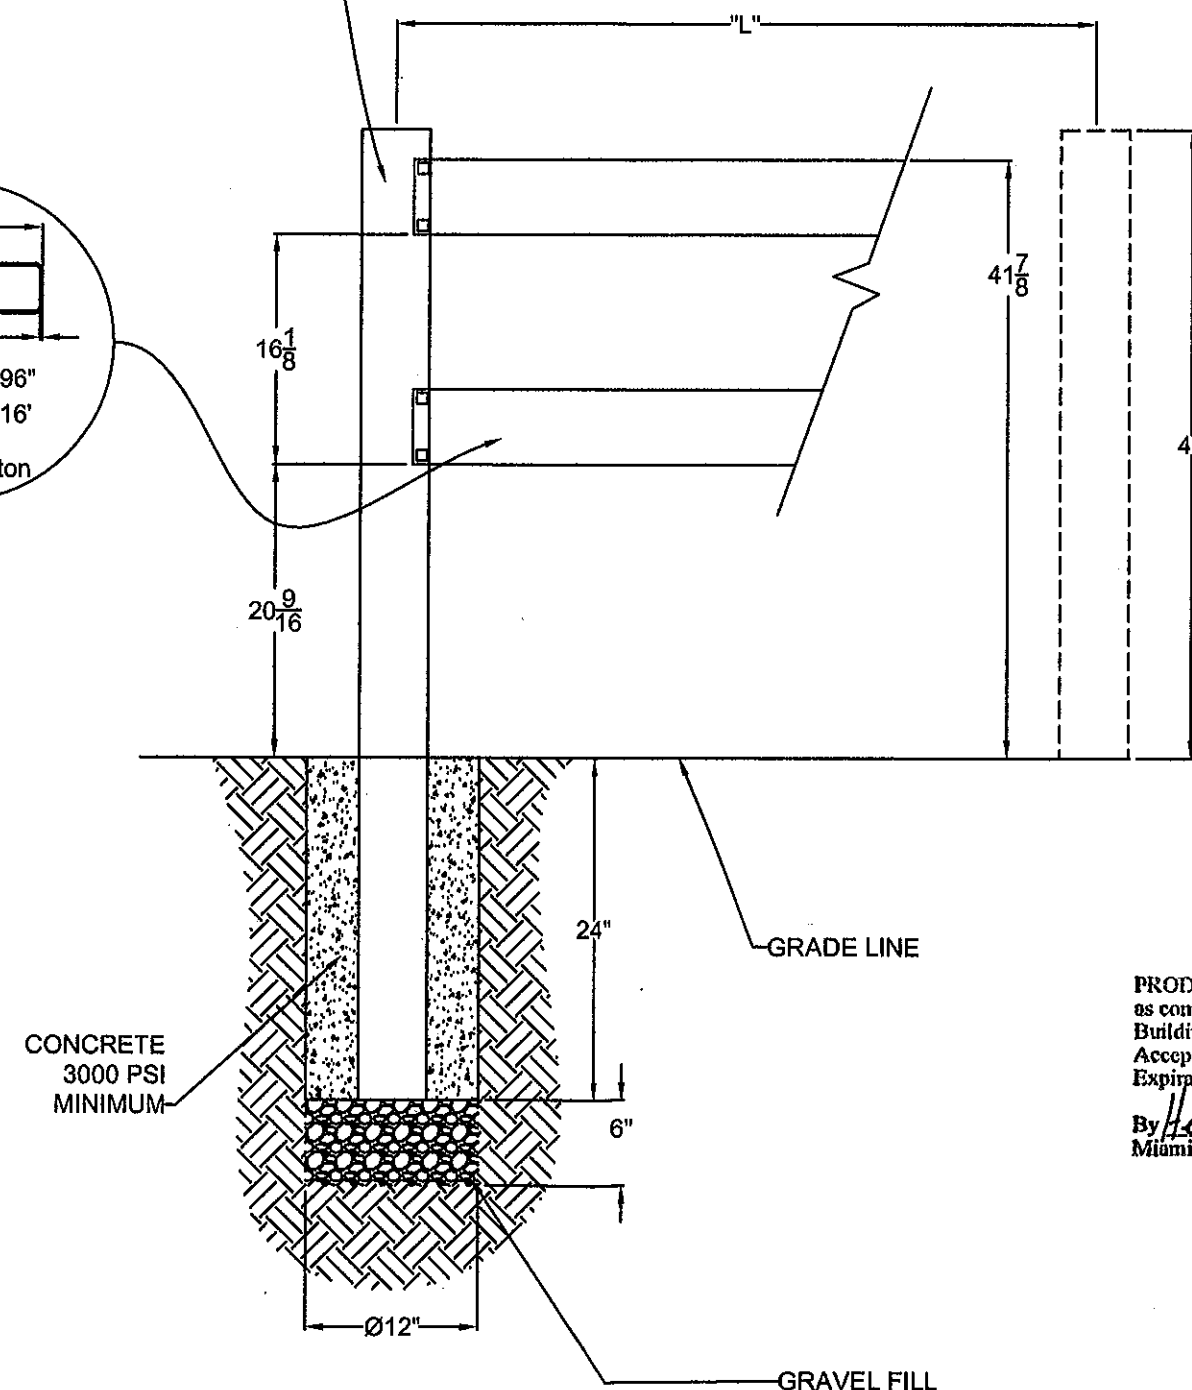


PRODUCT RENEWED  
as complying with the Florida  
Building Code  
Acceptance No 11-0908.06  
Expiration Date 12/21/2016  
By *Heather A. Miller*  
Miami Dade Product Control

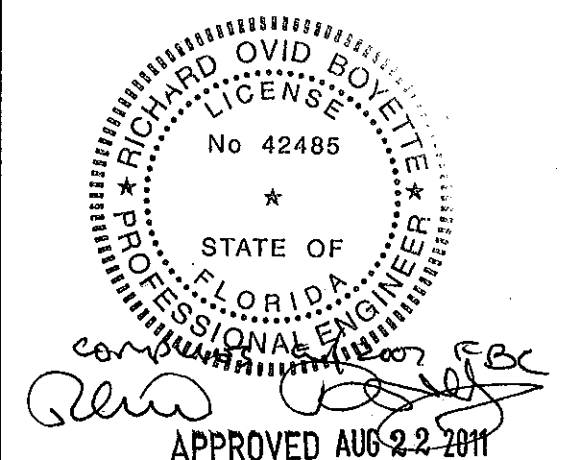

BARRETTE OUTDOOR LIVING  
7830 FREEWAY CIRCLE  
MIDDLEBURG HEIGHTS, OH 44130  
440-891-0790

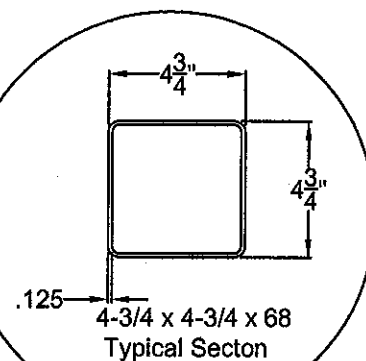

To lock rail into post:  
Just line up rail with routed hole

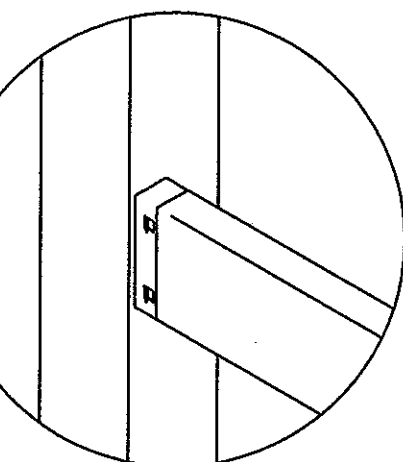

Push in rail until you hear the clicking sound.  
This means that the lock tab has engaged  
against the inner wall of the post.