



DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY AFFAIRS (PERA)
 BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
 PRODUCT CONTROL SECTION
 11805 SW 26 Street, Room 208
 Miami, Florida 33175-2474
 T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/pera

NOTICE OF ACCEPTANCE (NOA)

Canplas LLC.
Box 1800
Barrie, ON Canada L4M4V3

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. PERA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Slant Back Weather Pro Roof Vent

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of pages 1 through 3.
 The submitted documentation was reviewed by Alex Tigera.



NOA No: 11-0930.08
Expiration Date: 05/24/17
Approval Date: 05/24/12
Page 1 of 3

ROOFING COMPONENT APPROVAL

Category: Roofing
Sub-Category: Ventilation
Materials: Plastic

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Slant Back Weather Pro Roof Vent	Wide = 18" Length = 24" Height = 3-1/2"	TAS 100	Injection-molded vinyl, low profile shingle over attic vent, for use on shingle roof systems.

MANUFACTURING LOCATION:

1. Barrie, Ontrio CANADA

EVIDENCE SUBMITTED:

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Architectural Testing	TAS 100A(95)	B0281.01-109-18	08/11/11
ETC Laboratories	ETC-06-718-18119.0	ASTM D 2843 ASTM D 1929 ASTM D 635	09/11/06
CSA International	094693_0_000	Material Certification Record	12/19/11

APPROVED APPLICATIONS:

Slot: At chosen location starting 12" down from the ridge cut a hole through shingles and sheathing boards. Cut out shall be 6-1/2" wide x 8-1/2" long. Remove roofing nails from top row of shingles so the flashing of the roof vent will slide under shingles. Carefully roll back the shingles along the top and sides of the cut out.

Installation: Carefully slide upper half of base of vent under previously rolled back until base is centered over cutout. Nail the Slant Back Weather Pro Roof Vent in place using 1-1/2" galvanized ring shank roofing nails at the corners and spaced 6" o.c. Roll back the shingles over the top and sides of the flange. All exposed nail heads and interfaces between the vents flange and the prepared roof covering shall be sealed with roof cement.

Net Free Area: Refer to manufacturers published literature

Minimum Slope: 2:12




NOA No: 11-0930.08
Expiration Date: 05/24/17
Approval Date: 05/24/12
Page 2 of 3

LIMITATIONS:

1. Refer to applicable Building Code for required ventilation.
2. Slant Back Weather Pro Roof Vent shall be installed to comply with applicable building codes and shall be installed over composition shingles roofs only.
3. Slant Back Weather Pro Roof Vent shall not be installed on roof mean heights greater than 33 feet.

DETAIL DRAWINGS

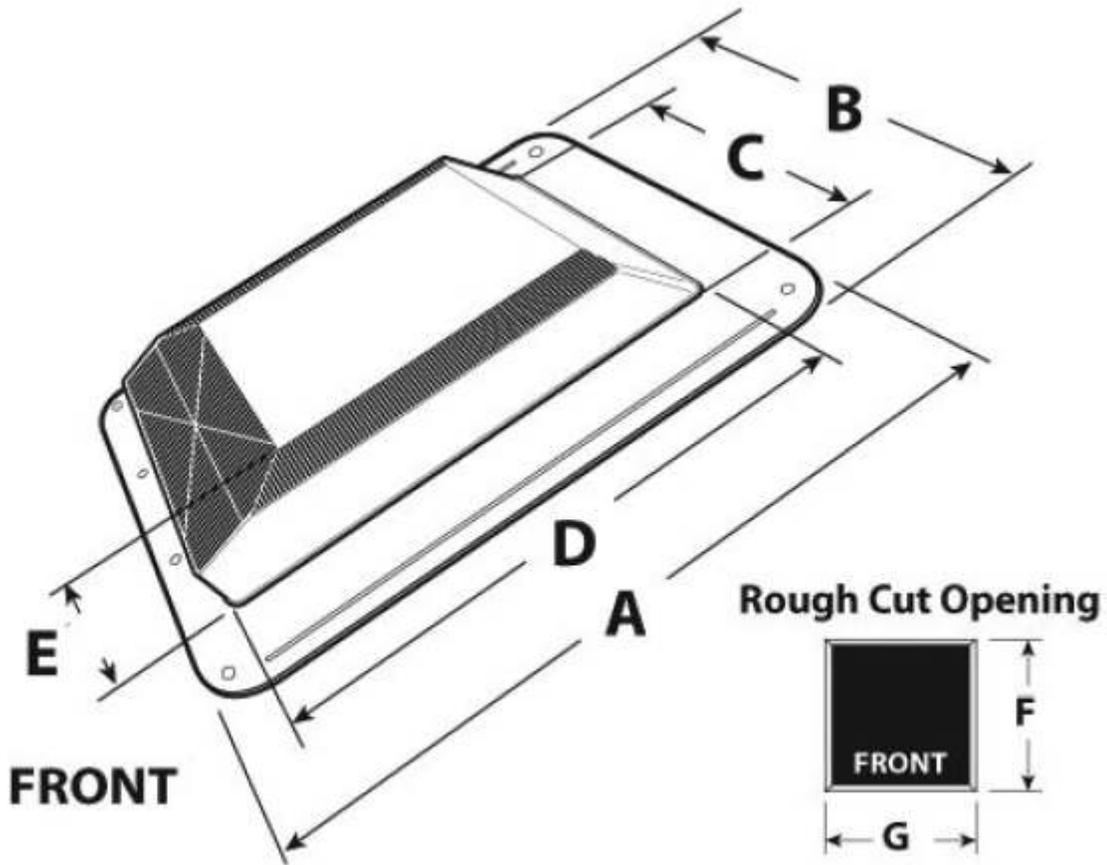

Dimensions (Inches)

A	B	C	D	E	F	G
24.000	18.000	12.000	19.000	3.500	8.500	6.500

END OF THIS ACCEPTANCE



NOA No: 11-0930.08
Expiration Date: 05/24/17
Approval Date: 05/24/12
Page 3 of 3