MIAMI-DADE COUNTY
DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Maxim Industries, Inc.
1630 Terre Colony Court
Dallas, TX 75212

Scope:
This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER- Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Dade Curb-Mount & Self-Flashing Skylight.

APPROVAL DOCUMENT: Drawing No. DCM-1 & DSF-1, titled " Dade Curb Mount & Dade Self Flashing ", sheets No. 1 and 2 of 2, prepared by Maxim Industries, Inc., dated 04/01/03 with no revisions, signed and sealed by Richard Boyette, P.E. on 04/10/2003, bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large & Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein and the dome shall be properly marked by Sheffield Plastics.
RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.
TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.
ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.
INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 08-0219.02** and consists of this page 1, evidence submitted pages E-1 & E-2 as well as approval document mentioned above.
The submitted documentation was reviewed by **Helmy A. Makar, P.E., M.S.**

MIAMI-DADE COUNTY APPROVED

04/18/2013

NOA No. 13-0306.04
Expiration Date: 05/15/2014
Approval Date: 04/18/2013

Maxim Industries, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #03-0224.11

A. DRAWINGS

1. *Drawing No. DCM-1 & DSF-1, sheet 1 and 2 of 2, titled "Dade Curb Mount & Dade Self Flashing", prepared by Maxim Industries, Inc, dated 04/01/03, with no revision, signed and sealed by R. Boyette, P.E.*

B. TESTS

1. *Test report on Large Missile Impact Test per TAS 201, Cyclic Load Test per TAS 203 and Uniform Static air Pressure Test per TAS 202 on "Dade Self-Flashing, Dade Curb mount", prepared by Architectural Testing, Inc, report No. 01-43381.01 issued on 01/29/03, signed and sealed by S. M. Uric, P.E.*

C. CALCULATIONS

1. *Anchor calculations prepared by Richard Burette, signed and sealed by R. Burette on 02/11/03*

D. MATERIAL CERTIFICATIONS

1. *Notice of Acceptance No. 01-0709.07 issued to Sheffield Plastics, Inc. on 08/23/01, expiring on 08/27/06.*

E. STATEMENTS

1. *Code compliance letter issued by Richard Burette, P.E. on 02/11/03, signed and sealed by R. Boyette, P.E.*

2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 08-0219.02

A. DRAWINGS

1. *None.*

B. TESTS

1. *None.*

C. CALCULATIONS

1. *None.*

D. QUALITY ASSURANCE

1. *By Miami-Dade County Building Code Compliance Office.*

E. MATERIAL CERTIFICATIONS

1. *None.*

Helmy A. Makar, P.E., M.S.
Product Control Unit Supervisor
NOA No. 13-0306.04
Expiration Date: 05/15/2014
Approval Date: 04/18/2013

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATIONS

1. None.

Helmy A. Makar, P.E., M.S.
Product Control Unit Supervisor
NOA No. 13-0306.04
Expiration Date: 05/15/2014
Approval Date: 04/18/2013

1. Minimum #12 X 1.25" fastener by others. Pre-punched installation holes 4" from each corner, maximum 10.5" on center. Minimum penetration = 1".
2. .060" X 1.5" X 1.75" 6063-T6 extruded aluminum retaining angle. Aluminum angle mitered and welded @ 4 corners.
3. 52.5" X 100.375" X .118" Hyzod inner polycarbonate dome @ 4" height. NOA: #01-0709-07.
4. 52.5" X 100.375" X .118" Hyzod outer polycarbonate dome @ 8" height. NOA: #01-0709-07.
5. OSI PR 256 urethane sealant: Located between aluminum angle retainer and top dome & between bottom dome and aluminum frame.
6. Butyl tape: 1" X .125" located between top and bottom domes.
7. 6063-T5 Extruded Aluminum Frame. 0.060" shape mitered and welded @ 4 corners.
8. #12 X 1.75" Fastener. One fastener located equidistant from each corner. (Four fasteners per skylight)
9. #10 X .375" stainless steel fastener @ 4" from each corner, maximum 11" on center.
10. Minimum distance = 4" from angle lip to roof surface for shingles or BUR without insulation. For insulation and tile roof add tile height and insulation thickness to the 4" minimum height.
11. All units equal to or less than 32 square feet will be accepted under this NOA.

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 13-0306.04
Expiration Date 05/15/2014
By
Miami Dade Product Control

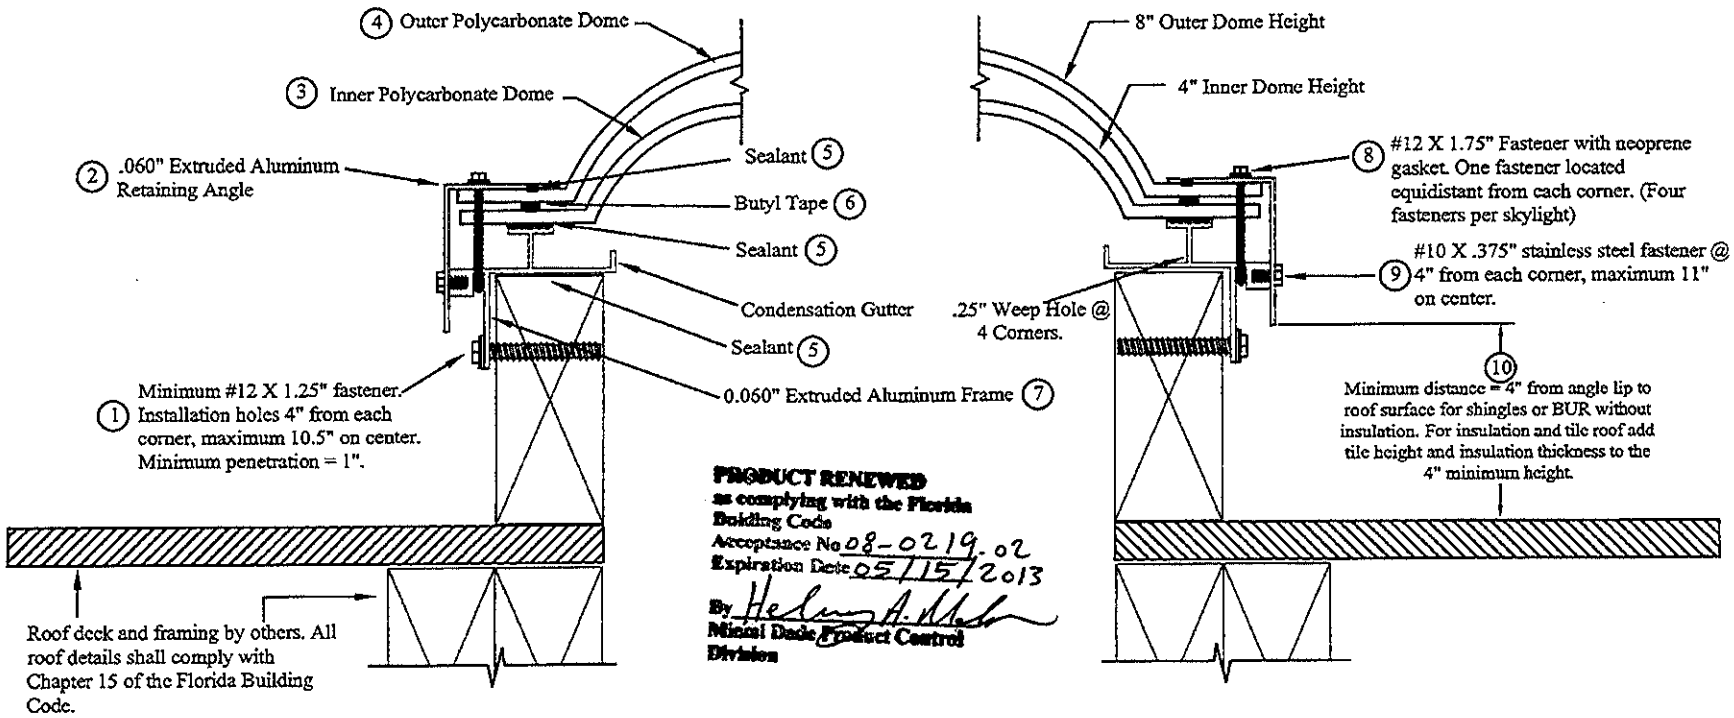

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 08-0219.02
Expiration Date 05/15/2013
By
Miami Dade Product Control
Division

Dade Curb Mount Model

Date: 04/01/03 Draw. #DCM-1
Drawing: Dade Curb Mount
Sheet#: 1 of 2
Design Pressure: 60psf +/-
Max. Skylight ID: 51.75" X 99.75"

Approved as complying with the
Florida Building Code
Date 05/15/03
NOA# 03-0224.11
Miami Dade Product Control
Division
By

RICHARD BOYETTE
FL PE # 42485
4031 COCONUT BLVD
ROYAL PALM BCH FL 3341
561-790-5766

4/10/03

MAXIM INDUSTRIES, INC
6170 Vanderbilt Avenue Dallas, TX 75214
Phone: 214.824.1557 Fax: 240.371.7345

1. Minimum #12 X 1.5" fastener by others. Pre-punched installation holes 3" from each corner, maximum 12" on center. Minimum penetration = 1".
2. .060" X 1.5" X 1.75" 6063-T6 extruded aluminum retaining angle. Aluminum angle mitered and welded @ 4 corners.
3. 49" X 97" X .118" Hyzod inner polycarbonate dome @ 4" height. NOA: #01-0709-07.
4. 49" X 97" X .118" Hyzod outer polycarbonate dome @ 8" height. NOA: #01-0709-07.
5. OSI PR 256 urethane sealant: Located between aluminum angle retainer and top dome & between bottom dome and aluminum frame.
6. Butyl tape: 1" X .125" located between top and bottom domes.
7. 6063-T5 Extruded Aluminum Frame. 0.060" shape mitered and welded @ 4 corners.
8. #12 X 1.75" Fastener. One fastener located equidistant from each corner. (Four fasteners per skylight)
9. #10 X .375" stainless steel fastener @ 4" from each corner, maximum 10" on center.
10. Minimum distance = 4" from angle lip to roof surface for shingles or BUR without insulation. For insulation and tile roof add tile height and insulation thickness to the 4" minimum height.
11. All units equal to or less than 32 square feet will be accepted under this NOA.

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 13-0306.04
Expiration Date 05/15/2014
By
Miami Dade Product Control

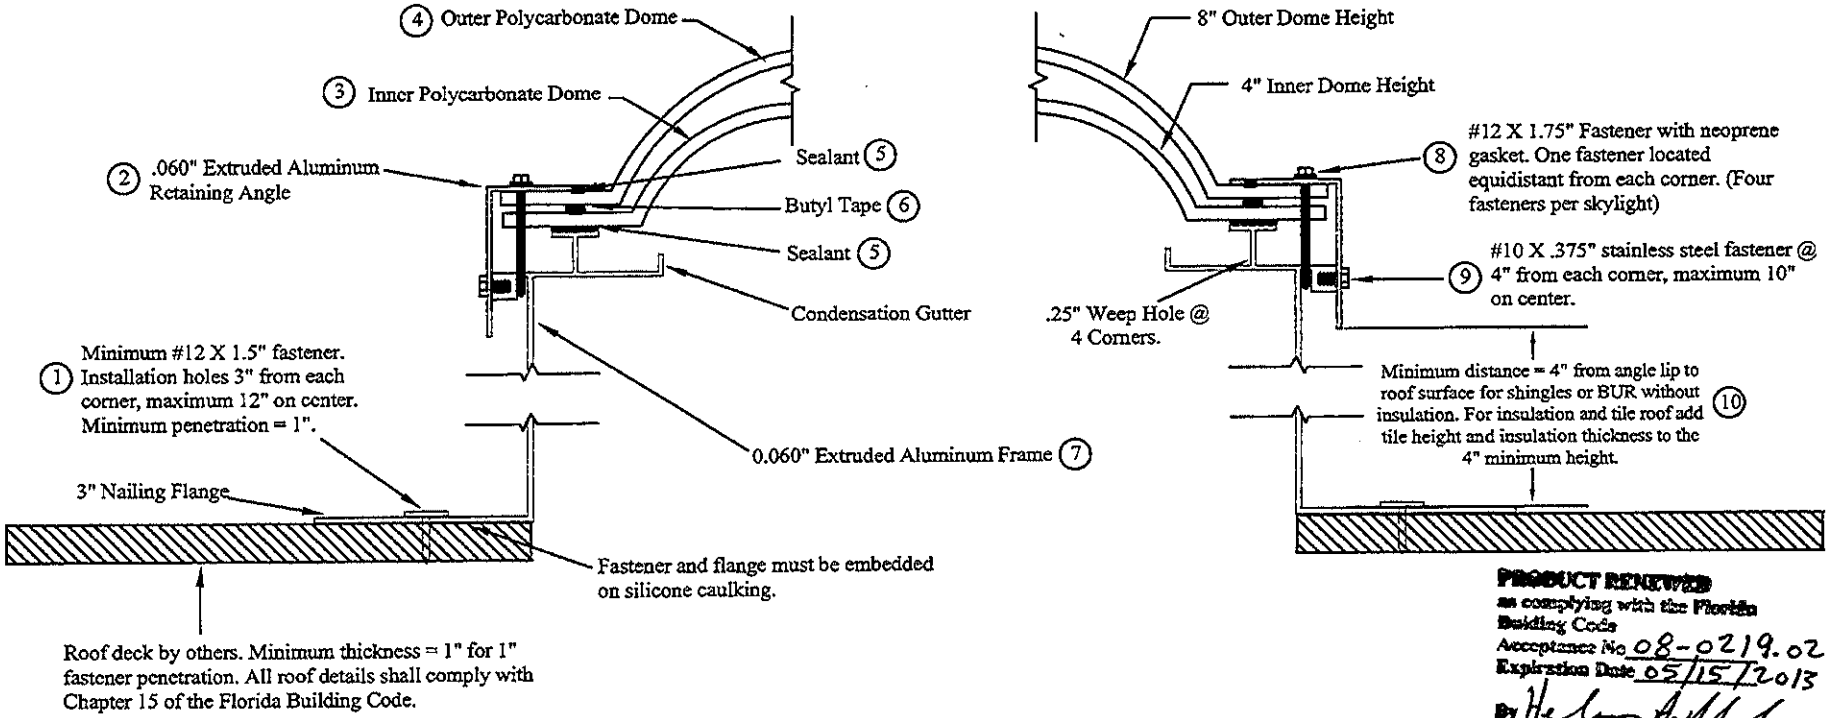

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 08-0219.02
Expiration Date 05/15/2013
By
Miami Dade Product Control
Division

Dade Self Flashing Model

Date: 04/01/03 Draw. #DSF-1
Drawing: Dade Self Flashing
Sheet#: 2 of 2
Design Pressure: 60psf +/-
Max. Skylight ID: 48" X 96"

Approved as complying with the
Florida Building Code
Date 05/15/03
NOA# 03-0224.11
Miami Dade Product Control
Division
By

RICHARD BOYETTE
FL PE # 42485
4031 COCONUT BLVD
ROYAL PALM BCH FL 3341
561-790-5766
4/10/03

MAXIM INDUSTRIES, INC
6170 Vanderbilt Avenue Dallas, TX 75214
Phone: 214.824.1557 Fax: 240.371.7345