



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Boral Roofing, LLC
7575 Irvine Center Drive, Suite 100
Irvine, CA 92618

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Saxony 900 Concrete Roof Tile

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA No. 12-0222.03 and consists of pages 1 through 10.
The submitted documentation was reviewed by Alex Tigera.



NOA No.: 13-0723.05
Expiration Date: 04/26/17
Approval Date: 09/26/13
Page 1 of 10

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub-Category: Roofing Tiles
Material: Concrete
Deck Type: Wood

1. SCOPE

This NOA approves a system using **Saxony 900 (Slate, Shake & Split Shake) Concrete Roof Tile**, as manufactured **Boral Roofing LLC** in Lake Wales, FL. and described this Notice of Acceptance. For locations where the pressure requirements, as determined by applicable Building Code does not exceed the design pressure values obtained by calculations in compliance with RAS 127 using the values listed in the installation section herein. The attachment calculations shall be done as a moment based system.

2. PRODUCT DESCRIPTION

<u>Manufactured by Applicant</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Saxony 900-Slate	l = 17" w = 13" thickness = 1-5/32"	TAS 112	Flat profile, interlocking, high-pressure extruded concrete roof tile equipped with two nail holes. For direct deck or battened nail-on, mortar set or adhesive set applications.
Saxony 900-Split Shake	l = 17" w = 13" thickness = 1-9/32"	TAS 112	Flat profile, interlocking, high-pressure extruded concrete roof tile equipped with two nail holes. For direct deck or battened nail-on, mortar set or adhesive set applications. Top surface available in 4 different configurations: <ol style="list-style-type: none"> 1. Complete tile brushed 2. Right half brushed (shown in drawing) 3. Left half brushed 4. No brush
Saxony 900-Shake	l = 17" w = 13" thickness = 1-9/32"	TAS 112	Flat profile, interlocking, high-pressure extruded concrete roof tile equipped with two nail holes. For direct deck or battened nail-on, mortar set or adhesive set applications.
Trim Pieces	Length: varies Width: varies varying thickness	TAS-112	Accessory trim, boosted Barcelona, concrete roof pieces for use at hips, rakes, ridges and valley terminations manufactured for each tile profile.



2.1 MANUFACTURING LOCATION

2.1.1 Lake Wales, FL.

2.2 EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
Redland Technologies	7161-03	Static Uplift Testing	Dec. 1991
	Appendix III	TAS 102 & TAS 102(A)	
The Center for Applied Engineering, Inc.	94-084	Static Uplift Testing	May 1994
		TAS 101 (Mortar Set)	
The Center for Applied Engineering, Inc.	94-060A	Static Uplift Testing	March, 1994
		TAS 101 (Adhesive Set)	
The Center for Applied Engineering, Inc.	25-7183-6	Static Uplift Testing	Feb. 1995
		TAS 102	
		(2 Quik-Drive Screws, Direct Deck)	
The Center for Applied Engineering, Inc.	25-7183-5	Static Uplift Testing	Feb. 1995
		TAS 102	
		(2 Quik-Drive Screws, Battens)	
The Center for Applied Engineering, Inc.	25-7214-1	Static Uplift Testing	March, 1995
		TAS 102	
		(1 Quik-Drive Screw, Direct Deck)	
The Center for Applied Engineering, Inc.	25-7214-5	Static Uplift Testing	March, 1995
		TAS 102	
		(1 Quik-Drive Screw, Battens)	
Redland Technologies	7161-03	Wind Tunnel Testing	Dec. 1991
	Appendix II	TAS 108 (Nail-On)	
Redland Technologies	Letter Dated Aug. 1, 1994	Wind Tunnel Testing	Aug. 1994
		TAS 108 (Nail-On)	
Redland Technologies	P0631-01	Wind Tunnel Testing	July 1994
		TAS 108 (Mortar Set)	
Redland Technologies	P0402	Withdrawal Resistance	Sept. 1993
		Testing of screw vs. smooth shank nails	
The Center for Applied Engineering, Inc.	Project No. 307025	Wind Driven Rain	Oct. 1994
	Test #MDC-77	TAS 100	
Atlanta Testing & Engineering, Inc.	R1.894	Physical Properties	Aug. 1994
	R2.894	TAS 112	
	R3.894		
Celotex Corporation Testing Service	520109-1	Static Uplift Testing	Dec. 1998
	520111-4	TAS 101	
Celotex Corporation Testing Service	520191-1	Static Uplift Testing	March 1999
		TAS 101	



Walker Engineering, Inc.	Evaluation Calculations	25-7094	February 1996
Walker Engineering, Inc.	Evaluation Calculations	25-7496	April 1996
Walker Engineering, Inc.	Evaluation Calculations	25-7584	December 1996
		25-7804b-8	
		25-7804-4 & 5	
		25-7848-6	
Walker Engineering, Inc.	Evaluation Calculations	25-7183	March 1995
Walker Engineering, Inc.	Evaluation Calculations	Aerodynamic Multipliers	January 2007
Walker Engineering, Inc.	Calculations	Two Patty Adhesive Set System	April 1999
Walker Engineering, Inc.	Evaluation Calculations	Restoring Moments Due to Gravity	February 2007
Nutting Engineers	130	TAS 112	January 2007

3. LIMITATIONS

- 3.1 Fire classification is not part of this acceptance.
- 3.2 For mortar or adhesive set tile applications, a static field uplift test shall be performed in accordance with TAS 106.
- 3.3 Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with TAS 112, appendix 'A'. Such testing shall be submitted to the Building Code Compliance Office for review.
- 3.4 Minimum underlayments shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- 3.5 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- 3.6 This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with the applicable Building Code.



4. INSTALLATION

- 4.1 Saxony 900 (Slate, Shake & Split Shake) Concrete Roof Tile and its components shall be installed in strict compliance with Roofing Application Standard RAS 118, RAS 119, and RAS 120.
- 4.2 Data For Attachment Calculations

Table 1: Average Weight (W) and Dimensions (l x w)			
Tile Profile	Weight-W (lbf)	Length-l (ft)	Width-w (ft)
Saxony 900 Slate, Shake & Split Shake	11.5	1.417	1.08

Table 2: Aerodynamic Multipliers - λ (ft ³)		
Tile Profile	λ (ft ³) Batten Application	λ (ft ³) Direct Deck Application
MonierLifetile Saxony 900 Slate, Shake & Split Shake	0.289	0.313

Table 3: Restoring Moments due to Gravity - M_g (ft-lbf)												
Tile Profile	2":12"		3":12"		4":12"		5":12"		6":12"		7":12" or greater	
	Battens	Direct Deck	Battens	Direct Deck								
Saxony 900 Slate, Shake & Split Shake	7.16	8.12	7.08	8.03	6.97	7.91	6.82	7.74	6.65	7.55	6.46	7.34



**Table 4: Attachment Resistance Expressed as a Moment - M_f (ft-lbf)
for Nail-On Systems**

Tile Profile	Fastener Type	Direct Deck (min 15/32" plywood)	Direct Deck (min. 19/32" plywood)	Battens
Saxony 900 Slate, Shake & Split Shake	2-10d Ring Shank Nails	30.9	38.1	17.2
	1-10d Smooth or Screw Shank Nail	7.3	9.8	4.9
	2-10d Smooth or Screw Shank Nails	14.0	18.8	7.4
	1 .#8 Screw	30.8	30.8	18.2
	2 .#8 Screws	51.7	51.7	24.4
	1-10d Smooth or Screw Shank Nail (Field Clip)	24.3	24.3	24.2
	1-10d Smooth or Screw Shank Nail (Eave Clip)	19.0	19.0	22.1
	2-10d Smooth or Screw Shank Nails (Field Clip)	35.5	35.5	34.8
2-10d Smooth or Screw Shank Nails (Eave Clip)	31.9	31.9	32.2	

**Table 5: Attachment Resistance Expressed as a Moment M_f (ft-lbf)
for Two Patty Adhesive Set Systems**

Tile Profile	Tile Application	Minimum Attachment Resistance
MonierLifetile Saxony 900 Slate, Shake & Split Shake	Adhesive	31.3 ²
1 See manufactures component approval for installation requirements.		
2 Dow Chemical TileBond Average weight per patty 13.9 grams. Polyfoam Product, Inc. Average weight per patty 8 grams.		

**Table 6: Attachment Resistance Expressed as a Moment - M_f (ft-lbf)
for Single Patty Adhesive Set Systems**

Tile Profile	Tile Application	Minimum Attachment Resistance
MonierLifetile Saxony 900 Slate, Shake & Split Shake	Polyfoam PolyPro™	118.9 ³
	Polyfoam PolyPro™	40.4 ⁴
3 Large paddy placement of 45 grams of PolyPro™.		
4 Medium paddy placement of 24 grams of PolyPro™.		


**Table 7: Attachment Resistance Expressed as a Moment - M_f (ft-lbf)
for Mortar Set Systems**

Tile Profile	Tile Application	Minimum Attachment Resistance
MonierLifetile Saxony 900 Slate, Shake & Split Shake	Mortar Set ¹	43.9 ⁵
5. Tile-Tite Roof Tile Mortar		



5. LABELING

- 5.1 All tiles shall bear the imprint or identifiable marking of the manufacturer's name or logo as detailed below, or following statement: "Miami-Dade County Product Control Approved".




LABEL FOR SAXONY 900 TILES (LAKE WALES FL PLANT) LOCATED UNDERNEATH TILE


6. BUILDING PERMIT REQUIREMENTS

- 6.1 Application for building permit shall be accompanied by copies of the following:
- 6.1.1 This Notice of Acceptance.
 - 6.1.2 Any other documents required by the Building Official or applicable building code in order to properly evaluate the installation of this system.



PROFILE DRAWINGS

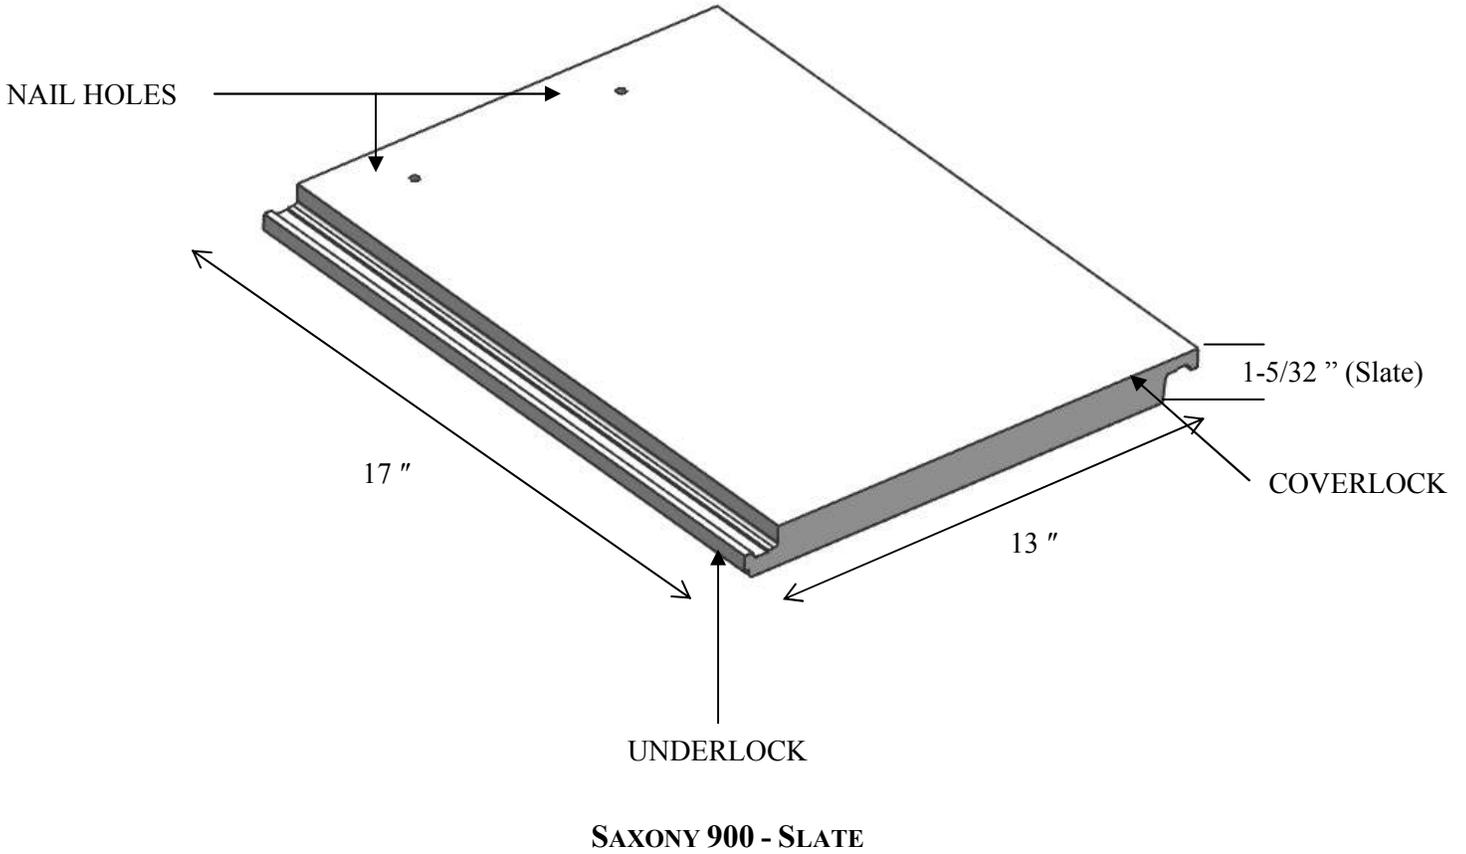

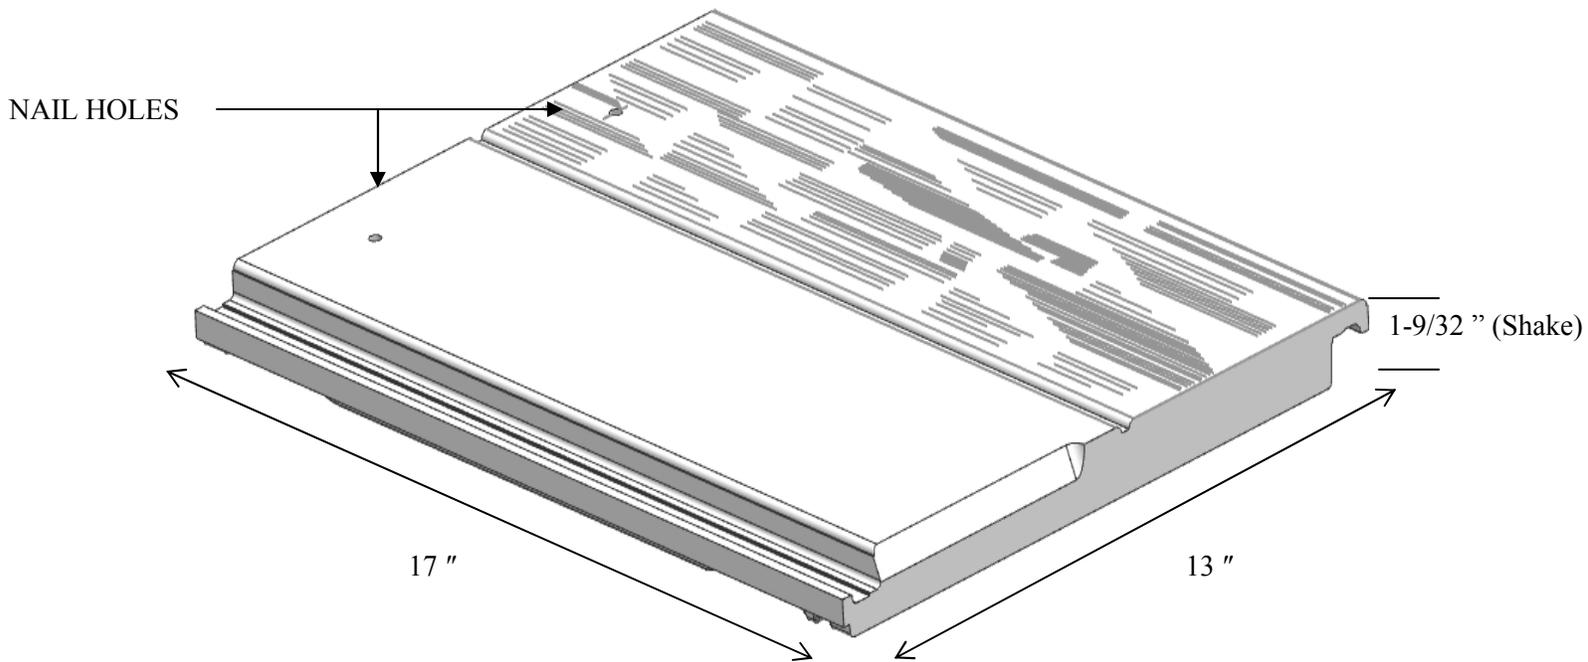


Note: Available Top Surface Finishes

- 5. Complete tile brushed
- 6. Right half brushed (shown in drawing)
- 7. Left half brushed
- 8. No brush

SAXONY 900 - SPLIT SHAKE



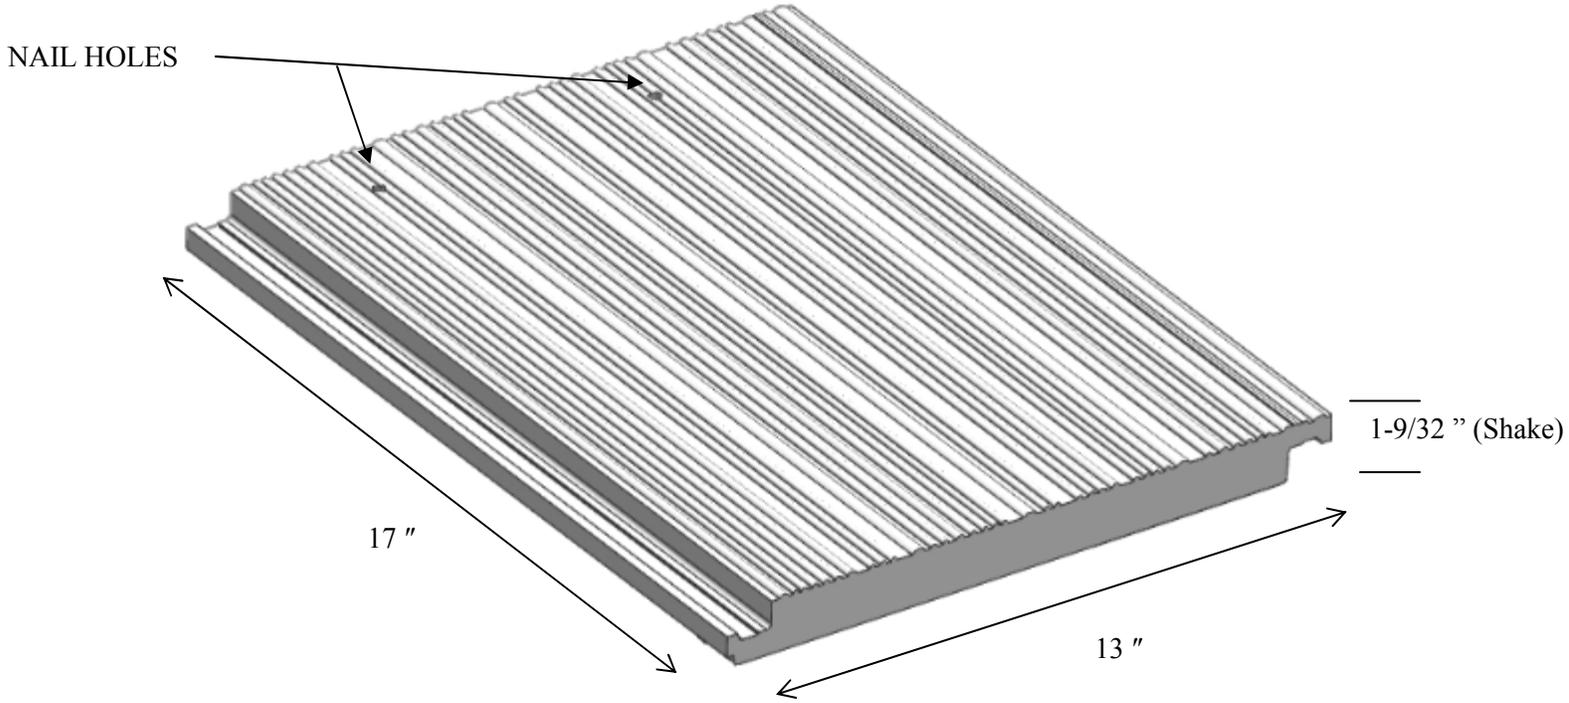

SAXONY 900-SHAKE
END OF THIS ACCEPTANCE



NOA No.: 13-0723.05
Expiration Date: 04/26/17
Approval Date: 09/26/13
Page 10 of 10