

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

PRODUCT CONTROL SECTION

www.miamidade.gov/economy

MIAMI-DADE COUNTY

Mr. Glass Doors & Widows, Inc. 8120 N. W. 84th Street Medley, FL 33166

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "MG-275" Outswing Aluminum (NS) Doors w/wo Transom.

APPROVAL DOCUMENT: Drawing No. **W10-73**, titled "Narrow Stile Aluminum Outswing Door (NI)", sheets 1 through 10 of 10, prepared by AL-Farooq Corporation, dated 10/07/10 and last revised on JUL 27, 2017, signed and sealed by Javad Ahmad, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None, approved Hurricane Protection Devices, complying w/FBC required Limitation:

- 1. See applicable Design Pressure in sheet 2 & 3 and hardware options in sheet 7.
- 2. When Door mulled with transom, lower design pressure of door or reinforced or non-reinforced horizontal mullion may control.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and series and following statement: "Miami-Dade County Product Control Approved", noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA # 11-0720.07 and consists of this page 1 and evidence pages E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by Ishaq I. Chanda, P.E.

MIAMI-DADE COUNTY
APPROVED

NOA No. 15-0401.02 Expiration Date: March 08, 2017 Approval Date: August 06, 2015

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

- 1. Manufacturer's die drawings and sections (submitted under file# 11-0720.07)
- 2. Drawing No. **W10-73**, titled "Narrow Stile Aluminum Outswing Door (NI)", sheets 1 through 10 of 10, prepared by AL-Farooq Corporation, dated 10/07/10 and last revised on JUL 27, 2017, signed and sealed by Javad Ahmad, P.E.

B. TESTS (submitted under file# 11-0720.07)

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of aluminum outswing double door, alum outswing door w/transom, doors w/transom & sidelite, prepared by Hurricane Engineering & Testing, Inc., Test Report No(s). **HETI-09-2547**, **HETI-09-2548**, **HETI-09-2549**, **HETI-09-2550** all dated 05/06/10, all signed and sealed by Candido F. Font, P. E. Note: Test report # **HETI-09-2547** has been revised and reissued along w/ marked-up Dwgs on Sep. 21, 2011, signed & sealed by Rafael E. Droz-Seda, P.E.

C. CALCULATIONS

- 1. Anchor verification calculations and structural analysis, complying with FBC-2014 (5th Edition), prepared by Al Farooq Corporation, dated 03/13/15, signed and sealed by Javad Ahmad, P.E
- 2. Glazing complies w/ ASTME-1300-02, 04 & -09.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS (submitted under file# 11-0720.07)

- 1. Technical cut sheet of physical properties of Santoprene manufactured by UltraFeb.
- 2. Physical properties of Neoprene manufactured by Carolina Customer Rubber.

F. STATEMENTS


- 1. Statement letter of conformance to FBC 2014 and letter of no financial interest, prepared by Al Farooq Corporation, dated 03/13/15, signed and sealed by Javad Ahmad, P.E.
- 2. Lab compliance as part of the above test reports.

G. OTHER

- 1. This NOA revises NOA # 11-0720.07, expiring 03/08/17.
- 2. Test proposal # **08-1382**, dated 09-22-08 approved by BCCO

Ishaq I. Chanda, P.E.
Product Control Examiner
NOA No. 15-0401.02

Expiration Date: March 08, 2017 Approval Date: August 06, 2015

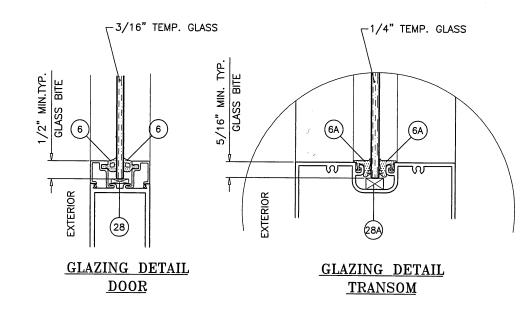

NARROW STILE

ALUMINUM OUTSWING ENTRANCE DOOR

DOORS NOT APPROVED FOR INSTALLATIONS WHERE WATER INFILTRATION RESISTANCE IS REQUIRED.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS BY OTHERS, MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.

ANCHORS SHALL BE AS LISTED, SPACED AS SHOWN ON DETAILS, ANCHORS EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

ANCHORING OR LOADING CONDITIONS NOT SHOWN IN THESE DETAILS ARE NOT PART OF THIS APPROVAL.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FLORIDA BLDG. CODE.

INSTRUCTIONS:

USE CHARTS AS FOLLOWS.

- STEP 1 DETERMINE DESIGN WIND LOAD REQUIREMENT BASED ON WIND VELOCITY, BLDG. HEIGHT, WIND ZONE USING APPLICABLE ASCE 7 STANDARD.
- STEP 2 FOR SINGLE (X) AND DOUBLE (XX) DOOR WITHOUT TRANSOMS SEE SHEET 2. USE LOWER VALUES FROM HINGE AND LOCK TYPES USED.
- STEP 3 FOR SINGLE (0/X) AND DOUBLE (0/XX) DOOR WITH TRANSOMS SEE HORIZONTAL MULLION CAPACITY CHART ON SHEET 3. THE LOWEST VALUE FROM STEPS 2 AND 3 SHALL APPLY.

DOORS NOT RATED FOR IMPACT.


INSTALLATION OF THIS PRODUCT IN THE HVHZ AREA REQUIRES THE USE OF APPROVED SHUTTERS OR EXTERNAL PROTECTION DEVICES COMPLYING WITH HVHZ REQUIREMENTS.

PRODUCT REVISED

as complying with the Florida
building Code
Acceptance No 15-04 01.02 Expiration Date MAROS, 2017

Visual Pede Product Control

INSTALLATION OF THIS SYSTEM OUTSIDE THE HVHZ AREA SHALL MEET THE APPLICABLE REQUIREMENTS FOR WIND BORNE DEBRIS PROTECTION.



AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978


MR. GLASS DOORS & WINDOWS INC. 8120 N.W. 84 STREET MEDLEY, FL. 33166
TEL. (305) 470-8284 FAX. (305) 470-8284


				Γ	<u> </u>		=
J		by description	REV. PER BNC COMMENTS	REV. PER PERA COMMENTS	UPDATED TO 2014 FBC		
		by					
	visions:	date	11.07.11	01.23.12	03.05.15		
	1151						_


date: 10-07-10	e.	۱₹۱
	2	Ľ
scale: 3/8" = 1"	∢	-
	m	0
dr. by: HAMID	O	ő
		L
chk. by:		


drawing no.


W10 - 73sheet 1 of 10

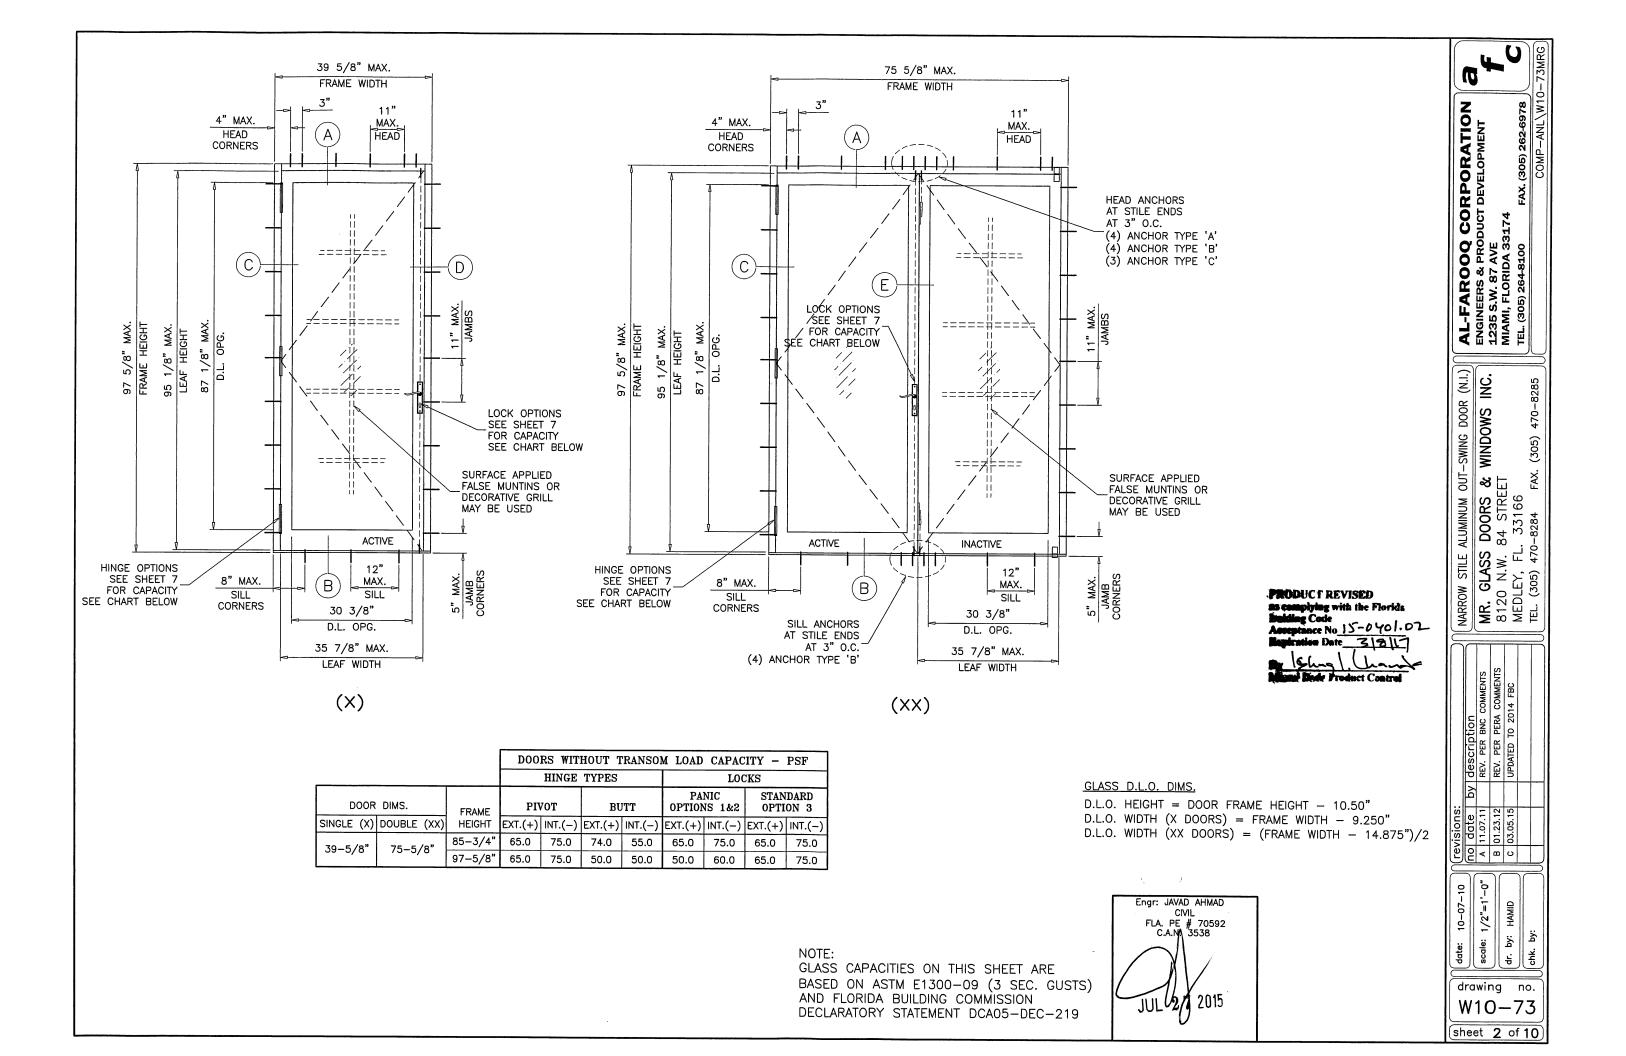

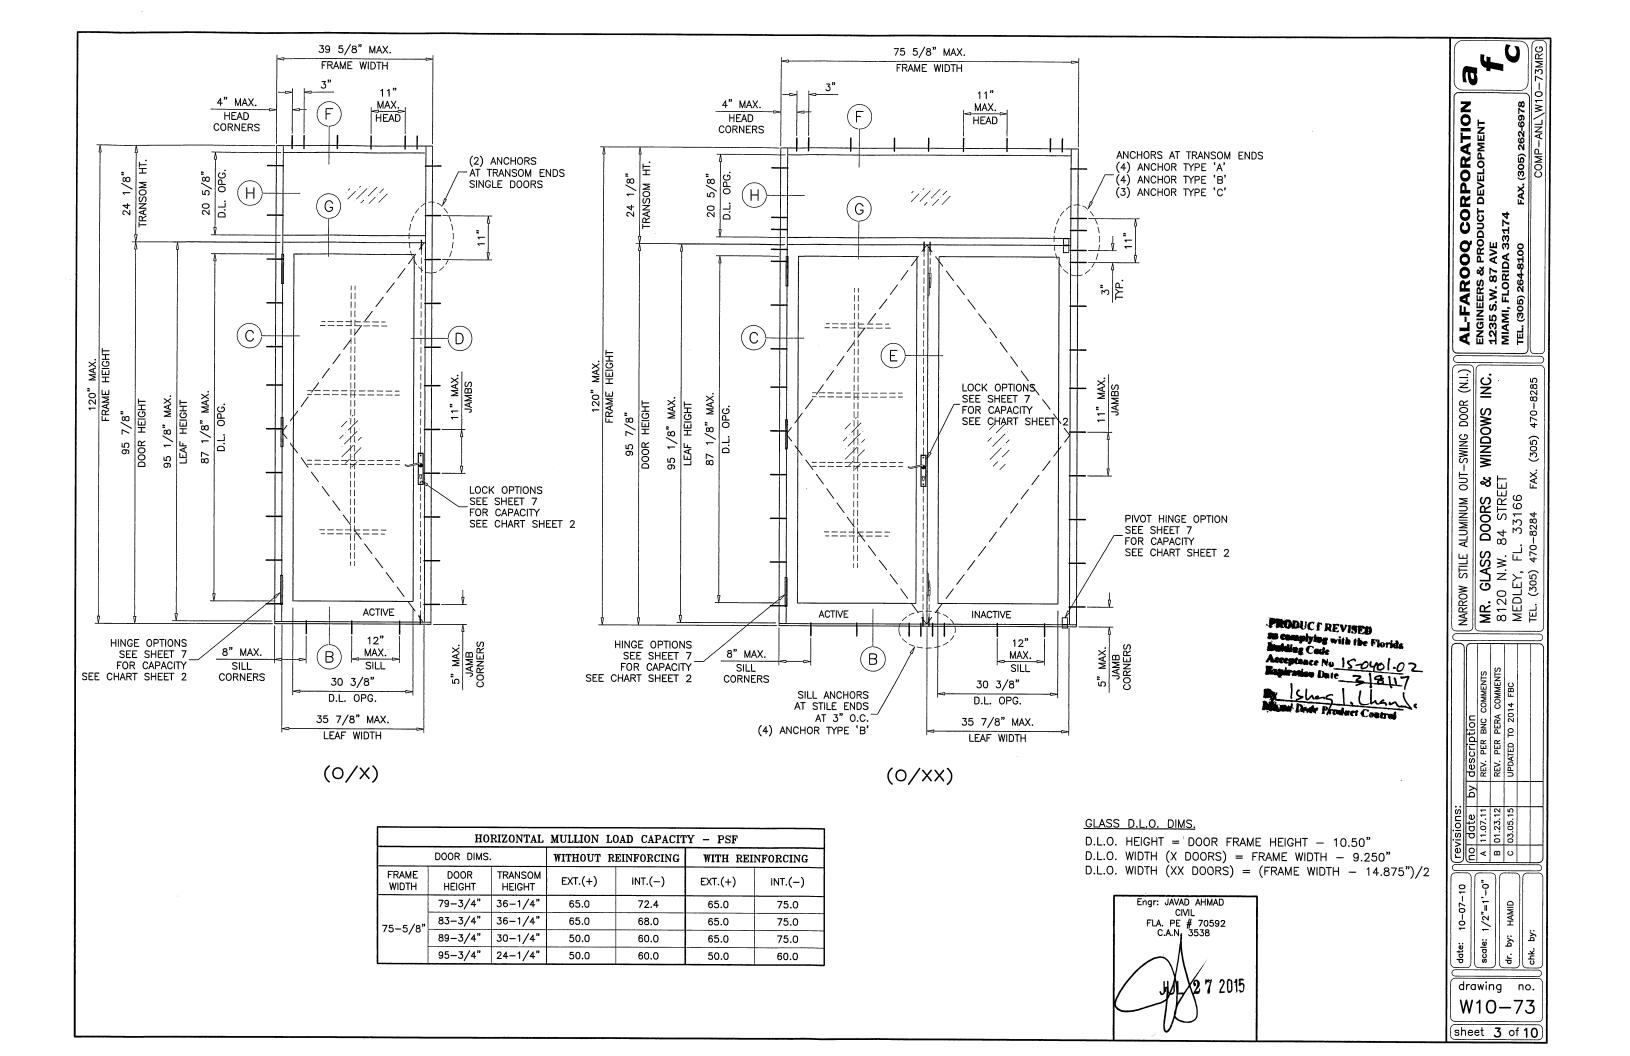

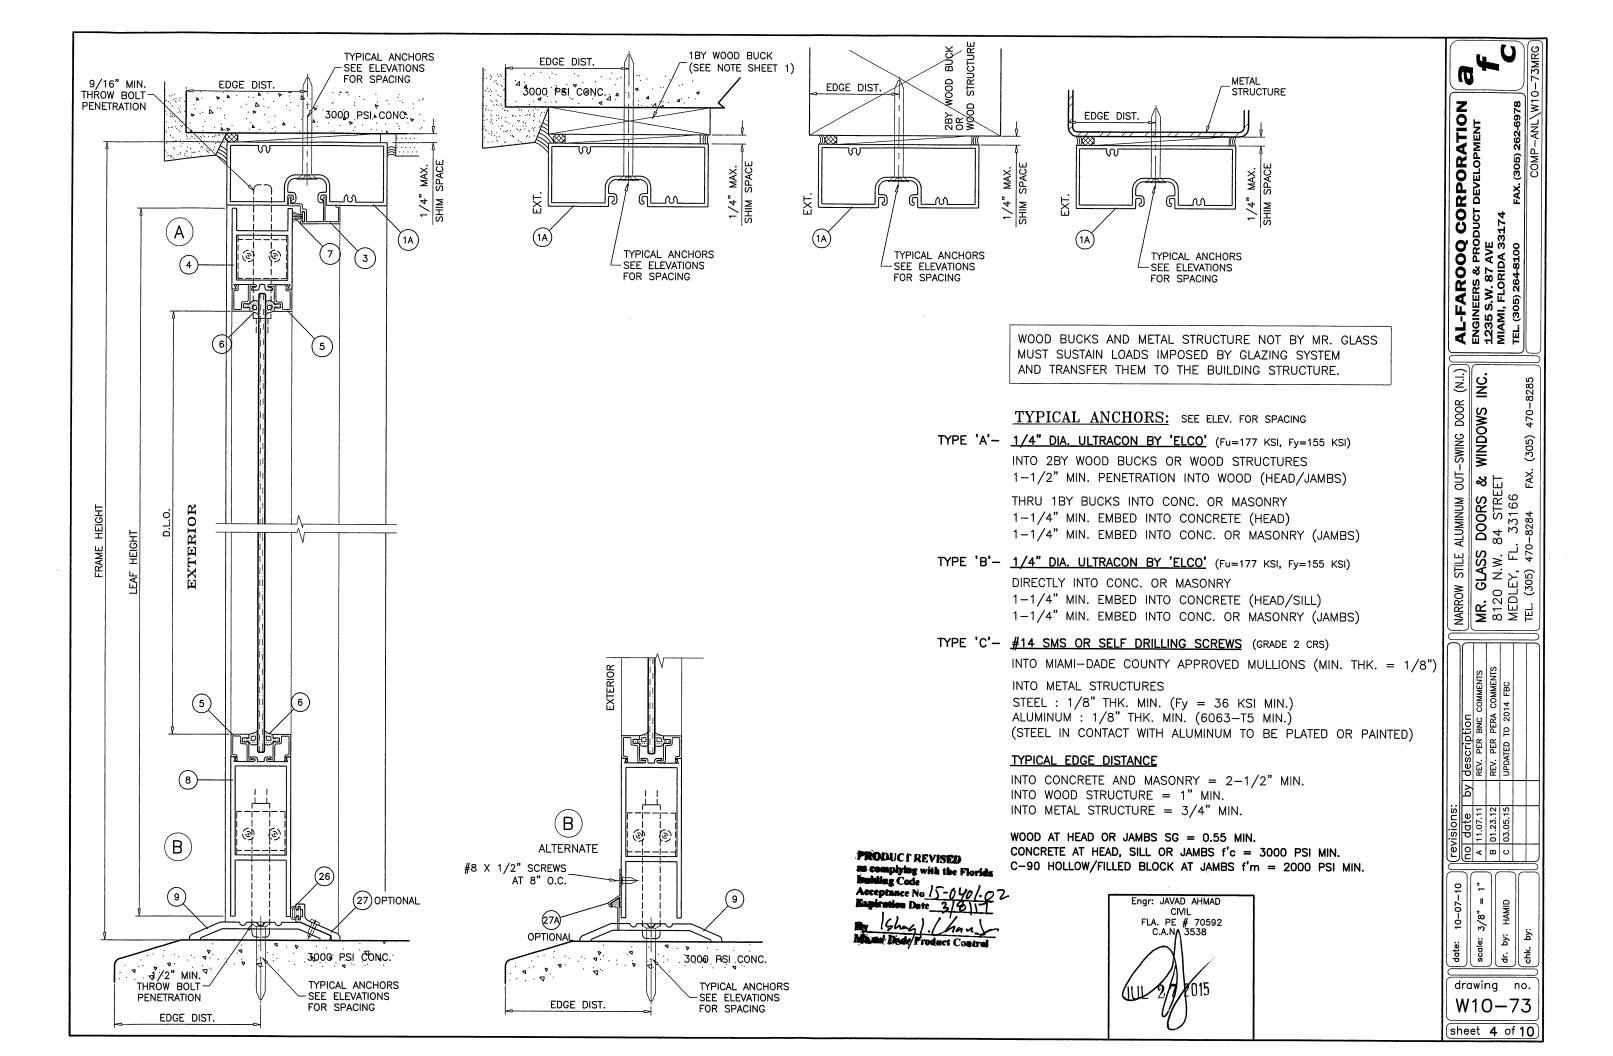

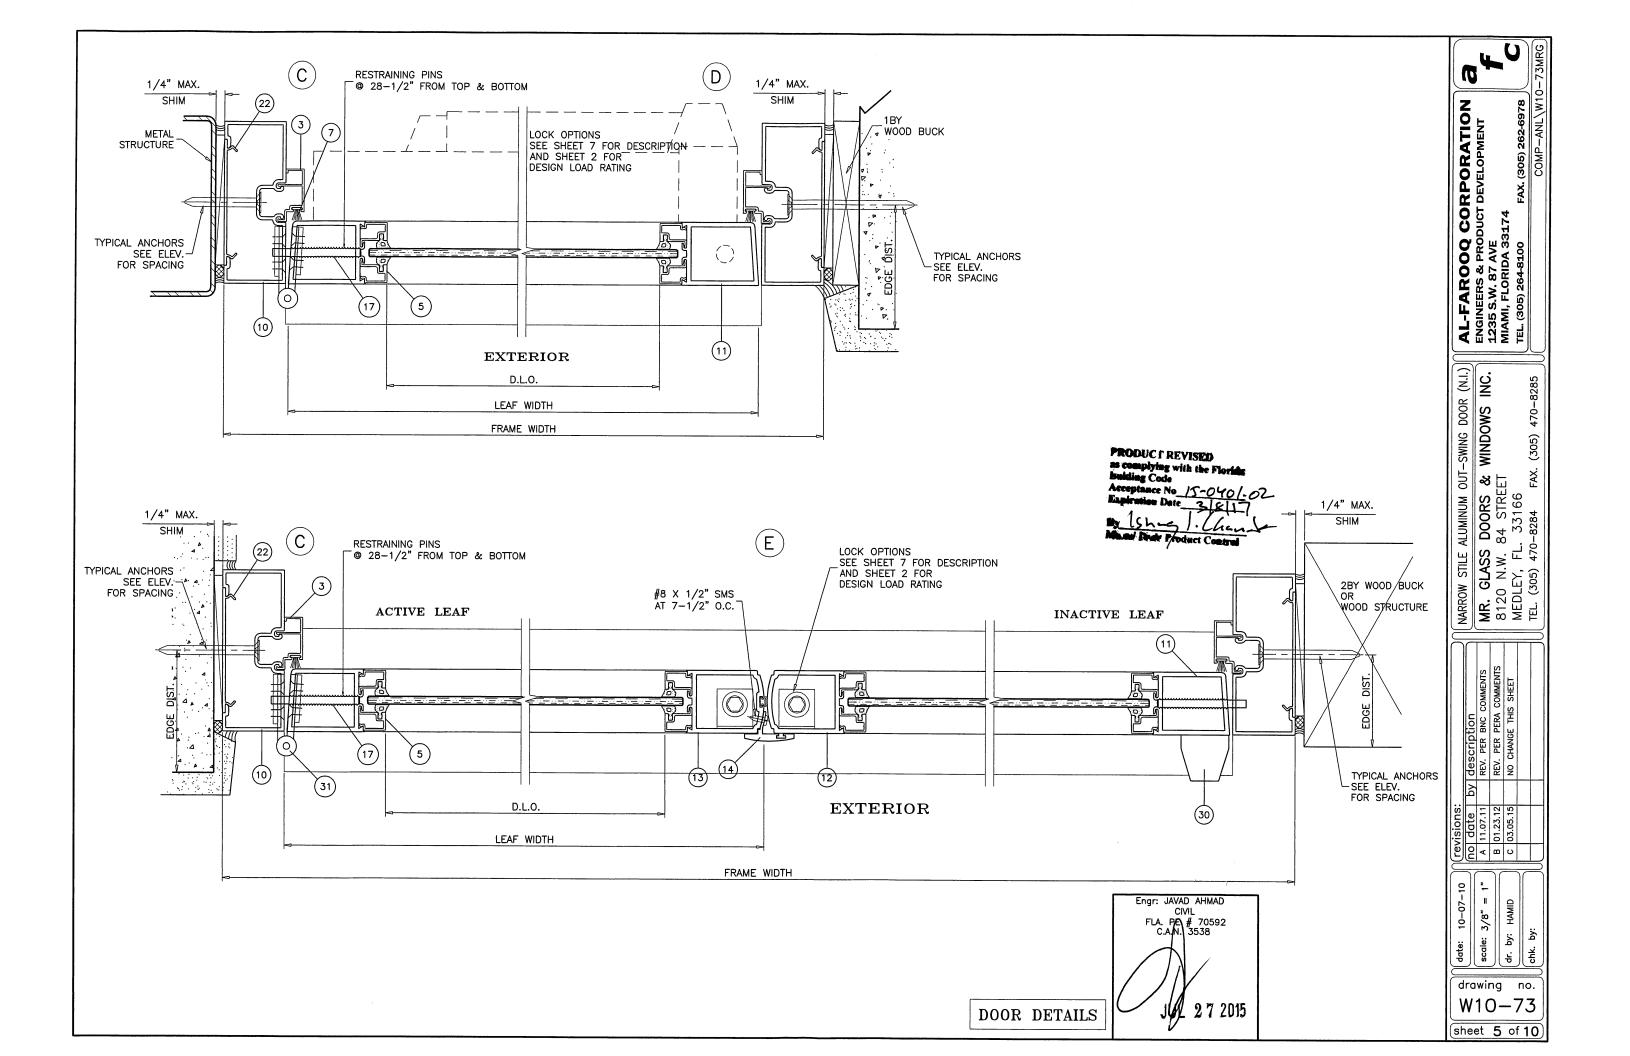

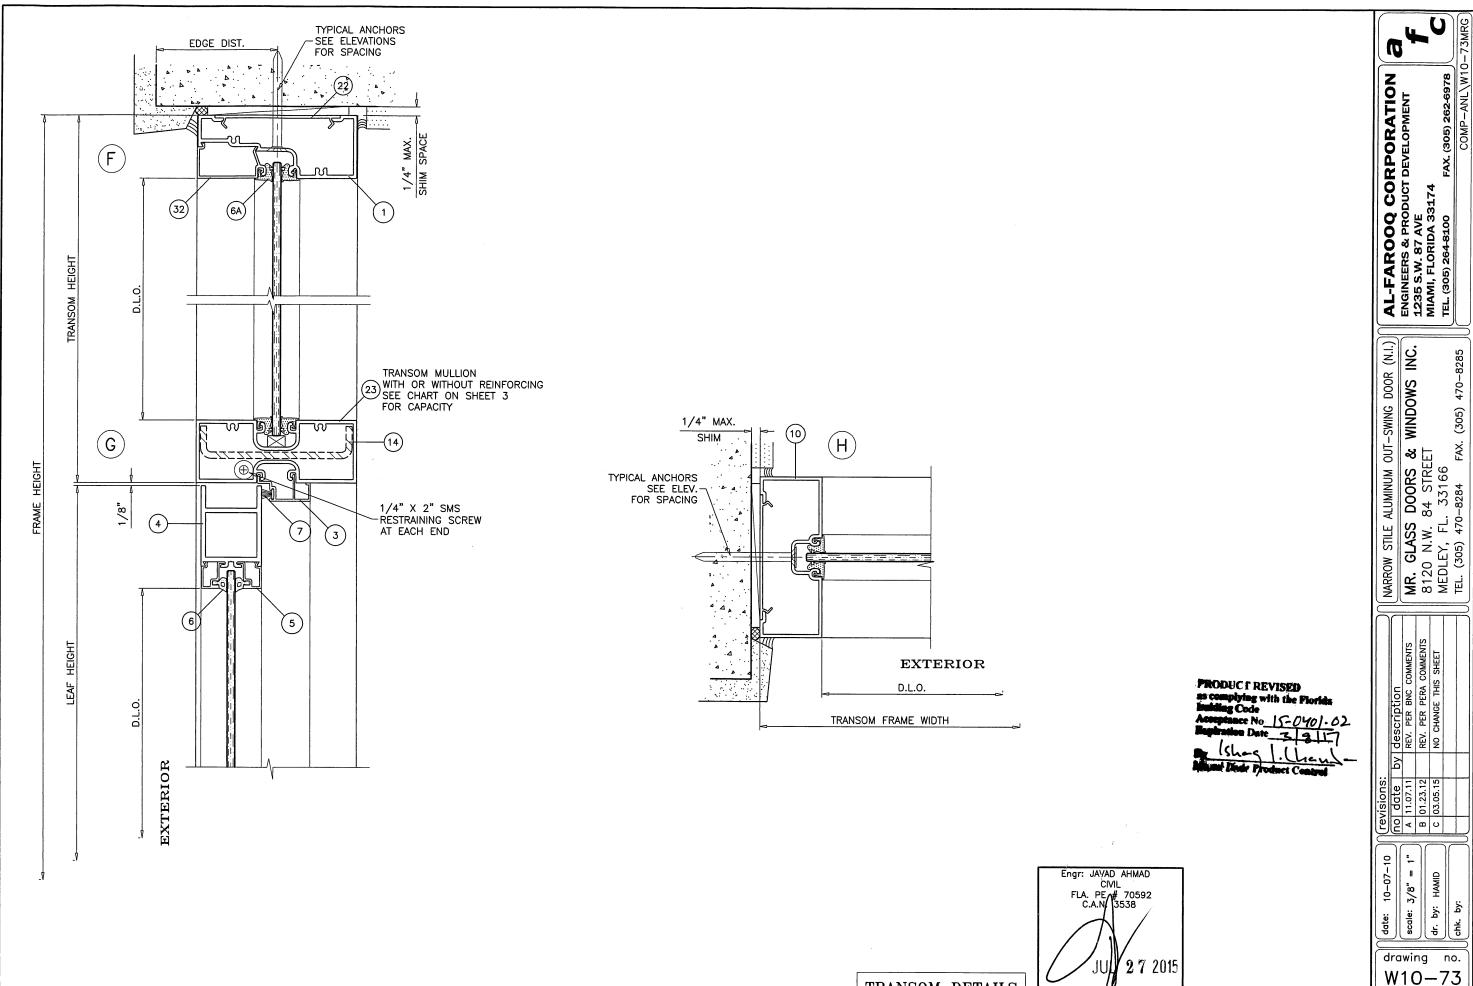

TRANSOM DETAILS

sheet 6 of 10

LOCKS:

PANIC

OPTION #1:

CONCEALED VERTICAL ROD PANIC EXIT DEVICE BY 'JACKSON PANIC SYSTEM' #1085 LOCATED AT 38" FROM SILL AT EACH LEAF. FASTENED WITH

(1) #10 X 3/8" FH SELF DRILLING SCREW AT ONE END AND (2) #10 X 1/2" FH SELF DRILLING SCREWS AT OTHER END

PANIC OPTION #2:

CONCEALED VERTICAL ROD PANIC EXIT DEVICE BY 'REGENT HARDWARE' #5770 LOCATED AT 40" FROM SILL AT EACH LEAF. FASTENED WITH


- (1) #10 X 3/8" FH SELF DRILLING SCREW AT ONE END AND (2) #10 X 1/2" FH SELF DRILLING SCREWS AT OTHER END
- STANDARD OPTION #3:

ACTIVE LEAF:

THREE POINT LOCK SYSTEM SERIES 2222 BY 'REGENT HARDWARE' KEY OPERATED FROM EXTERIOR AND THUMB TURN ON INTERIOR WITH CONCEALED FLUSH BOLTS AT TOP & BOTTOM OF LOCK STILE LOCATED AT 34" FROM BOTTOM OF LEAF

INACTIVE LEAF:


CONCEALED FLUSH BOLTS SERIES 2508 BY 'REGENT HARDWARE.' MANUALLY OPERATED LEVERS MOUNTED ON INSIDE FACE OF LEAF STILE LOCATED AT 10-3/4" FROM TOP AND BOTTOM LOCK FASTENED TO STILE WITH (2) #10 X 3/8" FH SELF DRILLING SCREWS

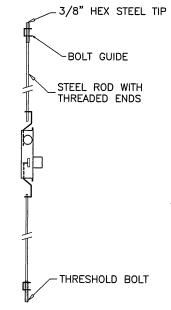

HINGES:

OPTION #1:


OFFSET PIVOT HINGES SERIES 4339 BY 'REGENT HARDWARE' AT TOP AND BOTTOM FASTENED TO FRAME AND THRESHOLD WITH #12 X 3/4" FH THREAD CUTTING SCREWS. (2) AT THRESHOLD, (2) AT JAMB BOTTOM (3) AT FRAME HEAD

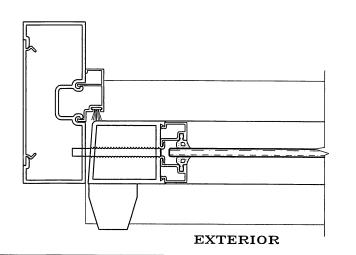


OPTION #2:

PANIC EXIT DEVICE OPTION #1 OR #2

> 4" X 4-1/2" X .130" THK. ST. STEEL KNUCKLE HINGE SERIES 4001 BY 'REGENT HARDWARE' 3 PER LEAF TOP/BOTTOM HINGES AT 11" FROM EACH END CENTER HINGE AT MIDSPAN HINGES FASTENED WITH #12 X 1/2" FH SCREWS

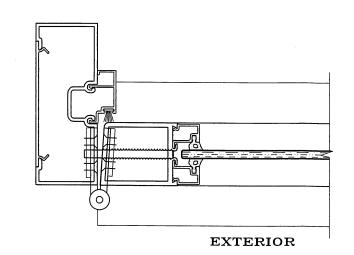

PRODUCT REVISED ddieg Code and Dade Product Control




AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978

(N.I.) WINDOWS INC. OUT-SWING MR. GLASS DOORS & W 8120 N.W. 84 STREET MEDLEY, FL. 33166 TEL. (305) 470-8284 FAX. (

HAMID 3/8" by: scale: <u>₽</u>

drawing no. W10 - 73

sheet 7 of 10

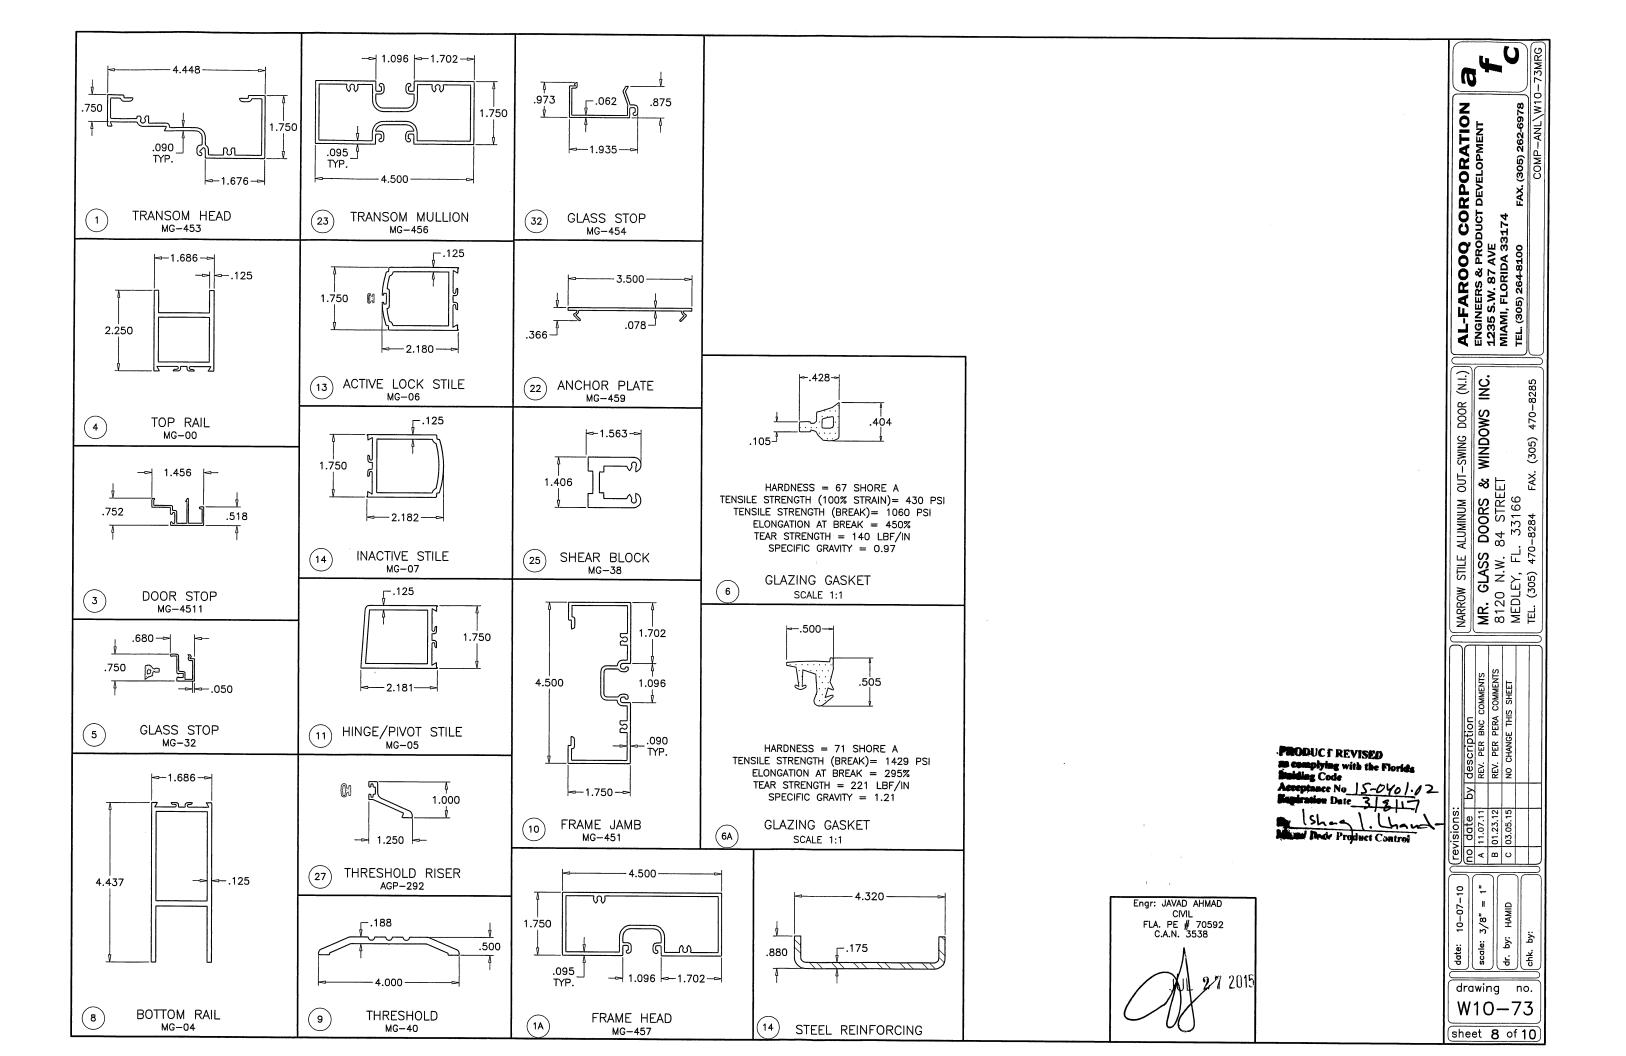

ITEM NO.	PART #	QUANTITY	DESCRIPTION	MATERIAL	MANF./SUPLIER/REMARKS
1	MG-453	1	TRANSOM HEAD	6063-T6	_
1A	MG-457	_	FRAME HEAD	6063-T6	_
2	5506	1	HORIZONTAL	6063-T6	-
3	MG-4511	AS REQD.	DOOR STOP	6063-T6	-
4	MG-00	1/ LEAF	TOP RAIL	6063-T6	_
5	MG-32	AS REQD.	GLASS STOP	6063-T6	_
6	WV3294	AS REQD.	GLAZING GASKET	SANTOPRENE	ULTRAFAB
6A	2028	AS REQD.	GLAZING GASKET	NEOPRENE	CAROLINA CUSTOM RUBBER
7	W31325MG	AS REQD.	ULTRAFIN PILE W'STRIPPING	WOOL	ULTRAFAB
8	MG-04	1/ LEAF	BOTTOM RAIL	6063-T6	-
9	MG-40	1	THRESHOLD	6063-T6	-
10	MG-451	2	OPEN BACK JAMB	6063-T6	_
11	MG-05	AS REQD.	HINGE OR PIVOT STILE	_	_
12	20240	1/ LEAF	FIX STILE (INACTIVE PANEL)	6063-T6	_
13	MG-06	1/ LEAF	LOCK STILE (ACTIVE PANEL)	6063-T6	_
14	_	1	REINFORCING CHANNEL	STEEL	ASTM A36, Fy 36 KSI
15	10741	_	PUSH BAR (OPTIONAL)	6063-T6	_
16	AGP-123	AS REQD.	HANDLE	6063-T6	_
17	14234	2/ LEAF	RESTRAINING PINS (2-1/2" X 1/4")	STEEL	_
18	30708	1/ LEAF	TOP FRAME OFFSET PIVOT	-	_
19	30709	1/ LEAF	TOP DOOR OFFSET PIVOT	_	_
20	30710	1/ LEAF	BOTTOM DOOR OFFSET PIVOT	-	_
21	30711	1/ LEAF	THRESHOLD OFFSET PIVOT	_	_
22	MG-459	AS REQD.	ANCHOR PLATE, 3" LONG AT ANCHORS	6063-T6	_
23	MG-456	1	TRANSOM MULLION	6063-T6	-
25	MG-38	_	SHEAR BLOCK	6063-T6	_
26	WV3294	AS REQD.	BULB W'STRIPPING	VINYL	DUROMETER 70±5
27	AGP-292	AS REQD.	OPTIONAL THRESHOLD RISER	6063-T6	_
27A	_	AS REQD.	OPTIONAL DOOR BOTTOM SWEEP	ALUM/VINYL	_
28	-	2/LITE	SETTING BLOCK, 1/8" X 1/2" X 1/2" LONG, AT 5" FROM EACH END	NEOPRENE	C.R. LAURENCE, DUROMETER 80±5
28A	_	2/LITE	SETTING BLOCK, 1/2" X 3/8" X 2" LONG, AT 9" FROM EACH END	NEOPRENE	C.R. LAURENCE, DUROMETER 80±5
29	#10 X 1-1/2"	2/ CORNER	ASSEMBLY SCREWS (PH SELF DRILLING)	-	GRADE 4 CRS, Fu=92 KSI, Fy=120 KSI
30	4339	2/ LEAF	PIVOT HINGES	_	REGENT HARDWARE
31	4001	3/ LEAF	BUTT HINGES	ST. STEEL	REGENT HARDWARE
32	MG-454	-	GLAZING STOP	6063-T6	_

SEALANTS:

ALL FRAME CORNERS, JOINTS, MULLION SEAMS AND PERIMETER OF GLAZING BEAD TO FRAME TO BE SEALED WITH DOW CORNING 795 SEALANT.

Engr: JAVAD AHMAD CIVIL FLA. PE # 70592 C.A.N. 3538

Mind Dede Froduct Control

by description

Bev. Per Biol Comments

Rev. Per Pera Comments

Rev. Per Pera Comments

No Change This Sheet paceuplying with the Florids building Code
Acceptance No 15-040/-02
Engineering Date 3 3 1

	revision	-	B 01.23.1	c 03.05.1		
		<u>- </u>			10	_
	10-07-10	scale: 3/8" = 1"		y: HAMID		.;.
	date:	scale		dr. by:	<u> </u>	Chk. by:
1	\subseteq					=
	drawing no					١.

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 262-6978


MR. GLASS DOORS & WINDOWS INC.


8120 N.W. 84 STREET


MEDLEY, FL. 33166


TEL. (305) 470-8284 FAX. (305) 470-8285

W10 - 73sheet 9 of 10

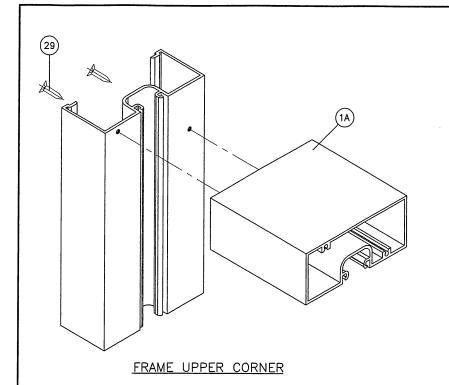

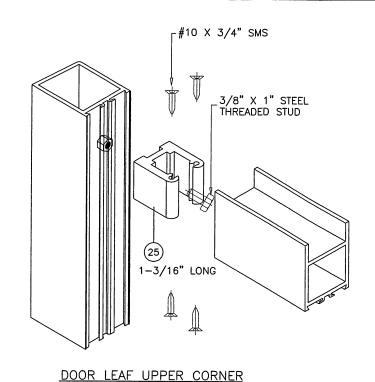


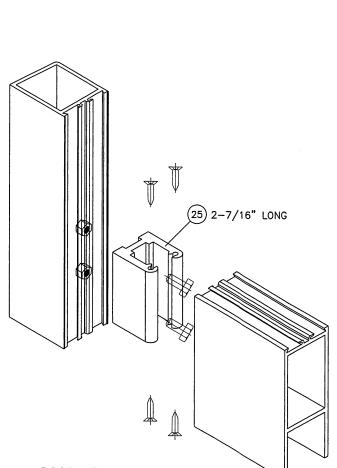

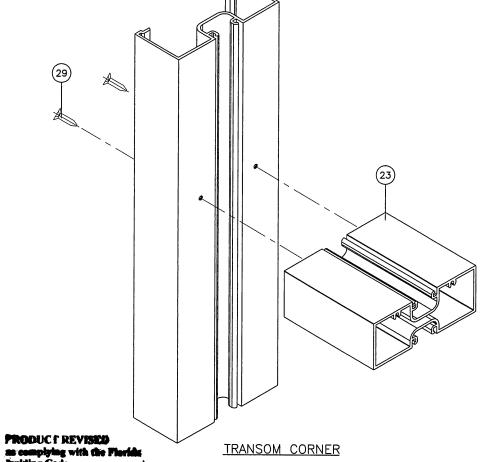

Engr: JAVAD AHMAD

Shoot Product Control

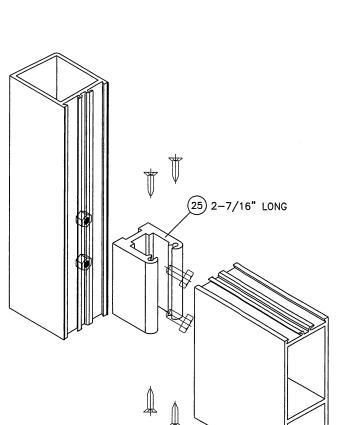

MR. GLASS DOORS & WINDOWS INC.

8120 N.W. 84 STREET

MEDLEY, FL. 33166

TEL. (305) 470-8284 FAX. (305) 470-8285

AL-FAROOQ CORPORATIONENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 262-6978

(305) 470-8285

date: 10–07–1
scale: 3/8" = (dr. by: HAMID)
chk. by:

drawing no. W10 - 73sheet 10 of 10

FRAME LOWER CORNER

_#10 X 1/2" FH MS

DOOR LEAF LOWER CORNER