

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

Gopi Glass Sales & Services Corp. 7450 NW 41st Street Miami, FL 33166

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Aluminum Single Hung Window – N.I.

APPROVAL DOCUMENT: Drawing No.**W06-24**, titled "Aluminum Single Hung Window", sheets 1 through 4 of 4, dated 03/16/06, with revision **E** dated 01/26/18, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E., bearing the Miami–Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami–Dade County Product Control Section.

MISSILE IMPACT RATING: None.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises and renews NOA# 16-1116.01 and consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

MIAMI-DADE COUNTY APPROYED 73/23/18

NOA No. 18-0205.01 Expiration Date: February 01, 2023 Approval Date: March 29, 2018

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. (Submitted under NOA No.06-0705.04)
- 2. Drawing No **W06-24**, sheets 1 through 4 of 4, titled "Aluminum Single Hung Window", dated 03/16/06, with revision D dated 11/07/16, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Hurricane Engineering & Testing, Inc., Test Report No.

HETI-05-1435, dated 11/28/05, signed and sealed by Ivonne Ghia, P.E.

(Submitted under NOA No.06-0705.04)

C. CALCULATIONS

- 1. Anchor verification calculations and structural analysis, complying with **FBC** 5th **Edition (2014)**, dated May 29, 2014, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.
- 2. Glazing complies with **ASTM E1300-09**.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

- 1. Statement letter of conformance, complying with **FBC** 5th **Edition (2014)**, and of no financial interest, dated May 29, 2014, issued by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.
- 2. Laboratory compliance letter for Test Report No. **HETI-05-1435**, issued by Hurricane Engineering & Testing, Inc., dated 11/28/05, signed and sealed by Ivonne Ghia, P.E. (Submitted under NOA No.06-0705.04)

G. OTHERS

1. Notice of Acceptance No. 14-0728.03, issued to Gopi Glass Sales & Services Corp. for their Aluminum Single Hung Window - N.I., approved on 10/09/14 and expiring on 02/01/17.

Manuel Perez, P.E. Product Control Examiner NOA No. 18-0205.01

Expiration Date: February 01, 2023 Approval Date: March 29, 2018

Gopi Glass Sales & Services Corp.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No **W06-24**, sheets 1 through 4 of 4, titled "Aluminum Single Hung Window", dated 03/16/06, with revision **E** dated 01/26/18, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Fenestration Testing Laboratory, Inc., Test Report No. **FTL-9931**, dated 01/25/18, signed and sealed by Idalmis Ortega, P.E.

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC** 6th **Edition (2017)**, dated 01/26/18, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC** 6th **Edition (2017)**, and of no financial interest, dated January 12, 2018, issued by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

G. OTHERS

1. Notice of Acceptance No. **16-1116.01**, issued to Gopi Glass Sales & Services Corp. for their Aluminum Single Hung Window - N.I., approved on 01/12/17 and expiring on 02/01/18.

Manuel Perez, P.E. Product Control Examiner


NOA No. 18-0205.01

Expiration Date: February 01, 2023 Approval Date: March 29, 2018


		DESIGN	LOAD C	APACITY	- PSF	
	WINDO	W DIMS.	GLASS	TYPE 'A	GLASS	TYPE 'E
	WIDTH	HEIGHT	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)
П	19-1/8"		60.0	80.0	60.0	80.0
П	26-1/2"		60.0	80.0	60.0	80.0
Ш	32"	00"	60.0	80.0	60.0	80.0
П	37"	26"	60.0	80.0	60.0	80.0
Ш	42"	(3)	60.0	80.0	60.0	80.0
Ш	48"		60.0	80.0	60.0	80.0
Ц	53-1/8"		60.0	75.8	60.0	75.8
	19-1/8"		60.0	80.0	60.0	80.0
П	26-1/2"		60.0	80.0	60.0	80.0
Ш	32"	70 7/0"	60.0	80.0	60.0	80.0
	37"	38–3/8"	60.0	80.0	60.0	80.0
	42"	(4)	60.0	79.1	60.0	79.1
	48"		60.0	70.9	60.0	70.9
L	53-1/8"		60.0	65.1	60.0	65.1
١	19-1/8"		60.0	80.0	60.0	80.0
ı	26-1/2"		60.0	80.0	60.0	80.0
1	32"	50 5/9"	60.0	80.0	60.0	80.0
	37"	50-5/8"	60.0	77.9	60.0	77.9
	42"	(5)	60.0	70.8	60.0	70.8
	48"		60.0	63.8	60.0	63.8
L	53-1/8"		54.2	54.2	58.8	58.8
	19-1/8"		60.0	80.0	60.0	80.0
1	26-1/2"		60.0	80.0	60.0	80.0
	32"	58"	60.0	80.0	60.0	80.0
	37"	(6)	60.0	78.7	60.0	78.7
	42"	(0)	60.0	71.7	60.0	71.7
	48"		60.0	62.7	60.0	64.8
L	53-1/8"		50.5	50.5	57.3	59.9
1	19-1/8"		60.0	80.0	60.0	80.0
	26-1/2"		60.0	80.0	60.0	80.0
	32"	63"	60.0	78.1	60.0	78.1
	37"	(6)	60.0	70.7	60.0	70.7
	42"	(5)	60.0	64.6	60.0	64.6
	48"		58.5	58.5	58.5	58.5
-	53-1/8"		49.6	49.6	54.2	54.2
1	19-1/8"		60.0	80.0	60.0	80.0
:	26-1/2"		60.0	80.0	60.0	80.0
	32"	74-1/4"	60.0	73.5	60.0	73.5
	37"	(7)	60.0	66.5	60.0	66.5
1	40"	('/	60.0	61.0	60.0	61.0
	42"	- ⊢				
	42 48" 53–1/8"		55.5	55.5	55.5	55.5

^{*} NO. IN PARENTHESIS INDICATE NO. OF ANCHORS PER JAMB.

GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219

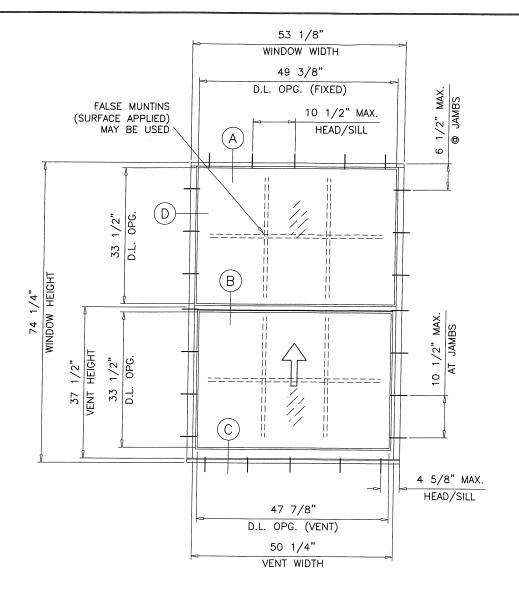

TYPICAL ELEVATION TESTED UNIT

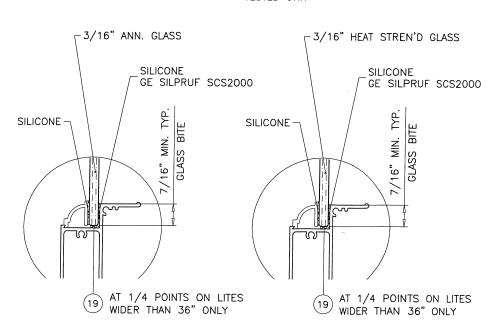

GLASS TYPE 'A'

GLASS TYPE 'B'

GLAZING OPTIONS

WINDOWS NOT RATED FOR IMPACT.

INSTALLATION OF THIS PRODUCT IN THE HVHZ AREA REQUIRES THE USE OF APPROVED SHUTTERS OR EXTERNAL PROTECTION DEVICES COMPLYING WITH HVHZ REQUIREMENTS.

INSTALLATION OF THIS SYSTEM OUTSIDE THE HVHZ AREA SHALL MEET THE APPLICABLE REQUIREMENTS FOR WIND BORNE DEBRIS PROTECTION.

ALUMINUM SINGLE HUNG WINDOW

DESIGN LOAD RATINGS FOR THESE WINDOWS TO BE AS PER CHART SHOWN ABOVE.

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE COMBINATIONS OF S.H./S.H. OR SINGLE HUNG WITH OTHER WINDOW TYPES IN MODULES OF TWO OR MORE WINDOWS USING MIAMI-DADE COUNTY APPROVED MULLIONS IN BETWEEN. LOWER DESIGN PRESSURE FROM WINDOWS OR MULLION APPROVAL WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2017 (6TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ)

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.


ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE. MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE

REQUIREMENTS OF THE 2017 FLORIDA BLDG. CODE & ADOPTED STANDARDS. THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY

OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC.

CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

> PRODUCT REVISED as complying with the Florida Building Code
> Acceptance No 18-0205.01
> Expiration Date Feb. 1, 2023 Miami Dade Product Control



 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220

 MIAMI, FLORIDA 33173
 (C.A.N. 3538)

 TEL. (305) 264-8100
 FAX. (305) 262-6978

Services HUNG s Sales & 41 STREET 33166 SINGLE Glass N.W. 4 FL. 3 ALUMINUM


Gopi 7450 MIAMI, description
UPDATED FOR 20
UPDATED TO 201
UPDATED TO 201
EDITORIAL CHANG date date 10.15.09 10.26.11 05.30.14 TO C B A D C


1/2"=1 03-16þ. | 뉴 || 충


drawing no.

W06 - 24

sheet 1 of 4

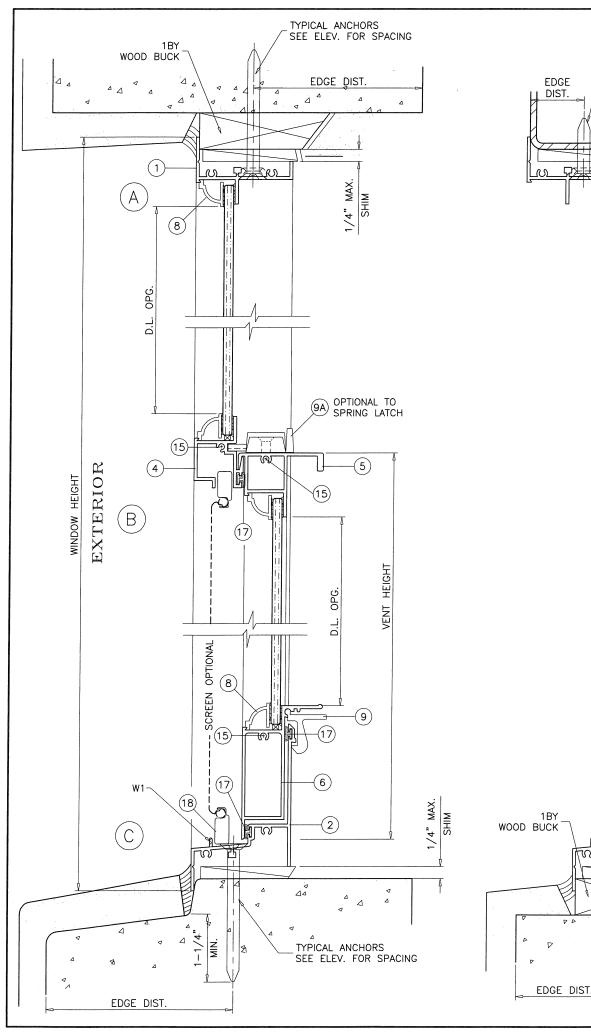

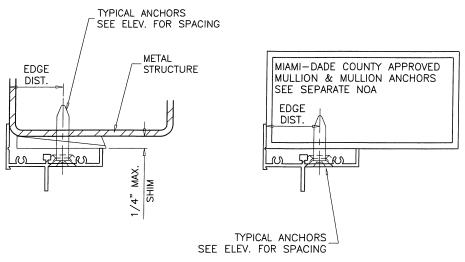

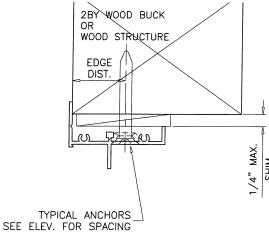

WOOD BUCKS AND METAL STRUCTURE NOT BY GOPI GLASS MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

SEALANTS:

ALL JOINTS AND FRAME CONNECTIONS SEALED WITH SILICONE SEALANT.

WEEPHOLES:

W1 = 1" LONG NOTCH AT EACH END

TYPICAL ANCHORS


-SEE ELEV.

FOR SPACING

CRITICAL EDGE DISTANCE

CONCRETE AT HEAD, SILL OR JAMBS f'c = 3000 PSI MIN. C-90 HOLLOW/FILLED BLOCK AT JAMBS f'm = 2000 PSI MIN.

PRODUCT REVISED as complying with the Florida **Building Code** Acceptance No 18-0205



TYPICAL ANCHORS: SEE ELEV. FOR SPACING

1/4" DIA. ULTRACON BY 'ELCO' (Fu=177 KSI, Fy=155 KSI) INTO 2BY WOOD BUCKS OR WOOD STRUCTURES 1-1/2" MIN. PENETRATION INTO WOOD (HEAD/SILL/JAMBS) AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978

Corp.

Services

Glass

O V B V O

by:

년.

drawing no.

W06 - 24

sheet 2 of 4

s Sales & ... 41 STREET 33166

Gopi (7450 MIAMI,

WINDOW

HUNG

.A.N.

THRU 1BY BUCKS INTO CONC. OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)


DIRECTLY INTO CONCRETE OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)


1/4" DIA. TEKS OR SELF-DRILLING SCREWS (GRADE 5 CRS) INTO METAL STRUCTURES (HEAD/SILL/JAMBS) (3) THREADS MIN. TO EXTEND BEYOND METAL THICKNESS ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.) (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

3/16" DIA. TEKS OR SELF-DRILLING SCREWS (GRADE 5 CRS) INTO MIAMI-DADE COUNTY APPROVED MULLIONS (NO SHIMS) (3) THREADS MIN. TO EXTEND BEYOND METAL THICKNESS ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) (NO SHIMS) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.) (NO SHIMS) (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)


INTO CONCRETE AND BLOCKS = 1-1/2" MIN. INTO WOOD STRUCTURE = 1" MIN. INTO METAL STRUCTURE = 3/4" MIN.


WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN.



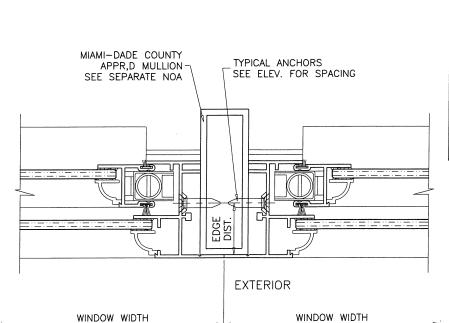


						_
ITEM #	PART #	REQD.	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS	$\ \ $
1	-	1	FRAME HEAD	6063-T5	-	
2	GSH118	1	FRAME SILL	6063-T5	-	
3	GSH120	2	FRAME JAMB	6063-T5	-	Ш
4	-	1	FIXED MTG. RAIL	6063-T5	-	Ш
5	GSH117	1	VENT TOP RAIL	6063-T6	-	Ш
6	GSH119A	1	VENT BOTTOM RAIL	6063-T6	-	
7	_	2	VENT JAMB	6063-T5	_	
8	_	AS REQD.	GLAZING BEAD	ALUMINUM	-	Ш
9	_	2/VENT	VENT LATCH @ 6-1/2" FROM ENDS	NYLON	-	
9A	672205K38	2/VENT	VENT LATCH @ 6-1/2" FROM ENDS	_	DECO PRODUCTS, ATTACHED W/ (2) #8 X 5/8" FH SMS	
10	GSH114	AS REQD.	VENT GUIDE	RIGID PVC	-	
11	_	AS REQD.	PILE WEATHERSTRIP	_	-	
15	_	AS REQD.	ASSEMBLY SCREWS	_	#8 x 3/4" P.H. CRS SMS	
16	_	2	BLOCK & TACKLE BALANCE	_	5/8" BOX, BALANCE SYSTEMS INC. OR EQ.	
17	_	AS REQD.	BULB WEATHERSTRIP	_	-	I
18	_	1	5/16" BOX SCREEN	_	OPTIONAL	
19	-	2/ LITE	SETTING BLOCK, DUROMETER 87±5 SHORE A	EPDM	OPTIONAL	

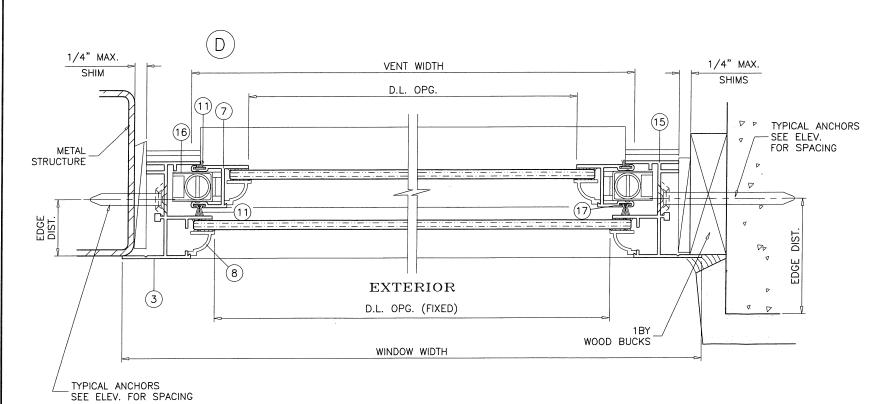

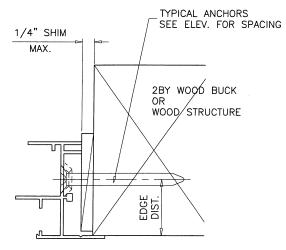

ARODUCT REVISED
as complying with the Florida
Building Code
Acceptance No
Expiration Date
Feb. 1, 2023

By Waynel Person Miami/Dade Product Control

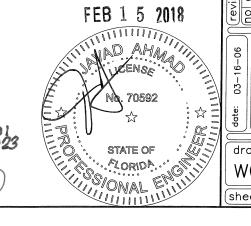

ALUMINUM SINGLE HUNG WINDOW	Gopi Glass Sales & Services Corp.	STREET	166	2089 FAX. (305) 477-0992
ALUMINUM SIN	Gopi Glass Sc	7450 N.W. 41 STREET	MIAMI, FL. 33166	TEL. (305) 592-2089

AL-FAROOQ CORPORATION ENGINEERS & PRODUCT DEVELOPMENT 9360 SUNSET DRIVE, SUITE 220 MIAMI, FLORIDA 33.173 (C.A.N. 3538) TEL. (305) 264-8100 FAX. (305) 262-6978

by description

by description

UPDATED FOR 2007 FBC

NO CHANGE THIS SHEET

NO CHANGE THIS SHEET

EDITORIAL CHANGES

date:	03-16-06	<u>e</u>)[e	
scale:	1/2" = 1"	2 ∢	10.15
		m	10.26
dr. by:	TARIQ	ပ	05.30
		۵	11.07
CDK. DV:	-	Ľ	

drawing no. W06-24

WU6-24 (sheet 3 of 4

