



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)  
BOARD AND CODE ADMINISTRATION DIVISION

## NOTICE OF ACCEPTANCE (NOA)

**MIAMI-DADE COUNTY  
PRODUCT CONTROL SECTION**

11805 SW 26 Street, Room 208  
Miami, Florida 33175-2474  
T (786)315-2590 F (786) 315-2599

[www.miamidade.gov/economy](http://www.miamidade.gov/economy)

**Lomanco, Inc.**  
**2101 West Main Street**  
**Jacksonville, AR 72076**

### SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION:** **Lomanco Lo-OmniRoll LOR-30 Ridge Vent**  
**TRI-BUILT® Lo-OmniRoll LOR-30 Ridge Vent**


**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.  
This NOA revises NOA No. 18-0615.04 consists of pages 1 through 5.

The submitted documentation was reviewed by **Freddy Semino**, 



**NOA No.: 18-1107.02**  
**Expiration Date: 09/04/23**  
**Approval Date: 01/03/19**  
**Page 1 of 5**

## ROOFING COMPONENT APPROVAL

Category: Roofing  
Sub-Category: Ventilation  
Materials: Plastic  
Minimum Slope: 3:12

## TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Lomanco Lo-OmniRoll (LOR-30) Ridge Vent	60" x 14 1/2" x 5/8" 0.625" thick	TAS 100(A)	Ridge ventilation system
TRI-BUILT® Lo-OmniRoll (LOR-30) Ridge Vent	60" x 14 1/2" x 5/8" 0.625" thick	TAS 100(A)	Ridge ventilation system

## TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>	<u>Manufacturer</u>
Roofing Nails	Min. 12 ga., 1 3/4"	TAS 114 Appendix E	Corrosion resistant smooth shank nails	Generic

## MANUFACTURING LOCATION

1. Jacksonville, AR

## EVIDENCE SUBMITTED

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
PRI Construction Materials Technologies, LLC	TAS 100	LOM-003-02-01	01/15/03
	TAS 100(A)-95	LOM-028-02-01	08/28/13
	ASTM D635	LOM-030-02-01	07/23/13
	ASTM D638	LOM-025-02-01	05/30/13
	ASTM D1929	LOM-031-02-01	07/23/13
	ASTM G155	LOM-025-02-01	05/30/13



NOA No.: 18-1107.02  
Expiration Date: 09/04/23  
Approval Date: 01/03/19  
Page 2 of 5

## APPROVED APPLICATIONS


<b>Tradename:</b>	<b>Lomanco Lo-Omni Roll (LOR-30) Ridge Vent</b> <b>TRI-BUILT® Lo-OmniRoll (LOR-30) Ridge Vent</b>
<b>System Type:</b>	Mechanical attachment of ridge vent system over composition shingles.
<b>Slot:</b>	<p>Truss Construction: Cut shall be 1-1/4" wide and 6" shorter at each end than the total length of the ridge vent to be installed.</p> <p>Ridge Pole Construction: Cut shall be 2-3/4" wide and 6" shorter at each end than the total length of the ridge vent to be installed.</p>
<b>Installation:</b>	<p>Mark proper alignment and end line for vents with chalk; snap a chalk line down both sides of the ridge at a distance of 7" down from the peak as shown in the manufacturer's installation instructions.</p> <p>Center the length of vent along the ridge. Start nailing with minimum 1 3/4" roofing nails placed 6" on center at manufacturer pre-marked locations. Use nails of sufficient length to penetrate through the sheathing a minimum of 3/16" or at least 1" into wood plank decking thicker than 1". Cut lines are provided if more than one vent is being used (See manufacturer installation manual). Additional pieces shall run in the same direction as they unroll out of the carton.</p>
<b>Ridge Shingle:</b>	Using nail lines provided on top of vent, install the cap shingles directly to the vent, in compliance with the shingle manufacturer's Notice of Acceptance (NOA) and installation instructions, using roofing nails of sufficient length to penetrate through the sheathing a minimum of 3/16" or at least 1" into wood plank decking thicker than 1".
<b>Ventilation Calculations:</b>	Refer to manufacturer's published literature.



## **LIMITATIONS**

1. Refer to applicable Building Code for required ventilation.
2. Ridge Vents shall comply with applicable Building Code.
3. Lomanco Lo-Omni Roll (LOR-30) Ridge Vent and TRI-BUILT® Lo-OmniRoll (LOR-30) Ridge Vent shall not be installed in conjunction with Gable vents.
4. Lomanco Lo-Omni Roll (LOR-30) Ridge Vent and TRI-BUILT® Lo-OmniRoll (LOR-30) Ridge Vent shall not be installed on roof hips.
5. Lomanco Lo-Omni Roll (LOR-30) Ridge Vent and TRI-BUILT® Lo-OmniRoll (LOR-30) Ridge Vent shall not be connected at ridge intersection, or within 12” of any side wall or roof protrusion, with a ventilation slot clearance of 12” from such obstructions.
6. Lomanco Lo-Omni Roll (LOR-30) Ridge Vent and TRI-BUILT® Lo-OmniRoll (LOR-30) Ridge Vent shall not be installed on roof mean heights greater than 33 ft.
7. For application over laminated shingles, apply a bead of silicone caulking or roof cement to the underside of the outer baffle and at exposed edges.
8. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.



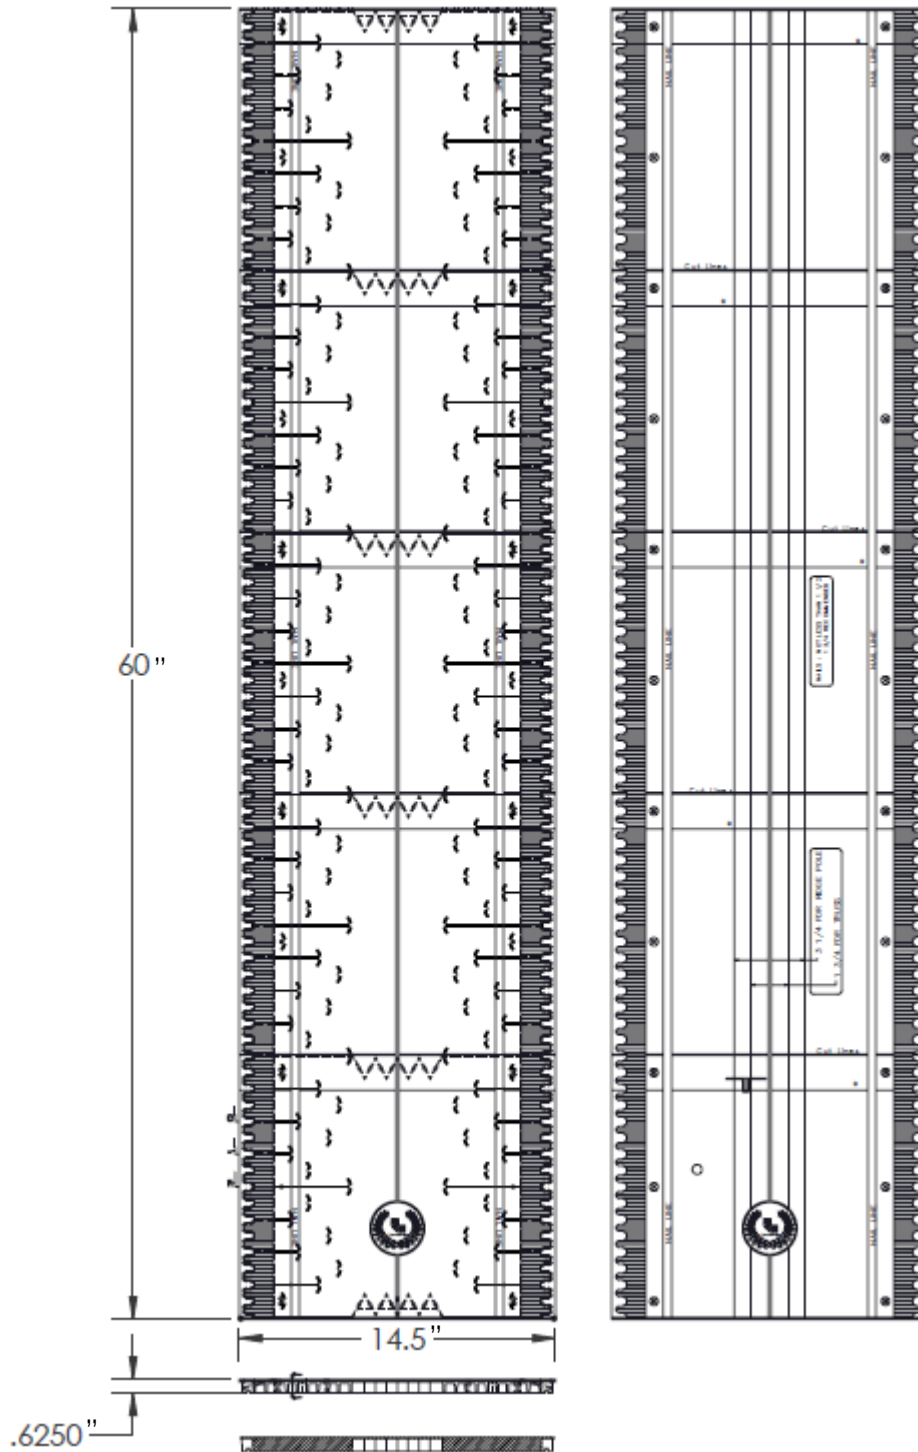

Lomanco Lo-OmniRoll (LOR-30) Ridge Vent  
 TRI-BUILT® Lo-OmniRoll (LOR-30) Ridge Vent

**END OF THIS ACCEPTANCE**

