

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY, FLORIDA PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208

T (786) 315–2590 F (786) 315–2599

www.miamidade.gov/economy

Aire Technologies, Inc. 1502 Industrial Drive Monongahela, PA 15063

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami–Dade County RER–Product Control Section to be used in Miami–Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Model DC-638 6" Deep Aluminum Louver

APPROVAL DOCUMENT: Drawing No. **08-00626**, titled "DC-638 Louver System – Large and Small Missile Impact", sheets 1 through 10 of 10, dated 10/07/2008, prepared by L. Roberto Lomas, P.E., signed and sealed by Luis R. Lomas, P.E. on 09/30/2020, bearing the Miami–Dade County Product Control Section approval stamp with the Notice of Acceptance number and approval date by the Miami–Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", is to be located on each unit.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami–Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of this page 1 and evidence page E-1, as well as approval document mentioned above. The submitted documentation was reviewed by **Carlos M. Utrera**, **P.E.**





NOA No. 20-0305.03 Expiration Date: November 25, 2025 Approval Date: November 25, 2020 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **08-00626**, titled "DC-638 Louver System – Large and Small Missile Impact", sheets 1 through 10 of 10, dated 10/07/2008, prepared by L. Roberto Lomas, P.E., signed and sealed by Luis R. Lomas, P.E. on 09/30/2020.

B. TESTS

- 1. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC, TAS 202–94
 - 2) Large Missile Impact Test per FBC, TAS 201-94
 - 3) Cyclic Wind Pressure Loading per FBC, TAS 203-94 along with marked-up drawings and installation diagram of DC-638 Aluminum Louvers, prepared by National Certified Testing Laboratories, Test Report No. **NCTL-210-4172-01**, dated 03/20/2020, signed and sealed by Douglas J. McDougall, P.E.

C. CALCULATIONS

1. Anchoring structural calculations dated 06/24/2020, prepared by L. Roberto Lomas, P.E., signed and sealed by Luis R. Lomas, P.E.

D. **OUALITY ASSURANCE**

1. Miami–Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of conformance to 6th Edition (2017) and 7th Edition (2020) and of no financial interest, dated 06/24/2020, issued by L. Roberto Lomas, P.E., signed and sealed by Luis R. Lomas, P.E.

Strong

Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 20-0305.03
Expiration Date: November 25, 2025
Approval Date: November 25, 2020

	REVISIONS				
REV	DESCRIPTION	DATE	APPROVED		
А	REVISED PER NEW REQUIREMENTS	06/24/2020	R.L.		

GENERAL NOTES:

- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE CURRENT FLORIDA BUILDING CODE INCLUDING THE HVHZ.
- 2. WOOD BUCK OR STUD FRAMING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE, BUCK OR FRAMING IS RESPONSIBILITY OF ARCHITECT OF RECORD.
- 3. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED. FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS._SEE DESIGN PRESSURE RATINGS SHEETS 2 TO 5.
- 4. ISOLATE ALL SUBSTRATE ANCHOR CLIPS/ ANGLES, PART NUMBERS 9, 13, 14 & 21 FROM MASONRY/CONCRETE SUBSTRATE BY OTHERS.
- 5. ALLOWABLE STRESS INCREASE OF 1/3 WAS NOT USED IN THE DESIGN OF THE PRODUCT SHOWN HEREIN. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
- 6. THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IT IS TO BE INSTALLED ONLY WHERE PENETRATION RESISTANCE IS NOT REQUIRED.

- 1. SHIM AS REQUIRED AT EACH SET OF INSTALLATION ANCHORS USING LOAD BEARING SHIMS. MAX. ALLOWABLE SHIM STACK TO BE 1/4". USE SHIMS WHERE SPACE GREATER THAN 1/16" IS
- 2. INSTALL LOUVER SYSTEM INTO CONCRETE/GROUT FILLED MASONRY USING 3/8" HILTI KWIK BOLT 3 AT EACH CLIP WITH SUFFICIENT LENGTH TO ACHIEVE A 3 1/2" MINIMUM EMBEDMENT WITH A 3 3/4" MINIMUM EDGE DISTANCE. LOCATE CLIPS PER ELEVATION AND INSTALLATION DETAILS.
- 3. INSTALL LOUVER SYSTEM INTO SYP WOOD FRAMING USING 7/16" LAG BOLTS AT EACH CLIP WITH SUFFICIENT LENGTH TO ACHIEVE A 3 1/2" MINIMUM EMBEDMENT. LOCATE CLIPS PER ELEVATION AND INSTALLATION DETAILS.
- 4. ALL ANCHORS/FASTENERS TO BE CORROSION RESISTANT.
- 5. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.50

AIRE TECHNOLOGIES, INC. 1502 INDUSTRIAL DRIVE E. MONONGAHELA, PA 15063

- B. CONCRETE AND GROUT: MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI.
- C. MASONRY: STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).

MAL DIN

Luis R. Lomas P.E. FL No.: 62514

PRODUCT APPROVED as complying with the Florida Building Code			
NOA-No.	20-0305.03		


Approval Date 11/25/2020

Strong Miami-Dade Product Control

TABLE OF CONTENTS			DC-638 LOUVER SYSTEM LARGE AND SMALL MISSILE IMPACT GENERAL NOTES			
SHEET NO.	DESCRIPTION	DRAWN: DWG NO. REV		REV		
1	GENERAL NOTES	TJH		08-00626		А
2 - 5	ELEVATIONS	SCALE NTS DATE 10/07/08 SHEET 1 OF 10				
6 - 9	INSTALLATION DETAILS	L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023				
10	COMPONENTS	434-688-0609 rllomas@lrlomaspe.com				

SIGNED: 09/30/2020

	REVISIONS		
REV	DESCRIPTION	DATE	APPROVED
А	REVISED PER NEW REQUIREMENTS	06/24/2020	R.L.

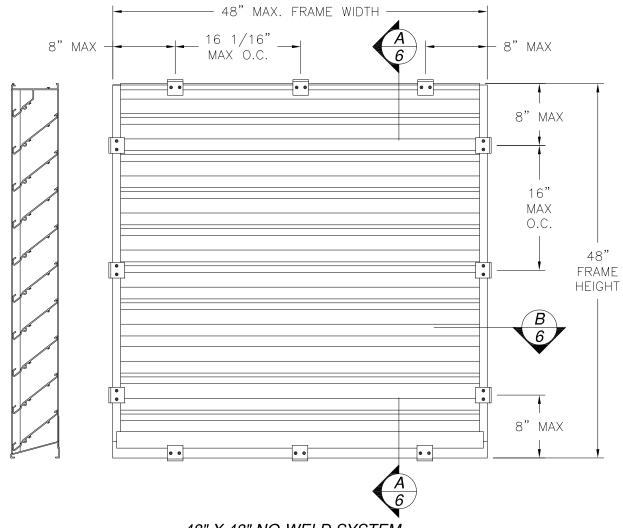

NOTES:

- 1. HEAD ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW, THROUGH JAMB INTO HEAD.
- 2. BOTTOM ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW THROUGH BOTTOM INTO JAMB.

48" X 48" NO-WELD SYSTEM
INTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
±90.0PSF	LARGE AND SMALL MISSILE IMPACT

48" X 48" PANEL SHOWN. OTHER SIZES ARE APPROVED AS LONG AS WIDTH DOES NOT EXCEED 48", PANEL HEIGHT IS UNLIMITED


PRODUCT APPROVED
as complying with the Florida
Building Code
NOA-No. 20-0305.03

Approval Date 11/25/2020


By Miami-Dade Product Control

AIRE TECHNOLOGIES, INC. 1502 INDUSTRIAL DRIVE E. MONONGAHELA, PA 15063 DC-638 LOUVER SYSTEM LARGE AND SMALL MISSILE IMPACT 48" X 48" NO-WELD SYSTEM DRAWN: DWG NO. TJH 08-00626 SCALE NTS DATE 10/07/08 SHEET 2 OF 10 L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/30/2020





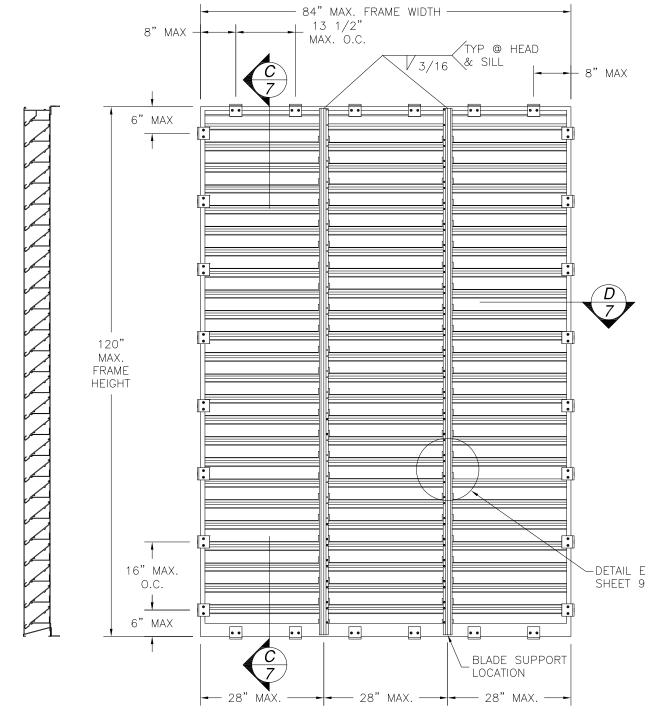

84" X 120" WELDED SYSTEM INTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
±150.0PSF	LARGE AND SMALL MISSILE IMPACT

84" X 120" PANEL SHOWN. OTHER SIZES ARE APPROVED AS LONG AS 84" WIDTH AND 120" HEIGHT ARE NOT EXCEEDED

PRODUCT APPROVED as complying with the Florida Building Code 20-0305.03 NOA-No.

Approval Date 11/25/2020

Atum Miami-Dade Product Control

NOTES:

WELD OUTSIDE OF JAMB.

BLADE 3 3/4" WELD.

AIRE TECHNOLOGIES, INC. 1502 INDUSTRIAL DRIVE E. MONONGAHELA, PA 15063 DC-638 LOUVER SYSTEM LARGE AND SMALL MISSILE IMPACT 84" X 120" WELDED SYSTEM DRAWN: DWG NO. TJH 08-00626 SCALE NTS DATE 10/07/08 SHEET 3 OF 10 L. ROBERTO LOMAS P.E.

1432 WOODFORD RD LEWISVILLE, NC 27023

434-688-0609 rllomas@lrlomaspe.com

1. HEAD ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW, THROUGH JAMB INTO HEAD, WELDED ON OUTSIDE WITH A 3

2. BOTTOM ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW THROUGH BOTTOM INTO JAMB. WELDED WITH 3 1/2"


3. BLADE ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW THROUGH JAMB INTO BLADE. WELDED ON BACK SIDE OF

REV A CORIDA CHILINGS ONAL ENGINE


Luis R. Lomas P.E. FL No.: 62514

SIGNED: 09/30/2020



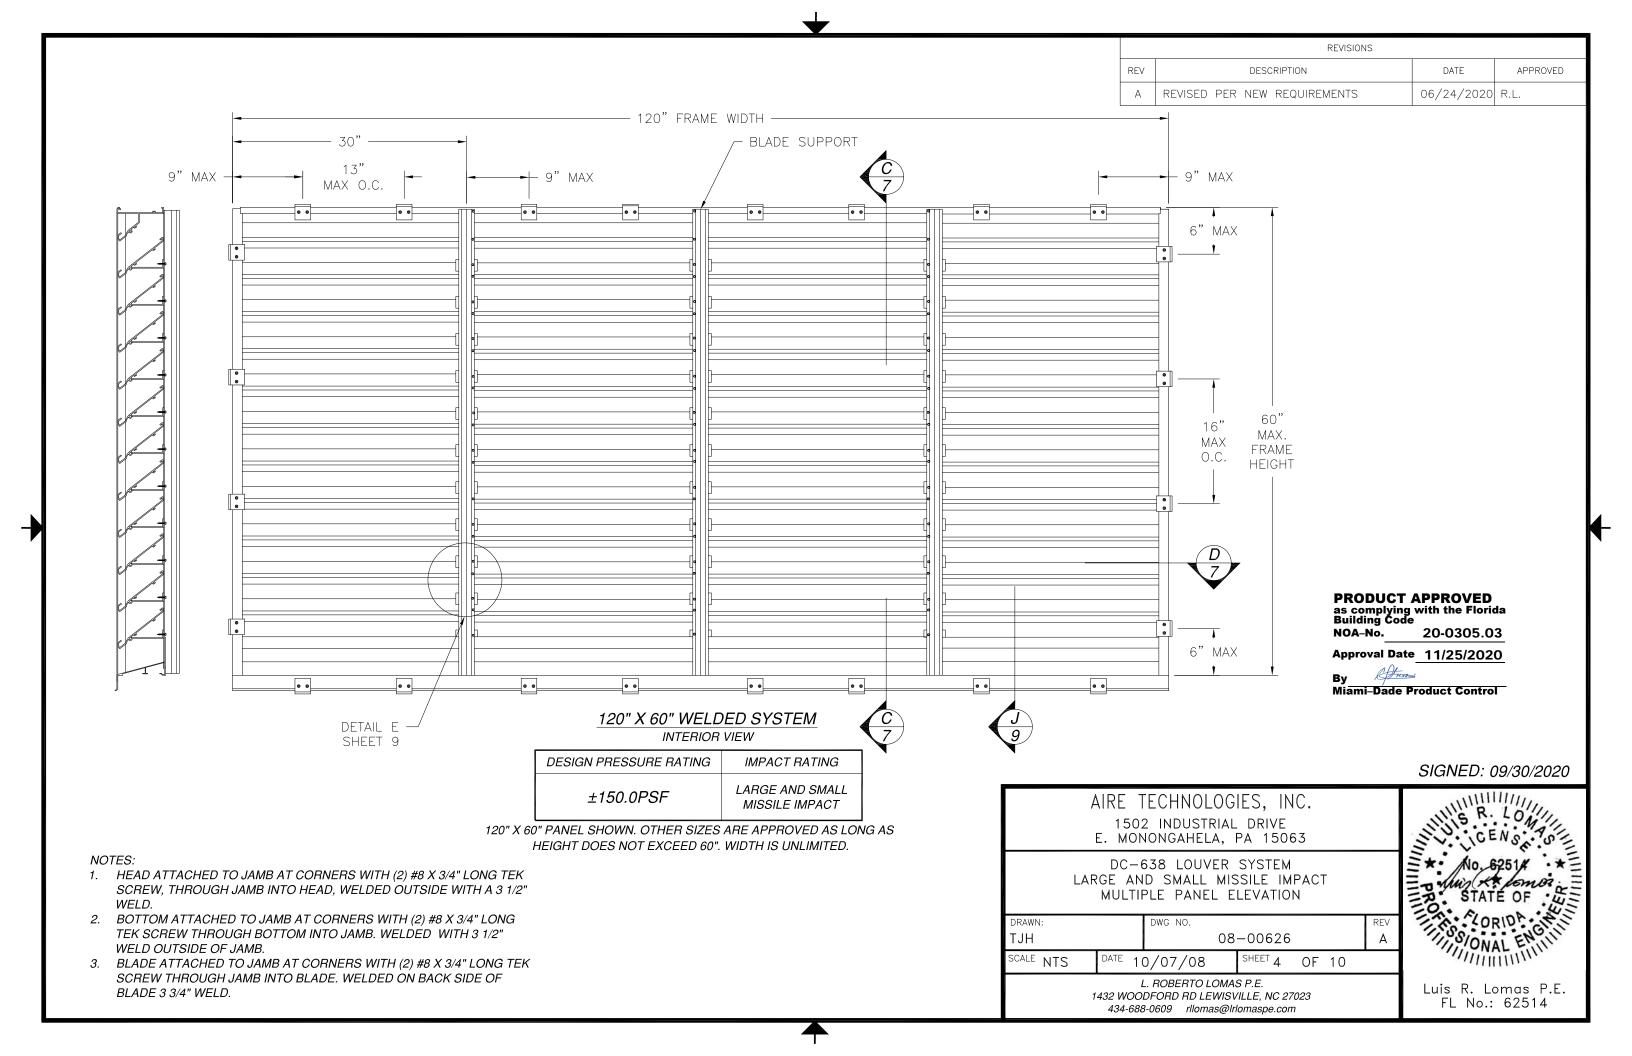

	REVISIONS		
REV	DESCRIPTION	DATE	APPROVED
А	REVISED PER NEW REQUIREMENTS	06/24/2020	R.L.

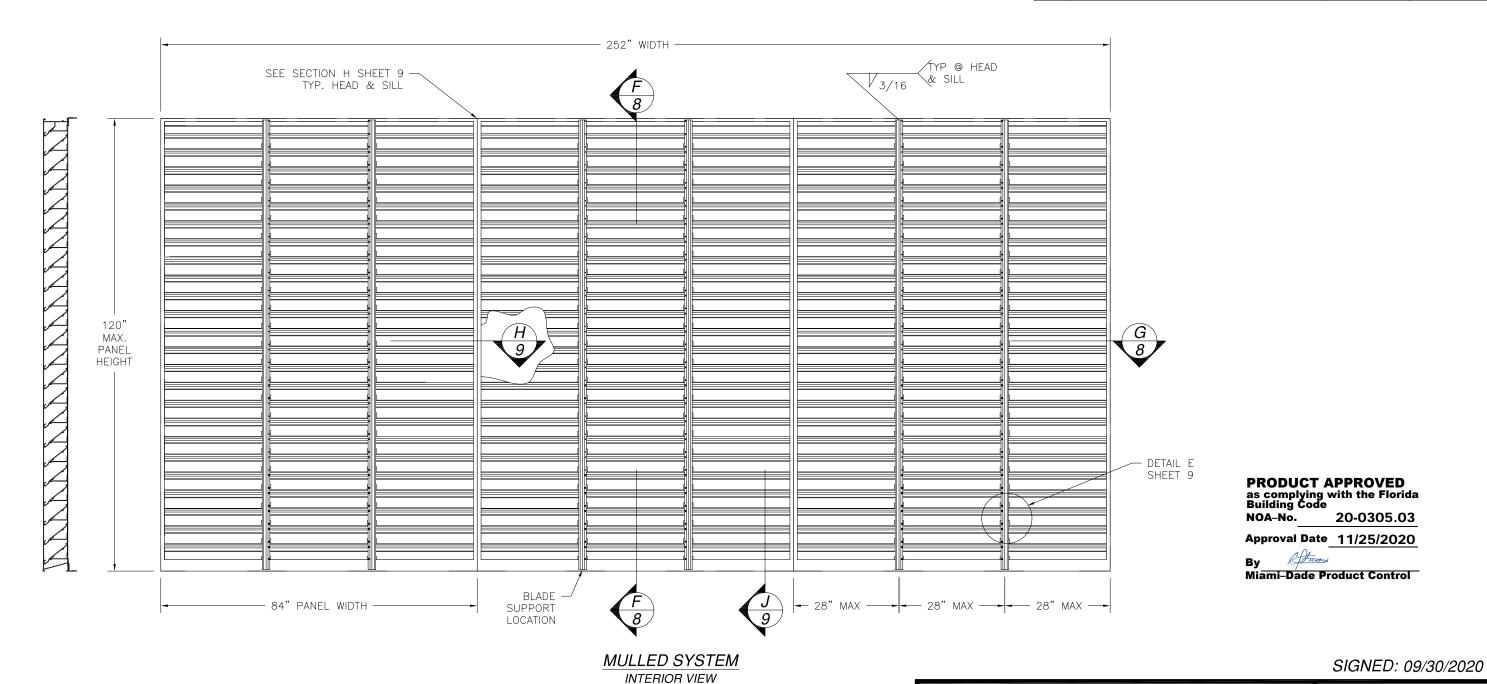

- 1. HEAD ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW, THROUGH JAMB INTO HEAD, WELDED OUTSIDE WITH A 3 1/2" WELD.
- 2. BOTTOM ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW THROUGH BOTTOM INTO JAMB. WELDED WITH 3 1/2" WELD OUTSIDE OF JAMB.
- 3. BLADE ATTACHED TO JAMB AT CORNERS WITH (2) #8 X 3/4" LONG TEK SCREW THROUGH JAMB INTO BLADE. WELDED ON BACK SIDE OF BLADE 3 3/4" WELD.

DESIGN PRESSURE RATING	IMPACT RATING
±90.0PSF	LARGE AND SMALL MISSILE IMPACT


252" X 120" SYSTEM SHOWN. OTHER SIZES ARE APPROVED AS LONG AS HEIGHT DOES NOT EXCEED 120". WIDTH IS UNLIMITED.


AIRE TECHNOLOGIES, INC. 1502 INDUSTRIAL DRIVE E. MONONGAHELA, PA 15063 DC-638 LOUVER SYSTEM LARGE AND SMALL MISSILE IMPACT MULTIPLE PANEL ELEVATION DRAWN: DWG NO. TJH 08-00626 SCALE NTS DATE 10/07/08 SHEET 5 OF 10 L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com


TREV NO. STATE OF STA

Luis R. Lomas P.E. FL No.: 62514




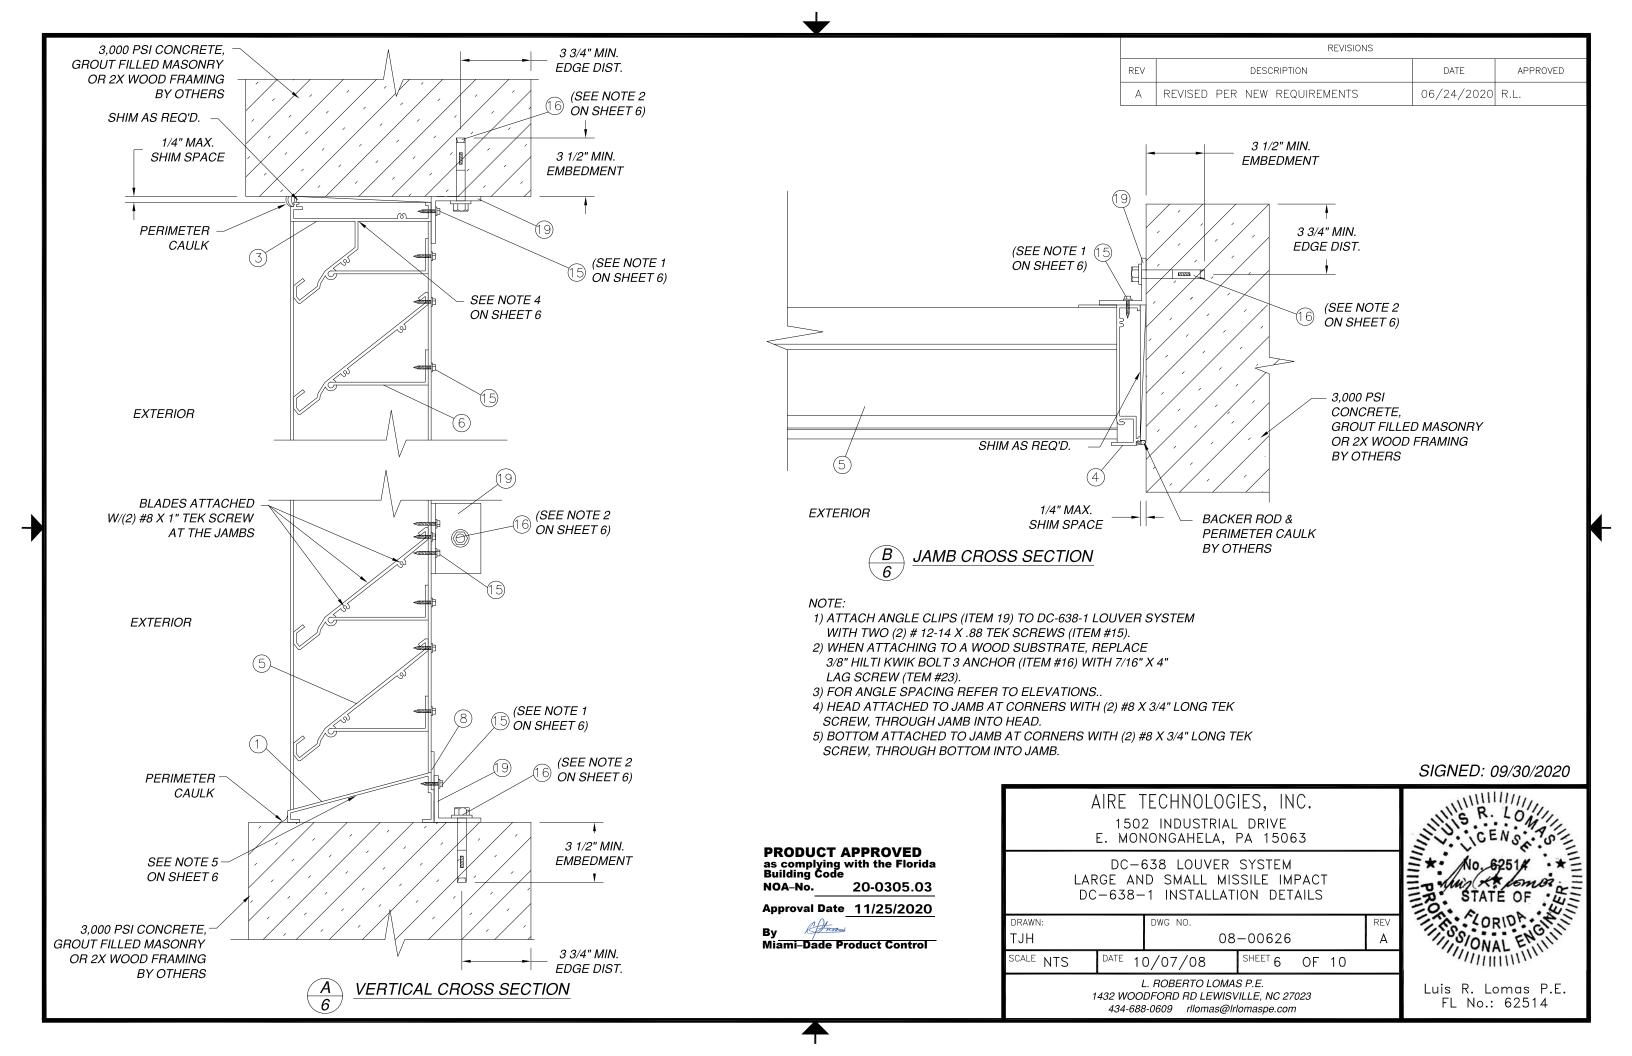


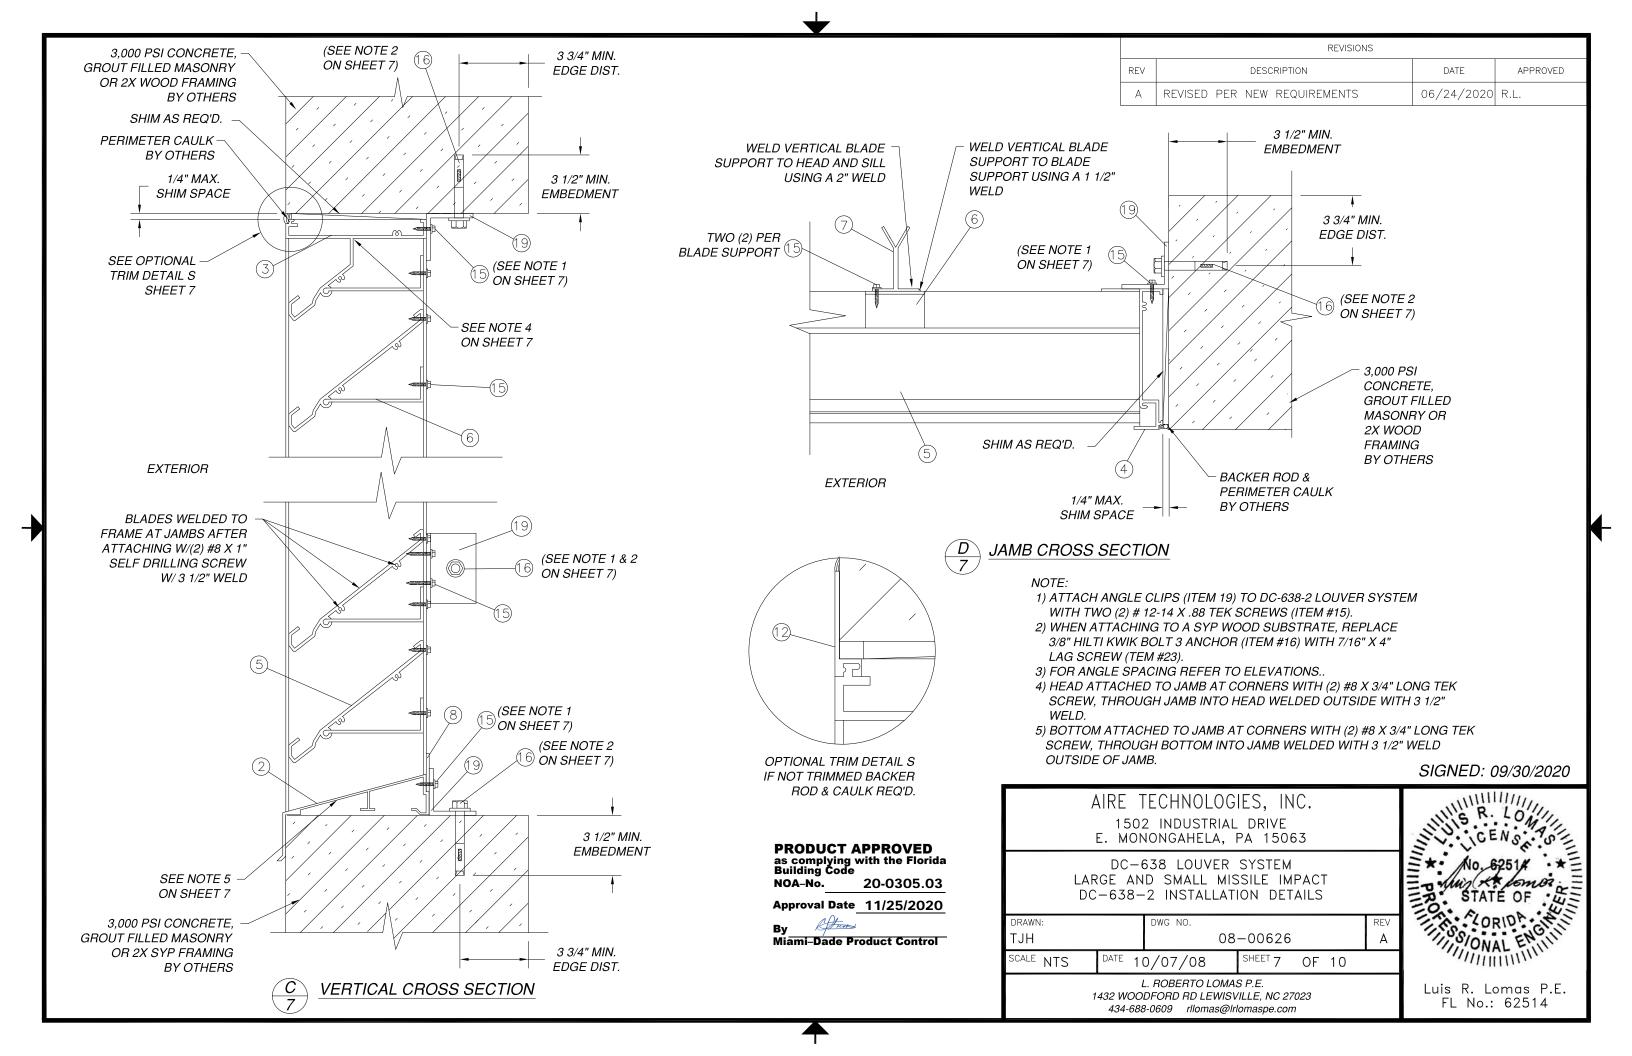

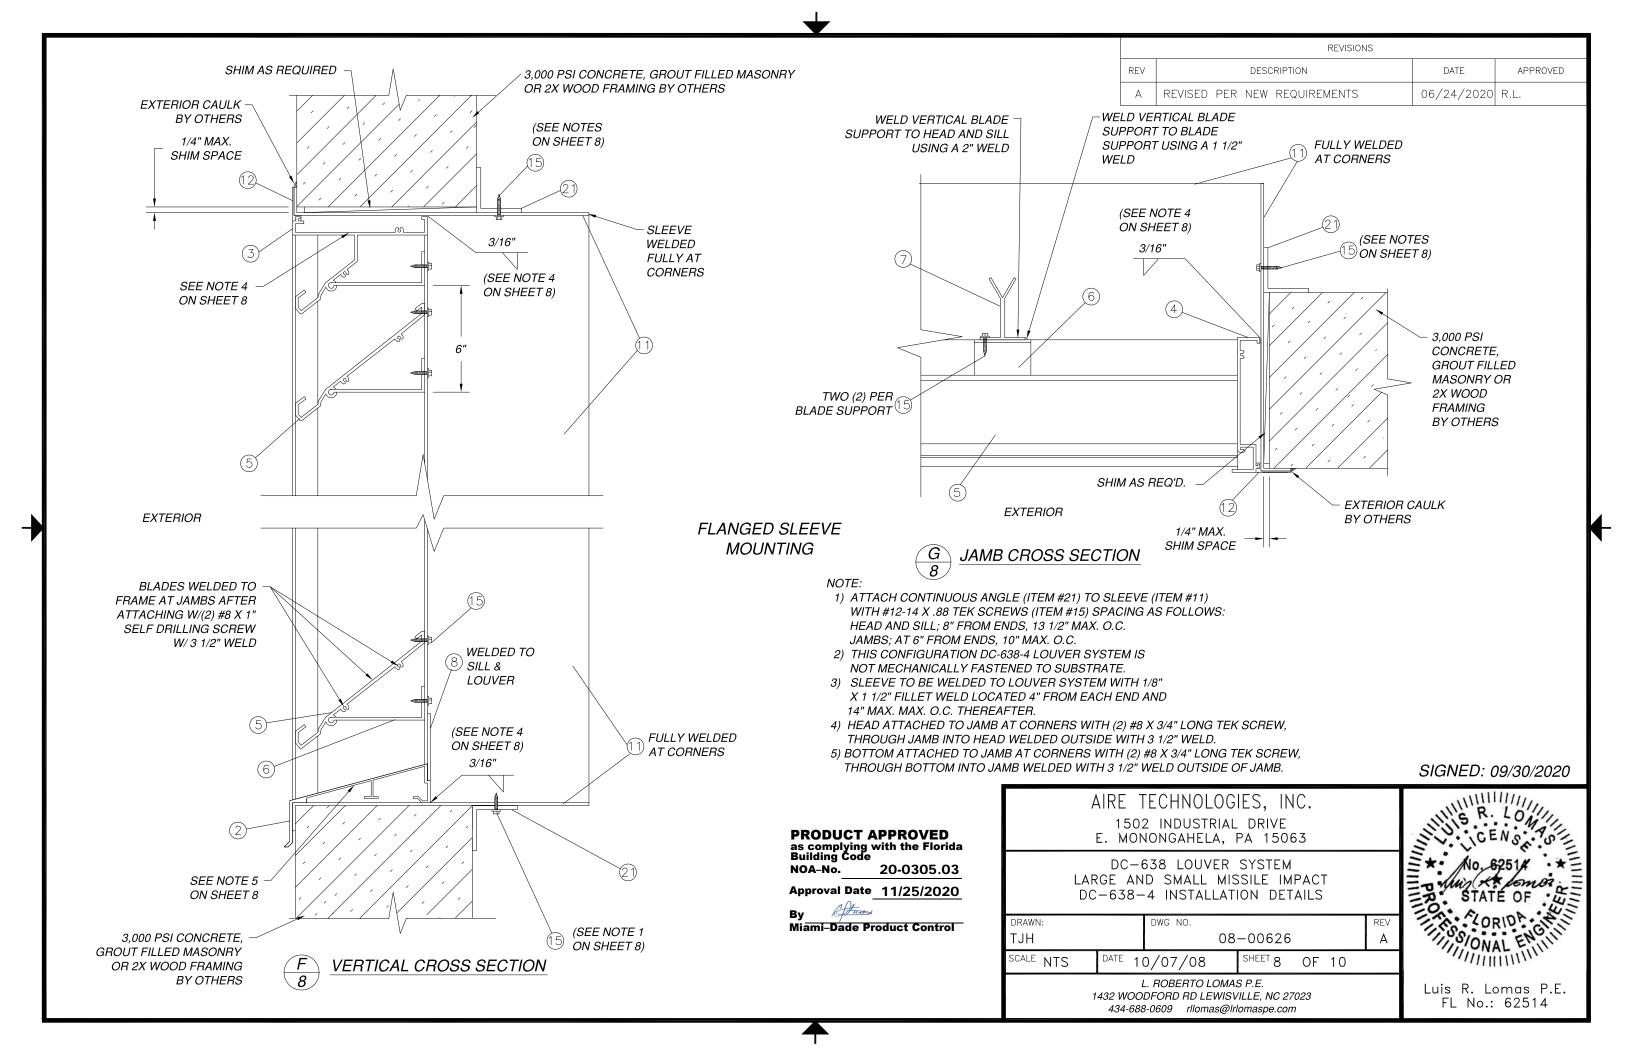


	REVISIONS		
REV	DESCRIPTION	DATE	APPROVED
А	REVISED PER NEW REQUIREMENTS	06/24/2020	R.L.

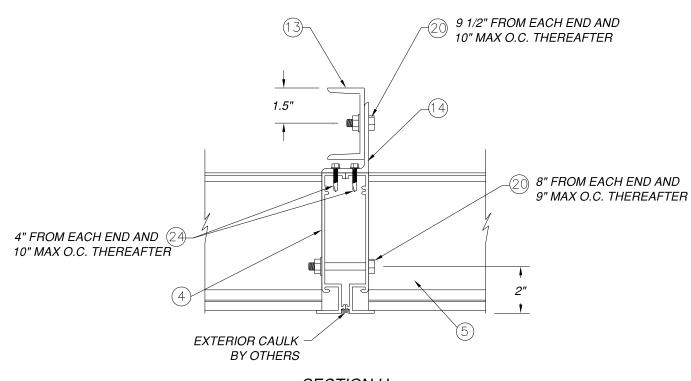

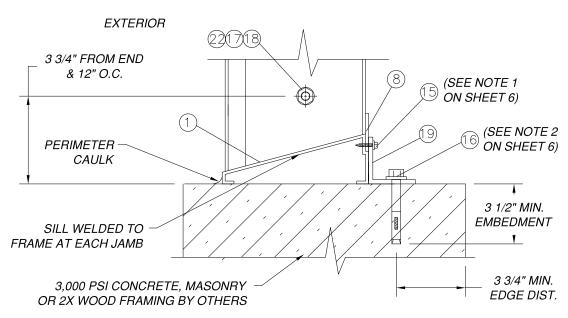

SECTION J

SECTION H

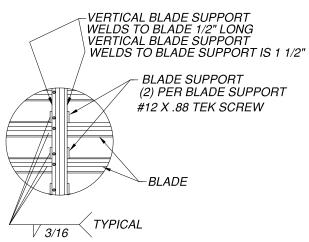


SECTION E

PRODUCT APPROVED as complying with the Florida Building Code NOA-No. 20-0305.03

Approval Date 11/25/2020

Miami-Dade Product Control

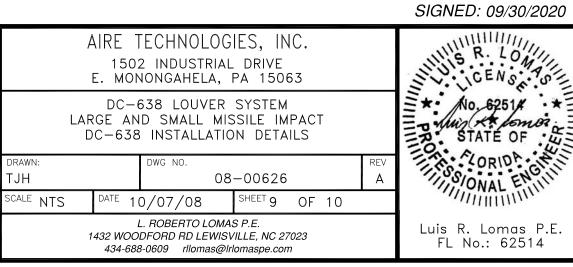

FL No.: 62514

