

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599 www.miamidade.gov/economy

PRODUCT CONTROL SECTION

MIAMI-DADE COUNTY

ECO Windows Systems, LLC 9114 N. W. 106th Street, Medley, FL 33178

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series 950 Aluminum Outswing Doors w/wo Sidelite-L.M.I.

APPROVAL DOCUMENT: Drawing No. **W17-66 Rev C**, titled "Series 950 Alum Outswing Door (L.M.I.)", sheets 1 through 10 of 10, prepared by AL-Farooq Corporation, dated 07/20/17 and last revised on Nov 18, 2020, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant Limitation:

- 1. See Single or Double Door Design Pressure (DP) ratings in sheet <u>2</u>. See Single or Double Door DP ratings with sidelites (w/ Reinforcement) and Standalone Single sidelite rating in sheets <u>3</u> & <u>4</u>. The max door leaf width shall not to exceed 37-1/8".
- 2. Laminated glass types A and A1 are limited to Kurarary's .090" Trofosil PVB interlayer.
- 3. Min 3-1/4" typical screw length is required for anchors thru the jambs.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and series and following statement: "Miami-Dade County Product Control Approved", noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises #18-0129.11 consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by Ishaq I. Chanda, P.E.

MIAMI-DADE COUNTY
APPROVED

Ishaq I. Chandes

NOA No. 20-1119.18 Expiration Date: December 27, 2023 Approval Date: January 14, 2021

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE

1. Evidence submitted under previous approval

A. DRAWINGS

- 1. Manufacturer's die drawings and sections
- 2. Drawing No. **W17-66 Rev C**, titled "Series 950 Alum Outswing Door (L.M.I.)", sheets 1 through 10 of 10, prepared by AL-Farooq Corporation, dated 07/20/17 and last revised on DEC 05, 2018, signed and sealed by Javad Ahmad, P.E.

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of an aluminum Outswing French door w/sidelite, prepared by Fenestration Testing Lab, Inc., Test Report No. **FTL-9486** dated 08/25/2017 and last revised on 08/08/18, signed and sealed by Idalmis Ortega, P. E.

C. CALCULATIONS

- 1. Anchor verification calculations and structural analysis, complying with FBC-2017 (6th Edition), prepared by Al Farooq Corporation, dated JAN 23, 2018 and last revised on OCT 30, 2018, signed and sealed by Javad Ahmad, P.E.
- 2. Glazing complies w/ ASTME-1300-02, -04 & -09.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 16-1117.01 issued to Kuraray America, Inc. (Former E.I. DuPont DeNemours & Co., Inc. for the "Trofosil ® ultra clear, clear & color glass interlayer", expiring on 07/08/19.

F. STATEMENTS

- 1. Statement letter of conformance to FBC 2016 (6th Edition) and letter of no financial interest, prepared by Al Farooq Corporation, dated 01/08/18, signed and sealed by Javad Ahmad, P.E.
- 2. Statement letter dated DEC 04, 2018 for anchor correction per tested condition, signed and sealed by Javad Ahmad, P.E. (submitted under #18-0129.11)
- 3. Lab compliance as part of the above referenced test report.

G. OTHER

1. This NOA revises #18-0129.11 expiring 12/27/23.

Ishaq I. Chands

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 20-1119.18
Expiration Date: December 27, 2023
Approval Date: January 14, 2020

ECO Windows Systems, LLC

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **W17-66 Rev D**, titled "Series 950 Alum Outswing Door (L.M.I.)", sheets 1 through 10 of 10, prepared by AL-Farooq Corporation, dated 07/20/17 and last revised on Nov 18, 2020, signed and sealed by Jalal Farooq, P.E.

B. TESTS

l. None.

C. CALCULATIONS

- 1. Anchor verification calculations and structural analysis, complying with FBC-2020 (7th Edition), prepared by Al Faroog Corporation, dated Nov 18, 2020, signed and sealed by Jalal Faroog, P.E.
- 2. Glazing complies w/ ASTME-1300-02, -04 -09& -16.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 19-0305.02 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers", expiring on 07/08/24.

F. STATEMENTS

- 1. Statement letter of conformance to FBC 2020 (7th Edition) and letter of no financial interest, prepared by Al Farooq Corporation, dated 11/18/20, signed and sealed by Jalal Farooq, P.E.
- 2. Statement letter dated DEC 04, 2018 for anchor correction per tested condition, signed and sealed by Javad Ahmad, P.E.
- 3. Lab compliance as part of the above referenced test report.


G. OTHER


1. Test proposal #17-0052 dated 04/05/17, approved by RER

Ishaq I. Chands

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 20-1119.18
Expiration Date: December 27, 2023
Approval Date: January 14, 2020

E-2

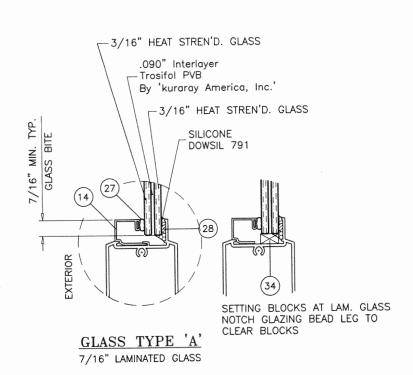

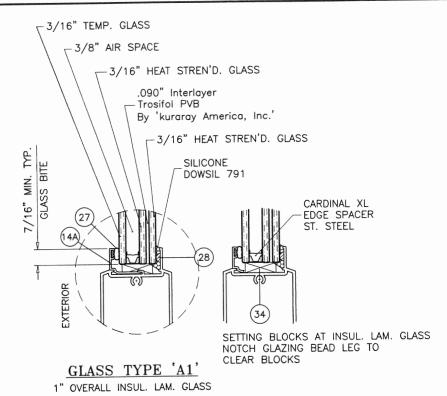

SERIES 950 ALUMINUM OUTSWING ENTRANCE DOOR

SINGLE (X) AND DOUBLE (XX) LEAF DOORS SEE SHEET 2. SINGLE AND DOUBLE LEAF DOORS WITH SIDELITES SEE SHEETS 3 & 4. SINGLE (O) STAND ALONE SIDELITE SEE SHEETS 3 & 4.

LOWER VALUES FROM SIDELITE CAPACITY CHART OR DOOR CAPACITY WILL APPLY TO ENTIRE SYSTEM.

DOORS APPROVED FOR INSTALLATION WHERE WATER INFILTRATION RESISTANCE IS REQUIRED.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2017 (6TH EDITION)/2020 (7TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2017/2020 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC.

CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.

PRODUCT REVISED as complying with the Florida **Building Code** NOA-No. 20-1119.18

Ishaq 1. Chands Miami-Dade Product Control

Expiration Date 12/27/2023

SERIES 950 ALUMINUM OUTSWING DOOR WINDOW SYSTEMS, N.W. 80th STREET EY, FL. 33166 ECO WIND 8502 N.W. 80 MEDLEY, FL.

(L.M.I.)

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6079


THESE DOORS ARE RATED FOR LARGE & SMALL MISSILE IMPACT. SHUTTERS ARE NOT REQUIRED.


NOV 1 8 2020



/	-/	11111					
١			date: 07-20-17	re	revisions:		
W	lro		2 10	no	no date	þ	by description
1	wi		scale: 3/8" = 1"	∢	A 04.09.18		REV. PER RER C
7.	ng			В	B 10.08.18		NO CHANGE THIS
			dr. by: TARIQ	O	C 10.30.18		REV. PER RER C
6	n			۵	D 11.12.20		UPDATED TO 202
6	ο.	chk. by:	.×				
	1						

sheet 1 of 10

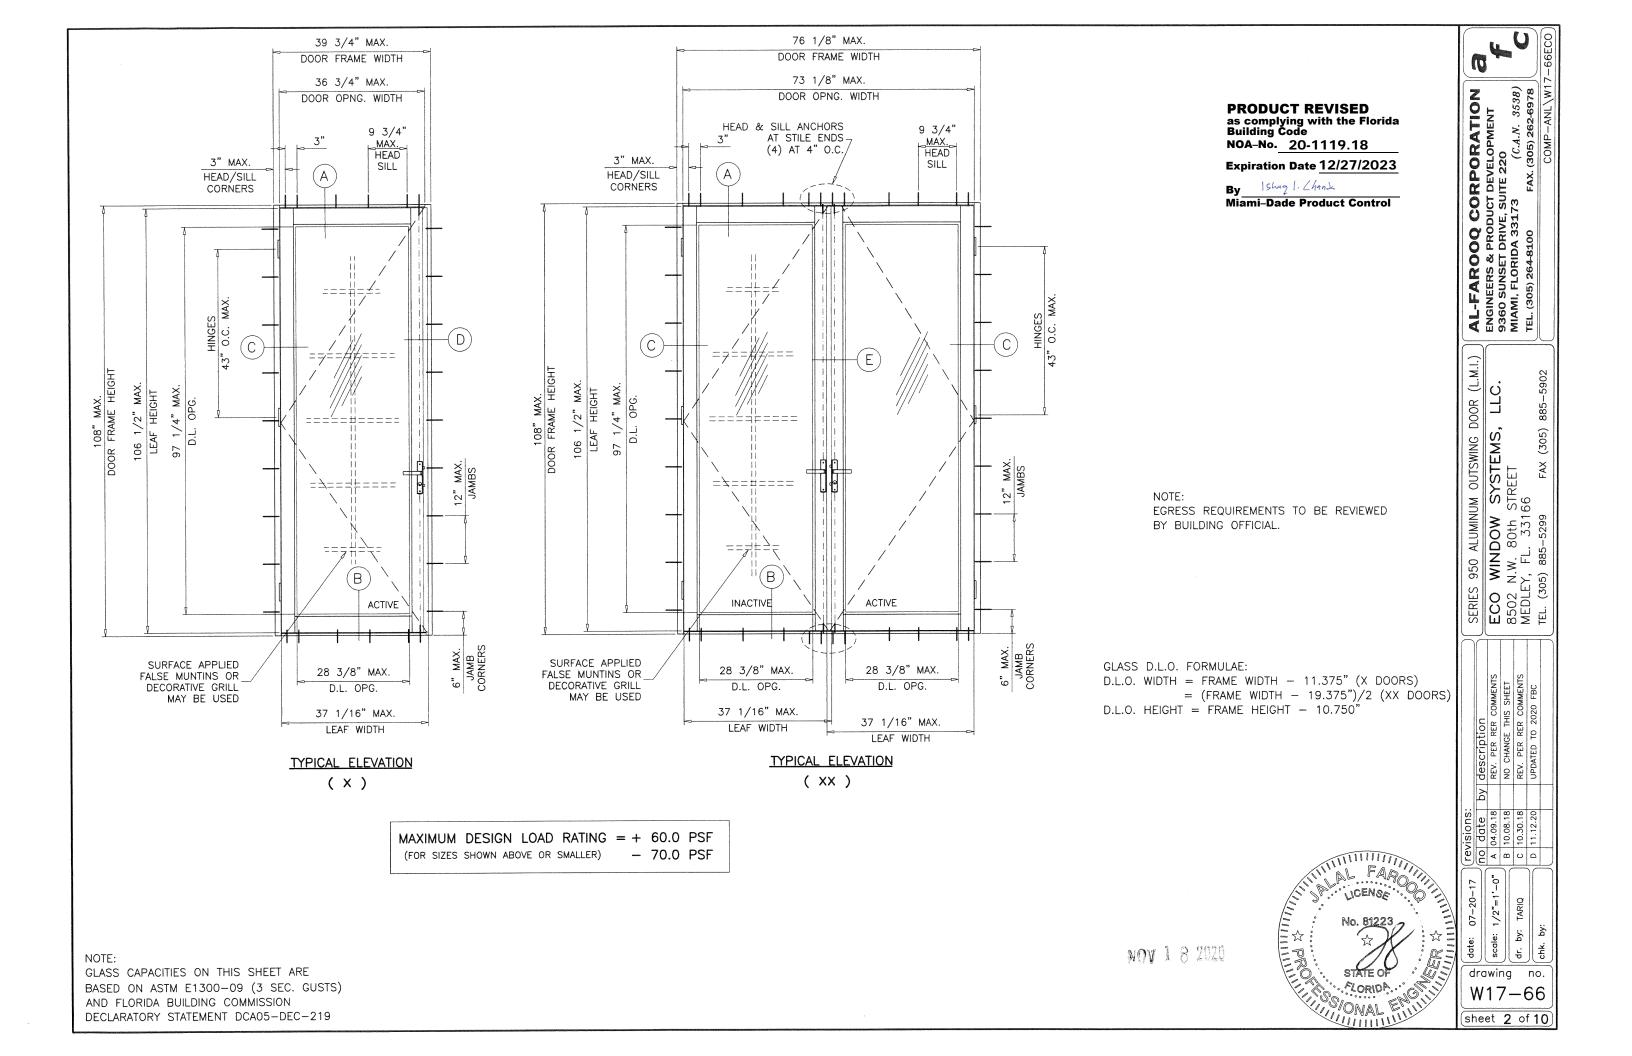

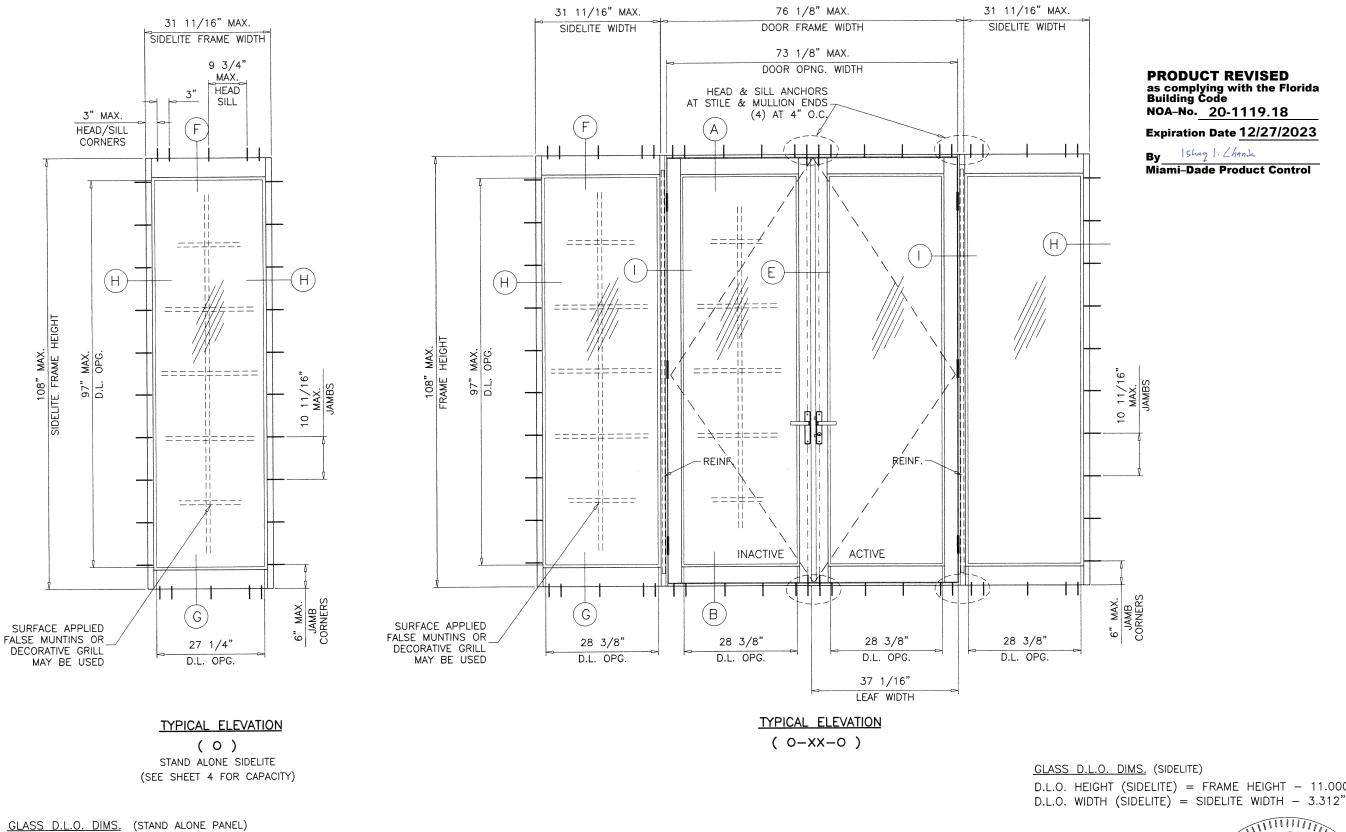

NOTE: FOR DOORS CAPACITIES SEE SHEET 2. FOR SINGLE SIDELITE CAPACITY SEE SHEET 4. FOR SIDELITE REINF. MULLION CAPACITY SEE SHEET 4. LOWER VALUES FROM DOOR, SIDELITE OR REINF. MULLION CHART WILL APPLY TO ENTIRE SYSTEM.

D.L.O. HEIGHT (SIDELITE) = FRAME HEIGHT - 11.000" D.L.O. WIDTH (SIDELITE) = FRAME WIDTH - 4.438"

D.L.O. HEIGHT (SIDELITE) = FRAME HEIGHT - 11.000'



1			-		ł
	date:	07-20-17	<u>6</u>	revisions:	
			no	no date	
•	scale:	scale: 1/2"=1'-0"	٧	A 04.09.18	
			В	B 10.08.18	
	dr. by	dr. by: TARIQ	ပ	C 10.30.18	
			۵	D 11.12.20	
	chk. by:	. <u>`</u>			

by description
REV. PER RER COMMENTS
NO CHANGE THIS SHEET
REV. PER RER COMMENTS
UPDATED TO 2020 FBC

U

(C.A.N. 3538) FAX. (305) 262-6978

 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220

 MIAMI, FLORIDA 33173
 (C.A.N. 3538)

 TEL. (305) 264-8100
 FAX. (305) 262-6978


| SERIES 950 ALUMINUM OUTSWING DOOR (L.M.I.) | ECO WINDOW SYSTEMS, LLC. 8502 N.W. 80th STREET | MEDLEY, FL. 33166 | TEL. (305) 885–5299 FAX (305) 885–5902 |

drawing no. W17 - 66


sheet 3 of 10

NOV 1 8 2020

		CAPACITY SINGLE SIDE	1
SIDELITE FRAME WIDTH	SIDELITE FRAME HEIGHT	WITH REINF	IOUT OCING
INCHES	INCHES	EXT.(+)	INT.(-)
24	80	60.0	70.0
28		60.0	70.0
32	60	60.0	70.0
36		53.3	62.2
24		60.0	70.0
28	0.4	60.0	70.0
32	84	60.0	70.0
36		53.3	62.2
24	96	60.0	70.0
28		60.0	70.0
32		60.0	70.0
35-9/16		53.3	62.2
24		60.0	70.0
28	108	60.0	69.8
31-11/16		60.0	65.8



SIDELITE REINF. MULLION CAPACITY - POSIDELITES WITH SINGLE OR DOUBLE LEAF DOORS (SEE NOTE BELOW)							
SIDELITE FRAME WIDTH	SIDELITE FRAME HEIGHT		LION EINF.				
INCHES	INCHES	EXT.(+)	INT.(-)				
24		60.0	70.0				
28	00	60.0	70.0				
32	80	60.0	70.0				
36		53.3	62.2				
24		60.0	70.0				
28	0.4	60.0	70.0				
32	84	60.0	70.0				
36	96	53.3	62.2				
24		60.0	70.0				
28		60.0	70.0				
32		60.0	70.0				
35-9/16		53.3	62.2				
24		60.0	70.0				
28	108	60.0	69.8				
31-11/16		60.0	65.8				

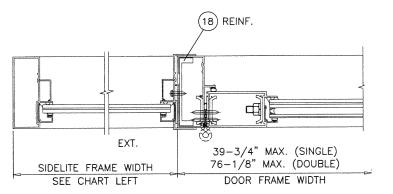

FOR DOORS CAPACITIES SEE SHEET 2. FOR SINGLE SIDELITE CAPACITY SEE CHART LEFT. FOR SIDELITE REINF. MULLION CAPACITY SEE CHART ABOVE. LOWER VALUES FROM DOOR, SIDELITE OR REINF. MULLION CHART WILL APPLY TO ENTIRE SYSTEM.

PRODUCT REVISED as complying with the Florida Building Code NOA-No. 20-1119.18

Expiration Date 12/27/2023

By Ishay 1. Chank

Miami-Dade Product Control

 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220

 MIAMI, FLORIDA 33173
 (C.A.N. 3538)

 TEL. (305) 264-8100
 FAX. (305) 262-6978

 (C.A.N. 3538) FAX. (305) 262-6978

SERIES 950 ALUMINUM OUTSWING DOOR (L.M.I.)

ECO WINDOW SYSTEMS, LLC.
8502 N.W. 80th STREET
MEDLEY, FL. 33166
TEL. (305) 885-5299 FAX (305) 885-5902





NOV 1 8 2020

drawing


W17 - 66sheet 4 of 10


no.

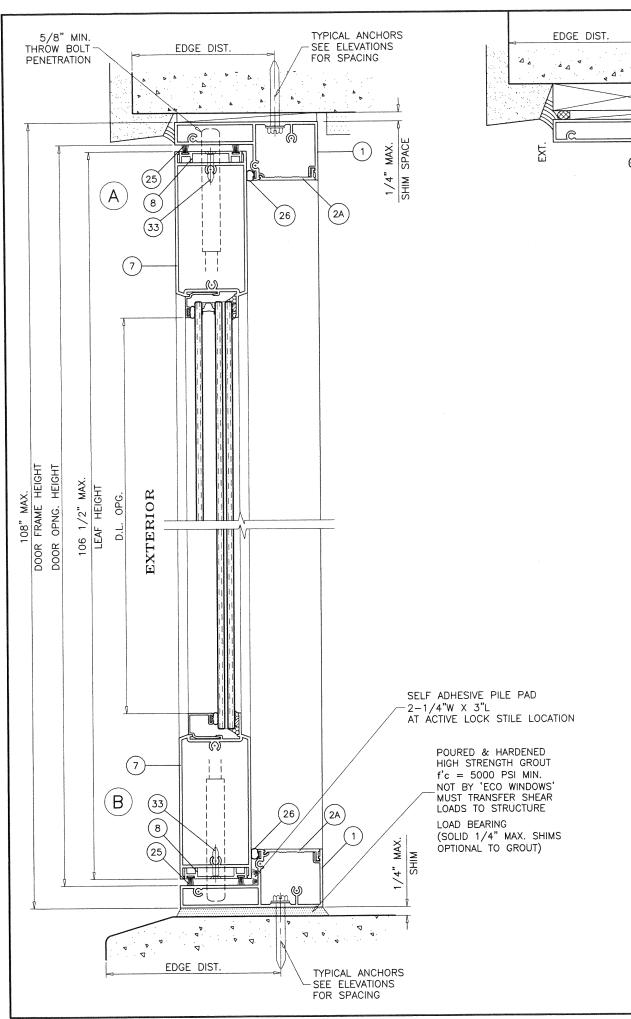

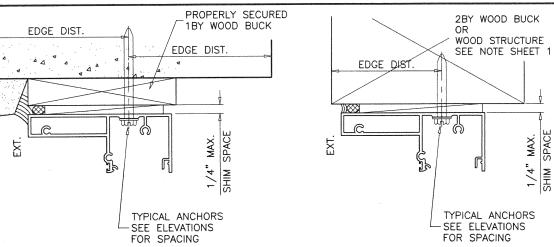

ANCHORS MUST GO THRU ANCHOR PADS AS SHOWN ON FRAME MEMBERS.

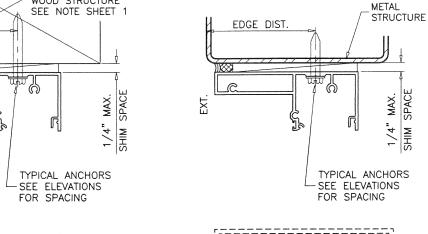



1BY OR 2BY WOOD BUCKS AND METAL STRUCTURE NOT BY 'ECO WINDOWS' MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

TYPICAL ANCHORS: SEE ELEV. FOR SPACING

1/4" DIA. ULTRACON+ BY 'DEWALT' (Fu=164 KSI, Fy=148 KSI)

INTO 2BY WOOD BUCKS OR WOOD STRUCTURES 1-1/2" MIN. PENETRATION INTO WOOD (HEAD/JAMBS)

THRU 1BY BUCKS INTO CONC. OR BLOCKS

1-1/4" MIN. EMBED INTO CONCRETE (HEAD/JAMBS)

1-1/2" MIN. EMBED INTO GROUT FILLED BLOCKS (JAMBS)

DIRECTLY INTO CONCRETE OR BLOCKS

1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS)

1-1/2" MIN. EMBED INTO GROUT FILLED BLOCKS (JAMBS)

#14 SMS OR SELF DRILLING SCREWS (GRADE 2 CRS)

INTO MIAMI-DADE COUNTY APPROVED MULLIONS

INTO METAL STRUCTURES (HEAD/JAMBS)

(3) THREADS MIN. PENETRATION BEYOND SUBSTRATE

ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.)

STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.)

(STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

TYPICAL EDGE DISTANCE

INTO CONCRETE AND MASONRY = 2-1/2" MIN.

INTO WOOD STRUCTURE = 1" MIN.

INTO METAL STRUCTURE = 3/4" MIN.


WOOD AT HEAD OR JAMBS SG = 0.55 MIN. CONCRETE AT HEAD, SILL OR JAMBS f'c = 3000 PSI MIN. C-90 GROUT FILLED BLOCK AT JAMBS f'm = 2000 PSI MIN.

PRODUCT REVISED as complying with the Florida Building Code NOA-No. 20-1119.18

Expiration Date 12/27/2023

Ishaq I. Chands Miami-Dade Product Control

DOOR DETAILS

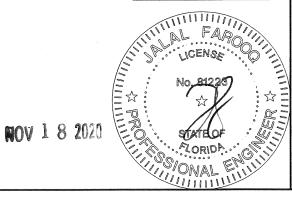

ECO WINDOW SYSTEMS, 8502 N.W. 80th STREET MEDLEY, FL. 33166 TEL. (305) 885–5299 FAX (305) 8

(C.A.N. 3538) FAX. (305) 262-6978

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978


DOOR


SERIES 950 ALUMINUM OUTSWING

drawing W17 - 66

by:

sheet **5** of **10**

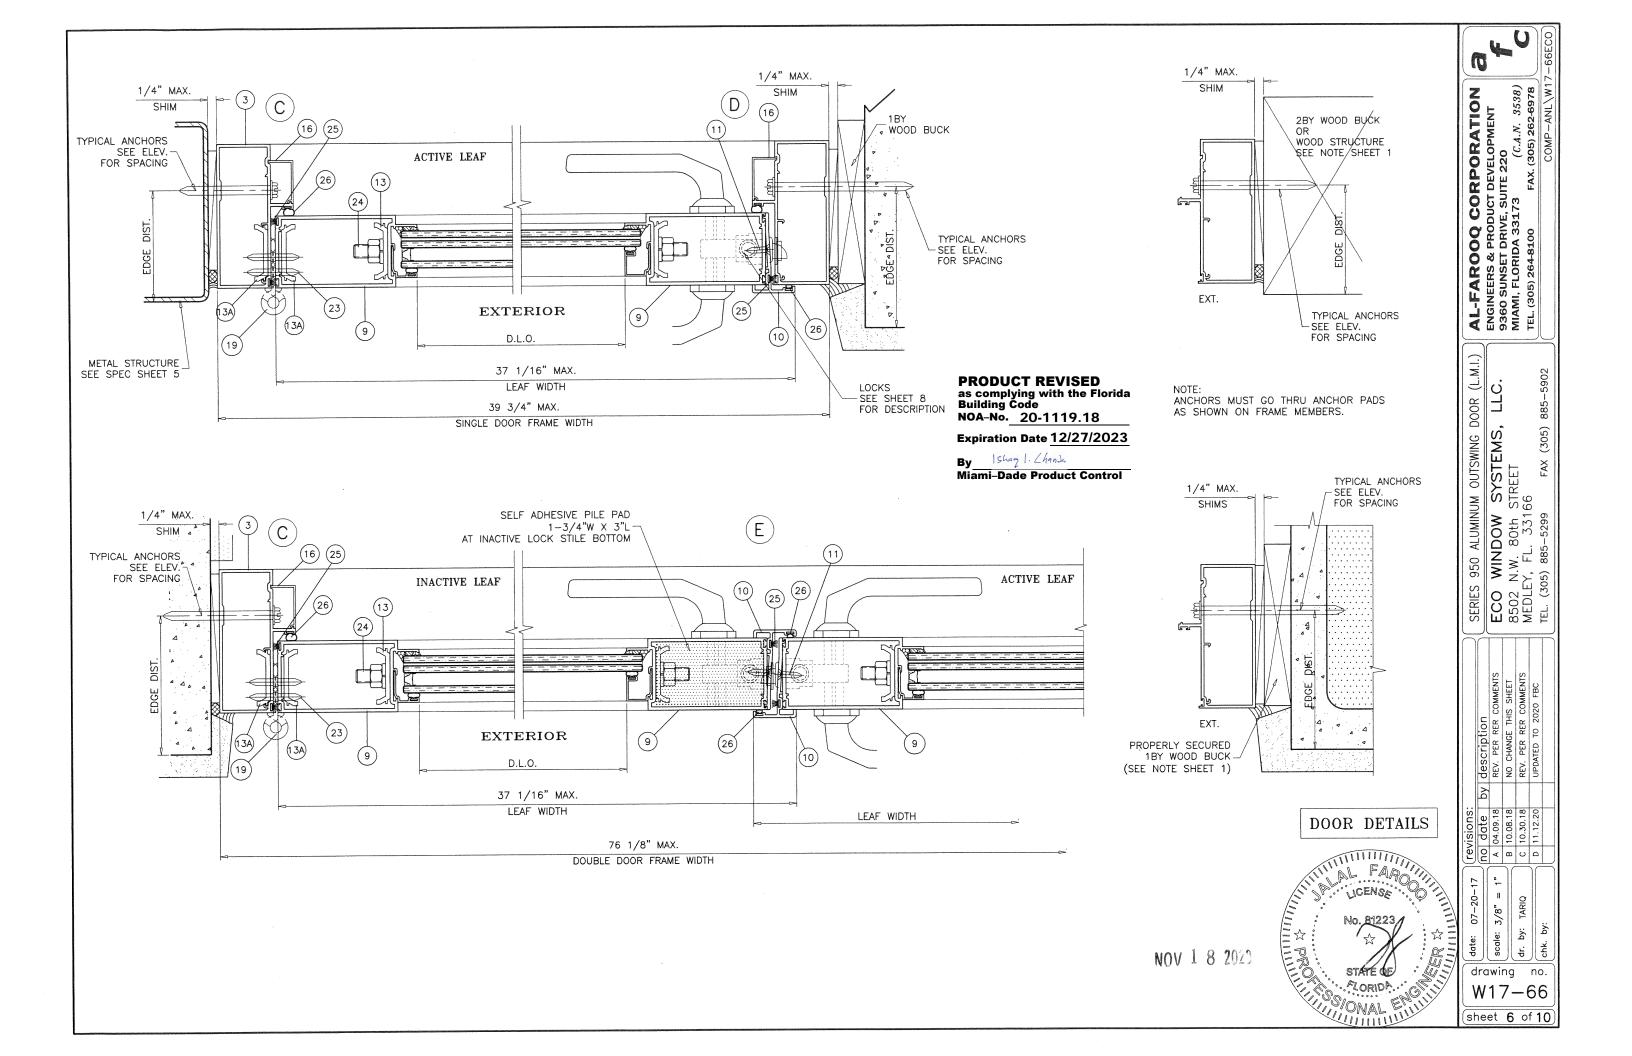

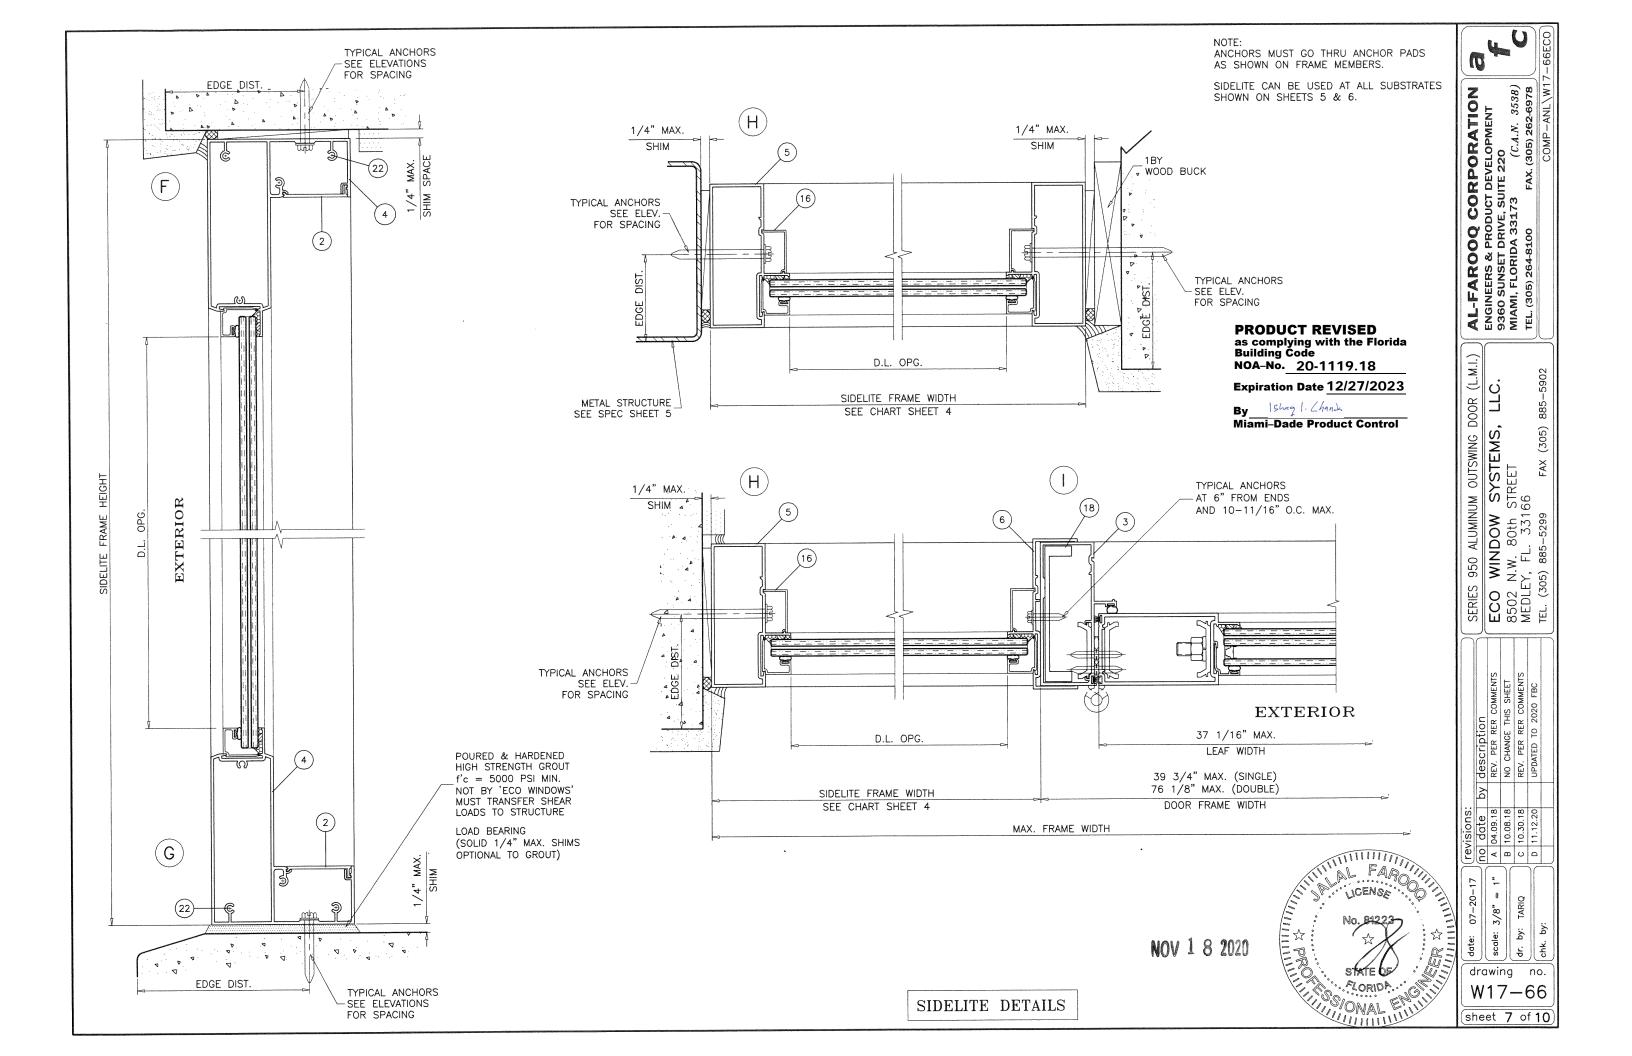

LOCKS:

ACTIVE LEAF:

4 POINT LOCK ASSEMBLY DL01-6007 BY 'INTERLOCK USA INC.' (2) LOCKING POINTS ENGAGING AT INACTIVE LEAF AT STRIKE PLATE 1/2" DIA. THROW BOLT (1) AT TOP ENGAGING FRAME HEAD AND (1) AT BOTTOM ENGAGING FRAME SILL THROW BOLTS ATTACHED TO LOCK BY 3/8" CONNECTING RODS LOCK HANDLE LOCATED AT 42-1/2" FROM BOTTOM

INACTIVE LEAF:

2 POINT LOCK ASSEMBLY BY 'INTERLOCK USA INC.' 1/2" DIA. THROW BOLTS AT TOP AND BOTTOM ENGAGING FRAME HEAD AND FRAME SILL THROW BOLTS ATTACHED TO LOCK BY 3/8" CONNECTING RODS LOCK LOCATED AT 42-1/2" FROM BOTTOM

DOOR HANDLES:

SURFACE MOUNT METALLIC HANDLES AT 42-1/2" FROM BOTTOM FASTENED TO ACTIVE AND INACTIVE LEAF LOCK STILES WITH (2) 1/4-20 X 1-13/16" CONE HEAD MS

(4) 1/4-20 X 5/16" SET SCREWS

HINGES:

7-3/4" LONG ALUMINUM BUTT HINGES BY 'SULLIVAN & ASSOC.' AT 11" FROM TOP AND BOTTOM AND ONE AT MIDSPAN OF LEAF FASTENED TO FRAME WITH (6) #10 X 3/4" FH SELF DRILLING SCREWS FASTENED TO LEAF WITH

(5) #10 X 3/4" PH SELF DRILLING SCREWS

SEALANTS:

ALL JOINTS AND FRAME CONNECTIONS SEALED WITH SCHNEE MOREHEAD JM5504 SEALANT.

4 1	1				
ITEM #	PART #	REQD.	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS
1	E627	AS REQD.	DOOR FRAME HEAD/SILL	6063-T6	_
2	E602	AS REQD.	FRAME COVER (SIDELITE)	6063-T6	_
2A	E629	AS REQD.	FRAME COVER (DOOR)	6063-T6	_
3	E628	AS REQD.	DOOR FRAME JAMB	6063-T6	_
4	E604	AS REQD.	SIDELITE TOP & BOTTOM FRAME	6063-T6	_
5	E605	AS REQD.	SIDELITE FRAME JAMB	6063-T6	_
6	E606	AS REQD.	SIDELITE SLIP ON JAMB	6063-T6	-
7	E907	AS REQD.	LEAF TOP & BOTTOM RAIL	6063-T6	_
8	E915	AS REQD.	LEAF W'STRIP ADAPTER	6063-T6	_
9	E908	AS REQD.	LEAF STILE	6063-T6	_
10	E910	AS REQD.	ASTRAGAL ADAPTER	6063-T6	_
11	#10 X 3/4"	AS REQD.	ADAPTER FASTENERS, AT 6" FROM ENDS AND 9" O.C. MAX.	ST. STEEL	FH SELF DRILLING SCREWS
12	E909	AS REQD.	LEAF ALIGNMENT BRACKET	6063-T6	_
13	E613	AS REQD.	LEAF CLAMP	6063-T6	4-1/4" LONG
13A	E613	2/ HINGE	HINGE BACK-UP PLATE	6063-T6	10-1/2" LONG
14	E913	AS REQD.	GLAZING BEAD (LAM. GLASS)	6063-T6	_
14A	E912	AS REQD.	GLAZING BEAD (INSUL. LAM. GLASS)	6063-T6	_
16	E616	AS REQD.	SNAP COVER	6063-T6	_
18		1	SIDELITE MULLION REINFORCING	6063-T6	
19	FD-107	3/ LEAF	BUTT HINGES	ALUMINUM	SULLIVAN & ASSOC.
22	#10 X 1-1/2"	AS REQD.	FRAME ASSEMBLY SCREWS	ST. STEEL	HWH SMS
23	#10 X 3/4"	_	HINGE INSTALLATION FASTENERS	ST. STEEL	FH SMS
24	_	2/ LEAF	3/8" DIA. THREADED ROD	STEEL	_
25	W11323	AS REQD.	PILE W'STRIPPING	WOOL	ULTRAFAB
26	E20618-KN-3020	AS REQD.	BULB W'STRIPPING	SANTOPRENE	EPDM
27	E206	AS REQD.	GLAZING BEAD BULB	SANTOPRENE	ULTRAFAB
28	_	AS REQD.	GLASS SPACER	SILICONE	FRANK LOWE RUBBER CO.
33	#10 X 3/4"	2/ ADAPTER	ADAPTER FASTENERS, AT 5" FROM ENDS	ST. STEEL	FH SELF DRILLING
34		2/ LITE	SETTING BLOCK, 1/4" X 1/2" X 4" LONG	EPDM	AT 6" FROM EACH END, DUROMETER 80±5

PRODUCT REVISED as complying with the Florida Building Code NOA-No. 20-1119.18

Expiration Date 12/27/2023

By Ishay 1. Chank Miami-Dade Product Control



	by description	REV. PER RER COI	NO CHANGE THIS	NO CHANGE THIS	UPDATED TO 2020	
revisions:	no date by	A 04.09.18	B 10.08.18	C 10.30.18	D 11.12.20	
date: 07-20-17	7	scale: 3/8" = 1"		dr. by: TARIQ		chk. by:
d	ra	wi	ng		nc	٠.

W17 - 66

sheet 8 of 10

(C.A.N. 3538) FAX. (305) 262-6978

 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220


 MIAMI, FLORIDA 33173
 (C.A.N. 3538)


 TEL. (305) 264-8100
 FAX. (305) 262-6978


SERIES 950 ALUMINUM OUTSWING DOOR (L.M.I.)

ECO WINDOW SYSTEMS, LLC.
8502 N.W. 80th STREET
MEDLEY, FL. 33166
TEL. (305) 885-5299 FAX (305) 885-5902

NOV 1 8 2020

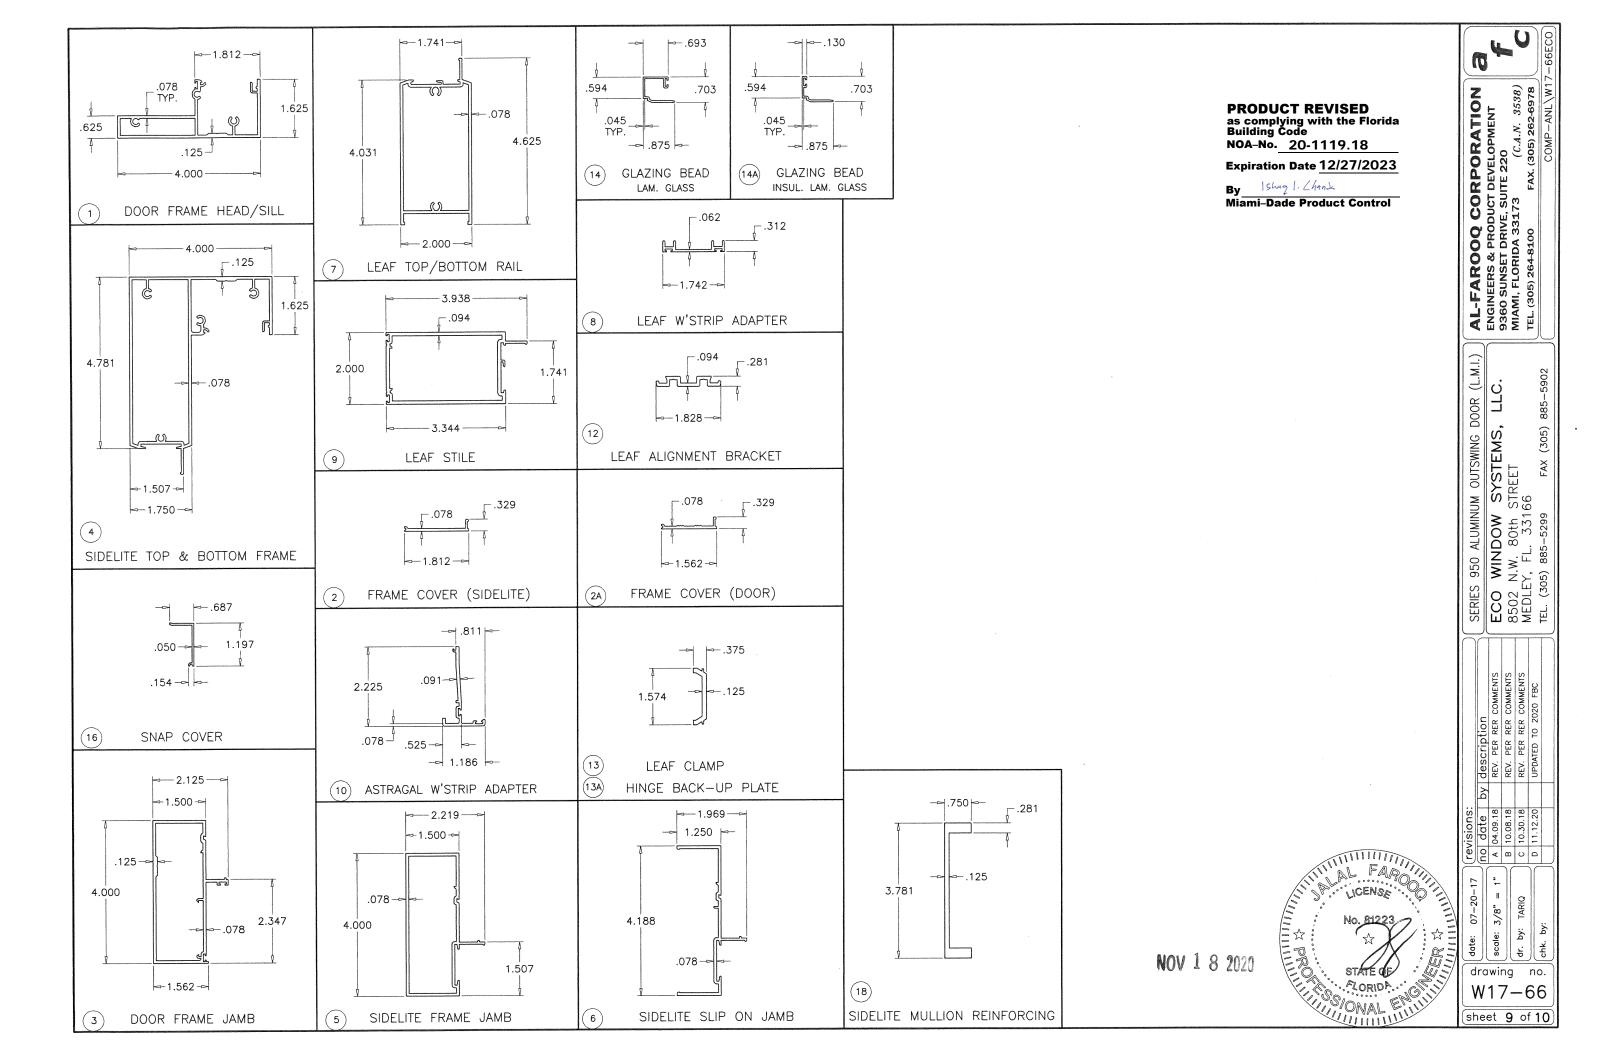

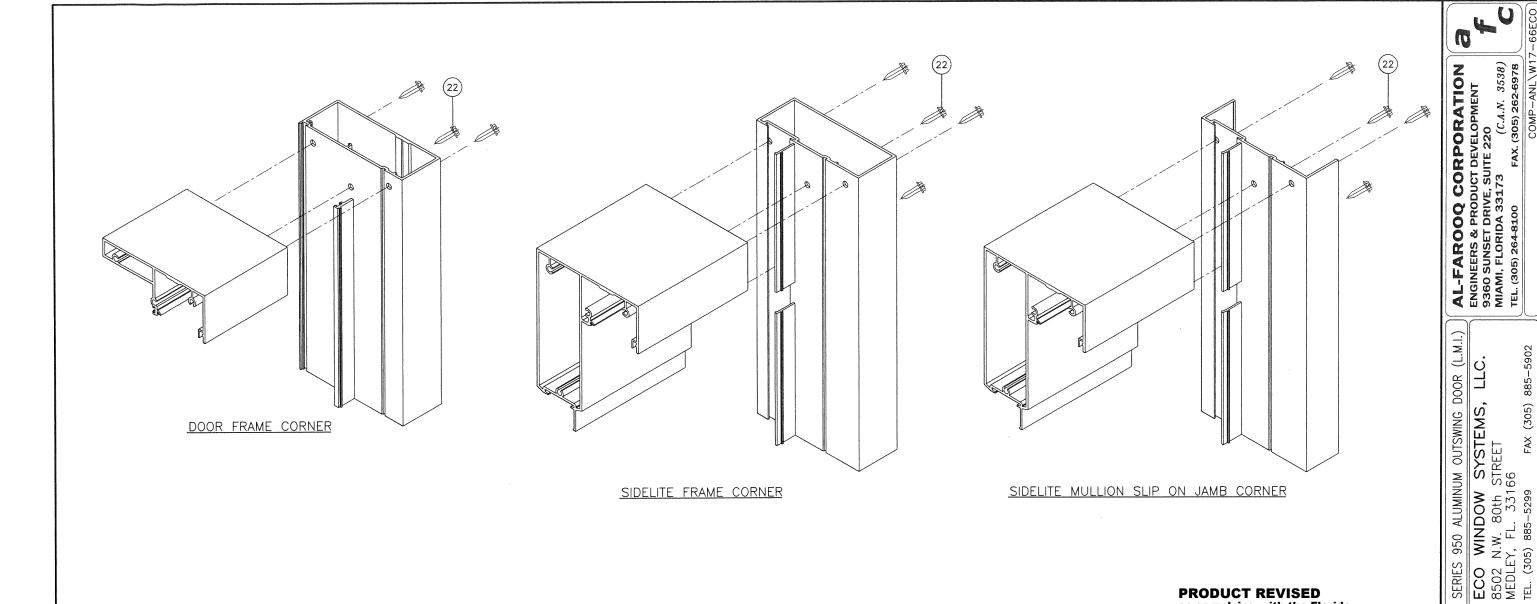

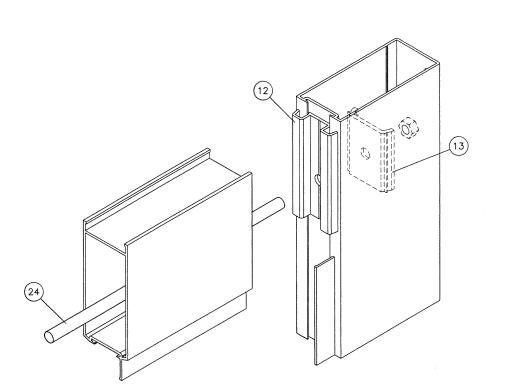


PRODUCT REVISED
as complying with the Florida
Building Code NOA-No. 20-1119.18

Expiration Date <u>12/27/2023</u>

By Shang I. Chank
Miami-Dade Product Control

NOV 1 8 2020



	by description	REV. PER RER COMMENTS	NO CHANGE THIS SHEET	NO CHANGE THIS SHEET	UPDATED TO 2020 FBC	
	þ					
revisions:	no date	A 04.09.18	B 10.08.18	C 10.30.18	D 11.12.20	
<u>e</u>	no	4	œ	ပ	۵	
7-20-17		(8" = 1"		ARIQ		

no.

sheet **10** of **10**

LEAF CORNER

drawing W17 - 66