



MIAMI-DADE COUNTY, FLORIDA  
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208  
Miami, Florida 33175-2474

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)  
**NOTICE OF ACCEPTANCE (NOA)**

[www.miamidade.gov/building](http://www.miamidade.gov/building)

**PGT Industries, Inc.**  
**1070 Technology Drive,**  
**North Venice, Fl. 34275**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

**DESCRIPTION: Series "SGD-770" Aluminum Horizontal Sliding Window w/ 90° & 135° corners – L.M.I.**

**APPROVAL DOCUMENT:** Drawing No. **PGT0129**, titled "Series 770 Alum. SGD-Window - LMI", sheets 1 through 22 of 22, dated 02/28/22, with revision **E** dated 03/25/22, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

**MISSILE IMPACT RATING: Large and Small Missile Impact Resistant**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and series and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.


**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA No. 20-0406.07** and consists of these pages 1 and 2, and evidence pages E-1, E-2, E-3, E-4 and E-5, as well as approval document mentioned above.

The submitted documentation was reviewed by **Manuel Perez, P.E.**



  
4/13/22

NOA No. 22-0407.11  
Expiration Date: February 12, 2025  
Approval Date: April 21, 2022  
Page 1

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's**

**A. DRAWINGS**

1. Manufacturer's die drawings and sections.  
*(Submitted under NOA No. 14-0320.03)*
2. Drawing No. **PGT0129**, titled "Series 770 Alum. SGD-Window - LMI", sheets 1 through 22 of 22, dated 03/20/20, with revision **D** dated 04/02/20, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.  
*(Submitted under NOA No. 20-0406.07)*


**B. TESTS**

1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94  
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94  
3) Water Resistance Test, per FBC, TAS 202-94  
4) Large Missile Impact Test per FBC, TAS 201-94  
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94  
6) Forced Entry Test, per ASTM F588 and TAS 202-94

along with marked-up drawings and installation diagram of all PGT Industries, Inc. representative units listed below and tested to qualify **Dowsil 791** and **Dowsil 983** silicones, prepared by Fenestration Testing Laboratory, Inc., Test Reports No.: **FTL-7897**, PGT PW5520 PVC Fixed Window (unit 6 in proposal), dated 09/03/14 **FTL-20-2107.1**, PGT SGD780 Aluminum Sliding Glass Door (unit 7 in proposal) **FTL-20-2107.2**, PGT CA740 Alum. Outswing Casement Window (unit 8 in proposal) **FTL-20-2107.3**, PGT PW7620A Aluminum Fixed Window (unit 9 in proposal) and **FTL-20-2107.4**, PGT PW7620A Aluminum Fixed Window (unit 10 in proposal) dated 07/13/20, all signed 07/13/20, all signed and sealed by Idalmis Ortega, P.E.  
*(Submitted under NOA No. 20-0406.07)*

2. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94  
2) Large Missile Impact Test per FBC, TAS 201-94  
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of a PVC sliding glass door, a PVC fixed window and an aluminum sliding glass door, using: Kodispace 4SG TPS spacer system, Duraseal® spacer system, Super Spacer® NXT™ spacer system and XL Edge™ spacer system at insulated glass, prepared by Fenestration Testing Laboratory, Inc., Test Reports No. **FTL-8717**, **FTL-8970** and **FTL-8968**, dated 02/15/16, 06/07/16 and 06/20/16 respectively, all signed and sealed by Idalmis Ortega, P.E.  
*(Submitted under NOA No. 14-0320.03)*

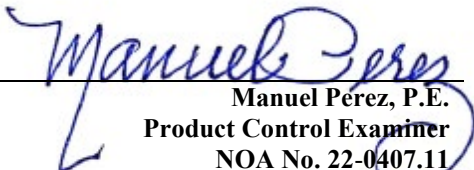  
Manuel Pérez, P.E.  
Product Control Examiner  
NOA No. 22-0407.11  
Expiration Date: February 12, 2025  
Approval Date: April 21, 2022

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)**

**B. TESTS (CONTINUED)**


3. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94  
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94  
3) Water Resistance Test, per FBC, TAS 202-94  
4) Large Missile Impact Test per FBC, TAS 201-94  
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94  
6) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94  
along with marked-up drawings and installation diagram of aluminum sliding glass door, prepared by Fenestration Testing Laboratory, Inc., Test Report No. **FTL-7554**, dated 11/01/13, signed and sealed by Marlin D. Brinson, P.E.  
**(Submitted under NOA No. 14-0320.03)**
4. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94  
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94  
3) Water Resistance Test, per FBC, TAS 202-94  
4) Forced Entry Test, Per FBC 2411.3.2.1 (b) TAS 202-94  
5) Small Missile Impact Test per FBC, TAS 201-94  
6) Cyclic Wind Pressure Loading per FBC, TAS 203-94  
along with marked-up drawings and installation diagram of aluminum sliding glass door, prepared by Fenestration Testing Laboratory, Inc., Test Reports No. **FTL-5980, FTL-5993, FTL-6036, FTL-6001, FTL-6014, FTL-6015, FTL-6017, FTL-6023, FTL-6024, FTL-6025, FTL-6028, FTL-6031, FTL-6033 and FTL-6036**, all dated 08/10/09 and signed and sealed by Julio Gonzalez, P.E.  
**(Submitted under NOA No. 09-0826.10)**
5. Additional, Reference Fixed window test report **FTL-7897** (Cardinal spacer) per TAS 201, 202 & 203-94, issued by Fenestration Testing Laboratory, Inc.  
**(Submitted under NOA No. 15-0430.08)**

**C. CALCULATIONS**

1. Anchor verification calculations and structural analysis, complying with **FBC 7<sup>th</sup> Edition (2020)**, dated 04/02/20, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.  
**(Submitted under NOA No. 20-0406.07)**
2. Glazing complies with **ASTM E 1300-09**.

**D. QUALITY ASSURANCE**

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

  
Manuel Pérez, P.E.  
Product Control Examiner  
NOA No. 22-0407.11  
Expiration Date: February 12, 2025  
Approval Date: April 21, 2022

**PGT Industries, Inc.**

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)**

**E. MATERIAL CERTIFICATIONS**


1. Notice of Acceptance No. **19-0305.02** issued to **Kuraray America, Inc.** for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayer" dated 05/09/19, expiring on 07/08/24.
2. Notice of Acceptance No. **17-0808.02** issued to **Kuraray America, Inc.** for their "SentryGlas® (Clear and White) Glass Interlayer" dated 12/28/17, expiring on 07/04/23.

**F. STATEMENTS**

1. Statement letter of conformance, complying with **FBC 7<sup>th</sup> Edition (2020)**, dated April 02, 2020, issued by manufacturer, signed and sealed by A. Lynn Miller, P.E.  
*(Submitted under NOA No. 20-0406.07)*
2. Statement letter of no financial interest, dated April 02, 2020, issued by manufacturer, signed and sealed by A. Lynn Miller, P.E.  
*(Submitted under NOA No. 20-0406.07)*
3. Letter of lab. compliance, part of the above test reports.  
*(Submitted under NOA No. 20-0406.07)*
4. Proposal No. **19-1155** issued by the Product Control Section, dated 01/10/20, signed by Ishaq Chanda, P.E.  
*(Submitted under NOA No. 20-0406.07)*
5. Proposal No. **16-0125** issued by the Product Control Section, dated 03/09/16, signed by Ishaq Chanda, P.E.  
*(Submitted under NOA No. 16-0629.09)*

**G. OTHERS**

1. Notice of Acceptance No. **19-1126.06**, issued to PGT Industries, Inc., for their Series "SGD-770" Aluminum Horizontal Sliding Window w/90° & 135° corners – L.M.I., approved on 01/09/20 and expiring on 02/17/25.

  
Manuel Pérez, P.E.  
Product Control Examiner  
NOA No. 22-0407.11  
Expiration Date: February 12, 2025  
Approval Date: April 21, 2022



**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**2. NEW EVIDENCE SUBMITTED**

**A. DRAWINGS**

1. Drawing No. **PGT0129**, titled “Alum. Sliding Glass Window (LM)”, sheets 1 thru 22 of 22, dated 02/28/22, with revision **E** dated 03/25/22, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.

**B. TESTS**


1. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94  
2) Large Missile Impact Test per FBC, TAS 201-94  
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94  
along with marked-up drawings and installation diagram of series “770” aluminum sliding glass door and a series “5570” vinyl sliding glass door, prepared by QAI Laboratories, Test Report No. **QAI-22-1040**, dated 04/03/22, signed and sealed by Idalmis Ortega, P.E
2. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94  
2) Large Missile Impact Test per FBC, TAS 201-94  
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94  
along with marked-up drawings and installation diagram of series “770” aluminum sliding glass door, prepared by QAI Laboratories, Test Report No. **QAI-21-1218**, dated 01/27/22, signed and sealed by Idalmis Ortega, P.E
3. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94  
2) Large Missile Impact Test per FBC, TAS 201-94  
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94  
along with marked-up drawings and installation diagram of series “5570” vinyl sliding glass door, prepared by QAI Laboratories, Test Report No. **QAI-21-1241**, dated 01/21/22, signed and sealed by Idalmis Ortega, P.E

**C. CALCULATIONS**

1. None

**D. QUALITY ASSURANCE**

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

  
Manuel Pérez, P.E.  
Product Control Examiner  
NOA No. 22-0407.11  
Expiration Date: February 12, 2025  
Approval Date: April 21, 2022

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**2. NEW EVIDENCE SUBMITTED (CONTINUED)**

**E. MATERIAL CERTIFICATIONS**


1. Notice of Acceptance No. **20-0915.22** issued to **Kuraray America, Inc.** for their “**Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers**” dated 11/19/20, expiring on 07/08/24.
2. Notice of Acceptance No. **20-0915.21** issued to **Kuraray America, Inc.** for their “**Trosifol® Extra Stiff (ES) PVB Glass Interlayer**” dated 11/19/20, expiring on 02/08/23.
3. Notice of Acceptance No. **20-0915.19** issued to **Kuraray America, Inc.** for their “**SentryGlas® (Clear and White) Glass Interlayers**” dated 11/19/20, expiring on 07/04/23.

**F. STATEMENTS**

1. Statement letter of conformance, complying with **FBC 7<sup>th</sup> Edition (2020)** dated April 4, 2022, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
2. Statement letter of no financial interest dated April 4, 2022, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.

**G. OTHERS**

1. Notice of Acceptance No. **20-0406.07**, issued to PGT Industries, Inc., for their Series “**SGD-770**” Aluminum Horizontal Sliding Window w/90°and 135° corners – L.M.I., approved on 08/27/20 and expiring on 02/12/25.

  
Manuel Pérez, P.E.  
Product Control Examiner  
NOA No. 22-0407.11  
Expiration Date: February 12, 2025  
Approval Date: April 21, 2022

SERIES 770A,IMPACT RESISTANT SLIDING GLASS WINDOW  
INCLUDING POCKETS & 90° / 135° CORNERS

GENERAL NOTES:

1) GLAZING TYPE OPTIONS: SEE TABLE B & GLAZING DETAILS ON SHEETS 4 & 5.

2) DESIGN PRESSURES:

- A. NEGATIVE DESIGN LOADS BASED ON TESTED PRESSURE AND GLASS TABLES ASTM E1300.
- B. POSITIVE DESIGN LOADS BASED ON WATER TEST PRESSURE AND GLASS TABLES ASTM E1300.
- C. DESIGN LOADS ARE BASED ON ALLOWABLE STRESS DESIGN, ASD.

3) ANCHORAGE: THE 33-1/3% STRESS INCREASE HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT. MATERIALS, INCLUDING BUT NOT LIMITED TO STEEL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE CURRENT FLORIDA BUILDING CODE. FOR ANCHORAGE DETAILS SEE SHEETS 6-14.

4) SHUTTERS ARE NOT REQUIRED PER FBC REQUIREMENTS, AS APPLICABLE.

5) INSTALLATION SCREWS, FRAME SPLICES, FRAME AND PANEL CORNERS TO BE SEALED WITH NARROW JOINT SEALANT. OVERALL SEALING/FLASHING STRATEGY FOR WATER RESISTANCE OF INSTALLATION SHALL BE DONE BY OTHERS AND IS BEYOND THE SCOPE OF THESE INSTRUCTIONS.

6) REFERENCES: ELCO ULTRACON, DEWALT ULTRACON+, DEWALT/ELCO CRETEFLEX AND AGGREGATOR NOA'S, ANSI/AF&PA NDS FOR WOOD CONSTRUCTION AND ADM, ALUMINUM DESIGN MANUAL.

7) THIS PRODUCT HAS BEEN DESIGNED & TESTED TO COMPLY WITH THE REQUIREMENTS OF THE CURRENT FLORIDA BUILDING CODE, INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).

8) WINDOW SIZES MUST BE VERIFIED FOR COMPLIANCE WITH EGRESS REQUIREMENTS PER CURRENT FLORIDA BUILDING CODE, AS APPLICABLE.

9) TEST REPORTS: FTL-5980, FTL-5993, FTL-6001, FTL-6014, FTL-6015, FTL-6017, FTL-6022, FTL-6023, FTL-6024, FTL-6025, FTL-6028, FTL-6031, FTL-6033, FTL-6036, FTL-7554, QAI 21-1218, QAI 21-1241 & QAI 22-1040

ANCHOR NOTES:

1) FOR CONCRETE/CMU SUBSTRATE APPLICATIONS IN MIAMI-DADE COUNTY, USE ONLY MIAMI-DADE COUNTY APPROVED ANCHORS. SEE TABLE A ON THIS SHEET FOR EMBEDMENT, EDGE DISTANCE AND SUBSTRATE REQUIREMENTS.

2) FOR OTHER SUBSTRATE APPLICATIONS SEE TABLE A, THIS SHEET.

3) WOOD BUCKS DEPICTED AS 1X ARE LESS THAN 1-1/2" THICK. PROPERLY SECURED, 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SOLID CONCRETE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD & TO BE REVIEWED BY THE BUILDING OFFICIAL.

4) METAL SUBSTRATE TO MEET MIN. STRENGTH AND THICKNESS REQUIREMENTS PER CURRENT FLORIDA BUILDING CODE AND TO BE REVIEWED BY THE AUTHORITY HAVING JURISDICTION.

5) IF SILL IS TIGHT TO SUBSTRATE, GROUT OR OTHER MATERIAL IS NOT REQUIRED. IF USED, NON-SHRINK, NON-METALLIC GROUT, MAX. 1/4" THICK & 3400 PSI MIN., (DONE BY OTHERS) MUST FULLY SUPPORT THE ENTIRE LENGTH OF THE SILL THAT IS NOT TIGHT TO THE SUBSTRATE, AND TRANSFER SHEAR LOAD TO SUBSTRATE. IF SUBSTRATE IS WOOD, 30# FELT PAPER OR MASTIC IS REQUIRED BETWEEN THE GROUT AND WOOD SUBSTRATE, OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION.

DESIGN PRESSURE RATING	IMPACT RATING
SEE TABLES 1-3 ON SHEETS 6-8	RATED FOR LARGE & SMALL MISSILE IMPACT RESISTANCE

TABLE A:

Anchor Group	Anchor Type	Frame Member	Substrate	Min. Edge Distance	Min. O.C. Distance	Min. Embedment or Metal Thickness
A	#12 18-8 SMS or #12 410 SS SMS (min. of 3 threads beyond metal substrate)	All	Southern Pine (SG = 0.55)	9/16"	7/8"	1-3/8"
			6063-T5 Aluminum	3/8"	9/16"	0.071" (20 Ga)
			A36 Steel	3/8"	9/16"	0.050"
			Gr. 33 Steel Stud	3/8"	9/16"	0.045" (18 Ga)
	1/4" DeWalt/Elco Aggre-Gator®	All	Concrete (min. 2.22 ksi)	1-1/2"	3"	1-3/8"
		Jamb / P-hook	Filled Block (ASTM C90)	2"	3"	2"
		Jamb / P-hook	Hollow Block (ASTM C90)	2"	3"	1-1/4"
	All	Southern Pine (SG = 0.55)	1"	1"	1-3/8"	
B	#12 Steel SMS (Gr. 5) (min. of 3 threads beyond metal substrate)	All	Southern Pine (SG = 0.55)	9/16"	7/8"	1-3/8"
			6063-T5 Aluminum	3/8"	9/16"	0.071" (20 Ga)
			A36 Steel	3/8"	9/16"	0.050"
			Gr. 33 Steel Stud	3/8"	9/16"	0.045" (18 Ga)
C	1/4" Elco UltraCon®	All	Concrete (min. 2.85 ksi)	1"	4"	1-3/8"
		Jamb / P-hook	Hollow Block (ASTM C90)	1"	6"	1-1/4"
	1/4" DeWalt UltraCon® +	Head / Sill	Concrete (min. 3 ksi)	1-5/16"	4"	1-3/8"
		Jamb / P-hook	Concrete (min. 3 ksi)	1"	4"	1-3/8"
		Jamb / P-hook	Hollow Block (ASTM C90)	1"	3"	1-1/4"
		All	Southern Pine (SG = 0.55)	1"	1"	1-3/8"
D	1/4" Elco UltraCon®	All	Concrete (min. 2.85 ksi)	2-1/2"	4"	1-3/8"
		Jamb / P-hook	Filled Block (ASTM C90)	2-1/2"	4"	1-3/4"
		Jamb / P-hook	Hollow Block (ASTM C90)	2-1/2"	6"	1-1/4"
	1/4" 410 SS DeWalt/Elco CreteFlex®	Head / Sill	Concrete (min. 3.35 ksi)	1"	4"	1-3/4"
		Jamb / P-hook	Concrete (min. 3.35 ksi)	1"	6"	1-3/4"
		Jamb / P-hook	Hollow Block (ASTM C90)	2-1/2"	6"	1-1/4"
		All	Southern Pine (SG = 0.55)	1"	1"	1-3/8"

- 1) WHERE SUBSTRATE CONDITIONS REQUIRE ANCHORAGE FROM MORE THAN ONE OF THE ANCHOR GROUPS ABOVE, CHOOSE THE ANCHOR GROUP OF THE LOWEST LETTER FOR ALL TABLES IN THIS APPROVAL.
- 2) ALL ANCHOR HEAD TYPES ARE APPLICABLE.
- 3) FOR THE MINIMUM STRENGTHS OF ANCHORS AND SUBSTRATES, SEE TABLE 5, SHEET 20.
- 4) HOLLOW BLOCK VALUES MAY ALSO BE USED IN FILLED BLOCK APPLICATIONS.
- 5) ANCHORS MUST BE OF SUFFICIENT LENGTH SO THAT A MINIMUM OF 3 THREADS EXTEND BEYOND METAL SUBSTRATE.

CODES / STANDARDS USED:

- 2020 FLORIDA BUILDING CODE (FBC), 7TH EDITION
- ASTM E1300-09
- ANSI/AF&PA NDS-2018 FOR WOOD CONSTRUCTION
- ALUMINUM DESIGN MANUAL, ADM-2015
- AISI S100-16
- AISC 360-16

GENERAL NOTES..... 1  
ANCHORAGE.....1,6-8  
EXAMPLE CONFIGS.....2-3  
GLAZING DETAILS..... 4,5  
DESIGN PRESSURES..... 6-8  
INSTALL DETAILS.....12-14  
ELEVATIONS..... 15,16  
PANEL / SILL TYPES..... 17  
CROSS SECTIONS.....18,19  
PARTS LIST..... 20  
EXTRUSIONS..... 21,22

**PRODUCT REVISED**  
**as complying with the Florida Building Code**  
**NOA-No. 22-0407.11**  
**Expiration Date: 02/12/2025**  
**By: Manuel Perez**  
**Miami-Dade Product Control**

ADDED GLASS TYPES  
3B-3E & 5B-5E; REV. AND  
ADDED TABLE FOR NEW  
GLASS; NEW TITLE  
BLOCK - JR - 3/25/22

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

Revision:  
02/28/22

DATE

ALUM. SLIDING GLASS WINDOW (LM)

GEN. NOTES AND ANCHOR

SGD-770W

JENS ROSOWSKI

By

1 OF 22

PGT0129

Rev.

E

REGISTRATION #29296

ALUM. SLIDING GLASS WINDOW (LM)

GEN. NOTES AND ANCHOR


SGD-770W

1 OF 22

PGT0129







Rev.

E

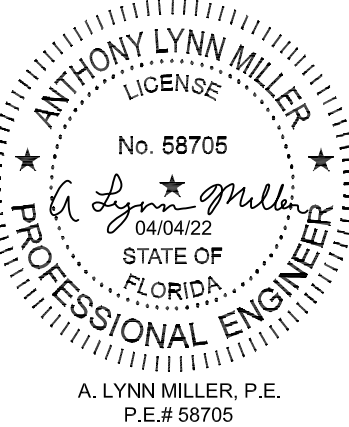



## EXAMPLE CONFIGURATIONS

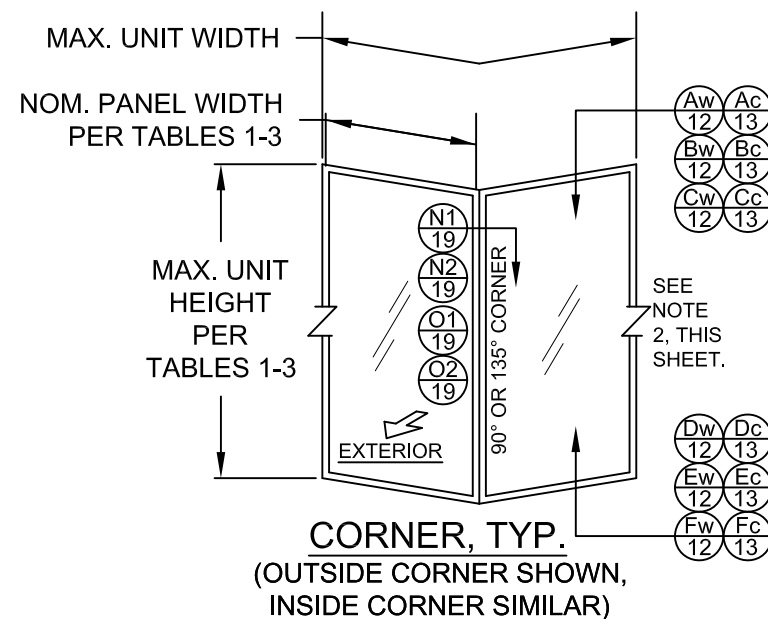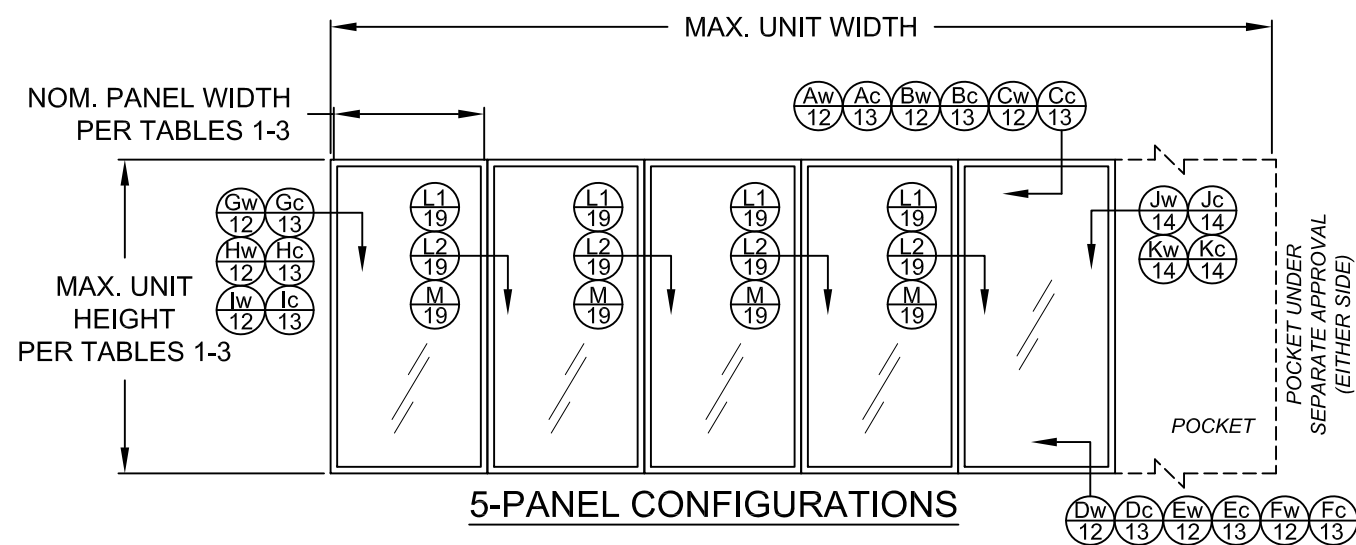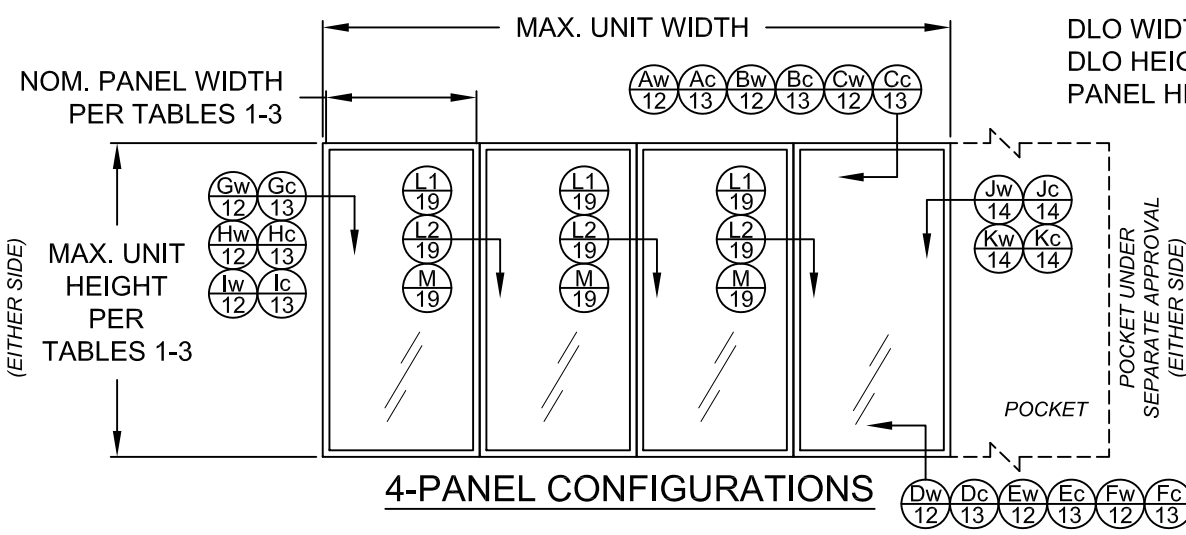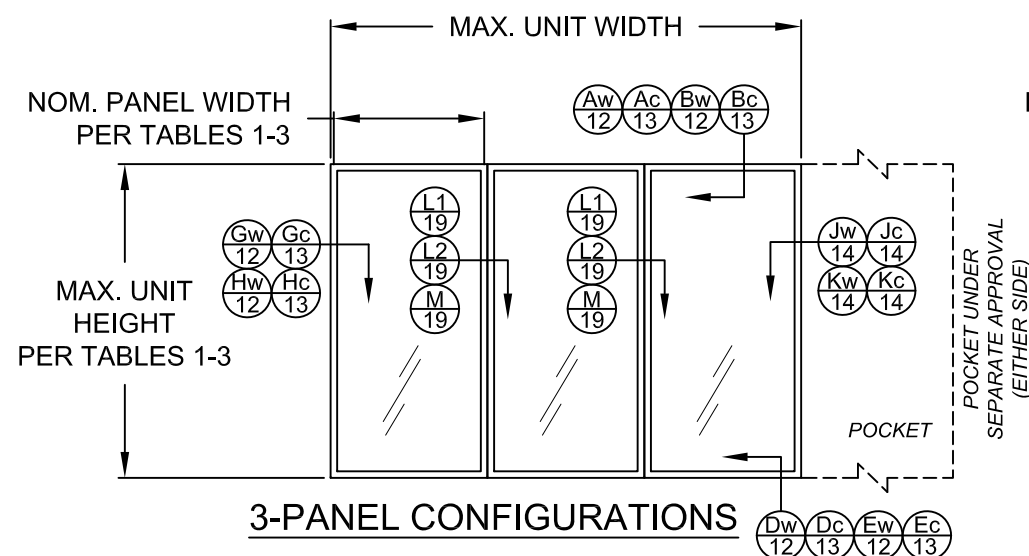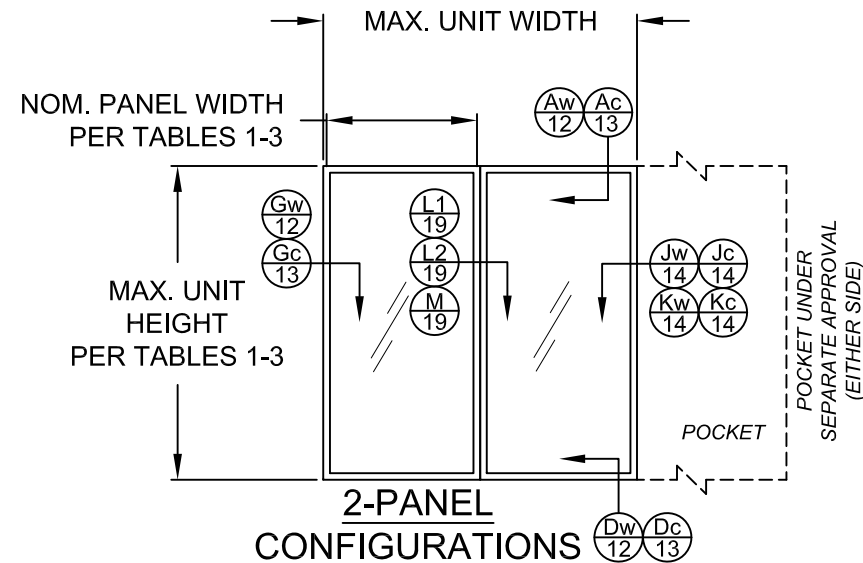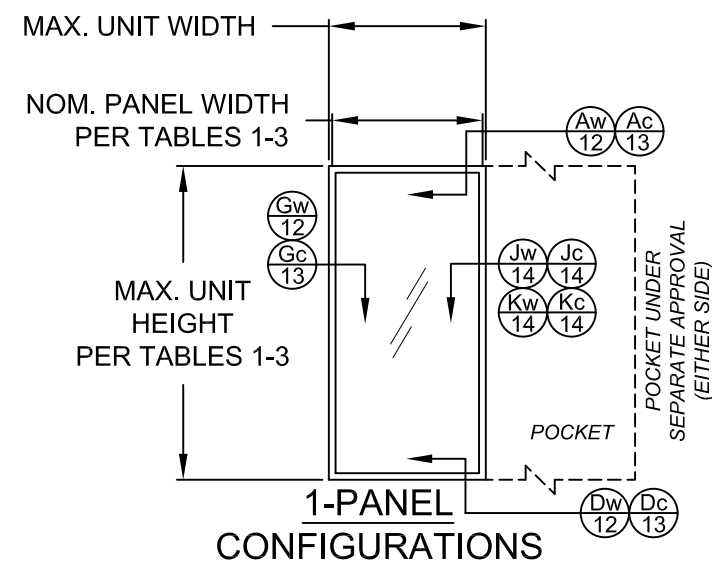

CONFIGURATIONS NOTES:


1) ALL CONFIGURATIONS SHOWN ARE ALSO AVAILABLE AS POCKET CONFIGURATIONS AT EITHER OR BOTH JAMB LOCATIONS USING DETAIL "Jw", "Jc", "Kw" OR "Kc" INSTALLATION. EXAMPLE: 4-PANEL XXXX IN POCKET (p) CONFIGURATION CAN BE pXXXXp, pXXXX OR XXXXp. OXXX IN POCKET CONFIGURATION CAN BE OXXXp.

2) 90° & 135° CORNER CONFIGURATIONS CAN BE A COMBINATION OF ANY 2 STRAIGHT CONFIGURATIONS.

3) FOR NOM. PANEL WIDTH, SEE TABLES 1-3.

"X" = OPERABLE PANEL,  
"O" = INOPERABLE PANEL,  
"p" = POCKET

—DETAIL LETTER



DLO WIDTH = NOM. PANEL WIDTH - 7"  
DLO HEIGHT = WINDOW UNIT HEIGHT - 10.125"  
PANEL HEIGHT = WINDOW UNIT HEIGHT - 1.866"

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. 22-0407.11  
Expiration Date: 02/12/2025  
By: Manuel Perez  
Miami-Dade Product Control

Revision:

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

ate	02/28/22
-----	----------

OSOWSKI

3	Rev.	6
---	------	---

UMD	10
-----	----


Dr	No.
----	-----

## EXAMPLE F CONFIGURATIONS


SGD-770W	2 OF 22
----------	---------

Series	Desc.
--------	-------


series De



REGISTRATION #29296

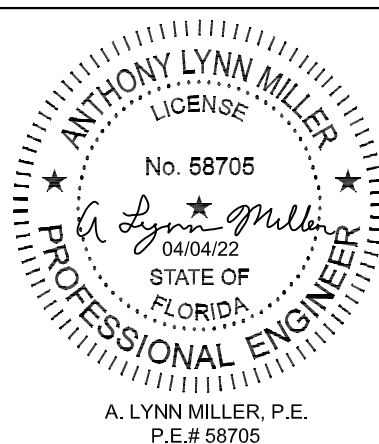

## EXAMPLE CONFIGURATIONS

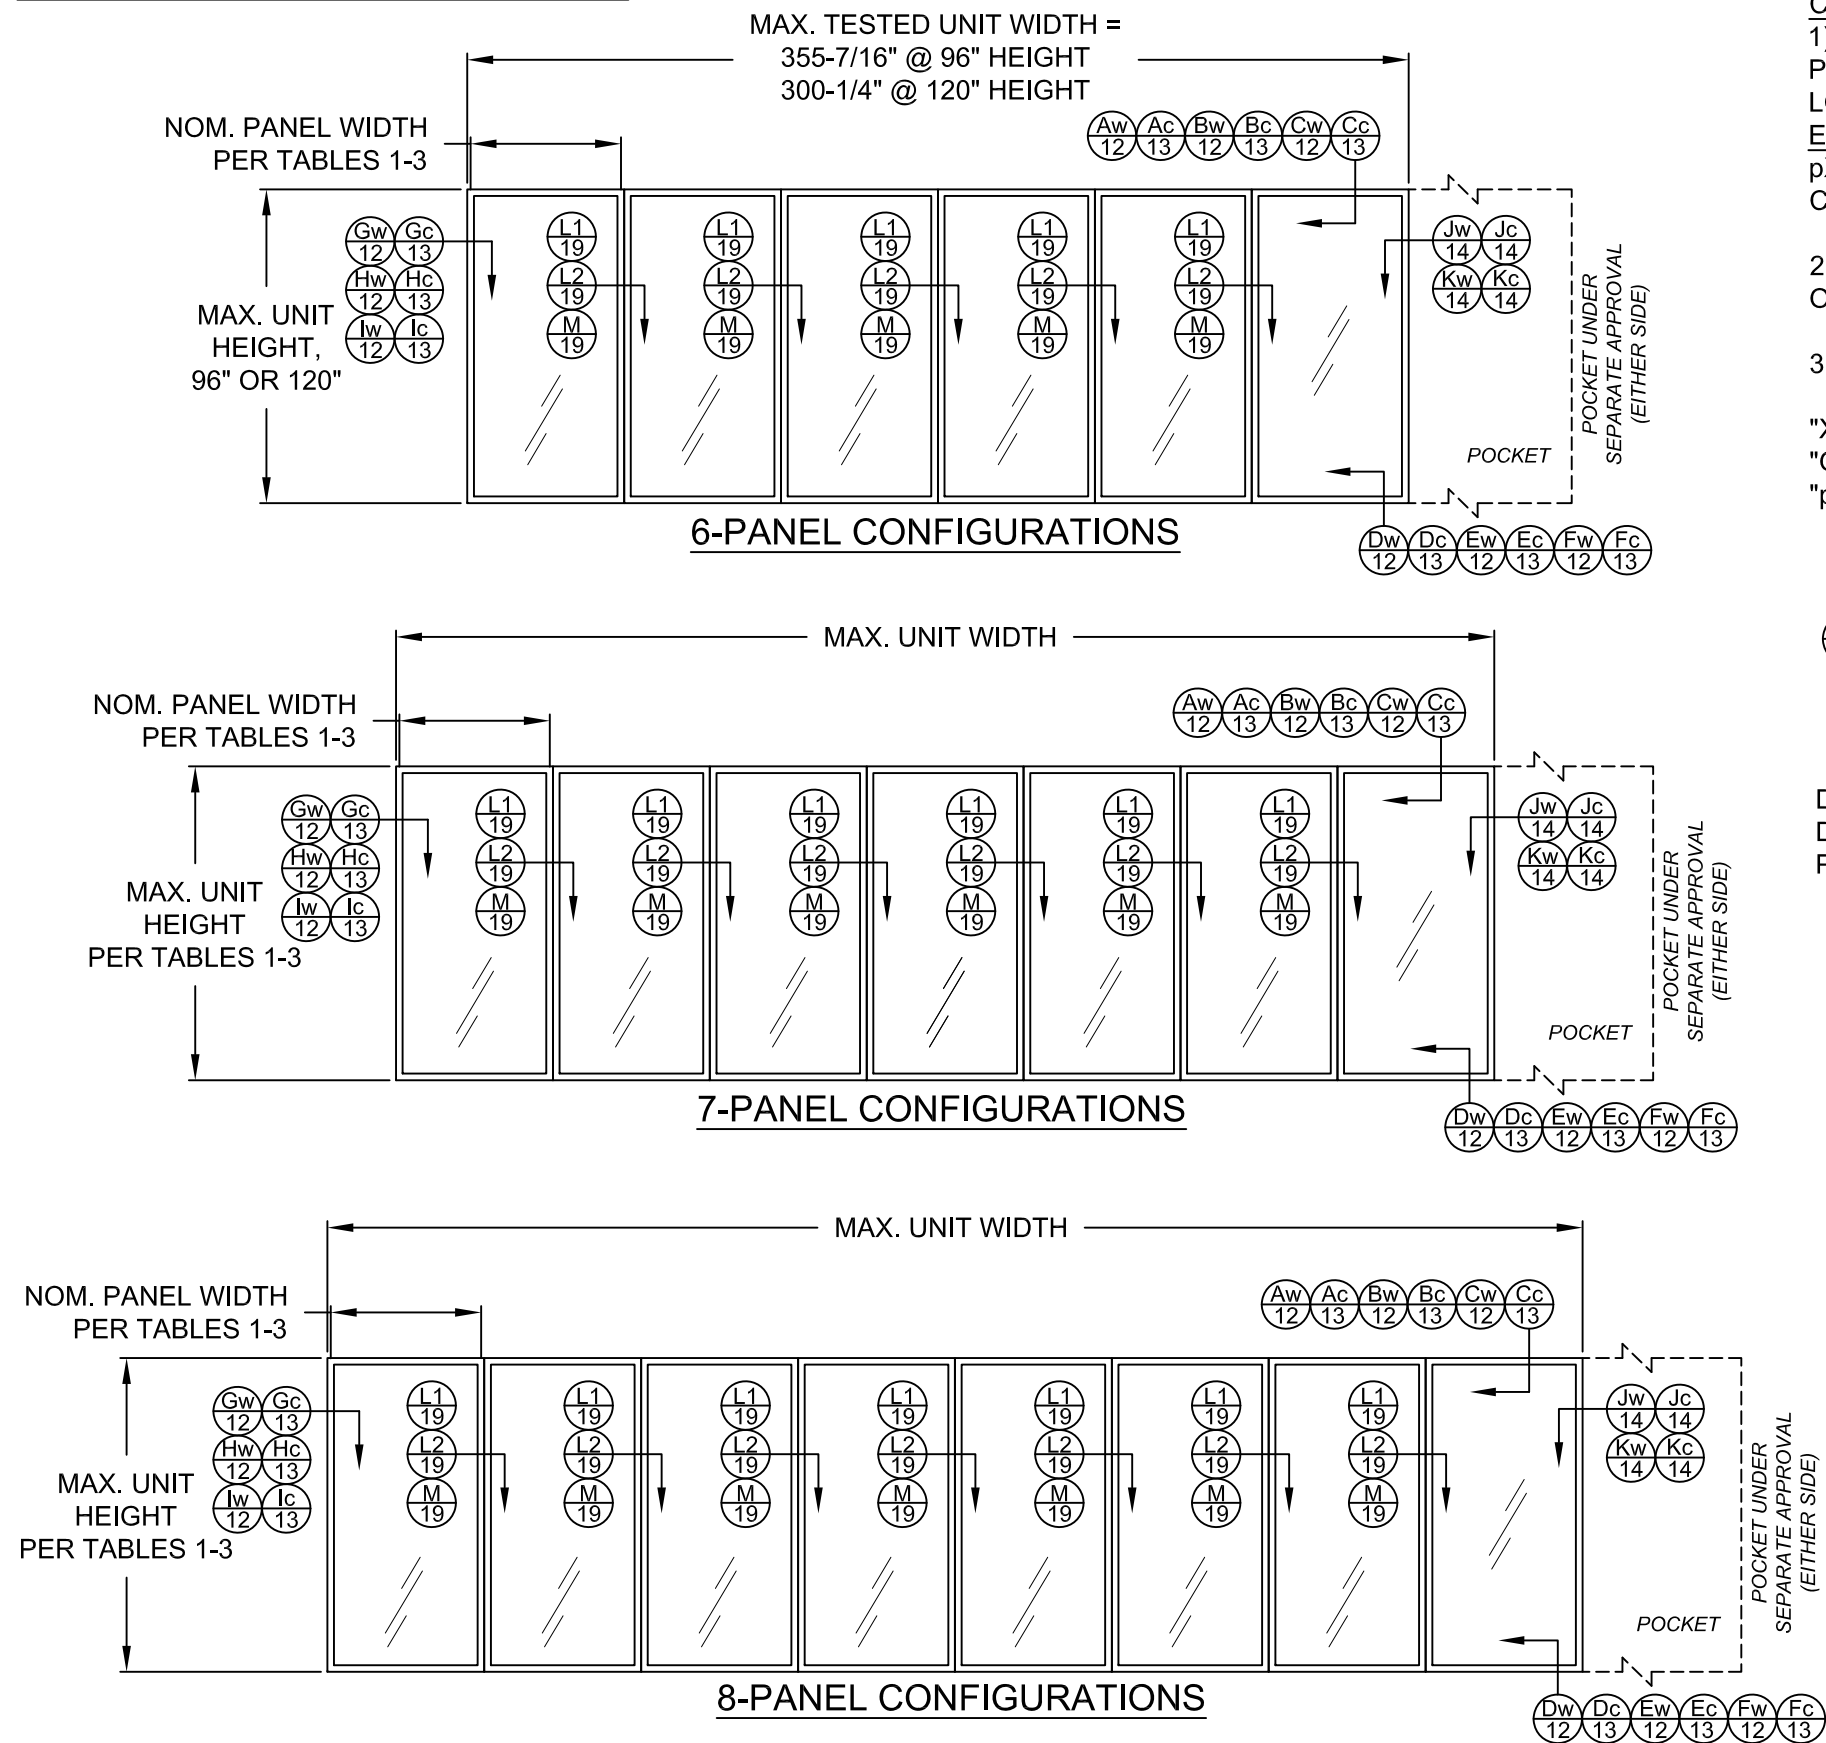

CONFIGURATIONS NOTES:

1) ALL CONFIGURATIONS SHOWN ARE ALSO AVAILABLE AS POCKET CONFIGURATIONS AT EITHER OR BOTH JAMB LOCATIONS USING DETAIL "Jw", "Jc", "Kw" OR "Kc" INSTALLATION. EXAMPLE: 4-PANEL XXXX IN POCKET (p) CONFIGURATION CAN BE pXXXXp, pXXXX OR XXXXp. OXXX IN POCKET CONFIGURATION CAN BE OXXXp.

2) 90° & 135° CORNER CONFIGURATIONS CAN BE A COMBINATION OF ANY 2 STRAIGHT CONFIGURATIONS.

3) FOR NOM. PANEL WIDTH, SEE TABLES 1-3.

"X" = OPERABLE PANEL,  
"O" = INOPERABLE PANEL,  
"p" = POCKET

DETAIL LETTER


"w" = WOOD OR METAL INSTALLATION


"c" = CONCRETE INSTALLATION

SHEET NUMBER


DLO WIDTH = NOM. PANEL WIDTH - 7"  
DLO HEIGHT = WINDOW UNIT HEIGHT - 10.125"  
PANEL HEIGHT = WINDOW UNIT HEIGHT - 1.866"

<p><b>PRODUCT REVISED</b> as complying with the Florida Building Code NOA-No. <u>22-0407.11</u> Expiration Date: <u>02/12/2025</u> By: <u>Manuel Perez</u> Miami-Dade Product Control</p>	
Revision:	


		1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941) 480-1600	
REGISTRATION #29296		COPYRIGHT © 2022 PGT INDUSTRIES, INC.	
ALUM. SLIDING GLASS WINDOW (LM)		Date	02/28/22
EXAMPLE CONFIGURATIONS		Drawn By	JENS ROSOWSKI
Series	SGD-770W	Sheet	3 OF 22
Desc.	3 OF 22	DWG No.	PGT0129
Title	3 OF 22	Rev.	E

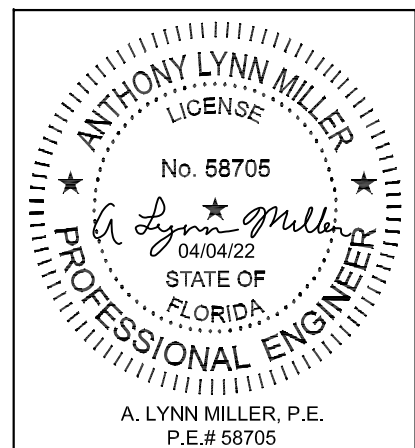


GLAZING DETAILS




GLASS TYPE 3




GLASS TYPE 3A




GLASS TYPE 3B




GLASS TYPE 3C




GLASS TYPE 3D




GLASS TYPE 3E




GLASS TYPE 4




GLASS TYPE 4A

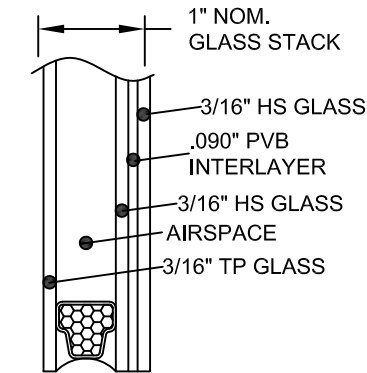


GLASS TYPE 5

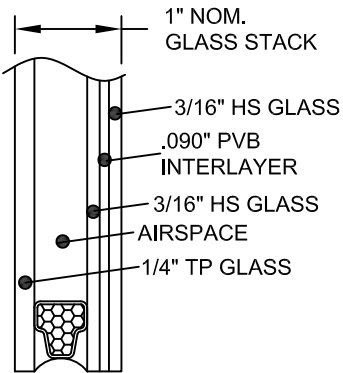


GLASS TYPE 5A

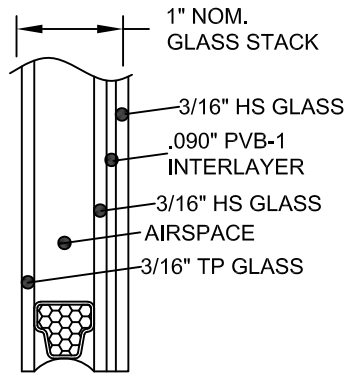


GLASS TYPE 5B

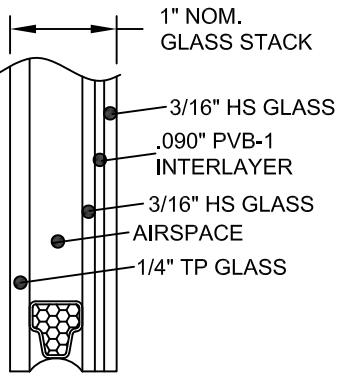


GLASS TYPE 5C

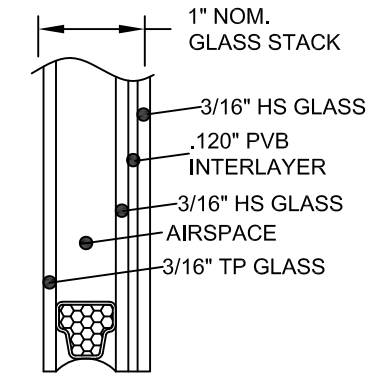


GLASS TYPE 5D

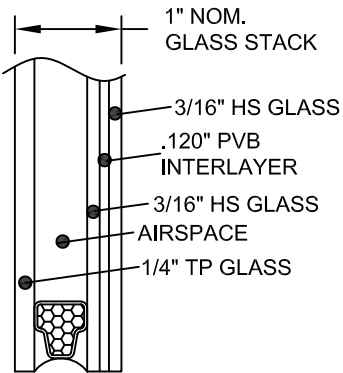

GLASS TYPE 5E

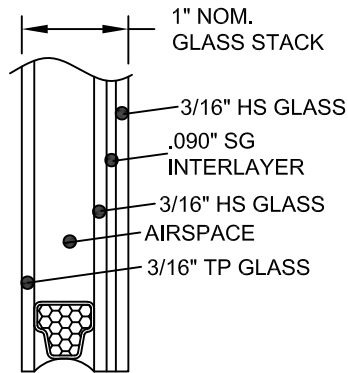

GLASS TYPE 6

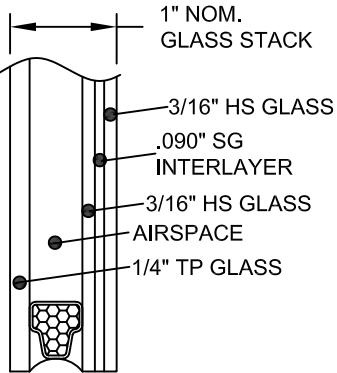

GLASS TYPE 6A

TABLE B:

Glass Type	Description (Listed from Exterior to Interior)
3	7/16" LAMI: 3/16" HS, .090" PVB, 3/16" HS
3A	9/16" LAMI: 1/4" HS, .090" PVB, 1/4" HS
3B	7/16" LAMI: 3/16" HS, .090" PVB-1, 3/16" HS
3C	9/16" LAMI: 1/4" HS, .090" PVB-1, 1/4" HS
3D	7/16" LAMI: 3/16" HS, .120" PVB, 3/16" HS
3E	9/16" LAMI: 1/4" HS, .120" PVB, 1/4" HS
4	7/16" LAMI: 3/16" HS, .090" SG, 3/16" HS
4A	9/16" LAMI: 1/4" HS, .090" SG, 1/4" HS
5	1" LAMI IG: 3/16" TP CAP, AIRSPACE, 3/16" HS, .090" PVB, 3/16" HS
5A	1" LAMI IG: 1/4" TP CAP, AIRSPACE, 3/16" HS, .090" PVB, 3/16" HS
5B	1" LAMI IG: 3/16" TP CAP, AIRSPACE, 3/16" HS, .090" PVB-1, 3/16" HS
5C	1" LAMI IG: 1/4" TP CAP, AIRSPACE, 3/16" HS, .090" PVB-1, 3/16" HS
5D	1" LAMI IG: 3/16" TP CAP, AIRSPACE, 3/16" HS, .120" PVB, 3/16" HS
5E	1" LAMI IG: 1/4" TP CAP, AIRSPACE, 3/16" HS, .120" PVB, 3/16" HS
6	1" LAMI IG: 3/16" TP CAP, AIRSPACE, 3/16" HS, .090" SG, 3/16" HS
6A	1" LAMI IG: 1/4" TP CAP, AIRSPACE, 3/16" HS, .090" SG, 3/16" HS
7	7/16" LAMI: 3/16" AN, .090" SG, 3/16" AN
7A	9/16" LAMI: 1/4" AN, .090" SG, 1/4" AN
8	1" LAMI IG: 3/16" TP CAP, AIRSPACE, 3/16" AN, .090" SG, 3/16" AN
8A	1" LAMI IG: 1/4" TP CAP, AIRSPACE, 3/16" AN, .090" SG, 3/16" AN

AN = ANNEALED  
HS = HEAT STRENGTHENED  
TP = TEMPERED  
PVB = TROSIFOL PVB INTERLAYER BY KURARAY AMERICA, INC.  
PVB-1 = MODIFIED TROSIFOL PVB INTERLAYER BY KURARAY AMERICA, INC.  
SG = SENTRYGLAS PVB INTERLAYER BY KURARAY AMERICA, INC.

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

Revision:  
ADDED GLASS TYPES  
3B-3E & 5B-5E; - JR -  
3/25/22

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

02/28/22

DATE

JENS ROSOWSKI

DRAWN BY

PGT0129

DWG NO.

4 OF 22

SHEET

SGD-770W

SERIES

ALUM. SLIDING GLASS WINDOW (LM)

TITLE

GLAZING DETAILS

DESC.

ANTHONY LYNN MILLER

LICENSE

No. 58705

04/04/22

STATE OF FLORIDA


PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.


P.E.# 58705




GLAZING DETAILS, CONT.




GLASS TYPE 7




GLASS TYPE 7A

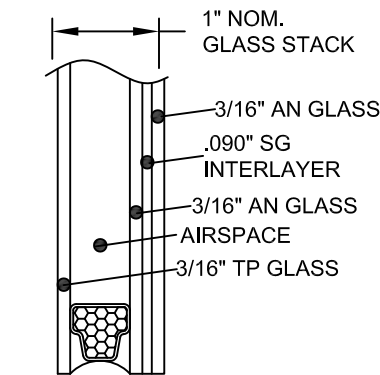


GLASS TYPE 8

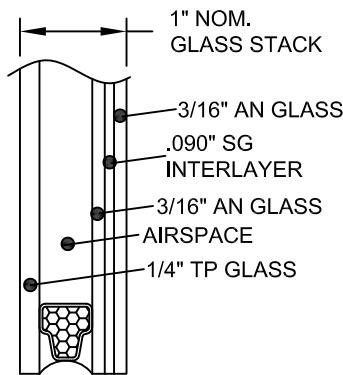


GLASS TYPE 8A

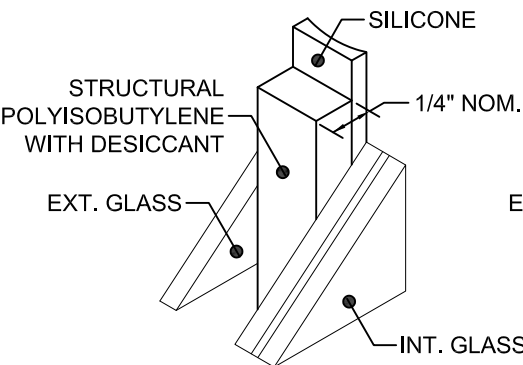


124 KODISPACE 4SG TPS

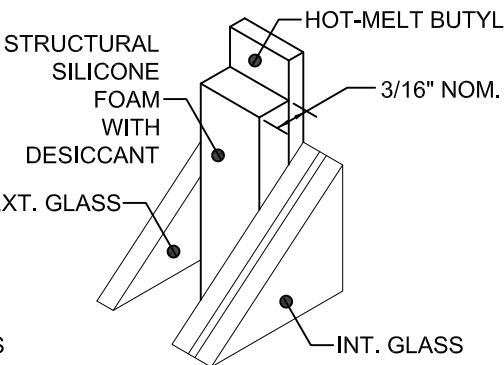

125 SUPER SPACER<sup>®</sup> NXT<sup>™</sup>

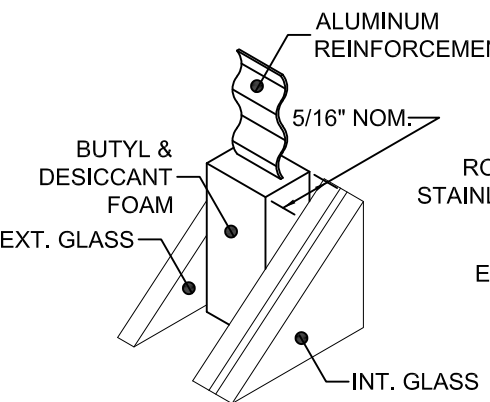


126 DURASEAL<sup>®</sup> SPACER

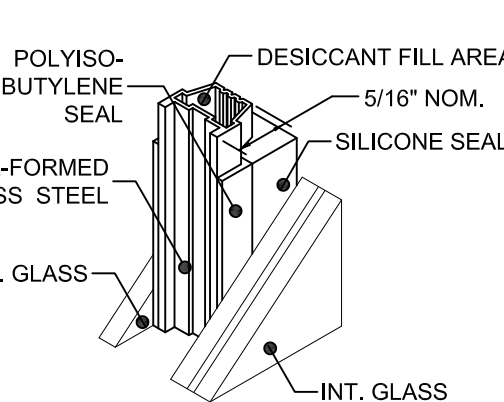


127 XL EDGE<sup>™</sup> SPACER

Part #	Description	Material
124	Kommerling 4SG TPS Spacer System	See this Sheet for Materials
125	Quanex Super Spacer nXT with Hot Melt Butyl	
126	Quanex Duraseal Spacer	
127	Cardinal XL Edge Spacer	

REFERENCE TEST REPORTS: FTL-8717, 8968 & 8970

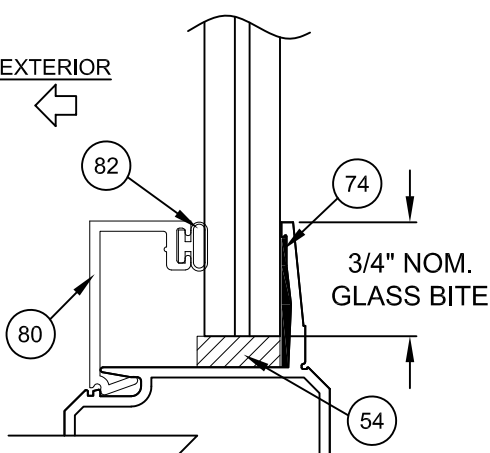

LAMI. GLAZING DETAIL

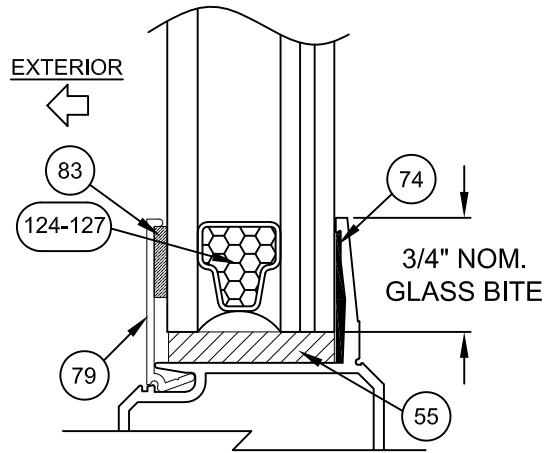

LAMI. IG GLAZING DETAIL

Revision:

**PRODUCT REVISED**  
as complying with the Florida Building Code  
**NOA-No. 22-0407.11**  
**Expiration Date: 02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

REGISTRATION #29296

ALUM. SLIDING GLASS WINDOW (LM)

GLAZING DETAILS

SGD-770W

Date: 02/28/22

By: JENS ROSOWSKI

No. PGT0129

Rev. E

Sheet 5 OF 22

Series

ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
04/04/22  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705

TABLE 1:

Design Pressure (DP) and Anchor Quantities Required, (for all approved configurations on Sheets 2 & 3) For corner astragal anchorage on 90° or 135° corner units, see sheet 11																				Maximum DP for all sizes: +60 / -60 (May be limited by Table 1A)							
Applies to Inter./Glass Types: .090" PVB: 3, 3A, 5 & 5A .090" SG: 7, 7A, 8 & 8A and the Stile/Astragal types shown below.				Window Unit Height (in)																							
				42				48				60				72				80				96			
				31-7/8" DLO				37-7/8" DLO				49-7/8" DLO				61-7/8" DLO				69-7/8" DLO				85-7/8" DLO			
				Anchor Group				Anchor Group				Anchor Group				Anchor Group				Anchor Group				Anchor Group			
				A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
Nominal Panel Width (in)	24	17" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	8	8	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8
	36	29" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	8	8	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8
	42	35" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	8	8	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8
	48	41" DLO	Head/Sill	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	10	8	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8

FOR EXAMPLE ON USING TABLE, SEE SHEET 8.


NOTES:

- 1) POSITIVE PRESSURES IN TABLE 1 ARE BASED ON THE USE OF THE 3-1/4" SILL.
- 2) WHEN USING THE 2-1/2" SILL, POSITIVE WATER DP IS 46.67 PSF MAX. WHEN USING THE 3-1/4" SILL, POSITIVE WATER DP IS 60.0 PSF MAX. WHEN USING THE 4" SILL, POSITIVE WATER DP IS 60.0 PSF MAX (NEGATIVE PRESSURES UNCHANGED). SEE TABLE 1A.
- 3) 4", 3-1/4" AND 2-1/2" SILL HEIGHTS ARE TESTED FOR WATER INFILTRATION WHEREAS THE 1-1/2" SILL IS NOT AND MUST ONLY BE USED WHERE WATER RESISTANCE IS NOT REQUIRED. MAX. POSITIVE DESIGN PRESSURES SHOWN IN TABLE 1 MAY BE USED WHEN THE WINDOW IS PROTECTED BY AN OVERHANG COMPLYING WITH THE CURRENT FLORIDA BUILDING CODE (SEE ADJACENT DIAGRAM); THIS CONDITION IS NOT RATED FOR WATER INFILTRATION.
- 4) SEE SHEETS 10-14 FOR ANCHORAGE SPACING, EDGE DISTANCE AND EMBEDMENT INFORMATION.
- 5) WINDOW SIZE TO COMPLY WITH CURRENT FBC EGRESS REQUIREMENTS WHEN REQUIRED.
- 6) JAMB ANCHORS ARE SPECIFIED AS THE TOTAL QUANTITY, DIVIDE BY 2 FOR PAIRS TO BE INSTALLED.

TABLE 1A:

Sill Height to Max. (+) DP (Water Infiltration Rating)	
Sill Riser Height (Flat or Box, see Sheet 17)	(+) Design Pressure, psf
Flush - 1-1/2"	see note 3
Low - 2-1/2"	+ 46.67
Medium - 3-1/4"	+ 60.0
High - 4"	+ 60.0

SEE NOTES 1-3

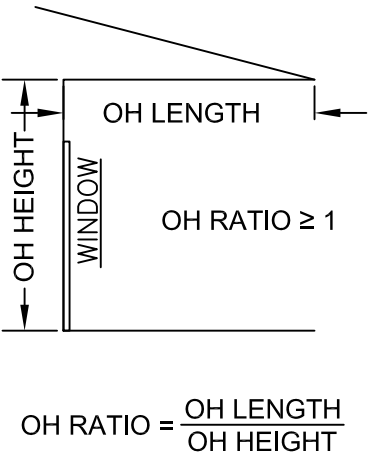

THE FOLLOWING STILE & ASTRAGAL TYPES SHALL BE USED FOR TABLE 1, SEE SHEETS 21 & 22 FOR PART DIMENSIONS AND SHEETS 18 & 19 FOR ASSEMBLY DETAILS.

Interlock	P-hook	Lockstile @ Jamb	Straight Astragal Assembly	Lockstile @ Straight Astragal	90° Astragal Assembly	Lockstile @ 90° Astragal	135° Astragal Assembly	Lockstile @ 135° Astragal
Standard Stiles	Standard Stile	Standard Stile	Standard Stile	Standard Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile
			Standard Astragal		Outside Corner	Outside Corner	Inside Corner	
					Inside Corner	Inside Corner	Outside Corner	
Part #60 (x2)	Part #60	Part #60	Part #60 (Stile) Part #67 (Astragal)	Part #60	Part #61 (Stile) Part #118 (Corner Receiver)	Part #119 (Out.) Part #120 (In.)	Part #61 (Stile) Parts #31 & #32 (Corn. & Fxd Mount)	Part #61


DLO WIDTH =  
NOM. PANEL WIDTH - 7"

DLO HEIGHT =  
WINDOW UNIT HEIGHT - 10.125"

PANEL HEIGHT =  
WINDOW UNIT HEIGHT - 1.866"

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
**NOA-No. 22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

Revision:

				1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600			
REGISTRATION #29296				COPYRIGHT © 2022 PGT INDUSTRIES, INC.			
Title		ALUM. SLIDING GLASS WINDOW (LM)		Date		02/28/22	
Desc.		DP & ANCHORAGE		By Drawn		JENS ROSOWSKI	
Series		SGD-770W		6 OF 22		PGT0129	
		Sheet				Rev. E	

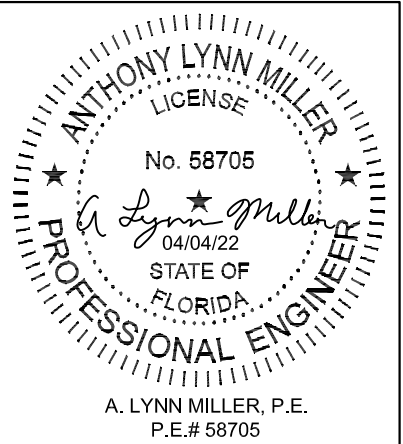




TABLE 2:

Design Pressure (DP) and Anchor Quantities Required, (for all approved configurations on Sheets 2 & 3)																			Maximum DP for all sizes: +60 / -60 (May be limited by Table 2A)									
For corner astragal anchorage on 90° or 135° corner units, see sheet 11																												
Applies to Interlayer/Glass Types: .090" PVB-1: 3B, 3C, 5B & 5C .120" PVB: 3D, 3E, 5D & 5E .090" SG: 4, 4A, 6, 6A, 7, 7A, 8, 8A and the Stile/Astragal Types shown below.				Window Height (in)																								
				42				48				60				72				80				96				
				31-7/8" DLO				37-7/8" DLO				49-7/8" DLO				61-7/8" DLO				69-7/8" DLO				85-7/8" DLO				
				Anchor Group				Anchor Group				Anchor Group				Anchor Group				Anchor Group				Anchor Group				
				A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	
Nominal Panel Width (in)	24	17" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	8	8	8	8	
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	
	36	29" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	8	8	8	8	
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	
	42	35" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	8	8	8	8	
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	
	48	41" DLO	Head/Sill	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	10	8	8	8	8	
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	
	54	47" DLO	Head/Sill	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	10	8	8	8	8	
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	
	60	53" DLO	Head/Sill	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	10	8	8	8	8	
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	

FOR EXAMPLE ON USING TABLE, SEE SHEET 8.

NOTES:

- 1) POSITIVE PRESSURES IN TABLE 2 ARE BASED ON THE USE OF THE 3-1/4" SILL.
- 2) WHEN USING THE 2-1/2" SILL, POSITIVE WATER DP IS 46.67 PSF MAX. WHEN USING THE 3-1/4" SILL, POSITIVE WATER DP IS 60.0 PSF MAX. WHEN USING THE 4" SILL, POSITIVE WATER DP IS 60.0 PSF MAX (NEGATIVE PRES. UNCHANGED). SEE TABLE 2A.
- 3) 4", 3-1/4" AND 2-1/2" SILL HEIGHTS ARE TESTED FOR WATER INFILTRATION WHEREAS THE 1-1/2" SILL IS NOT AND MUST ONLY BE USED WHERE WATER RESISTANCE IS NOT

REQUIRED. MAX. POSITIVE DESIGN PRESSURES SHOWN IN TABLE 2 MAY BE USED WHEN THE WINDOW IS PROTECTED BY AN OVERHANG COMPLYING WITH THE CURRENT FBC (SEE ADJACENT DIAGRAM); THIS CONDITION IS NOT RATED FOR WATER INFILTRATION.

- 4) SEE SHEETS 10-14 FOR ANCHORAGE SPACING, EDGE DISTANCE AND EMBEDMENT INFORMATION.
- 5) WINDOW SIZE TO COMPLY WITH CURRENT FBC EGRESS REQUIREMENTS WHEN REQUIRED.
- 6) JAMB ANCHORS ARE SPECIFIED AS THE TOTAL QUANTITY, DIVIDE BY 2 FOR PAIRS TO BE INSTALLED.

THE FOLLOWING STILE & ASTRAGAL TYPES SHALL BE USED FOR TABLE 2, SEE SHEETS 21 & 22 FOR PART DIMENSIONS AND SHEETS 18 & 19 FOR ASSEMBLY DETAILS.








Interlock	P-hook	Lockstile @ Jamb	Straight Astragal Assembly	Lockstile @ Straight Astragal	90° Astragal Assembly	Lockstile @ 90° Astragal	135° Astragal Assembly	Lockstile @ 135° Astragal
Heavy-duty Stiles	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile
			Standard Astragal		Outside Corner	Outside Corner	Inside Corner	
					Inside Corner	Inside Corner	Outside Corner	
Part #61 (x2)	Part #61	Part #61	Part #61 (Stile) Part #67 (Astragal)	Part #61	Part #61 (Stile) Part #118 (Corner Receiver)	Part #119 (Out.) Part #120 (In.)	Part #61 (Stile) Parts #31 & #32 (Corn. & Fxd Mount)	Part #61

TABLE 2A:

Sill Height to Max. (+) DP (Water Infiltration Rating)	
Sill Riser Height (Flat or Box, see Sheet 17)	(+) Design Pressure, psf
Flush - 1-1/2"	see note 3
Low - 2-1/2"	+ 46.67
Medium - 3-1/4"	+ 60.0
High - 4"	+ 60.0

SEE NOTES 1-3



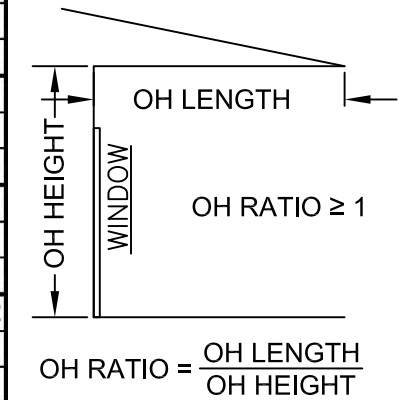**PRODUCT REVISED**  
as complying with the Florida Building Code  
**NOA-No. 22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

Revision:

ADDED GLASS TYPES  
3B-3E & 5B-5E; - JR -  
3/25/22

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

02/28/22

JENS ROSOWSKI

PGT0129

E

Rev.

7 OF 22

SGD-770W

Sheet

DP & ANCHORAGE

ALUM. SLIDING GLASS WINDOW (LM)

REGISTRATION #29296

PGI®

ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
04/04/22  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705



TABLE 3:


Design Pressure (DP) and Anchor Quantities Required, (for all approved configurations on Sheets 2 & 3) For corner astragal anchorage on 90° or 135° corner units, see sheet 11																				Maximum DP for all sizes: +90 / -90 (May be limited by Table 3A)							
Applies to Inter./Glass Types: .090" SG: 4, 4A, 6, 6A, 7, 7A, 8 & 8A and the Stile/Astragal types shown below.				Window Unit Height (in)																							
				42				48				60				72				80				96			
				31-7/8" DLO				37-7/8" DLO				49-7/8" DLO				61-7/8" DLO				69-7/8" DLO				85-7/8" DLO			
				Anchor Group				Anchor Group				Anchor Group				Anchor Group				Anchor Group				Anchor Group			
				A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
Nominal Panel Width (in)	24	17" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	8	8	8	8	8	8	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8
	36	29" DLO	Head/Sill	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C4+1	C5+1	C5+1	C4+1	C4+1
			Jamb	4	4	4	4	6	6	6	6	6	6	6	6	8	8	8	8	10	8	8	8	12	10	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	6+7	6+7	6+7	6+7	8+9	8+9	8+9	8+9
	42	35" DLO	Head/Sill	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C5+2	C5+2	C5+2	C5+2
			Jamb	4	4	4	4	6	6	6	6	8	6	6	6	8	8	8	8	10	8	8	8	12	10	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	8+9	8+9	8+9	8+9
	48	41" DLO	Head/Sill	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C4+2	C5+2	C5+2	C4+2	C4+2	See Note A below.				
			Jamb	4	4	4	4	6	6	6	6	8	6	6	6	10	8	8	8	10	8	8	8	14	12	8	8
			P-Hook	4+5	4+5	4+5	4+5	4+5	4+5	4+5	4+5	5+6	5+6	5+6	5+6	6+7	6+7	6+7	6+7	7+8	7+8	7+8	7+8	9+10	9+10	9+10	9+10

NOTE A: +/-90.0 PSF FOR GLASS TYPES 4, 4A, 6, 6A, 7A, 8 & 8A; +/-87.1 FOR GLASS TYPE 7

- NOTES:
- 1) POSITIVE PRESSURES IN TABLE 3 ARE BASED ON THE USE OF THE 4" SILL.
  - 2) WHEN USING THE 2-1/2" SILL, POSITIVE WATER DP IS 46.67 PSF MAX. WHEN USING THE 3-1/4" SILL, POSITIVE WATER DP IS 60.0 PSF MAX. WHEN USING THE 4" SILL, POSITIVE WATER DP IS 90.0 PSF MAX (NEGATIVE PRESSURES UNCHANGED). SEE TABLE 3A.
  - 3) 4", 3-1/4" AND 2-1/2" SILL HEIGHTS ARE TESTED FOR WATER INFILTRATION WHEREAS THE 1-1/2" SILL IS NOT AND MUST ONLY BE USED WHERE WATER RESISTANCE IS NOT REQUIRED. MAX. POSITIVE DESIGN PRESSURES SHOWN IN TABLE 3 MAY BE USED WHEN THE WINDOW IS PROTECTED BY AN OVERHANG COMPLYING WITH THE CURRENT FLORIDA BUILDING CODE (SEE ADJACENT DIAGRAM); THIS CONDITION IS NOT RATED FOR WATER INFILTRATION.
  - 4) SEE SHEETS 10-14 FOR ANCHORAGE SPACING, EDGE DISTANCE AND EMBEDMENT INFORMATION.
  - 5) WINDOW SIZE TO COMPLY WITH CURRENT FBC EGRESS REQUIREMENTS WHEN REQUIRED.
  - 6) JAMB ANCHORS ARE SPECIFIED AS THE TOTAL QUANTITY, DIVIDE BY 2 FOR PAIRS TO BE INSTALLED.

Sill Height to Max. (+) DP (Water Infiltration Rating)	
Sill Riser Height (Flat or Box, see Sheet 17)	(+) Design Pressure, psf
Flush - 1-1/2"	see note 3
Low - 2-1/2"	+ 46.67
Medium - 3-1/4"	+ 60.0
High - 4"	+ 90.0

SEE NOTES 1-3

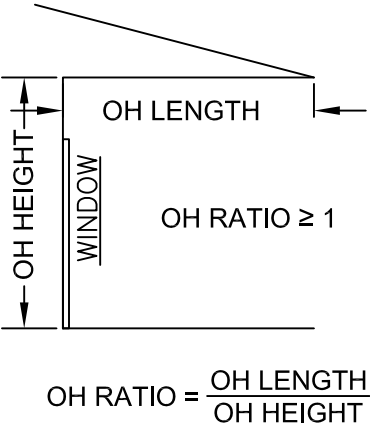

EXAMPLE ON SHEET 9

THE FOLLOWING STILE & ASTRAGAL TYPES SHALL BE USED FOR TABLE 3, SEE SHEETS 21 & 22 FOR PART DIMENSIONS AND SHEETS 18 & 19 FOR ASSEMBLY DETAILS.

Interlock	P-hook	Lockstile @ Jamb	Straight Astragal Assembly	Lockstile @ Straight Astragal	90° Astragal Assembly	Lockstile @ 90° Astragal	135° Astragal Assembly	Lockstile @ 135° Astragal
Heavy-duty Stiles	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile	Heavy-duty Stile
			Heavy-duty Astragal		Outside Corner	Outside Corner	Inside Corner	
					Inside Corner	Inside Corner	Outside Corner	
Part #61 (x2)	Part #61	Part #61	Part #61 (Stile) Part #68 (Astragal)	Part #61	Part #61 (Stile) Part #118 (Corner Receiver)	Part #119 (Out.) Part #120 (In.)	Part #61 (Stile) Parts #31 & #32 (Corn. & Fxd Mount)	Part #61

DLO WIDTH =  
NOM. PANEL WIDTH - 7"


DLO HEIGHT =  
WINDOW UNIT HEIGHT - 10.125"

PANEL HEIGHT =  
WINDOW UNIT HEIGHT - 1.866"


**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

Revision:

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	COPYRIGHT © 2022 PGT INDUSTRIES, INC.	02/28/22	JENS ROSOWSKI	PGT0129	E
	REGISTRATION #29296	ALUM. SLIDING GLASS WINDOW (LM)	DP & ANCHORAGE	8 OF 22	SGD-770W

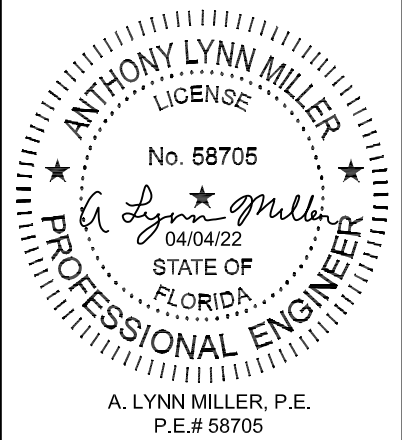



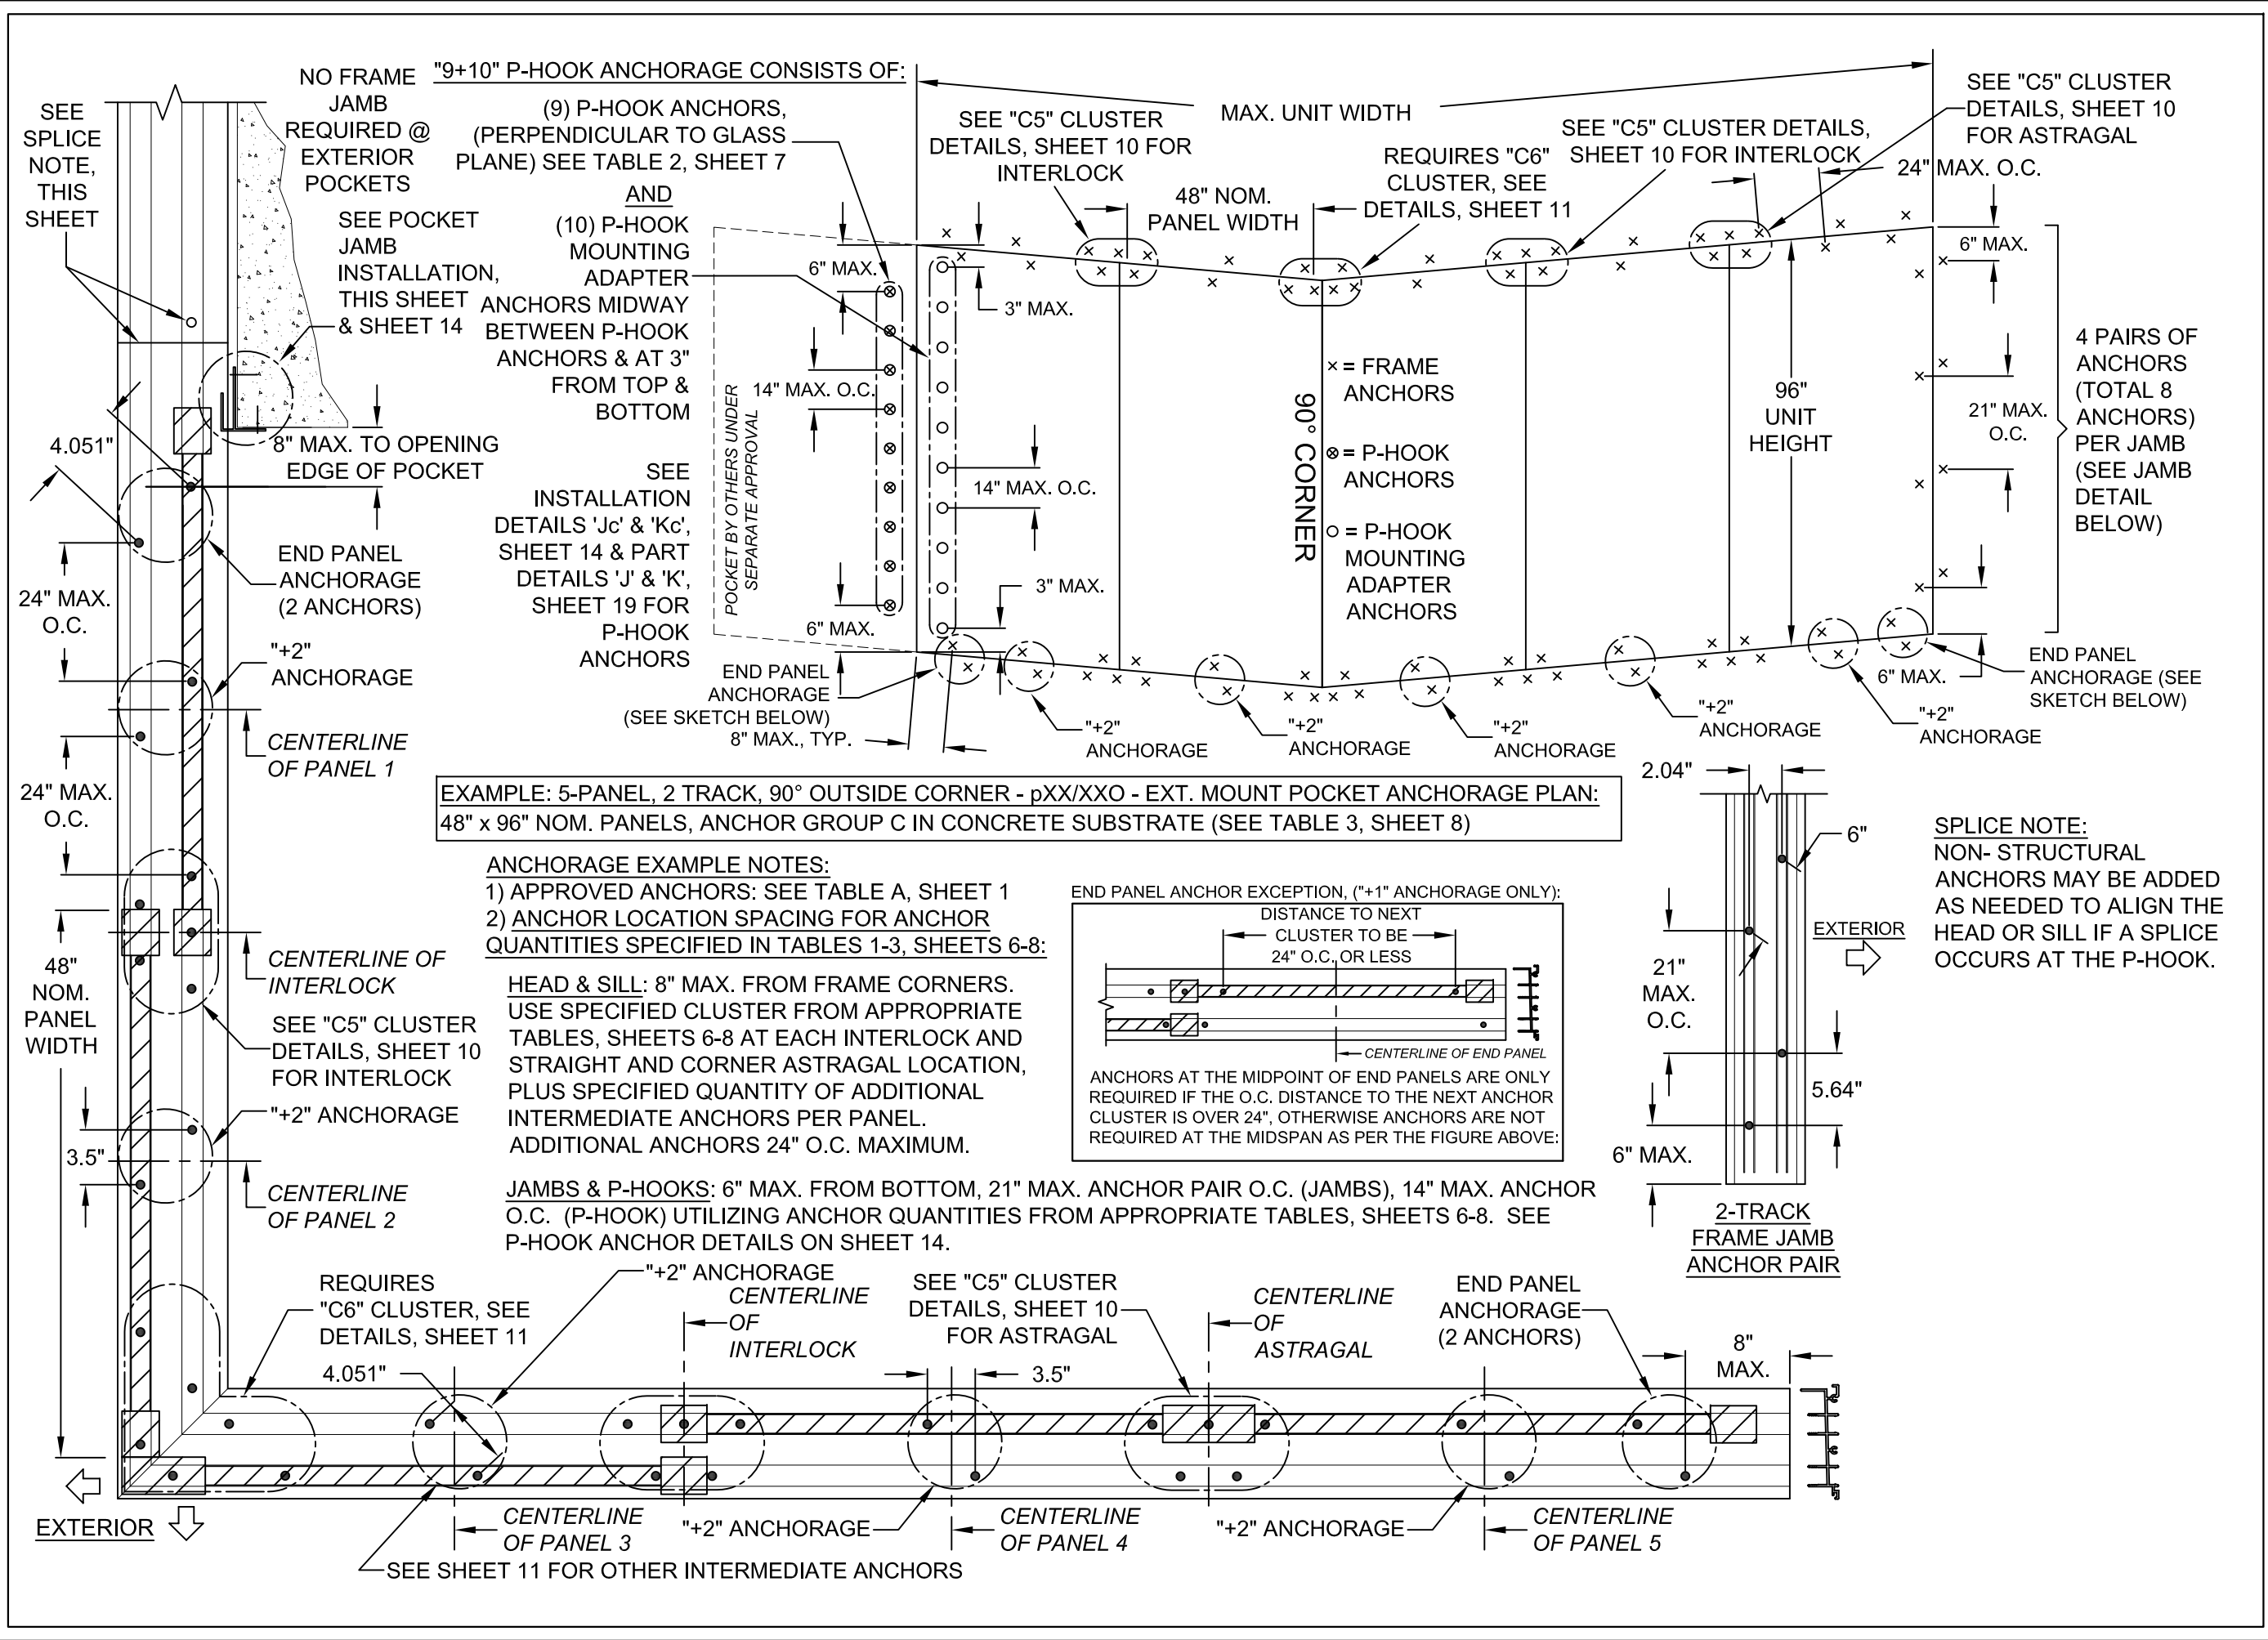

EXAMPLE: 5-PANEL, 2 TRACK, 90° OUTSIDE CORNER - pXX/XXO - EXT. MOUNT POCKET ANCHORAGE PLAN:  
48" x 96" NOM. PANELS, ANCHOR GROUP C IN CONCRETE SUBSTRATE (SEE TABLE 3, SHEET 8)


ANCHORAGE EXAMPLE NOTES:

- 1) APPROVED ANCHORS: SEE TABLE A, SHEET 1
- 2) ANCHOR LOCATION SPACING FOR ANCHOR QUANTITIES SPECIFIED IN TABLES 1-3, SHEETS 6-8:

HEAD & SILL: 8" MAX. FROM FRAME CORNERS. USE SPECIFIED CLUSTER FROM APPROPRIATE TABLES, SHEETS 6-8 AT EACH INTERLOCK AND STRAIGHT AND CORNER ASTRAGAL LOCATION, PLUS SPECIFIED QUANTITY OF ADDITIONAL INTERMEDIATE ANCHORS PER PANEL. ADDITIONAL ANCHORS 24" O.C. MAXIMUM.

JAMBS & P-HOOKS: 6" MAX. FROM BOTTOM, 21" MAX. ANCHOR PAIR O.C. (JAMBS), 14" MAX. ANCHOR O.C. (P-HOOK) UTILIZING ANCHOR QUANTITIES FROM APPROPRIATE TABLES, SHEETS 6-8. SEE P-HOOK ANCHOR DETAILS ON SHEET 14.

END PANEL ANCHOR EXCEPTION, ("1" ANCHORAGE ONLY):

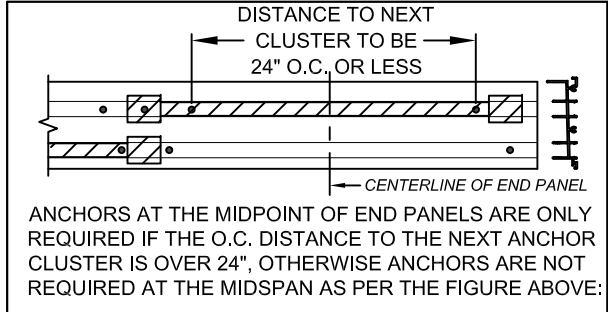












SPLICE NOTE:  
NON- STRUCTURAL ANCHORS MAY BE ADDED AS NEEDED TO ALIGN THE HEAD OR SILL IF A SPLICE OCCURS AT THE P-HOOK.

Revision:

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	COPYRIGHT © 2022 PGT INDUSTRIES, INC.	02/28/22	JENS ROSOWSKI	PGT0129	E		
						Date	
							By
ALUM. SLIDING GLASS WINDOW (LM)	REGISTRATION #29296	9 OF 22	SGD-770W	Sheet	Title		
						Desc.	
							Series
DWG	No.	P					
			Example Spacing & Example	Jens Rosowski			

ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
04/04/22  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705

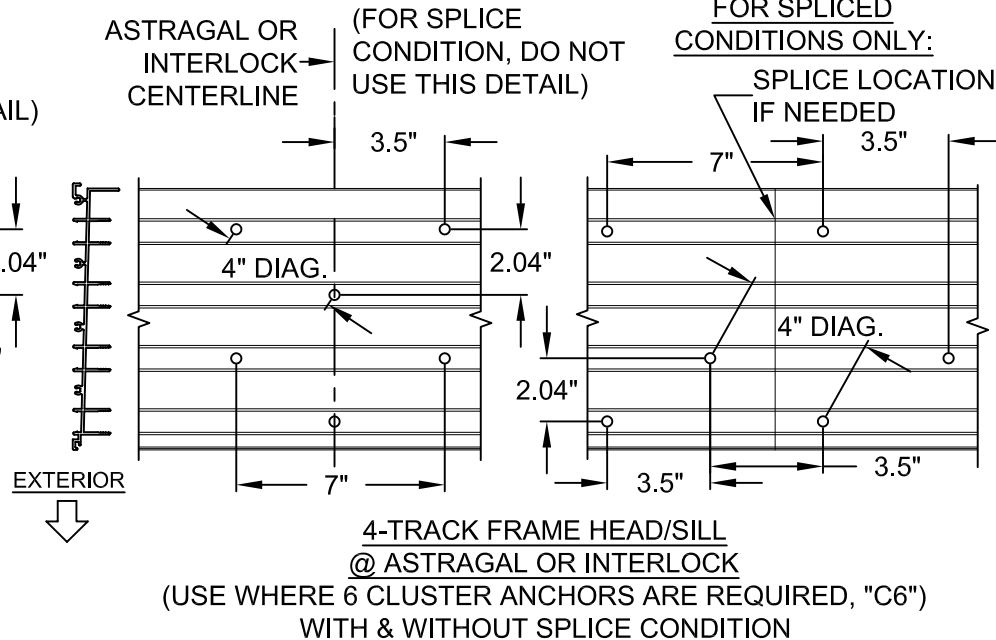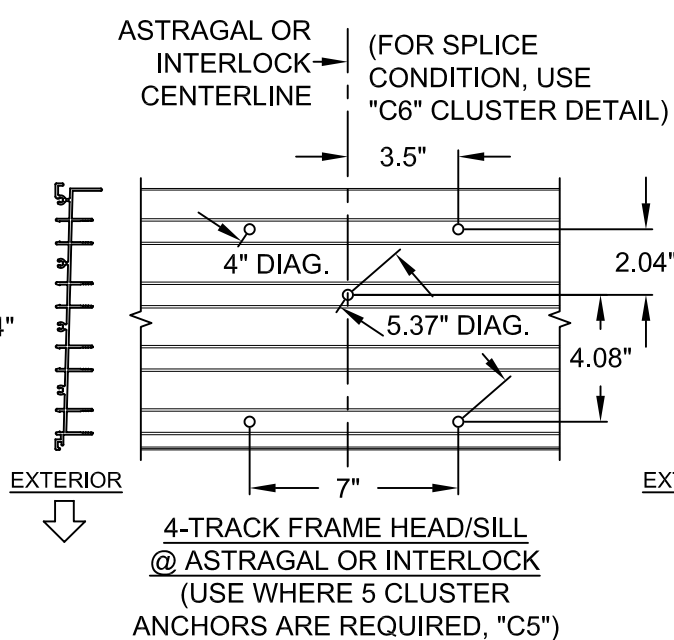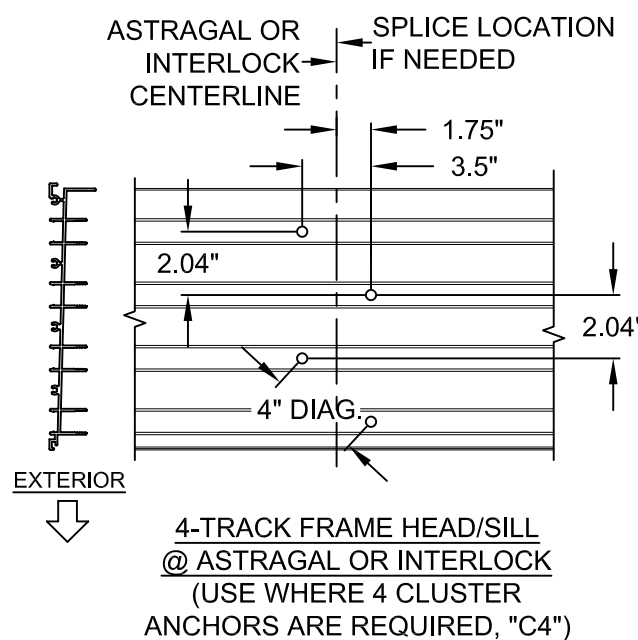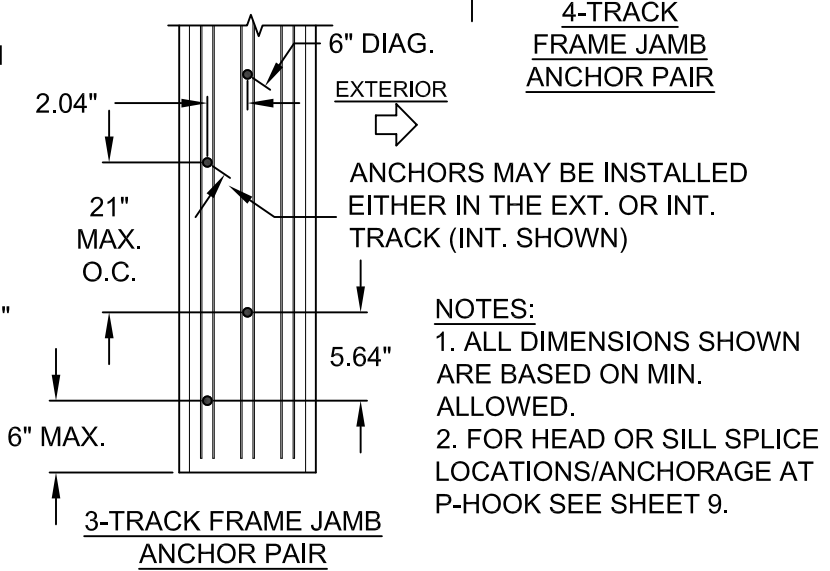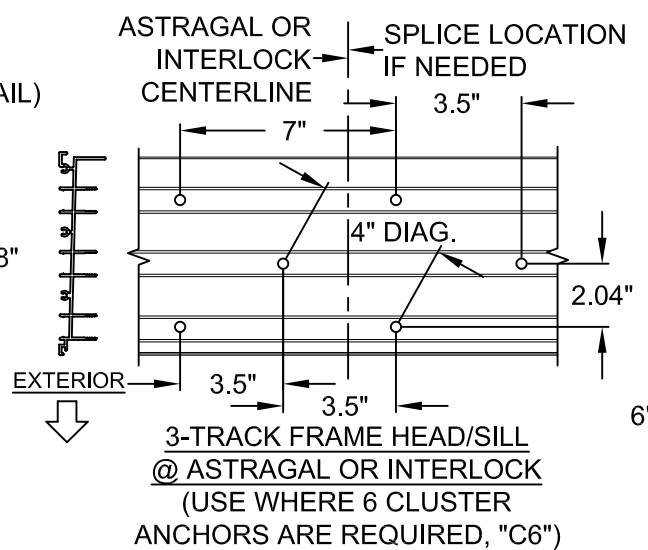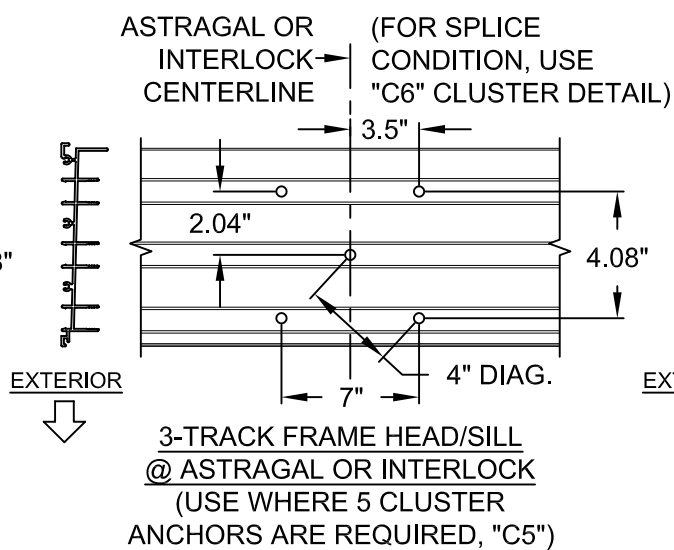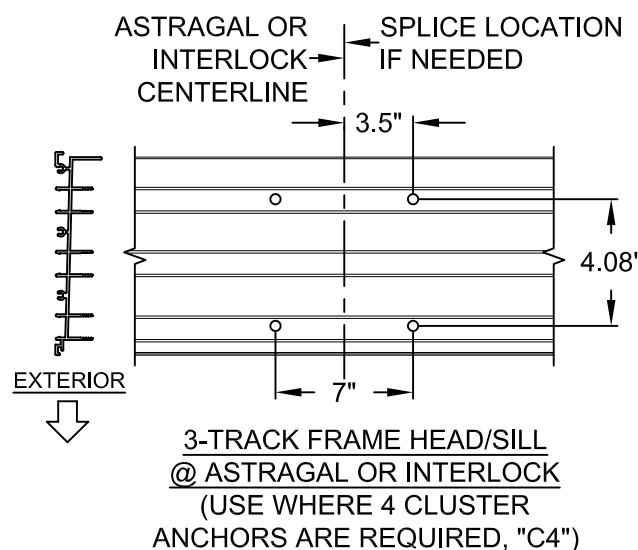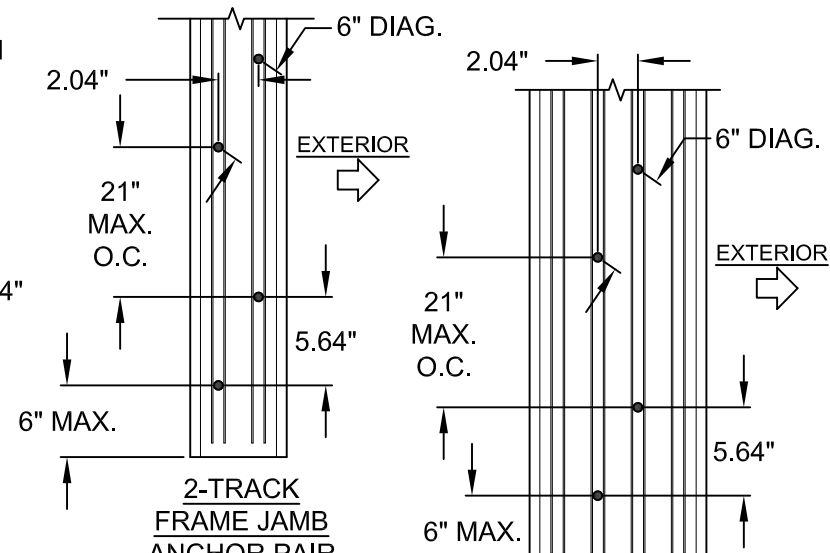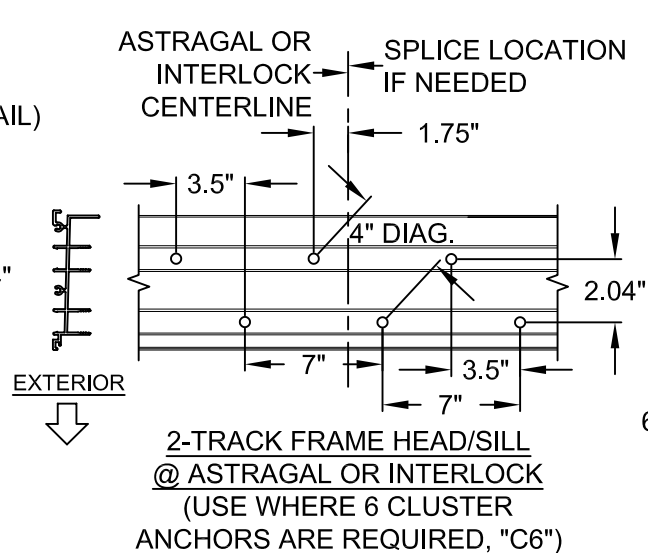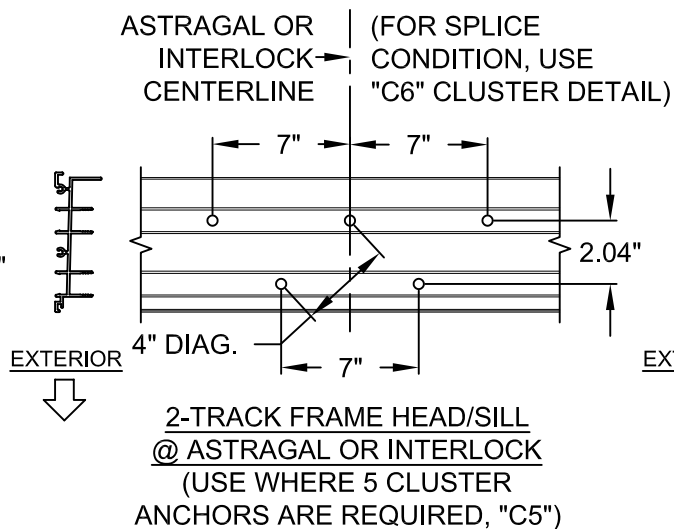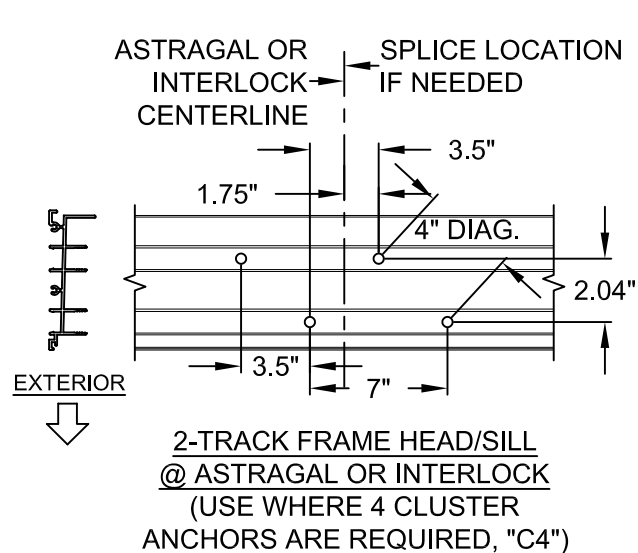

**NOTES:**

1. ALL DIMENSIONS SHOWN ARE BASED ON MIN. ALLOWED.

2. FOR HEAD OR SILL SPLICE LOCATIONS/ANCHORAGE AT P-HOOK SEE SHEET 9.



**PRODUCT REVISED**  
as complying with the Florida Building Code  
**NOA-No. 22-0407.11**  
**Expiration Date: 02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

Revision:


1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.


1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	02/28/22	JENS ROSOWSKI	PGT0129	E
ALUM. SLIDING GLASS WINDOW (LM)	10 OF 22	ANCHORAGE - CLUSTERS	SGD-770W	Sheet
REGISTRATION #29296	DATE	DRAWN BY	NO.	DWG.
ALUM. SLIDING GLASS WINDOW (LM)	02/28/22	JENS ROSOWSKI	PGT0129	E
ANCHORAGE - CLUSTERS				
SGD-770W				

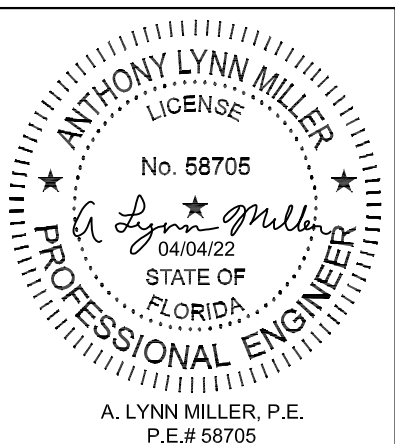




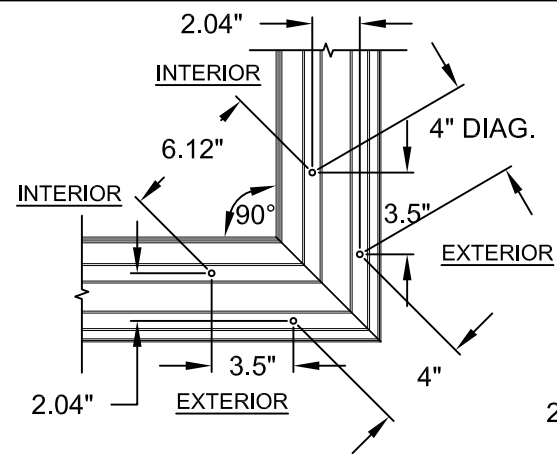


90° CORNER  
2-TRACK FRAME HEAD/SILL  
(USE WHERE 4 CLUSTER  
ANCHORS ARE REQUIRED, "C4")

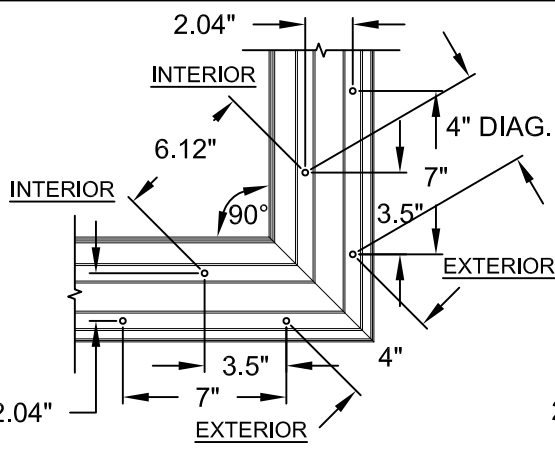




90° CORNER  
2-TRACK FRAME HEAD/SILL  
(USE WHERE 5 OR 6 CLUSTER  
ANCHORS ARE REQUIRED, "C6")

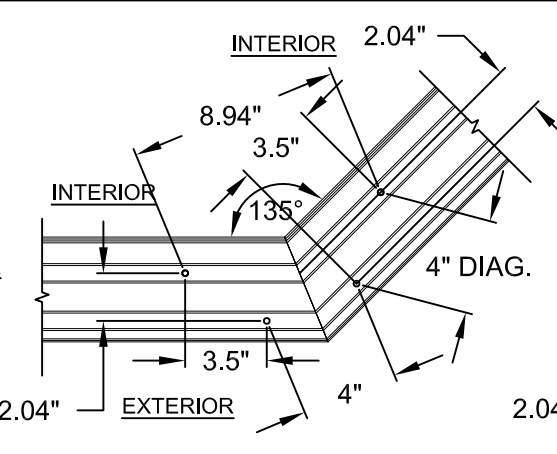


135° CORNER  
2-TRACK FRAME HEAD/SILL  
(USE WHERE 4 CLUSTER  
ANCHORS ARE REQUIRED, "C4")

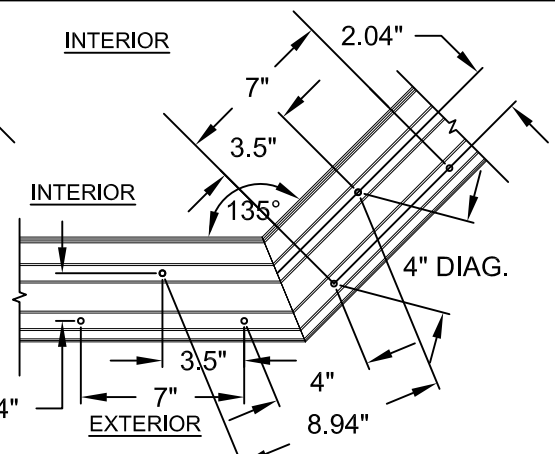


135° CORNER  
2-TRACK FRAME HEAD/SILL  
(USE WHERE 5 OR 6 CLUSTER  
ANCHORS ARE REQUIRED, "C6")

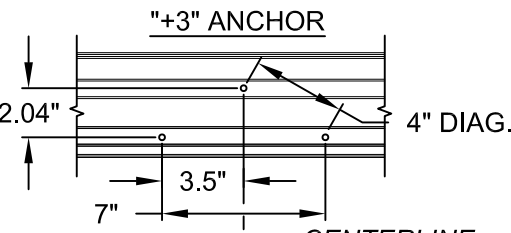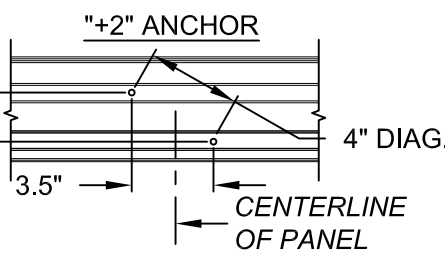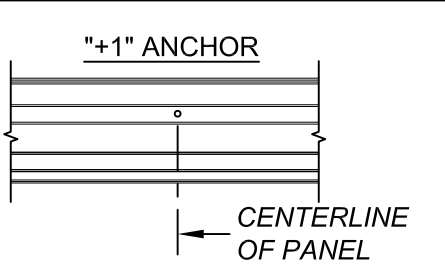

2-TRACK FRAME HEAD/SILL  
INTERMEDIATE ANCHOR LAYOUT



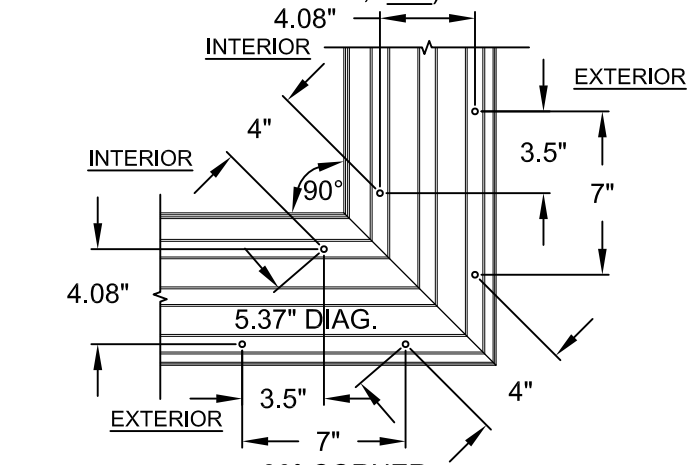


90° CORNER  
3-TRACK FRAME HEAD/SILL  
("C6" ANCHOR CLUSTER REQUIRED  
AT ALL 3-TRACK CORNERS)

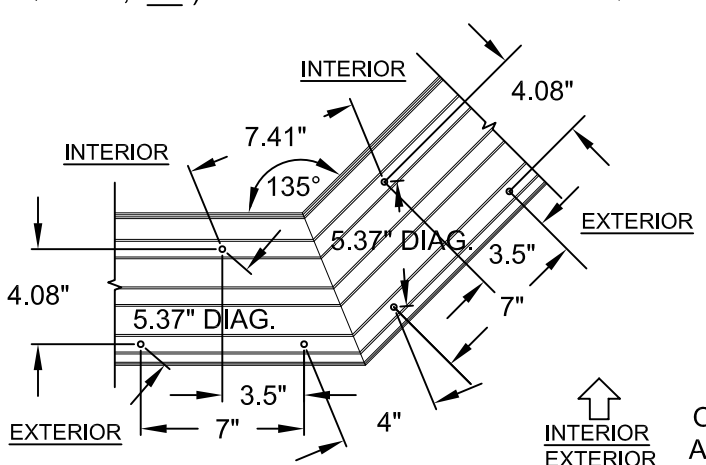


135° CORNER  
3-TRACK FRAME HEAD/SILL  
("C6" ANCHOR CLUSTER REQUIRED  
AT ALL 3-TRACK CORNERS)


ON  
ALL  
VIEWS  
↑  
INTERIOR  
↓  
EXTERIOR

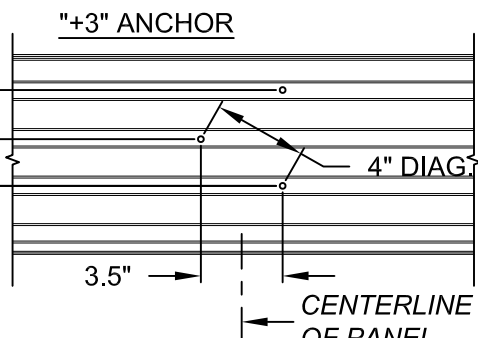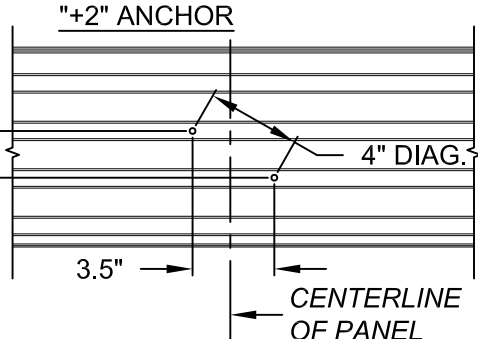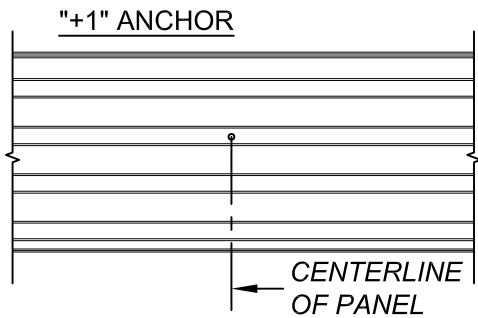

4-TRACK FRAME HEAD/SILL  
INTERMEDIATE ANCHOR LAYOUT  
(3-TRACK SIMILAR)

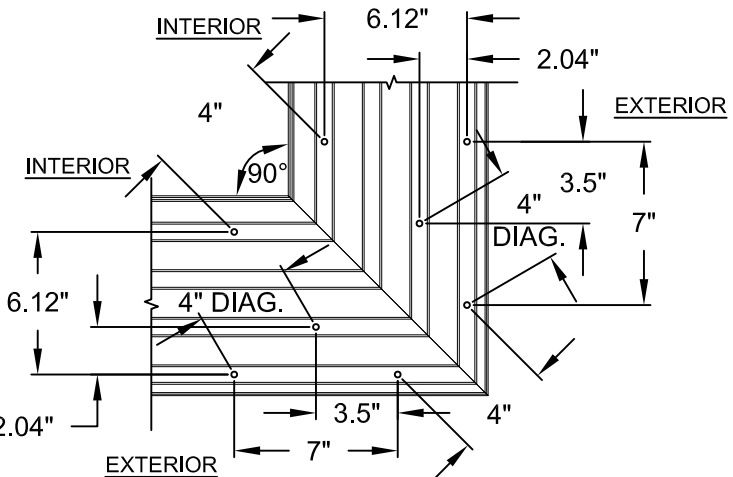

90° CORNER  
4-TRACK FRAME HEAD/SILL  
("C8" ANCHOR CLUSTER REQUIRED  
AT ALL 4-TRACK CORNERS)

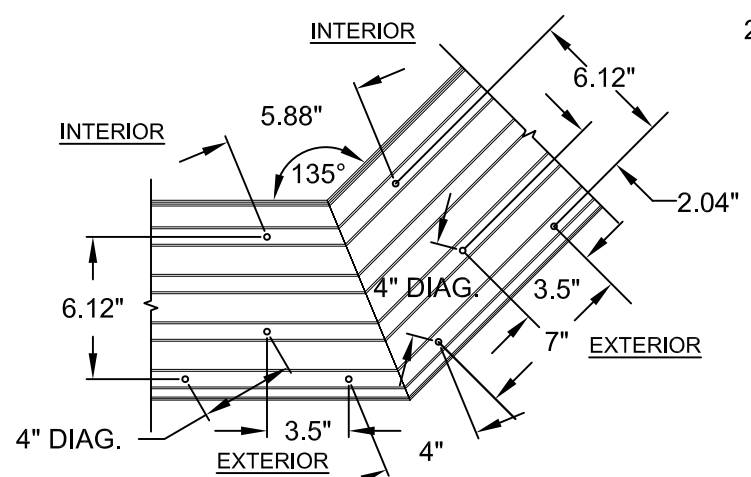



135° CORNER  
4-TRACK FRAME HEAD/SILL  
("C8" ANCHOR CLUSTER REQUIRED  
AT ALL 4-TRACK CORNERS)

NOTES:  
1. ALL DIMENSIONS SHOWN ARE BASED ON MINIMUM ALLOWED.  
2. DETAILS DEPICT ANCHOR QUANTITY AND SPACING, AND WOULD BE IDENTICAL FOR EXTERIOR OR INTERIOR CORNER CONFIGURATIONS.


**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

Revision:


			1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600		
REGISTRATION #29296			COPYRIGHT © 2022 PGT INDUSTRIES, INC.		
ALUM. SLIDING GLASS WINDOW (LM)		Date		02/28/22	
ANCHORAGE - CLUSTERS		Drawn By		JENS ROSOWSKI	
SGD-770W		11 OF 22		PGT0129	
Sheet		DWG No.		Rev.	
Series		Desc.		E	

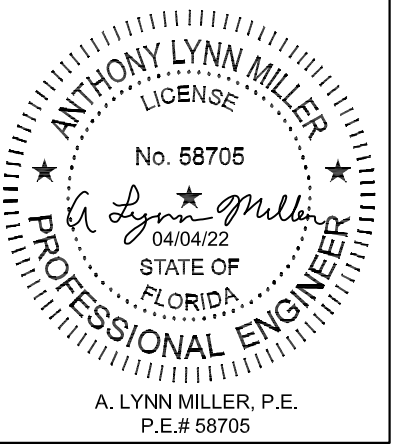


INSTALLATION DETAILS

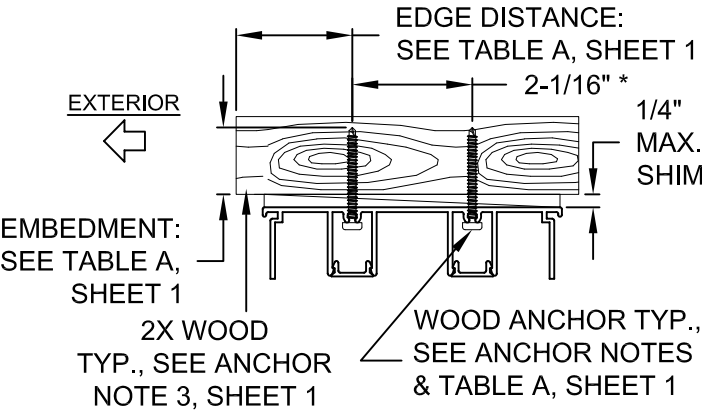

DET Aw 2-TRACK FRAME HEAD WOOD INSTALLATION

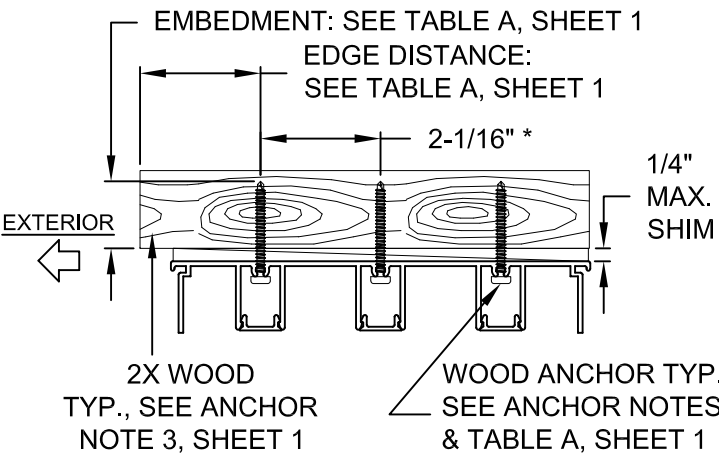


DET Bw 3-TRACK FRAME HEAD WOOD INSTALLATION

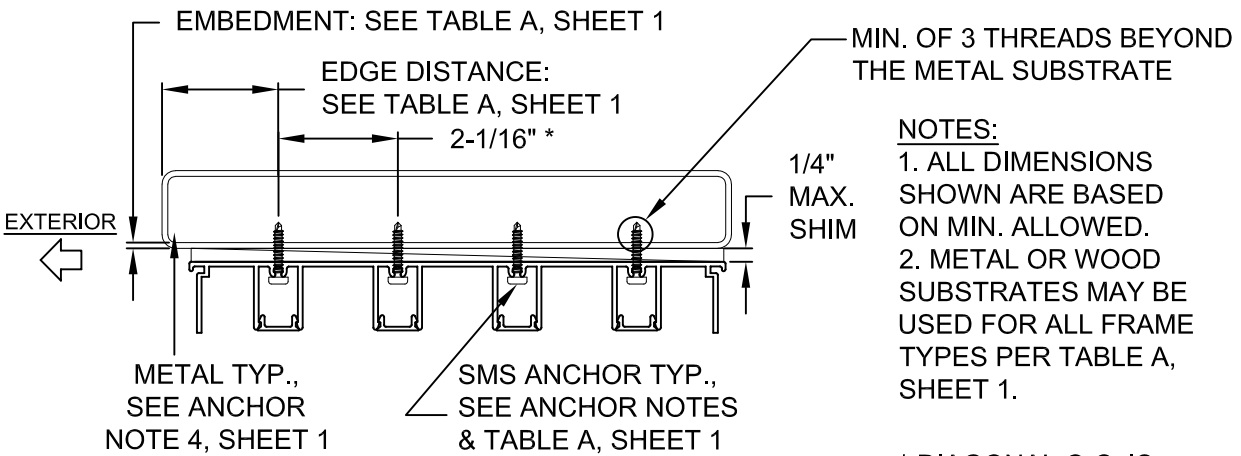


DET Cw 4-TRACK FRAME HEAD METAL INSTALLATION


NOTES:  
1. ALL DIMENSIONS SHOWN ARE BASED ON MIN. ALLOWED.  
2. METAL OR WOOD SUBSTRATES MAY BE USED FOR ALL FRAME TYPES PER TABLE A, SHEET 1.  
  
\* DIAGONAL O.C. IS MIN 4" (HEAD & SILL) OR 6" (JAMB) SEE DETAILS, SHEETS 10 & 11.

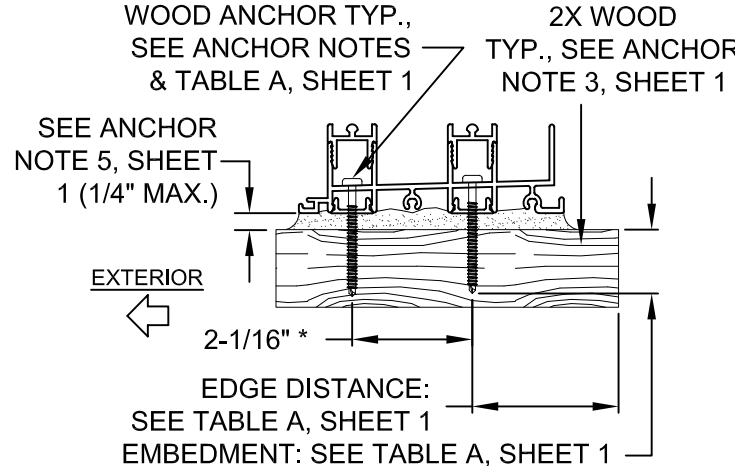


DET Dw 2-TRACK FRAME SILL WOOD INSTALLATION

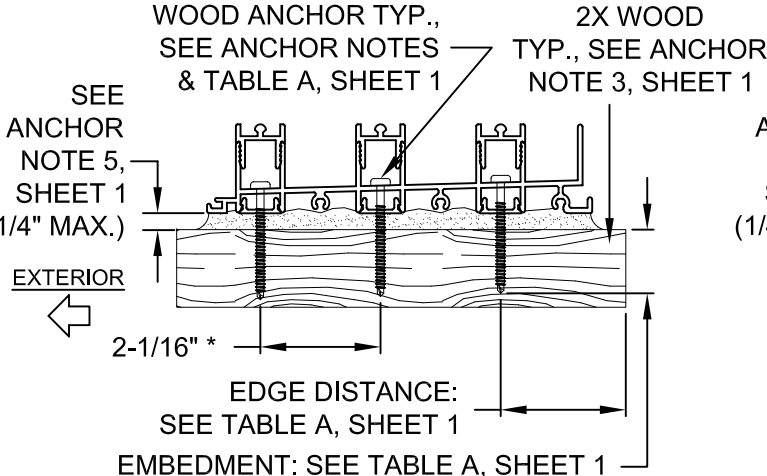


DET Ew 3-TRACK FRAME SILL WOOD INSTALLATION

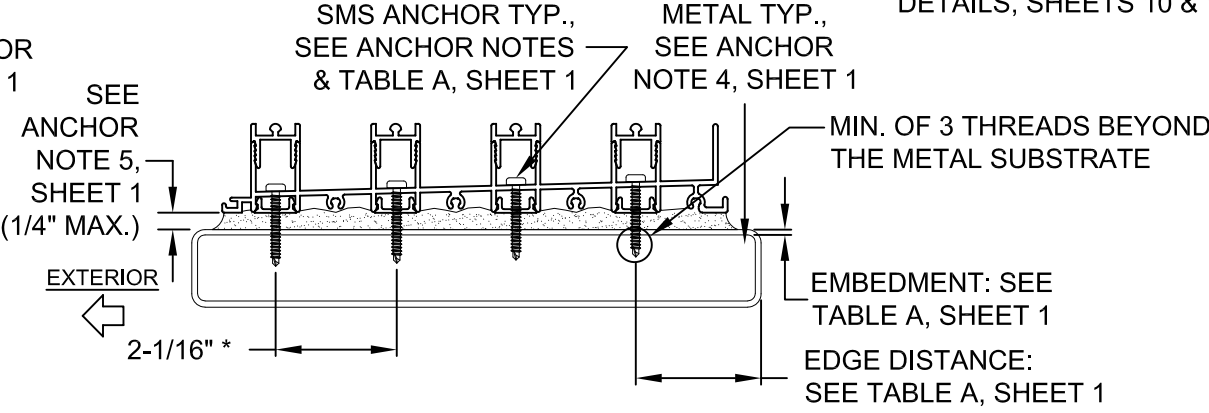


DET Fw 4-TRACK FRAME SILL METAL INSTALLATION

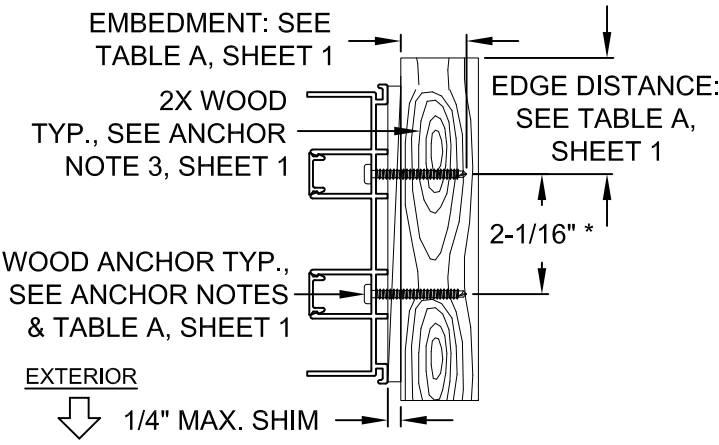

DET Gw 2-TRACK FRAME JAMB WOOD INSTALLATION

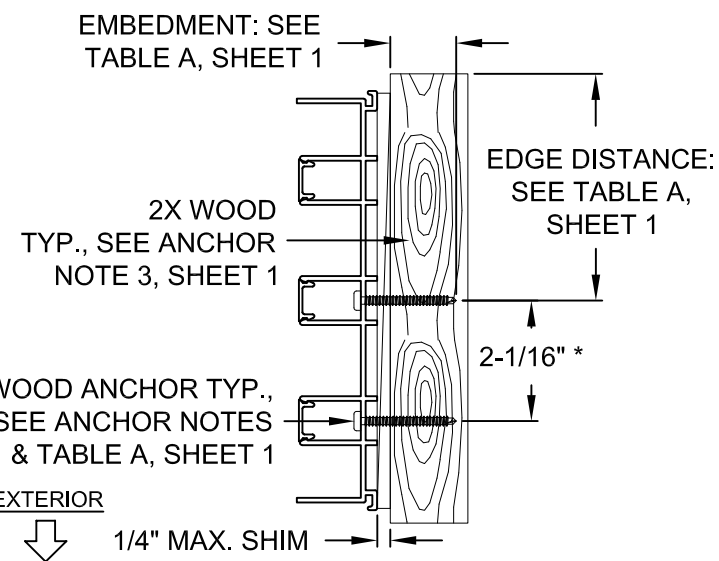


DET Hw 3-TRACK FRAME JAMB WOOD INSTALLATION

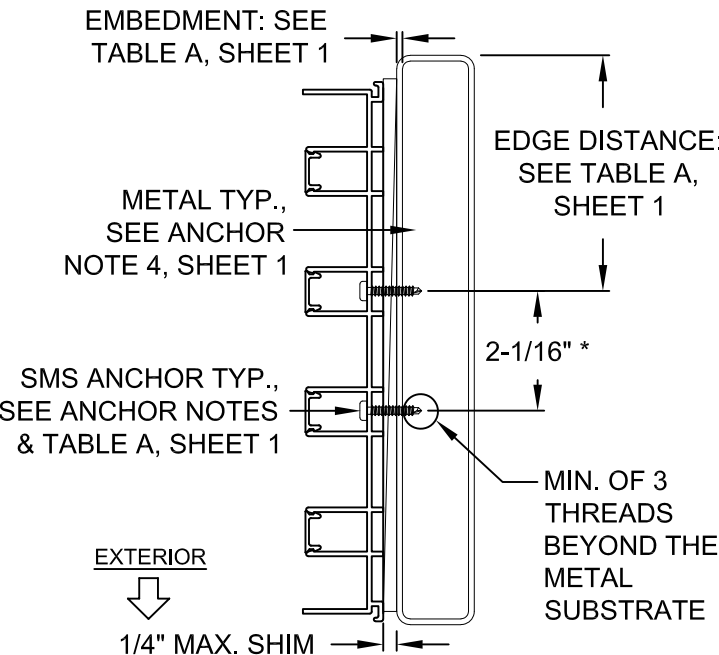


DET Iw 4-TRACK FRAME JAMB METAL INSTALLATION

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	COPYRIGHT © 2022 PGT INDUSTRIES, INC.	02/28/22	JENS ROSOWSKI	PGT0129	E
ALUM. SLIDING GLASS WINDOW (LM)	REGISTRATION #29296	12 OF 22	ANCHORAGE DETAILS	SGD-770W	Sheet


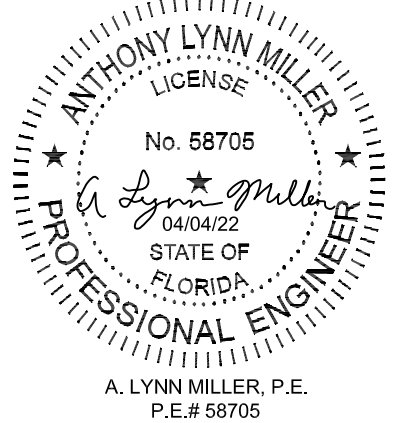


INSTALLATION DETAILS

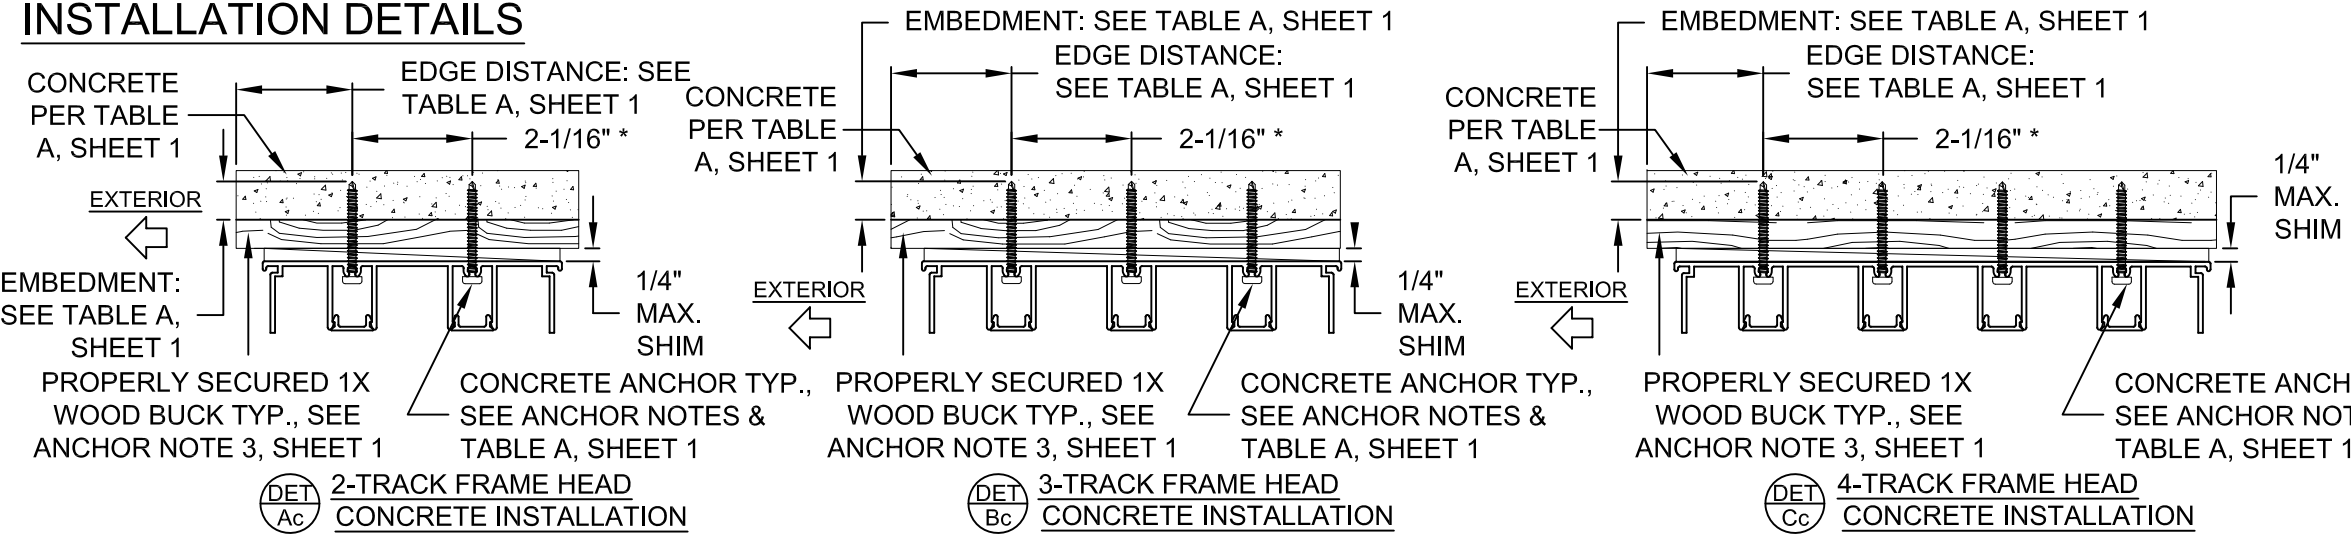


NOTES:  
1. ALL DIMENSIONS SHOWN ARE BASED ON MIN. ALLOWED.  
\* DIAGONAL O.C. IS MIN 4" (HEAD & SILL) OR 6" (JAMB) SEE DETAILS, SHEETS 10 & 11.

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

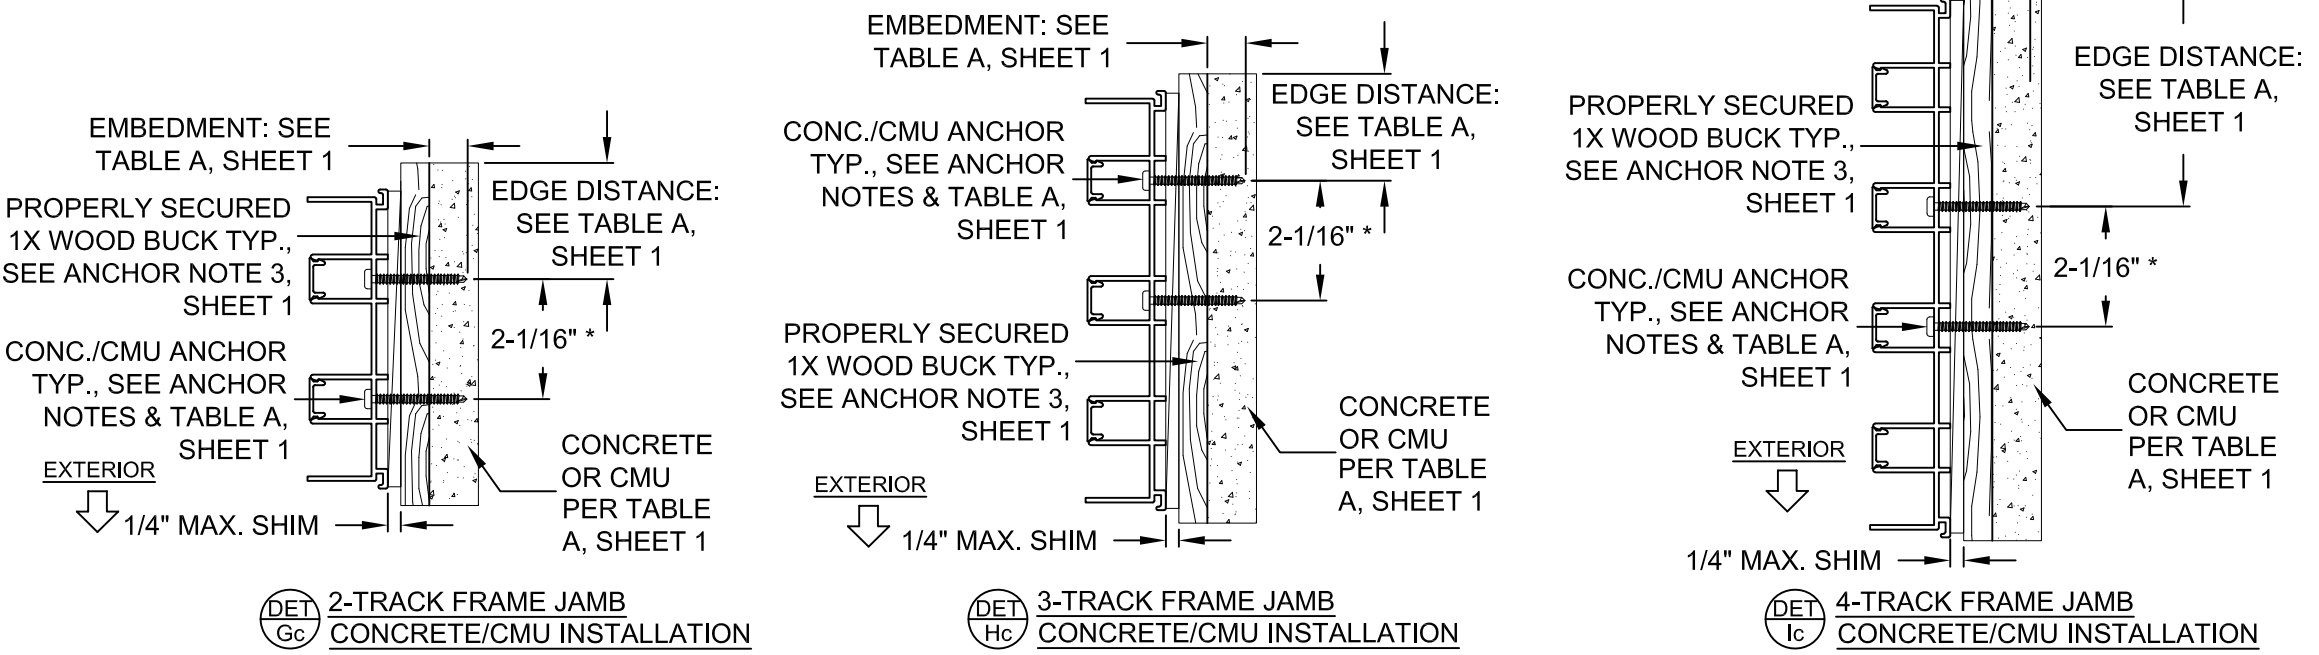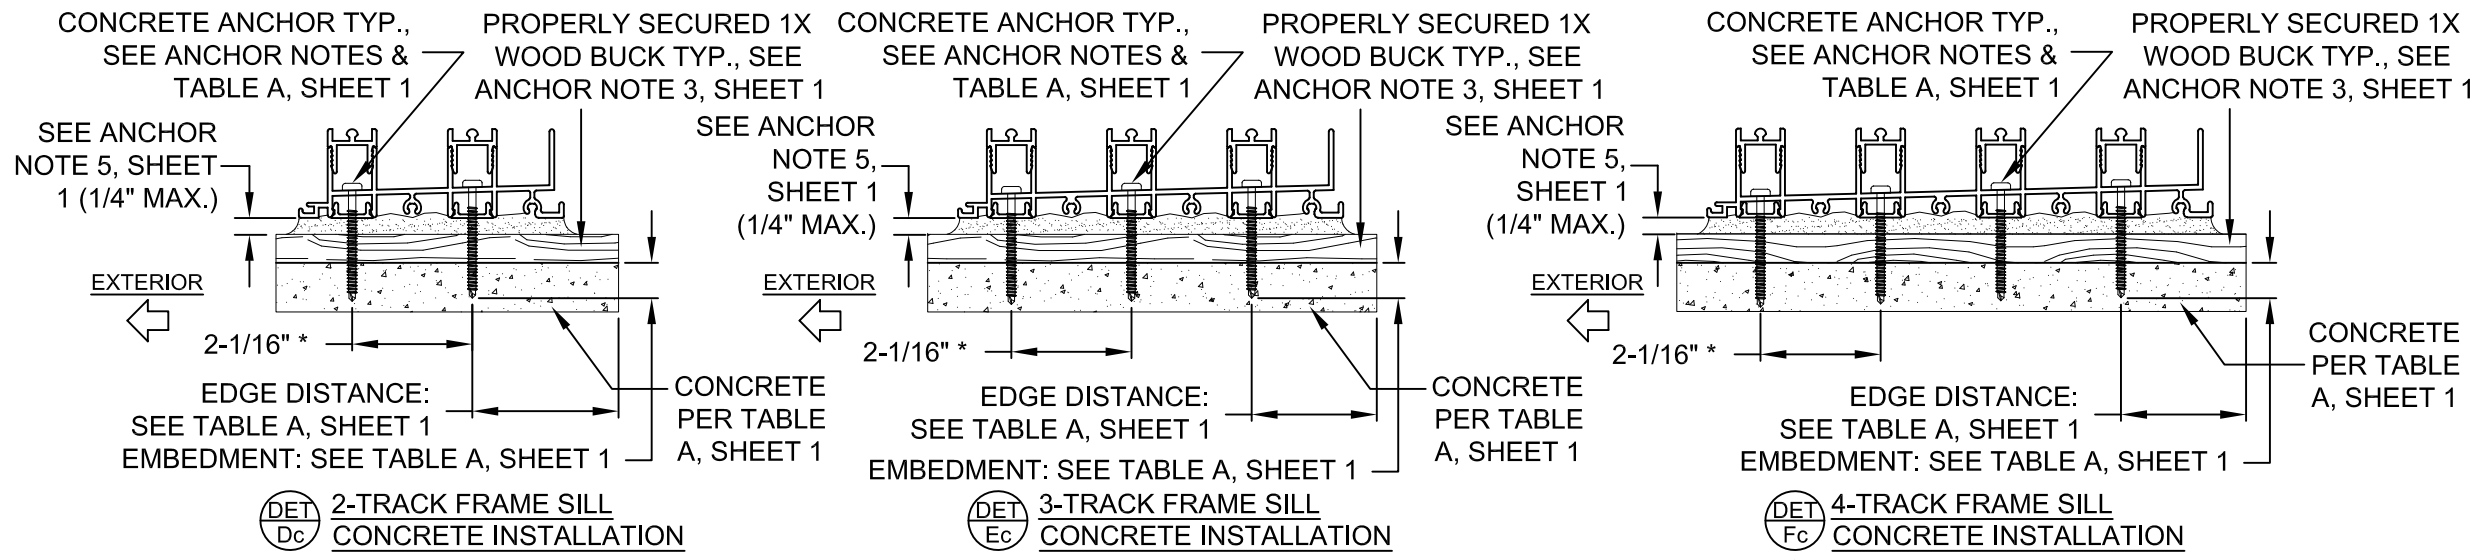


Revision:		1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600		COPYRIGHT © 2022 PGT INDUSTRIES, INC.		02/28/22		JENS ROSOWSKI		PGT0129		E	
		ALUM. SLIDING GLASS WINDOW (LM)		ANCHORAGE DETAILS		13 OF 22		SGD-770W		Rev.		No.	
										Date		By	
										Dwg		Title	

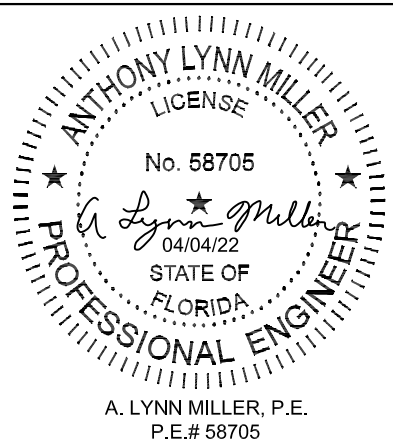





INSTALLATION DETAILS

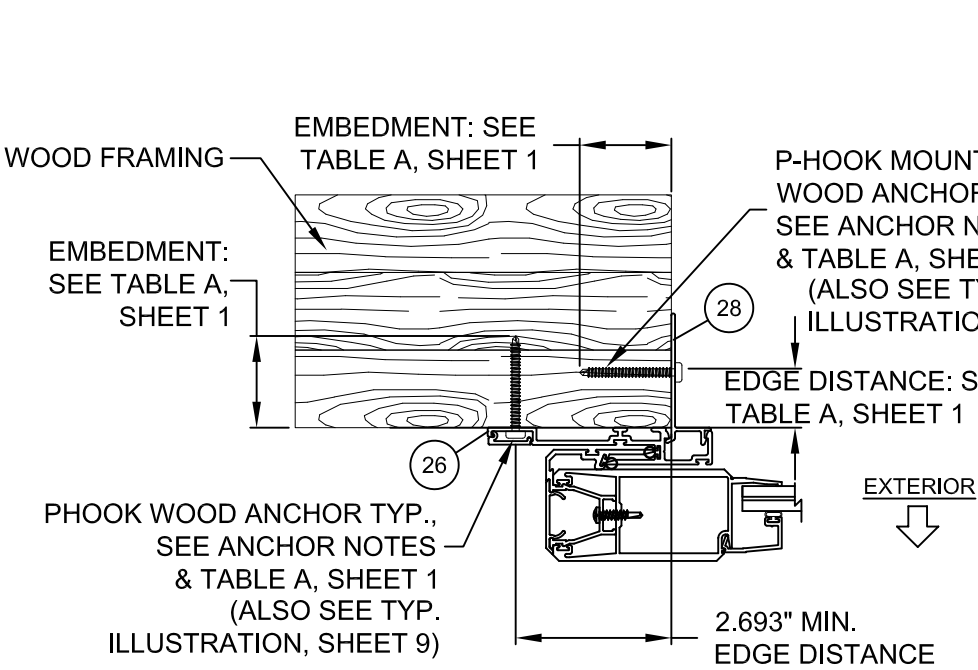


DET Jw P-HOOK FOR USE WITH FLAT SILL RISERS PARTS #18, #20, #22 OR #24, WOOD INSTALLATION (SEE TABLES 1A, 2A & 3A FOR WATER RATINGS) EXTERIOR MOUNT SHOWN, MAY ALSO BE INSTALLED IN INTERIOR CONDITION

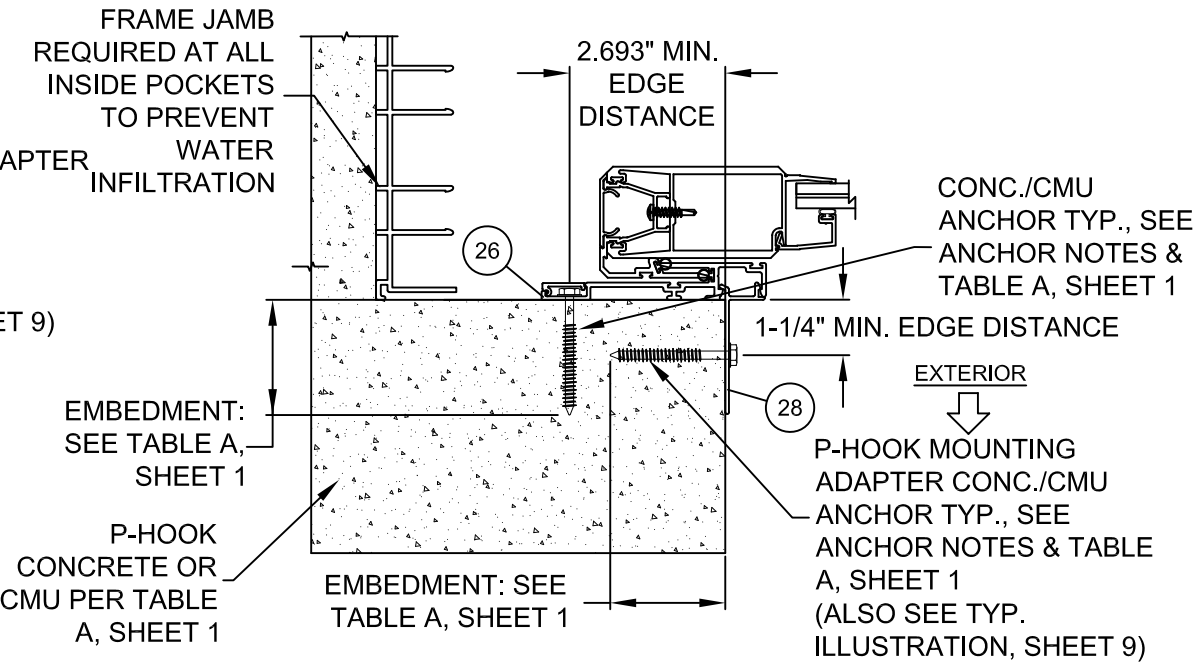

DET Jc P-HOOK FOR USE WITH ANY SILL RISER PARTS #18, #20, #22 OR #24, CONCRETE/CMU INSTALLATION (SEE TABLES 1A, 2A & 3A FOR WATER RATINGS) INTERIOR MOUNT SHOWN, MAY ALSO BE INSTALLED IN EXTERIOR CONDITION

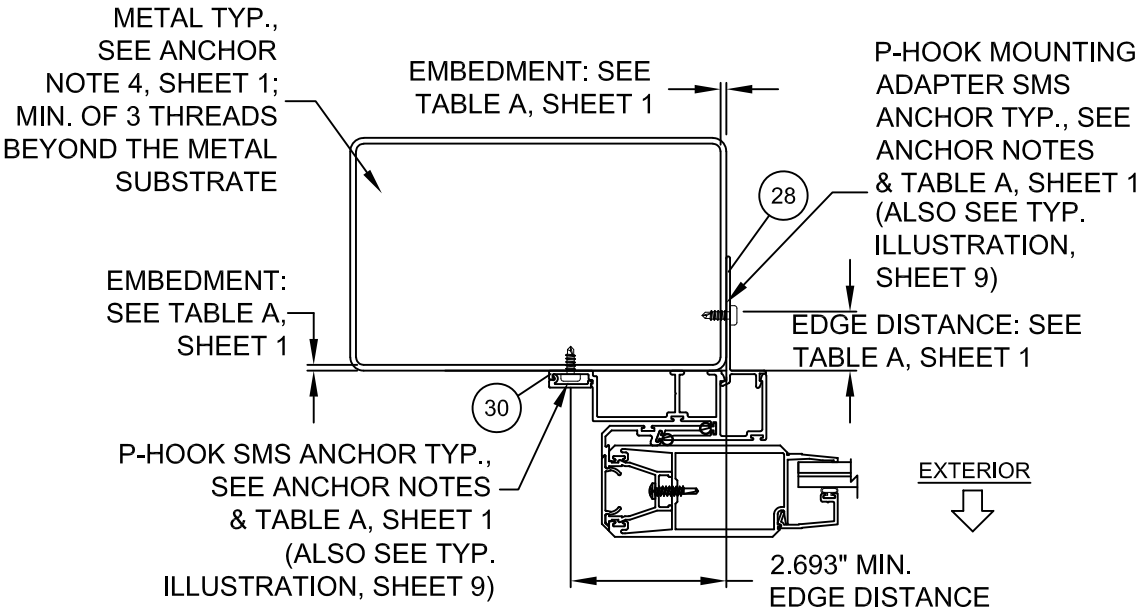

DET Kw P-HOOK FOR USE WITH BOX SILL RISERS PARTS #19, #21, #23 OR #25, METAL INSTALLATION (SEE TABLES 1A, 2A & 3A FOR WATER RATINGS) EXTERIOR MOUNT ONLY

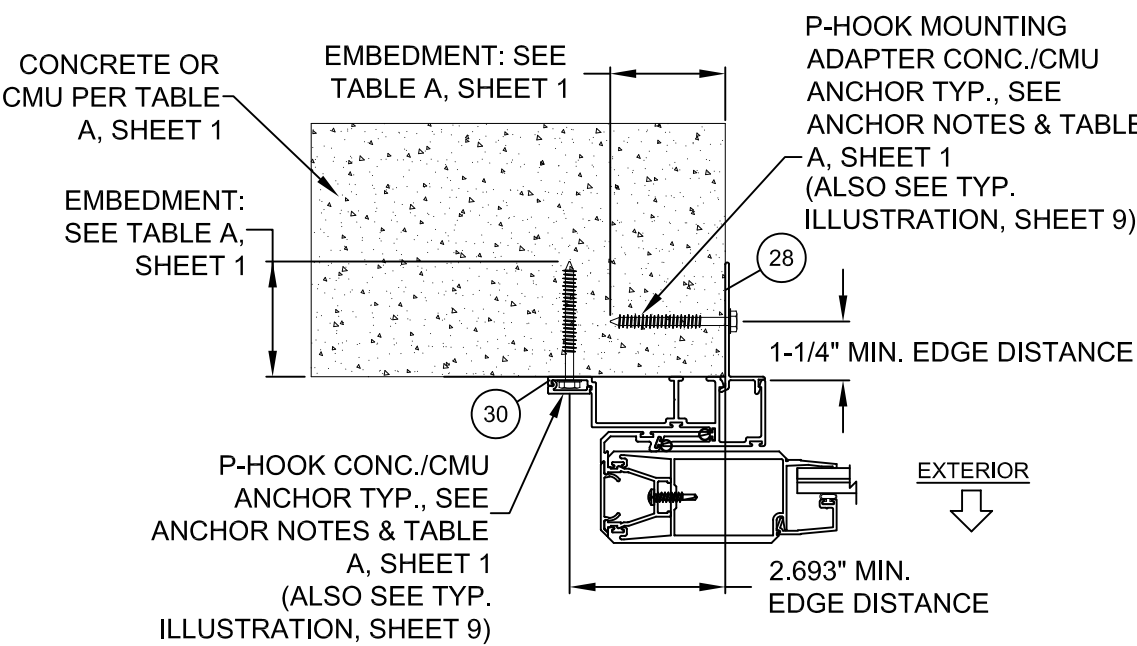

DET Kc P-HOOK FOR USE WITH BOX SILL RISERS PARTS #19, #21, #23 OR #25, CONCRETE INSTALLATION (SEE TABLES 1A, 2A & 3A FOR WATER RATINGS) EXTERIOR MOUNT ONLY

- NOTES:
1. ALL DIMENSIONS SHOWN ARE BASED ON MIN. ALLOWED.
2. FIGURES ON THIS SHEET ARE FOR ILLUSTRATIVE PURPOSES ONLY. SEE TABLE A, SHEET 1 FOR ALL APPROVED SUBSTRATES.
3. SEE TABES 1-3, SHEETS 6-8 FOR REQUIRED P-HOOK AND P-HOOK MOUNTING ADAPTER ANCHOR QUANTITIES. ALSO SEE EXAMPLE ON SHEET 9.

Revision:

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

REGISTRATION #29296

ALUM. SLIDING GLASS WINDOW (LM)

ANCHORAGE DETAILS

SGD-770W

02/28/22

JENS ROSOWSKI

14 OF 22

PGT0129

E

ANTHONY LYNN MILLER

LICENSE

No. 58705

04/04/22






STATE OF FLORIDA

PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.  
P.E.# 58705

HEADER BLOCK TO HEADER ATTACHMENT  
TO PREVENT ANY EXTERIOR-OPERABLE  
PANEL FROM DISLODGING TO THE  
EXTERIOR, INSTALL ONE HEADER BLOCK  
AT EACH INTERLOCK, ASTRAGAL AND  
P-HOOK INTO THE EXTERIOR TRACK OF THE  
HEADER. TRIM THE SCREW COVER AS  
NEEDED.

EXAMPLE: HEADER BLOCK PLACEMENT IN  
3-PANEL CONFIGURATION, OTHERS SIMILAR.

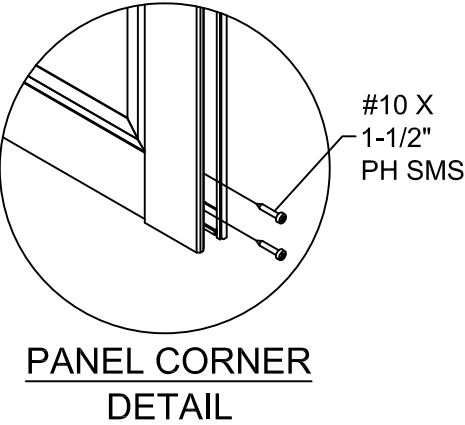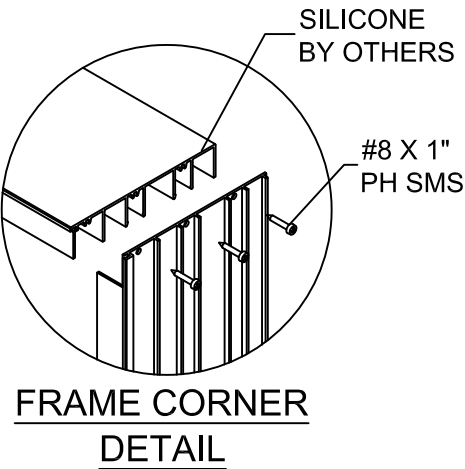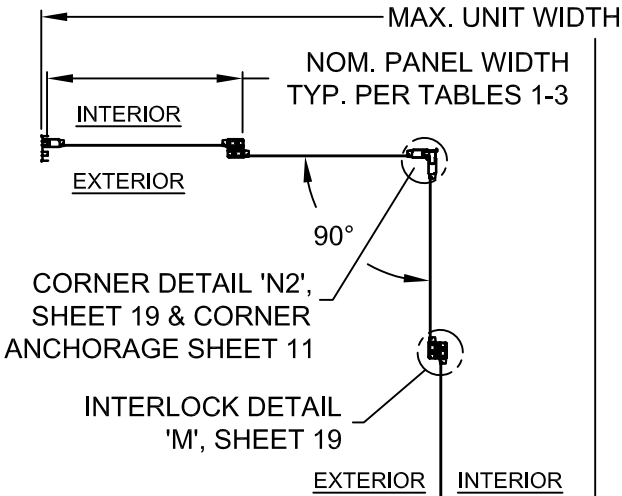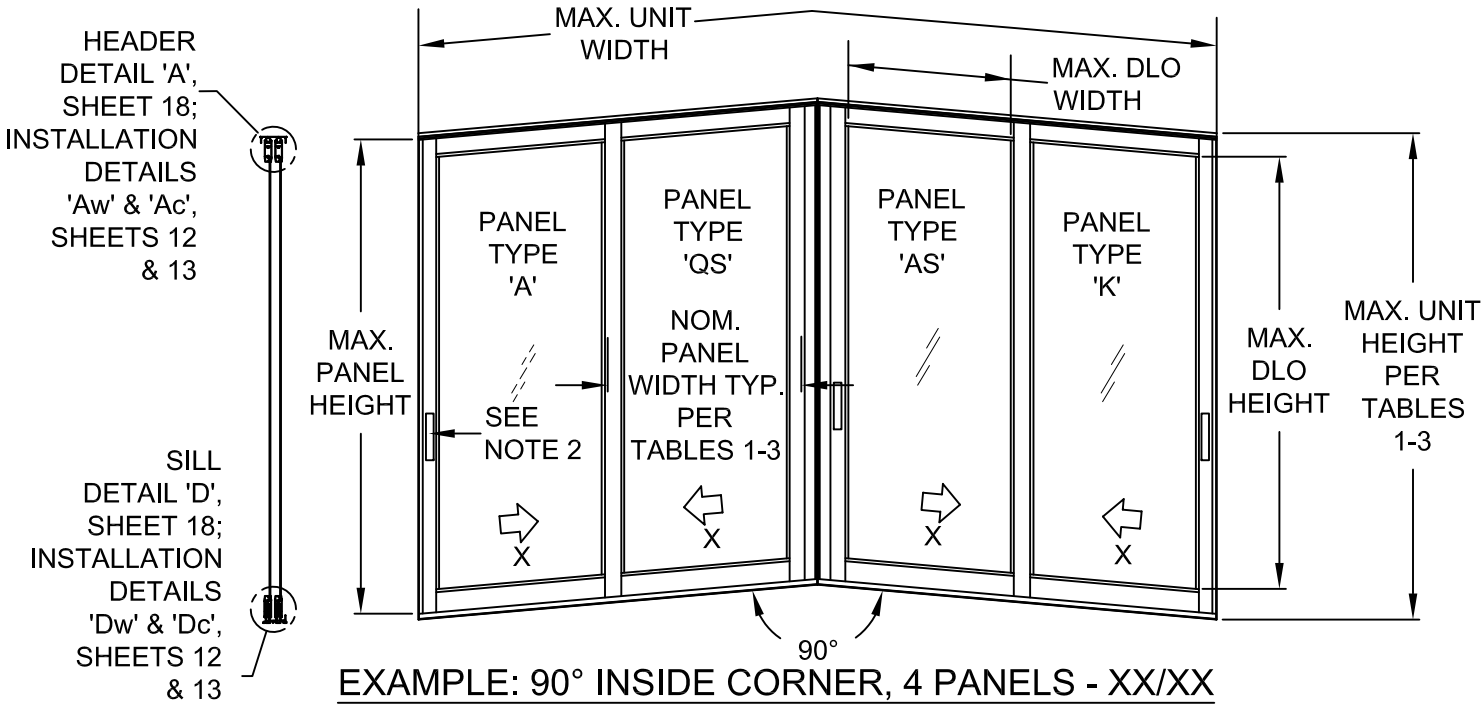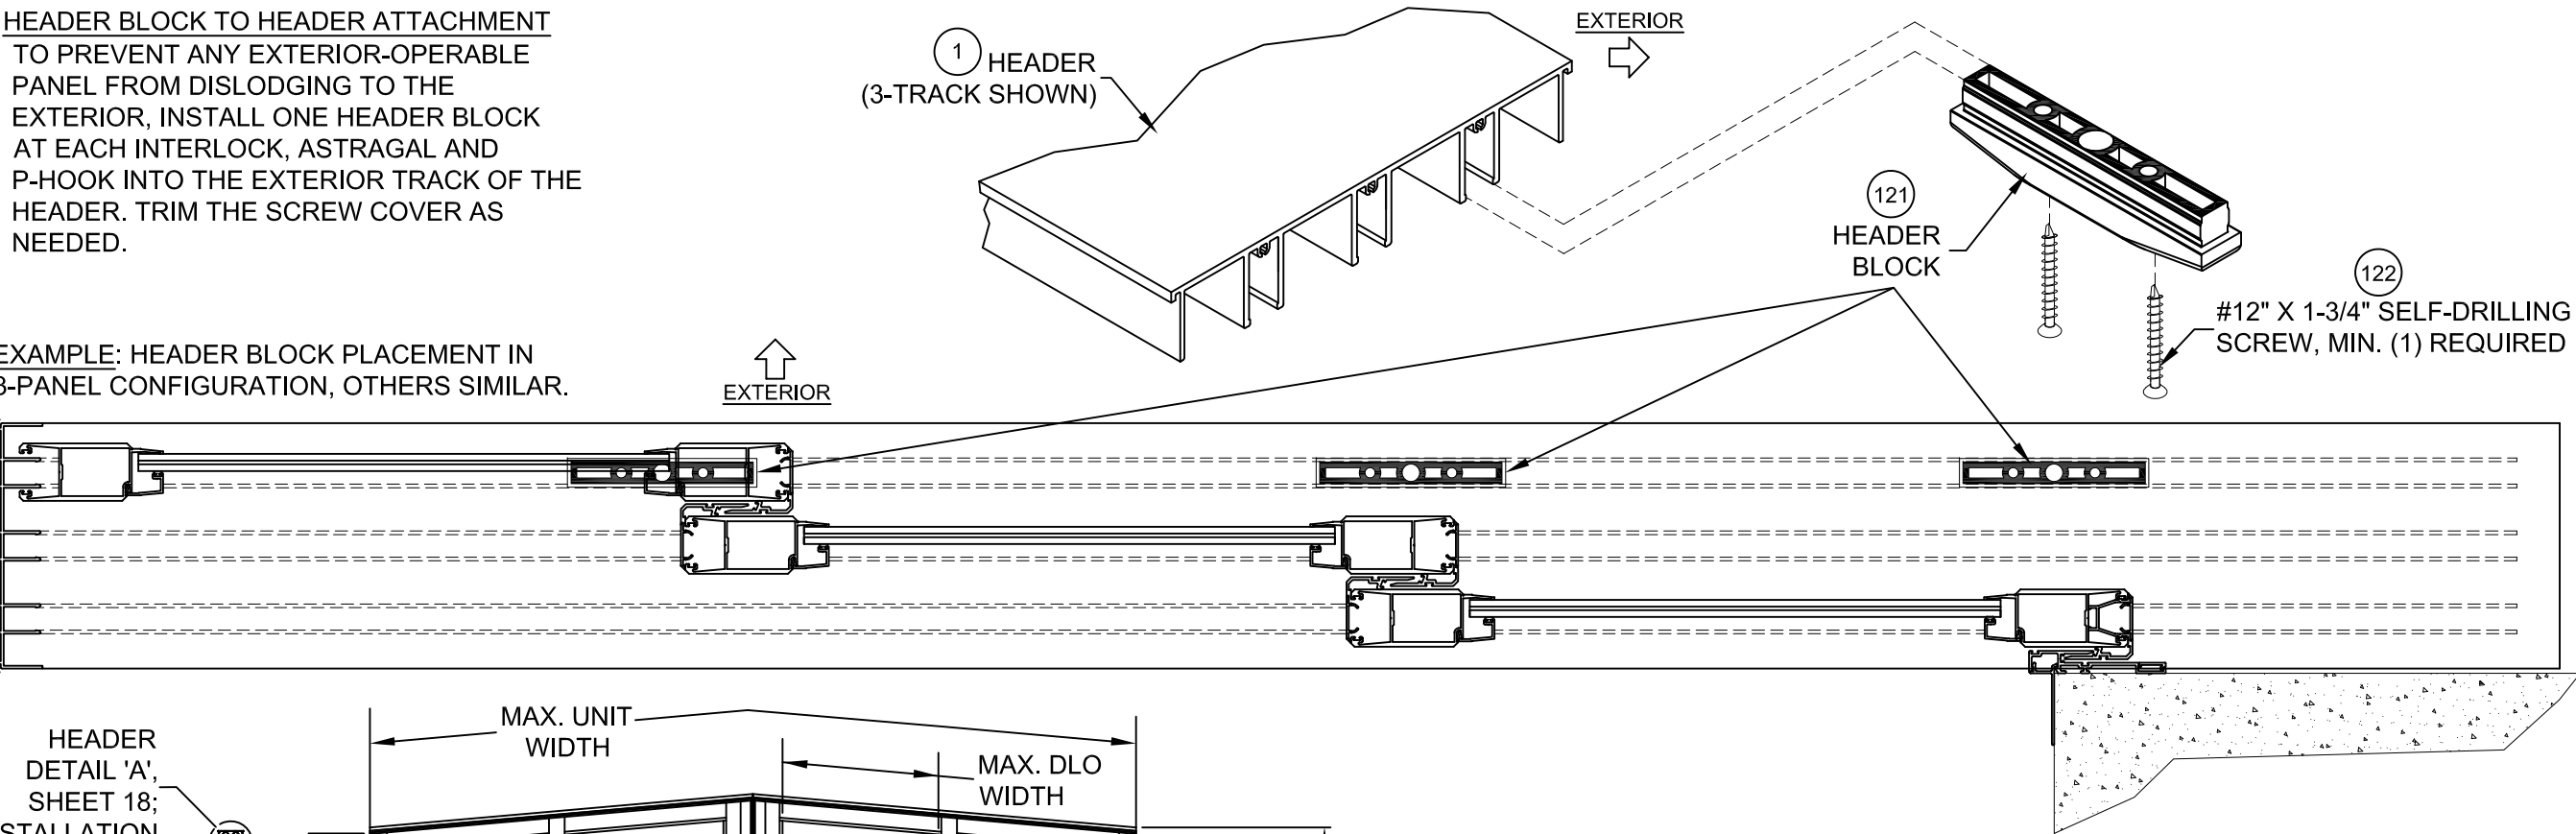


- NOTES:
- 1) SEE SHEET 17 FOR INDIVIDUAL PANEL CONFIGURATIONS AS APPLICABLE. SEE DP/ANCHOR TABLES, SHEETS 6-8 FOR MAX. PANEL HEIGHT AND WIDTH. SEE SHEETS 18 & 19 FOR SECTION DETAILS AND SHEETS 12-14 FOR INSTALLATION DETAILS.
  - 2) (1) LOCK (ITEMS 75 & 107-110) AT EACH LOCKSTILE, LOCKING INTO KEEPER (ITEM 103) AT FRAME JAMB OR ASTRAGAL.
  - 3) PLEASE SEE APPLICABLE ASTRAGAL & INTERLOCK COMBINATIONS PER DP/ANCHOR TABLES.

DLO WIDTH = NOM. PANEL WIDTH - 7"  
DLO HEIGHT = WINDOW UNIT HEIGHT - 10.125"  
PANEL HEIGHT = WINDOW UNIT HEIGHT - 1.866"

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control






Revision:

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	COPYRIGHT © 2022 PGT INDUSTRIES, INC.	02/28/22	JENS ROSOWSKI	E
ALUM. SLIDING GLASS WINDOW (LM)	REGISTRATION #29296	Date	By	No.
EXAMPLE ELAVATION	SGD-770W	15 OF 22	Sheet	PGT0129
Title	Desc.	Series	Title	Series

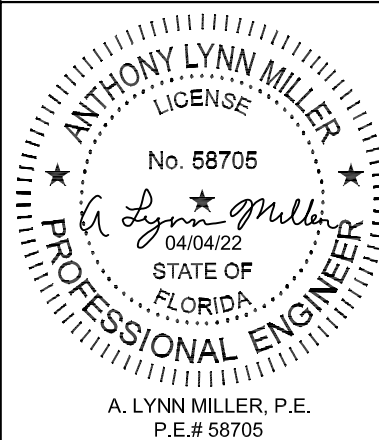


CONFIG. EXAMPLES


FOR ALL DETAILS ON THIS SHEET, SEE NOTES ON SHEET 15

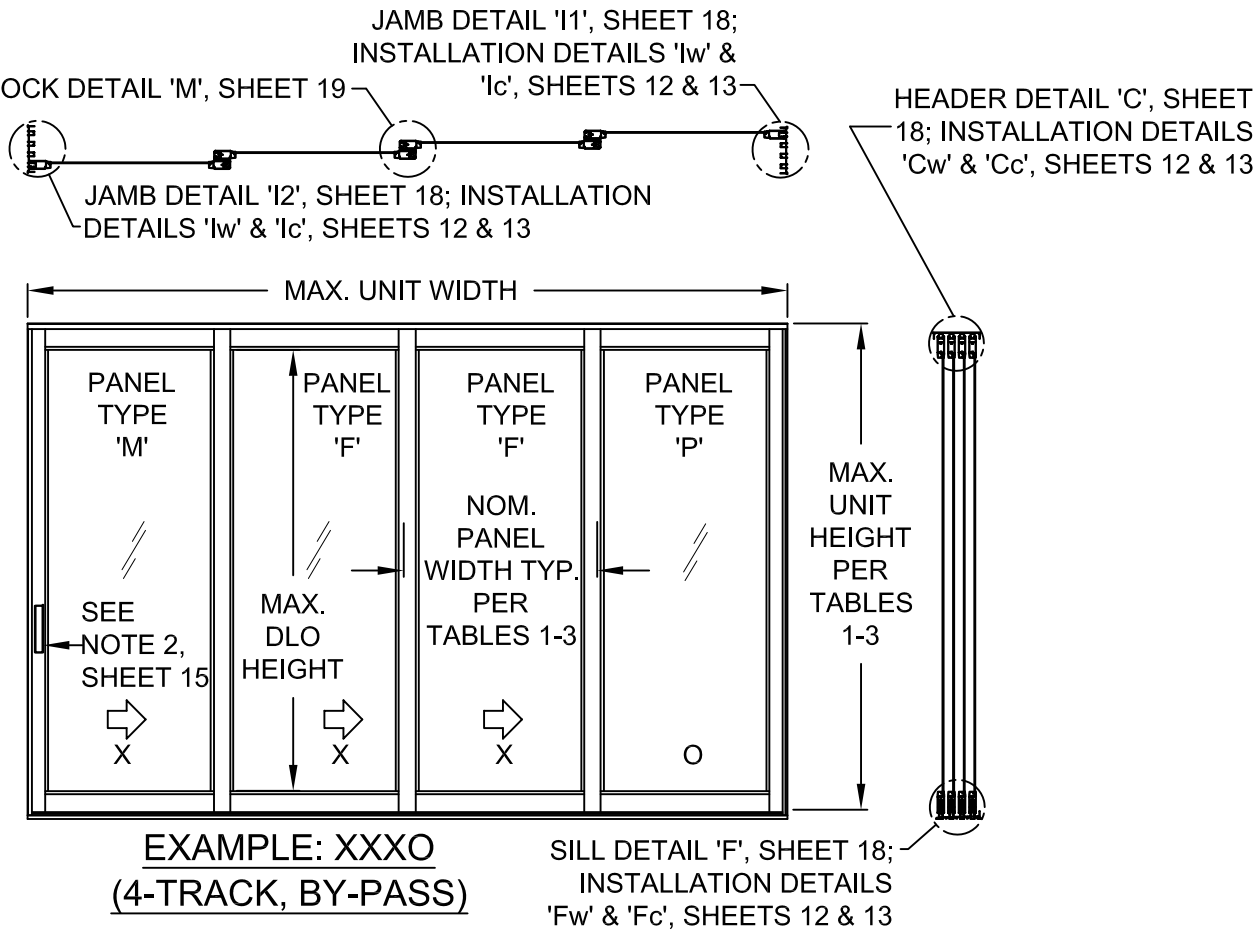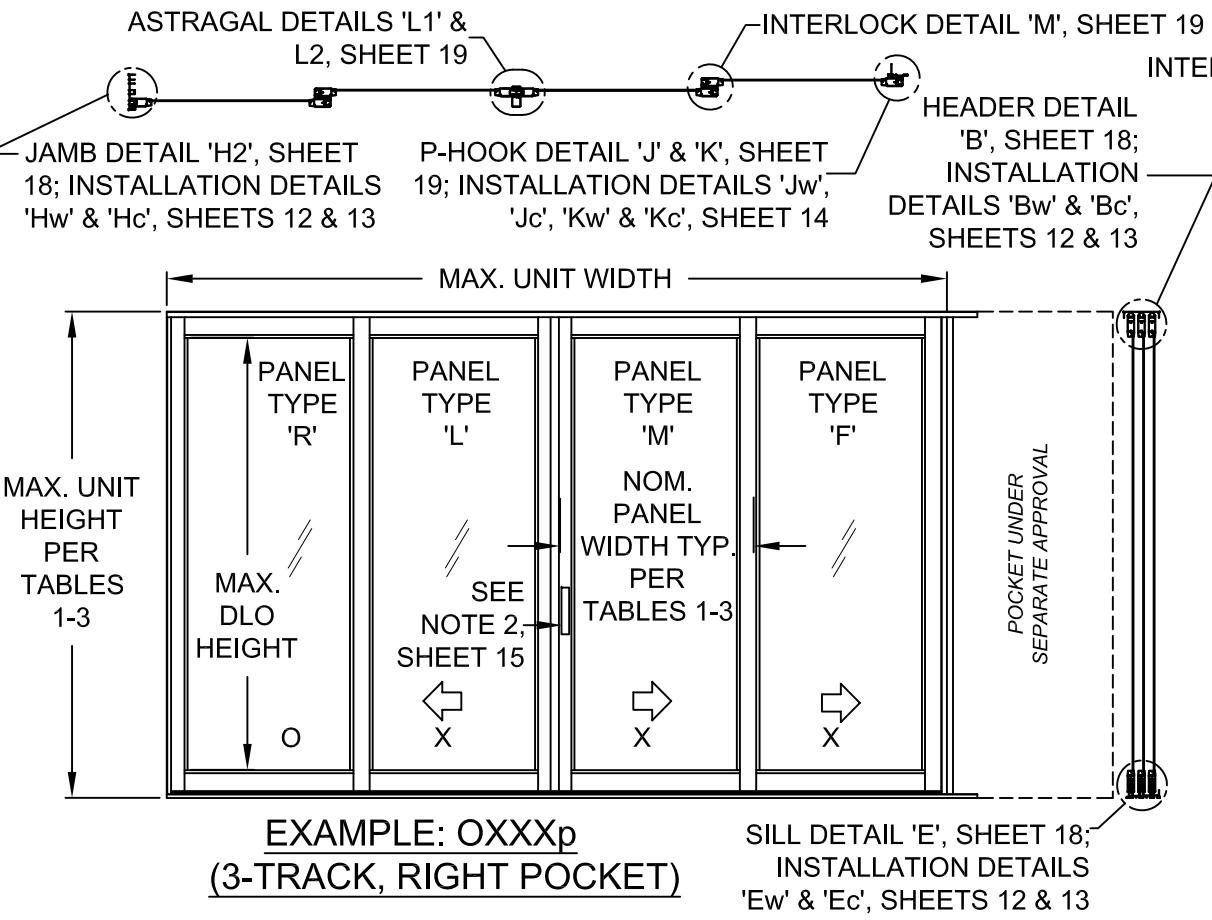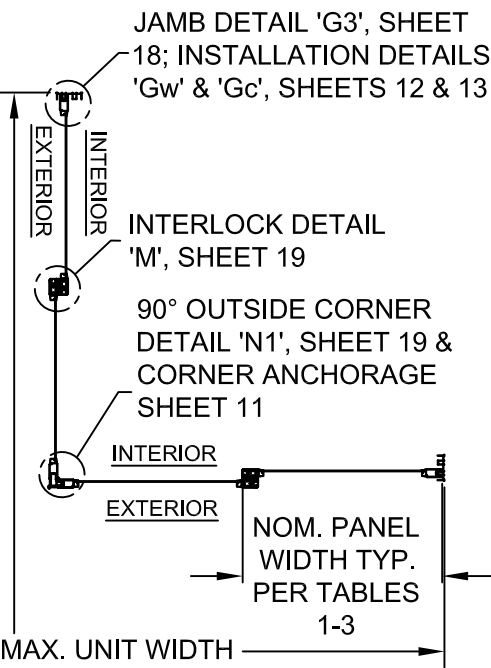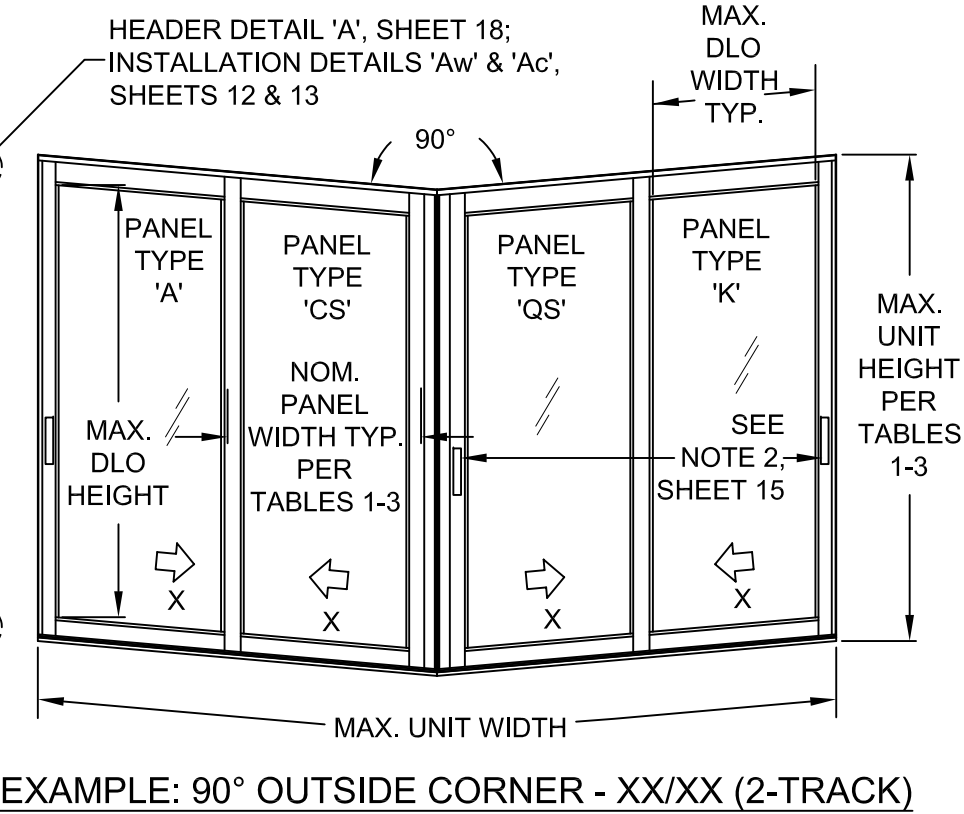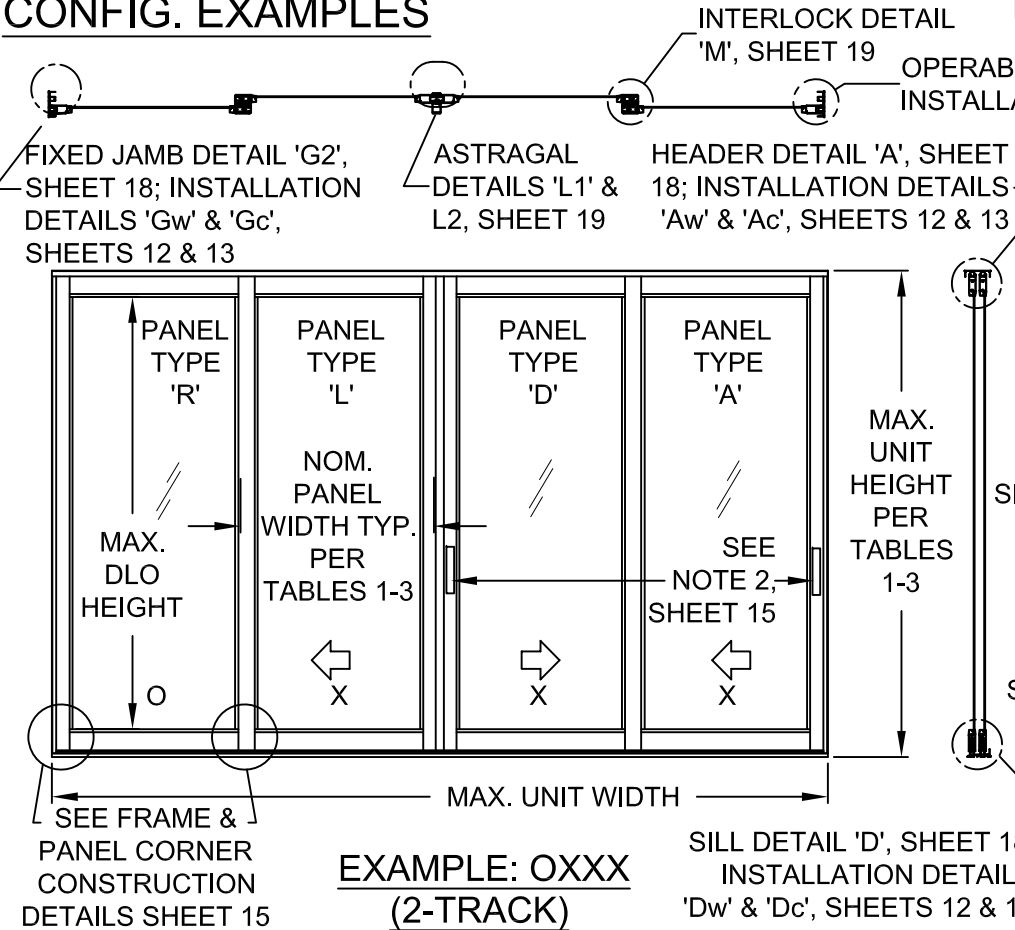

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

		REGISTRATION #29296		COPYRIGHT © 2022 PGT INDUSTRIES, INC.		1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	
Revision:							

Title		Alum. Sliding Glass Window (LM)		Date	02/28/22	
Desc.		EXAMPLE ELEVATION		By	JENS ROSOWSKI	
Series	SGD-770W	Sheet	16 OF 22	DWG No.	PGT0129	Rev. E

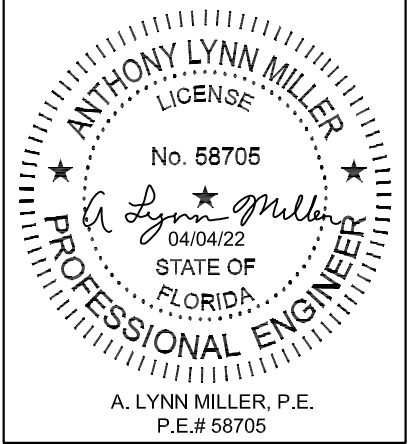



PANEL TYPES		PANEL'S RIGHT STILE TYPE														
		SINGLE INTERLOCK OUT	SINGLE INTERLOCK IN	FIXED STILE	LOCKSTILE W/ HANDLE	ASTRAGAL BOX OUT	ASTRAGAL BOX IN	ASTRAGAL BOX OUT W/ HANDLE	ASTRAGAL BOX IN W/ HANDLE	INT CORNER 90 LOCKSTILE W/ HANDLE #120	EXT CORNER 90 LOCKSTILE W/ HANDLE #119	EXT CORNER 90 RECEIVER W/ HANDLE #61 #118	INT CORNER 90 RECEIVER W/ HANDLE #61 #118	EXT CORNER 90 RECEIVER #118 #61	EXT CORNER 135 RECEIVER W/ HANDLE #61 #31	INT CORNER 135 RECEIVER W/ HANDLE #61 #31
PANEL'S LEFT STILE TYPE	SINGLE INTERLOCK OUT		F	PP	K			L (BOX OUT)		TR	TQ	TC	TA		TV	TW
	SINGLE INTERLOCK IN	B	E	P	A			C (BOX OUT)	C (BOX IN)	IC	SQ	SC	SA		SV	SW
	FIXED STILE	RR	R			S (BOX OUT)	S (BOX IN)						FD	FC	FV	FW
	LOCKSTILE W/ HANDLE	D	M			J (BOX OUT)	J (BOX IN)									
	ASTRAGAL BOX OUT W/ HANDLE	LR (BOX OUT)														
	ASTRAGAL BOX IN W/ HANDLE		N (BOX IN)													
	ASTRAGAL BOX OUT			T (BOX OUT)	U (BOX OUT)											
	ASTRAGAL BOX IN			T (BOX IN)	U (BOX IN)											
	INT CORNER 90 LOCKSTILE W/ HANDLE #120	RT	CI													
	EXT CORNER 90 LOCKSTILE W/ HANDLE #119	QT	QS													
	EXT CORNER #61 90 RECEIVER W/ HANDLE #118	CT	CS													
	INT CORNER #61 90 RECEIVER W/ HANDLE #118	AT	AS	DF												
	EXT CORNER #118 90 RECEIVER #61			CF												
	EXT CORNER #31 135 RECEIVER W/ HANDLE #61	VT	VS	VF												
	INT CORNER #31 135 RECEIVER W/ HANDLE #61	WT	WS	WF												

**PANEL NOTES:**

- SEE DP TABLES 1-3, SHEETS 6-8 FOR PANEL SIZES & DESIGN PRESSURE.
- PANEL TYPES NOT SHOWN OR CROSSED OFF ARE NOT REQUIRED FOR ANY CONFIGURATIONS AND ARE NOT AVAILABLE.
- 90° ASTRAGALS TO USE HEAVY-DUTY STILES (#61), CORNER RECEIVER (#118) AND EITHER EXTERIOR (#119) OR INTERIOR (#120) CORNER ASTRAGALS.
- 135° ASTRAGALS TO USE HEAVY-DUTY STILES (#61) AND CORNER ADDON (#31).


**SILL RISERS OPTIONS**

18\* SILL RISER, FLAT \* FLUSH, 1-1/2"

20 SILL RISER, FLAT LOW, 2-1/2"

22 SILL RISER, FLAT MEDIUM, 3-1/4"

24 SILL RISER, FLAT HIGH, 4"




PANEL "E" SHOWN. SEE TABLE FOR OTHER PANEL TYPES AND APPLICABLE STILE/ASTRAGAL REQUIREMENTS.

PANEL NOTES:

1. SEE DP TABLES 1-3, SHEETS 6-8 FOR PANEL SIZES & DESIGN PRESSURE.
2. PANEL TYPES NOT SHOWN OR CROSSED OFF ARE NOT REQUIRED FOR ANY CONFIGURATIONS AND ARE NOT AVAILABLE.
3. 90° ASTRAGALS TO USE HEAVY-DUTY STILES (#61), CORNER RECEIVER (#118) AND EITHER EXTERIOR (#119) OR INTERIOR (#120) CORNER ASTRAGALS.
4. 135° ASTRAGALS TO USE HEAVY-DUTY STILES (#61) AND CORNER ADDON (#31).

SILL RISERS OPTIONS

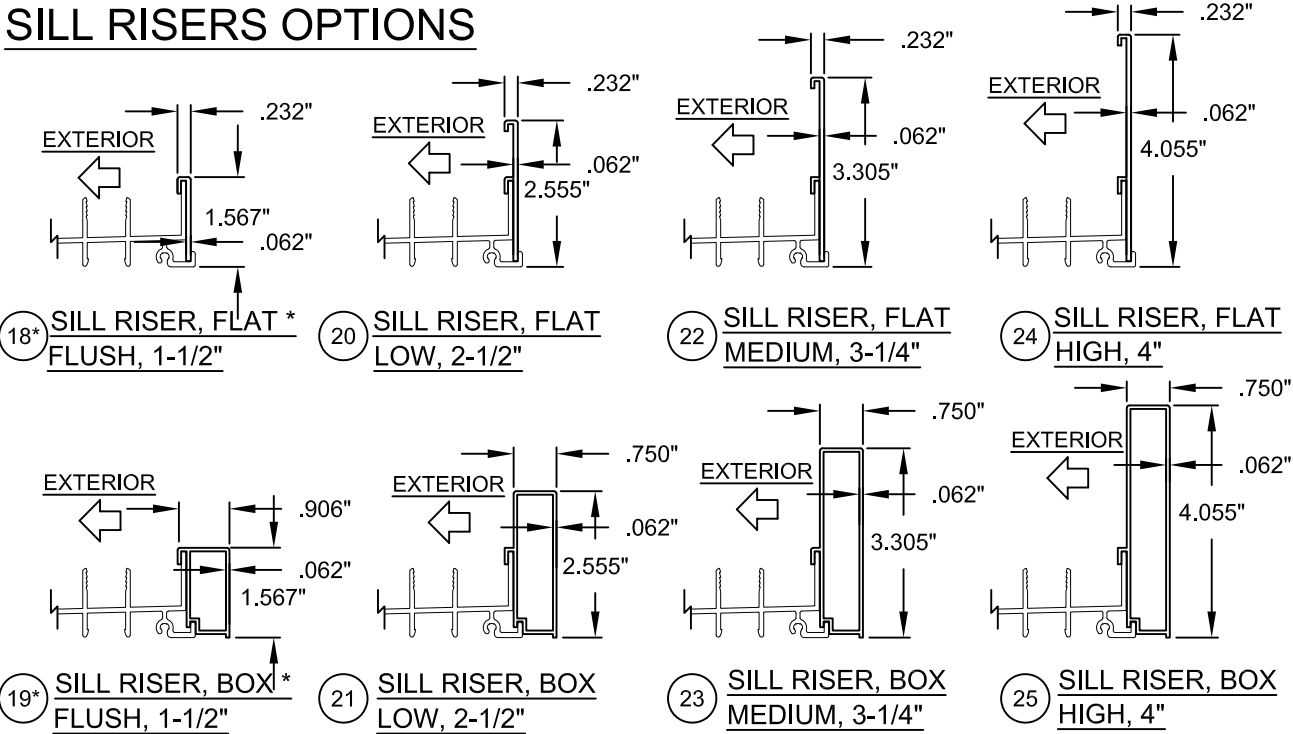

\* NOT VALID FOR WATER INFILTRATION RESISTANCE REQUIREMENTS, SEE SHEETS 6-8


**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

Revision:

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	COPYRIGHT © 2022 PGT INDUSTRIES, INC.	02/28/22	JENS ROSOWSKI	E
ALUM. SLIDING GLASS WINDOW (LM)	REGISTRATION #29296	17 OF 22	PANEL TYPES	SGD-770W
ANTHONY LYNN MILLER LICENSE No. 58705 04/04/22 STATE OF FLORIDA PROFESSIONAL ENGINEER	A. LYNN MILLER, P.E. P.E.# 58705			


ASSEMBLY DETAILS

(SEE SHEETS 12-14 FOR FOR INSTALLATION DETAILS)

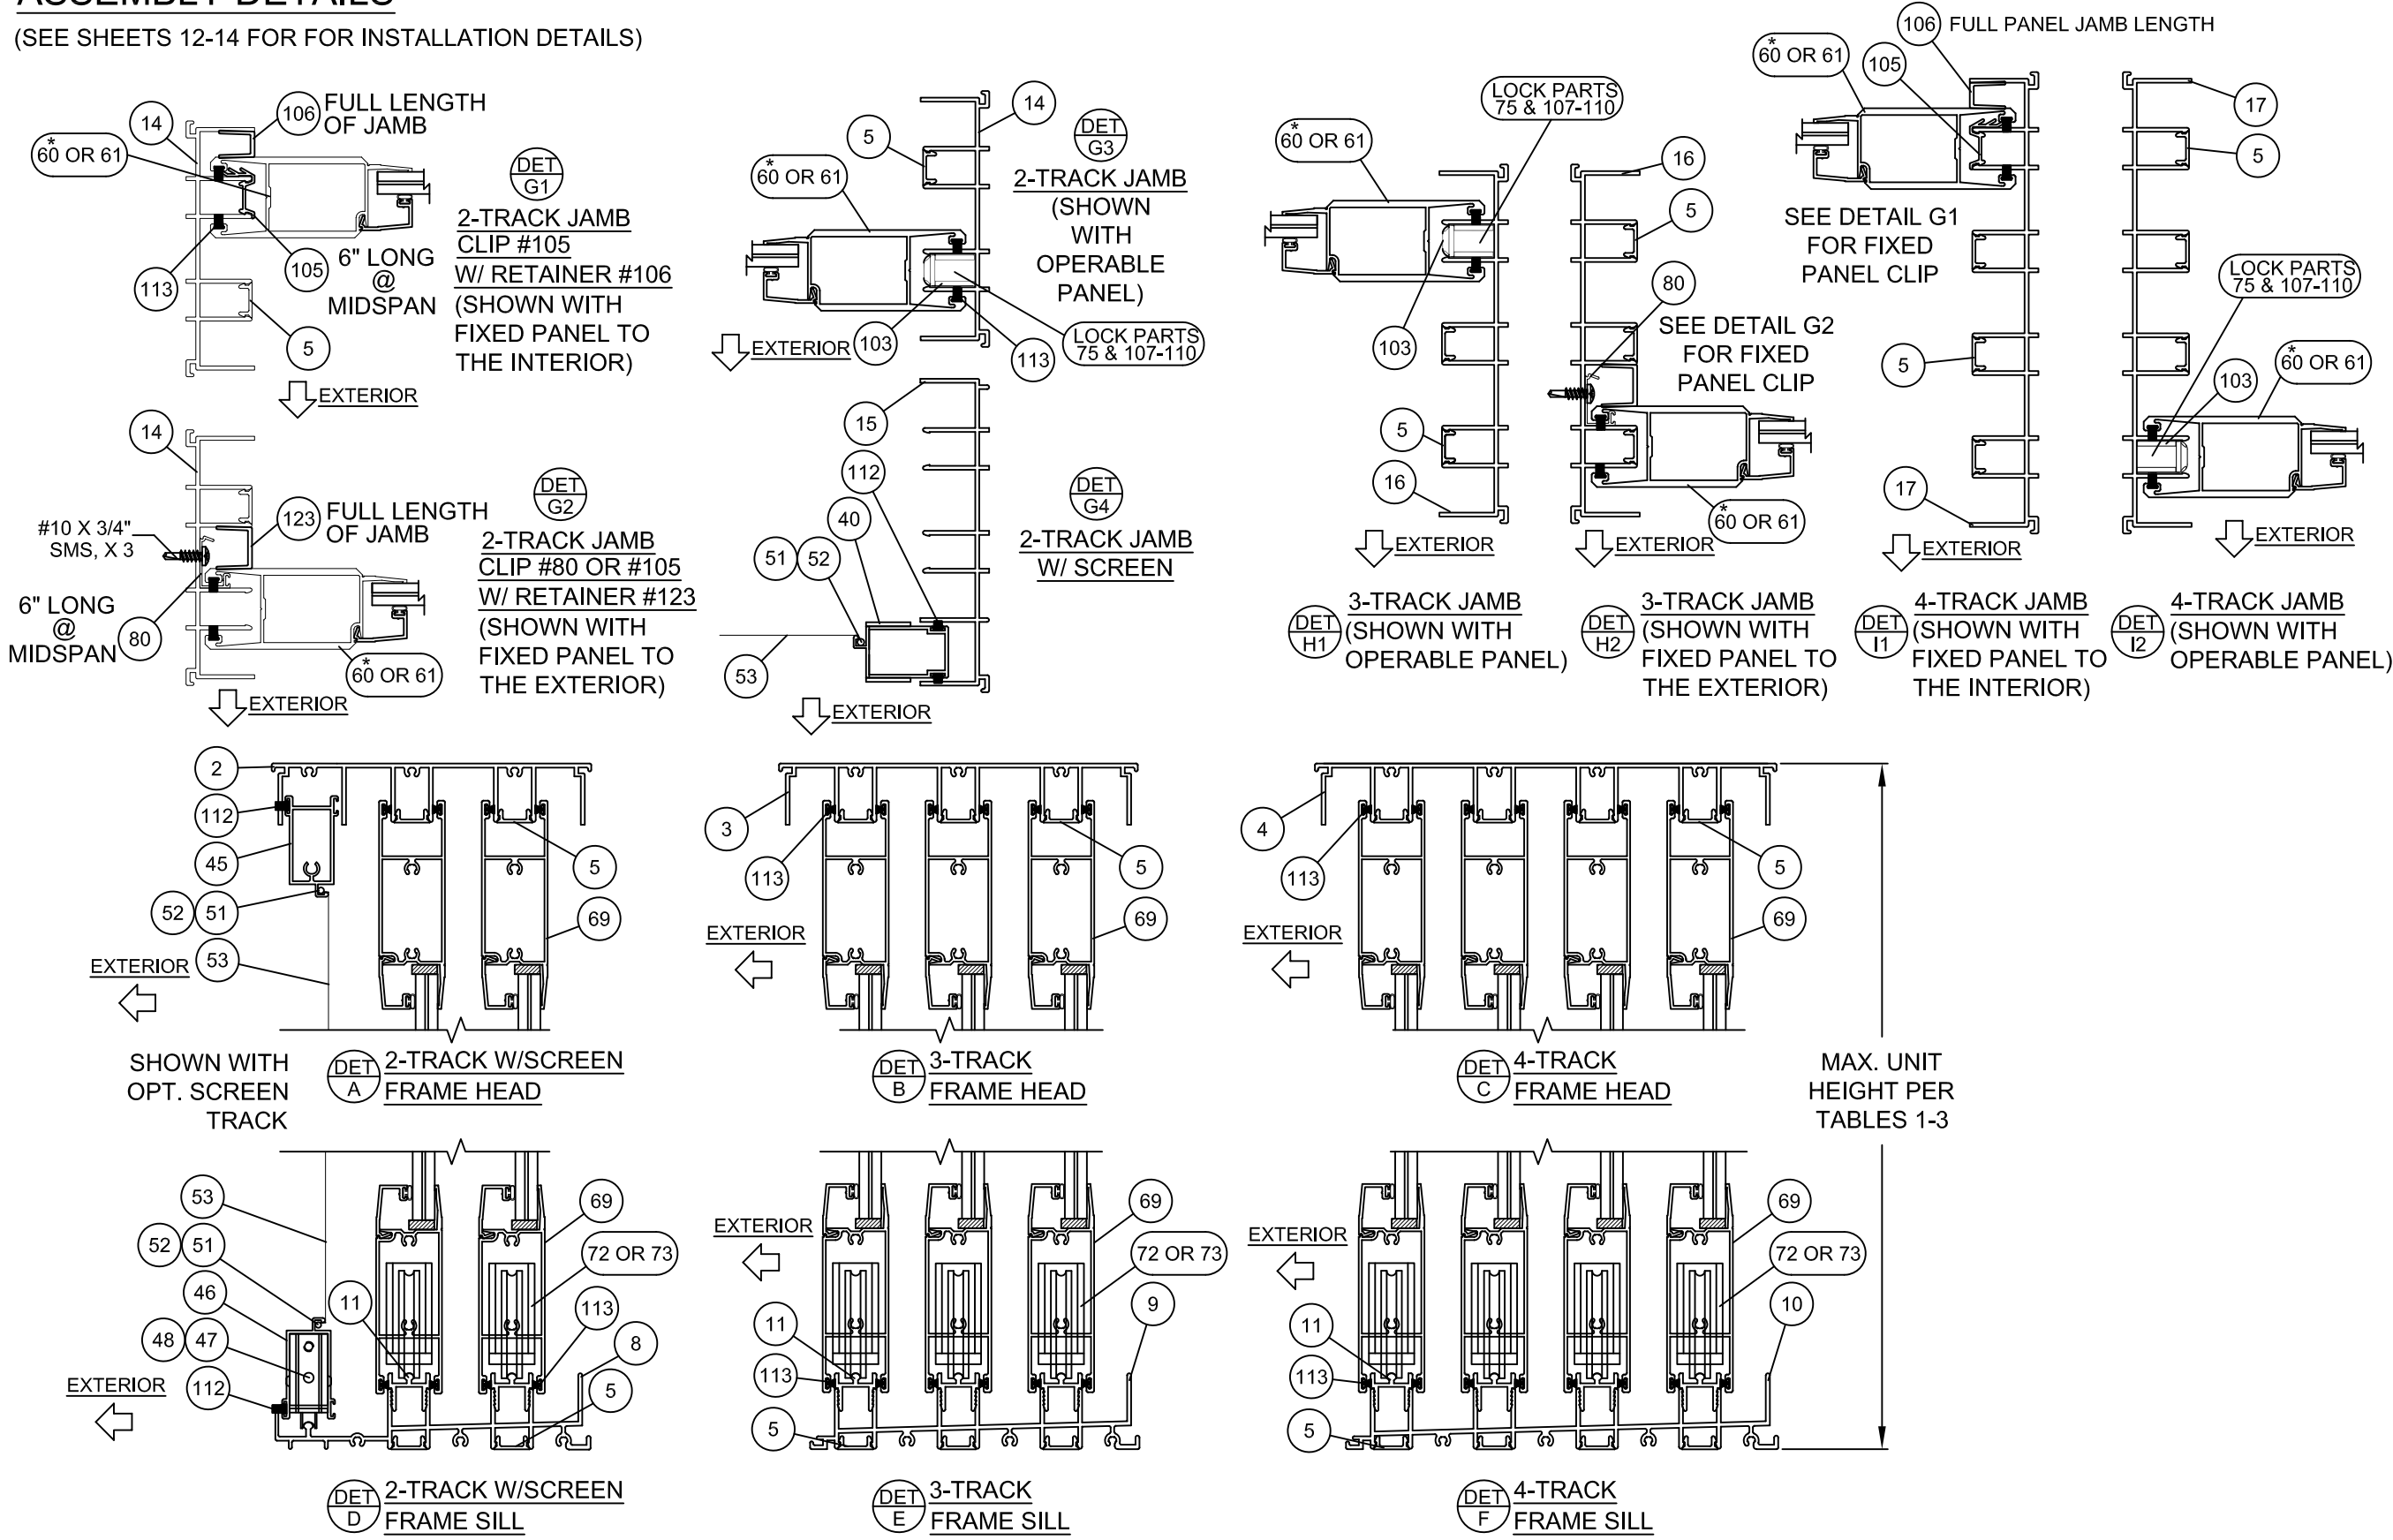

\* ITEM 61 SHOWN, ITEM 60 ALSO APPLICABLE, SEE TABLES 1-3, SHEETS 6-8 FOR DP (PSF) ASSOCIATED WITH STILE.


**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
**NOA-No. 22-0407.11**  
**Expiration Date: 02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	COPYRIGHT © 2022 PGT INDUSTRIES, INC.	02/28/22	JENS ROSOWSKI	PGT0129	E
	REGISTRATION #29296	ALUM. SLIDING GLASS WINDOW (LM)	VERTICAL SECTION DETAILS	18 OF 22	SGD-770W

**ANTHONY LYNN MILLER**  
LICENSE  
No. 58705  
04/04/22  
STATE OF  
FLORIDA  
**PROFESSIONAL ENGINEER**  
A. LYNN MILLER, P.E.  
P.E.# 58705

ASSEMBLY DETAILS

(SEE SHEETS 12-14 FOR FOR INSTALLATION DETAILS)

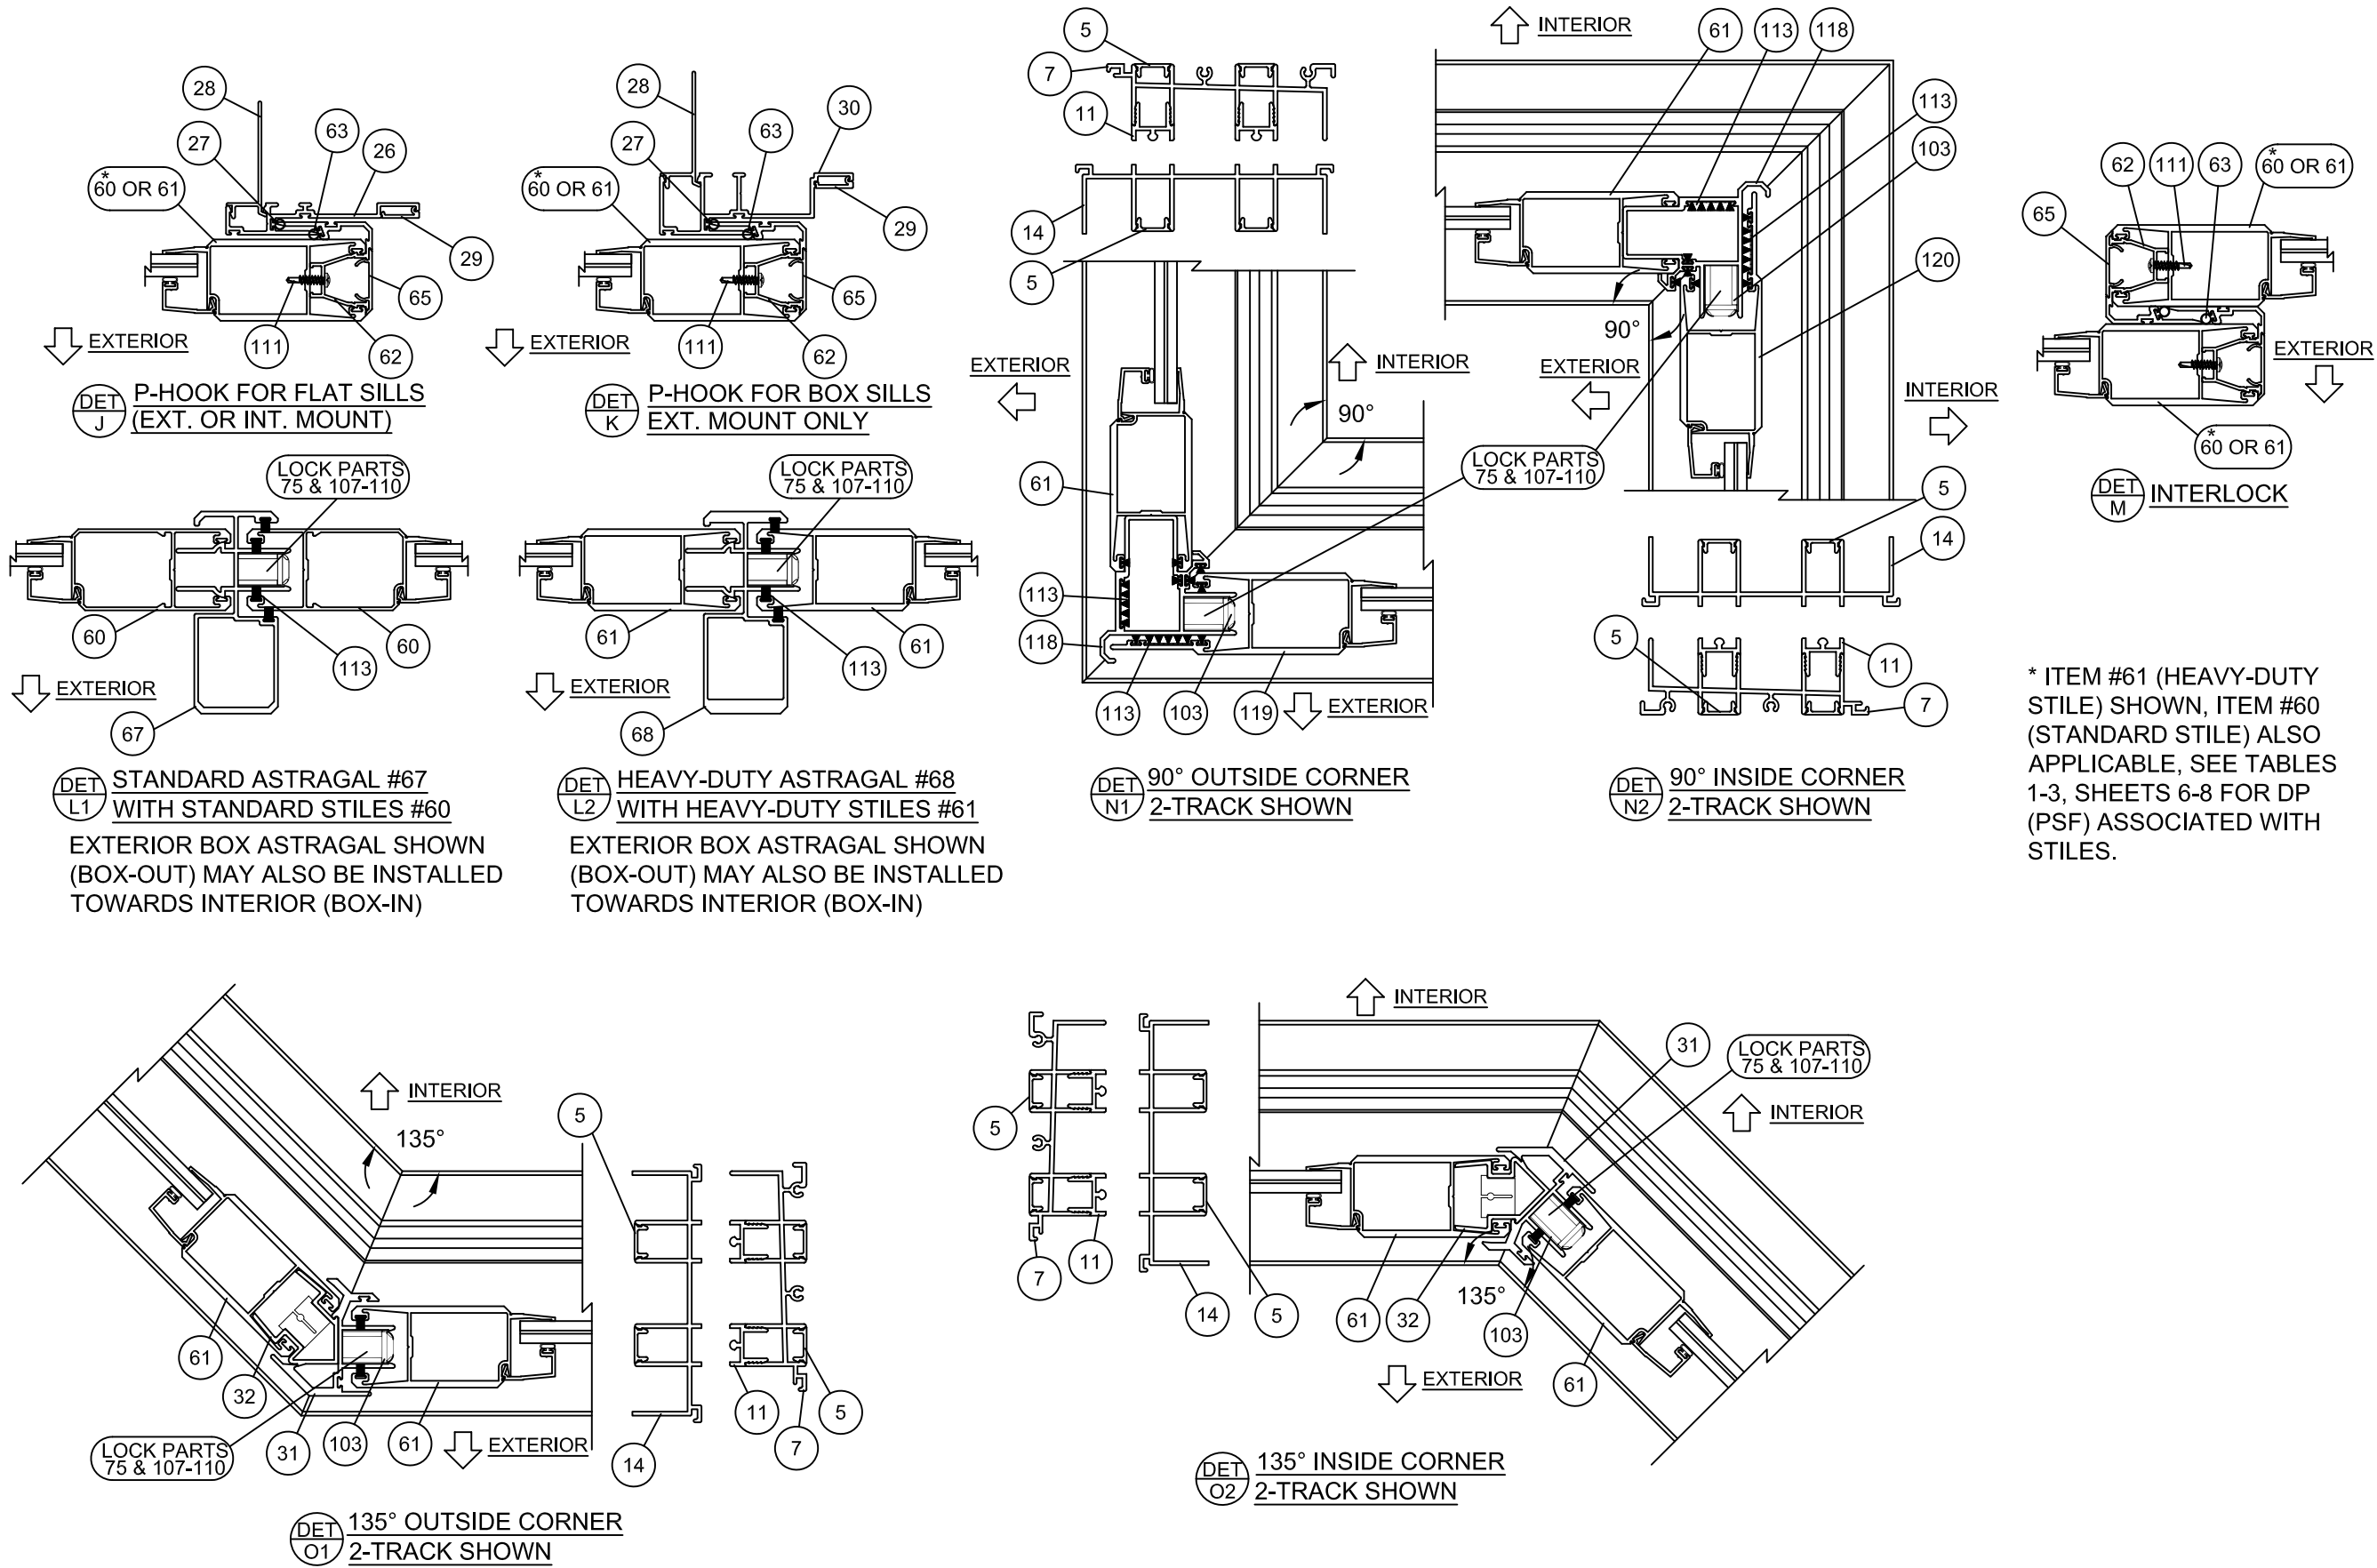

\* ITEM #61 (HEAVY-DUTY STILE) SHOWN, ITEM #60 (STANDARD STILE) ALSO APPLICABLE, SEE TABLES 1-3, SHEETS 6-8 FOR DP (PSF) ASSOCIATED WITH STILES.

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
Miami-Dade Product Control

Revision:

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)480-1600	COPYRIGHT © 2022 PGT INDUSTRIES, INC.	02/28/22	JENS ROSOWSKI	PGT0129	E
ALUM. SLIDING GLASS WINDOW (LM)	REGISTRATION #29296	19 OF 22	HORIZONTAL SECTION DETAILS	SGD-770W	Sheet
PGT®	ALUM. SLIDING GLASS WINDOW (LM)	19 OF 22	HORIZONTAL SECTION DETAILS	SGD-770W	Series

ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
04/04/22  
STATE OF  
FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705



TABLE 5:

Item	PGT Dwg. #	PGT #	Description
1	17306	617306	2-TRACK HEAD
2	17303	617303	2-TRACK HEAD WITH SCREEN RAIL
3	17309	617309	3-TRACK HEAD
4	17312	617312	4-TRACK HEAD
5	17314	617314	FRAME SCREW COVER
6	17317	617317	FRAME HEAD/JAMB ADD-ON
7	17304	617304	2-TRACK SILL
8	17301	617301	2-TRACK SILL WITH SCREEN RAIL
9	17307	617307	3-TRACK SILL
10	17310	617310	4-TRACK SILL
11	17313	617313	FRAME SILL TRACK INSERT
12	17315	617315	FRAME SILL SCREEN ADD-ON (SEE NOTE 3)
13	17316	617316	FRAME SILL SCREEN END ADD-ON (SEE NOTE 3)
14	17305	617305	2-TRACK JAMB
15	17302	617302	2-TRACK JAMB WITH SCREEN RAIL
16	17308	617308	3-TRACK JAMB
17	17311	617311	4-TRACK JAMB
18	17322	617322	SILL RISER - FLAT, FLUSH, 1-1/2"
19	17319	617319	SILL RISER - BOX, FLUSH, 1-1/2"
20	17321	617321	SILL RISER - FLAT, LOW, 2-1/2"
21	17318	617318	SILL RISER - BOX, LOW, 2-1/2"
22	17355	617355	SILL RISER - FLAT, MEDIUM, 3-1/4"
23	17354	617354	SILL RISER - BOX, MEDIUM, 3-1/4"
24	17323	617323	SILL RISER - FLAT, HIGH, 4"
25	17320	617320	SILL RISER - BOX, HIGH, 4"
26	17333	617333	POCKET P-HOOK
27	7070	67070	NEOPRENE BULB WSTP FOR P-HOOK
28	17334	617334	POCKET P-HOOK MOUNT
29	17335	617335	P-HOOK COVER
30	17348	617348	POCKET P-HOOK FOR BOX RISER
31	17378	617378	135 CORNER
32	17376	617376	135 FIXED MOUNT
ITEMS 40-53 ARE SCREEN PARTS:			
40	4319	612258	SCREEN SIDE RAIL - LOCKSTILE
41		7LOCKWGSK	SCREEN LOCKSET
42		41818	SCREEN KEEPER SPACER SET
43	8152	68152	SCREEN INTERLOCK ADAPTER
44	4428	64428	SCREEN DOUBLE INTERLOCK
45	4317	612256	SCREEN TOP RAIL
46	4318	612257	SCREEN BOTTOM RAIL

TABLE 5:

Material	Min. F <sub>y</sub>	Min. F <sub>u</sub>
#12 Steel Screw	92 ksi	120 ksi
#12 18-8 Screw	60 ksi	95 ksi
#12 410 Screw	90 ksi	110 ksi
1/4" DeWalt/Elco Aggre-Gator®	57 ksi	96 ksi
1/4" Elco UltraCon®	155 ksi	177 ksi
1/4" DeWalt UltraCon+®	148 ksi	164 ksi
1/4" 410 SS DeWalt/Elco CreteFlex®	127.4 ksi	189.7 ksi
6063-T5 Aluminum	16 ksi	22 ksi
A36 Steel	36 ksi	58 ksi
Gr. 33 Steel Stud	33 ksi	45 ksi

Item	PGT Dwg. #	PGT #	Description
47	668	7SRAZ	STANDARD ROLLER
48	668	7SRAX	STANDARD ROLLER - ST. STL.
49	4344	64344	SCREEN ASTRAGAL
50	17349	617349	OXO SCREEN ASTRAGAL ADAPTER
51	1692	61692	SCREEN SPLINE - .165"
52	1694	61694	SCREEN SPLINE - .150"
53		61816C20	SCREEN CLOTH
54	1725		1/2" X 4" X 1/16" SET. BLOCK, NEOPRENE 85 +/-5
55	1726		1" X 4" X 1/16" SET. BLOCK, NEOPRENE 85 +/-5
60	17325	617325	PANEL STILE
61	17326	617326	PANEL STILE (HEAVY DUTY)
62	17327	617327	INTERLOCK ADAPTOR
63	1225	6TP248	VINYL BULB WSTP. - THIN (INSIDE INTERLOCK)
64	1729	71729	SILL END WEATHERSTRIP PAD
65	17328	617328	INTERLOCK SCREW COVER
67	17329	617329	ASTRAGAL
68	17339	617339	HEAVY DUTY ASTRAGAL
69	17324	617324	TOP & BOTTOM RAIL
70	17350	417350	WEATHERSTRIP EXTENSION (INJECTION MOLDED)
71	1695	71695	1-1/2" X 1" X 3/4" HIGH FIN SEAL DUST PLUGS
72	8153	78153X	TANDEM ST. STL. ROLLER ASSY.
73	8153	78153N	TANDEM NYLON ROLLER ASSY.
74		SILICONE	DOW-791, 899, 983, 995 OR GE-7700
75	8185	78185X	GEMINI MORTICE 3-PLY DUAL LOCK W/LONG TRIM PLATE
76		71032X1FPFX	#10-32 X 1" FL. SS SCREW W/ TYPE "F" TIP
77		7103239	10-32 STEEL ZINC U-NUT
79	17357	617357	1" IG BEAD
80	17359	617359	7/16" BEAD / FIXED PANEL CLIP
81	17360	617360	9/16" BEAD
82	1224	6TP247K	VINYL BULB WEATHERSTRIP
83	61745	1745	LOWE INC, 1/2" X 1/16" SGL. SIDE ADH. TAPE, POLYETH.
100	8052	48052	ROLLER ADJ. HOLE PLUG
101		72087	JAMB BUMPER
102	1696	71696	DUST PLUG
103	8186	78186X	1" KEEPER
104	653	7SDKEEP	SCREEN LOCK KEEPER
105	17344	617344	FIXED PANEL CLIP - 6" LONG
106	17352	617352	FIXED PANEL RETAINER - 9/16"
107	1739	71739	HANDLE KIT - INTERIOR RAISED WITH THUMB TURN
108	1740	71740	HANDLE KIT - RAISED EXTERIOR HANDLE
109	1731	78162SN	HANDLE KIT - RECESSED INTERIOR WITH THUMB TURN
110	1732	78178	HANDLE KIT - RECESSED EXTERIOR PULL
111		710X34PPSDAX	#10 X 3/4" PH. PN. TEK - S.S.
112	1235	67S16	WSTP, .270 X .170 - FIN SEAL
113	1712	64066	.187" X .230" FINSEAL
114		710X115PPX	#10 X 1-1/2"
115		710XPPT	#10 X 1"
116		720X1X	#14-20 X 1" S.S.
117		720X112X	#14-20 X 1-1/2" S.S.
118	17336	617336	90 DEGREE CORNER RECEIVER
119	17337	617337	90 DEGREE OUTSIDE CORNER ASTRAGAL
120	17338	6117338	90 DEGREE INSIDE CORNER ASTRAGAL
123	17352	617352	FIXED PANEL RETAINER, 7/8"


- NOTES:
- 1) ALL ALUMINUM = 6063-T6
- 2) ITEMS # 33-39, 56-59, 66, 78, 84-99, 121 & 122 ARE NOT USED AND ARE NOT PART OF THIS APPROVAL.
- 3) USE OF #12 OR #13 REQUIRES MIN. #10 SMS OR 3/16" MASONRY ANCHORS @ 24" MAX. O.C.

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. **22-0407.11**  
Expiration Date: **02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

Revision:

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

REGISTRATION #29296

ALUM. SLIDING GLASS WINDOW (LM)

02/28/22

Date

JENS ROSOWSKI

By

No.

DWG

PGT0129

E

Rev.

BILL OF MATERIALS

20 OF 22

SGD-770W

Sheet

Series

Desc.

Title

ANTHONY LYNN MILLER

LICENSE

No. 58705



















*Anthony Lynn Miller*

04/04/22

STATE OF FLORIDA

PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.  
P.E.# 58705

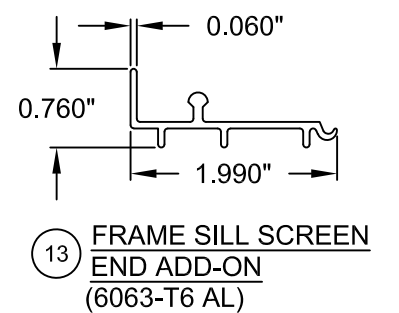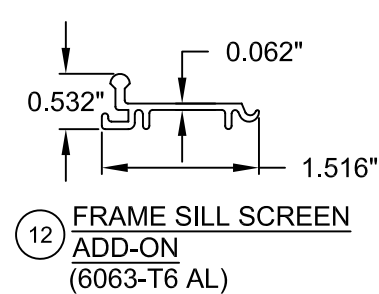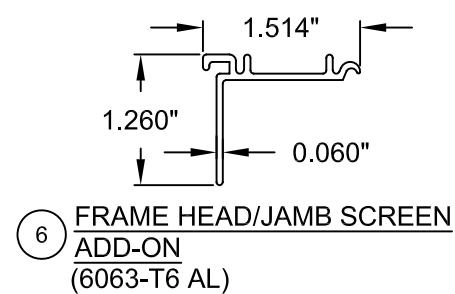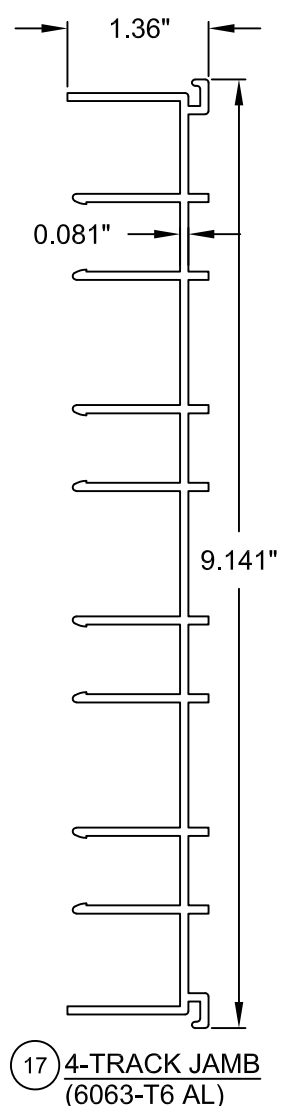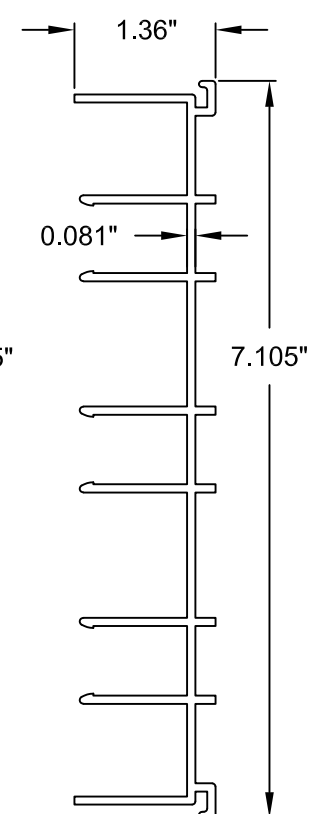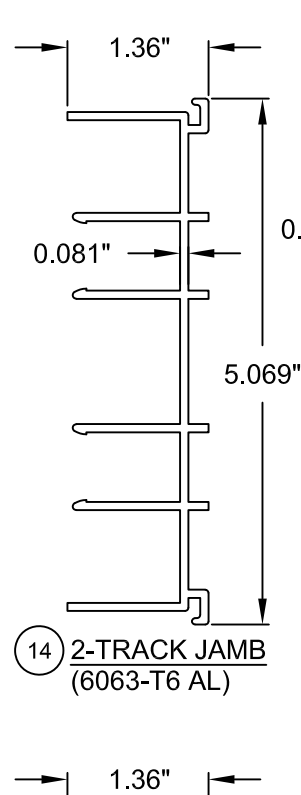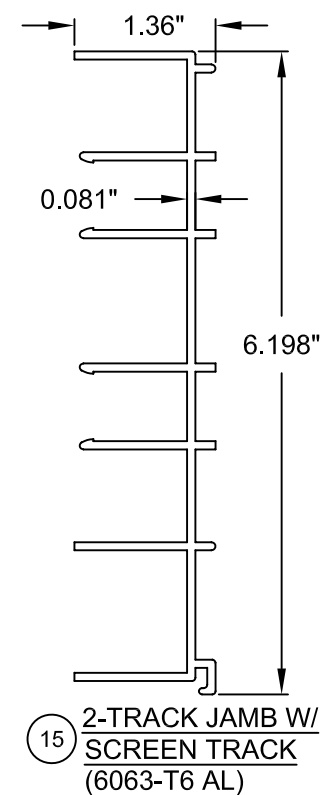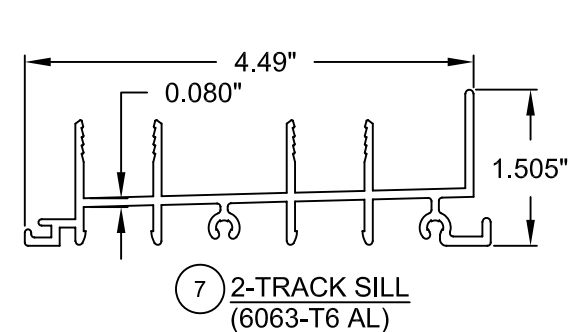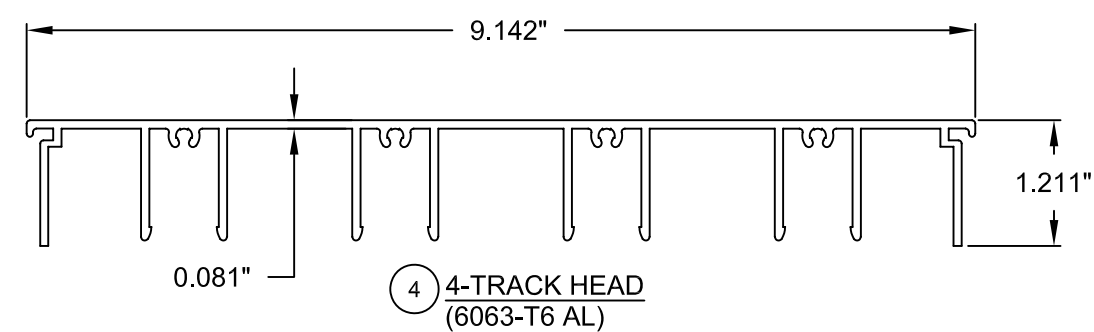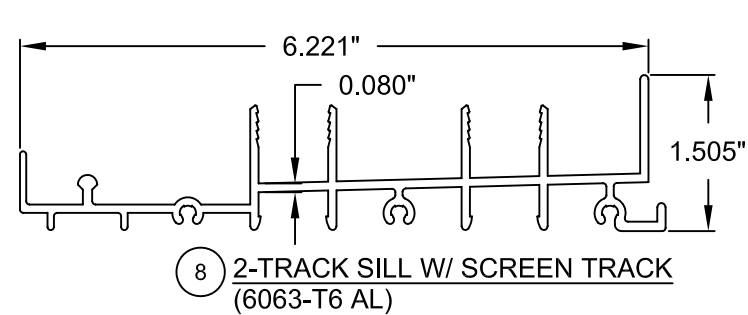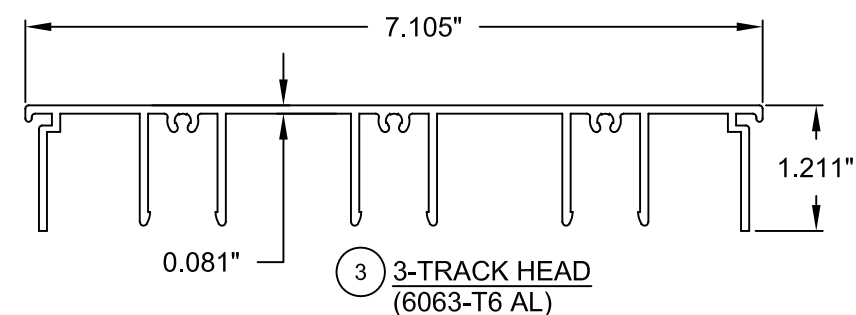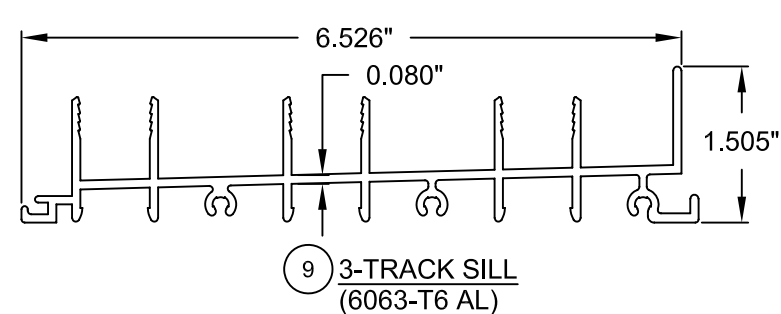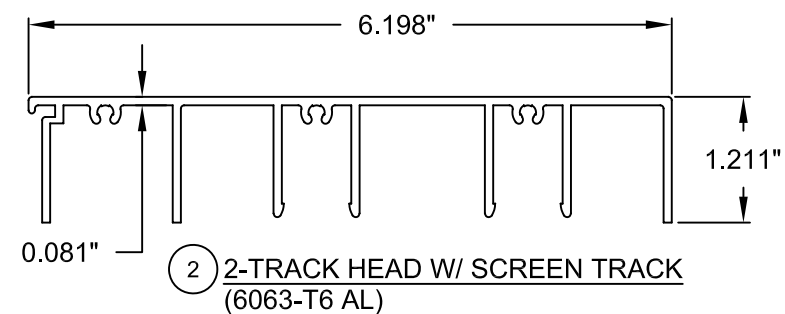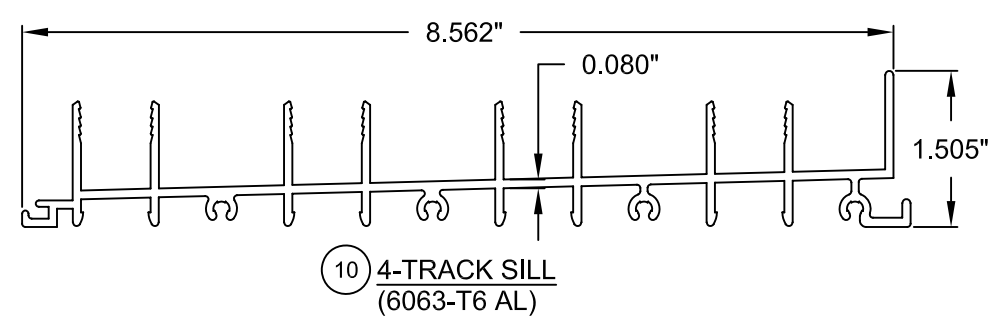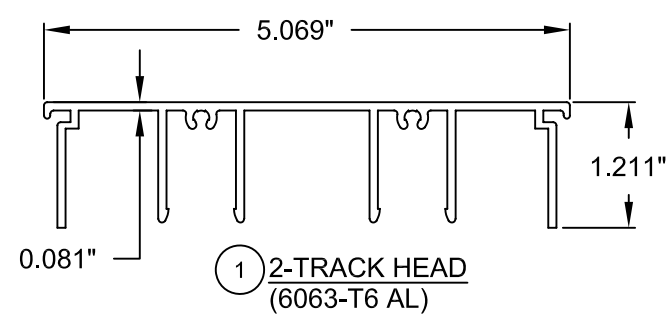

REQUIRES MIN. #10 SMS  
OR 3/16" MASONRY  
ANCHORS @ 24" MAX. O.C.

REQUIRES MIN. #10 SMS  
OR 3/16" MASONRY  
ANCHORS @ 24" MAX. O.C.

SEE SHEET 17 FOR SILL RISERS.

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. 22-0407.11  
Expiration Date: 02/12/2025  
By: Manuel Perez  
Miami-Dade Product Control

Revision:

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.

02/28/22

JENS ROSOWSKI	9
---------------	---

PGT0129	Rev.	E
---------	------	---

LOW (LM)

By	
row	

	DWG	No.	D
--	-----	-----	---

ALUM. SLIDING GLASS WIND

## EXTRUSIONS

SGD-770W	Sheet	21 OF 22
----------	-------	----------


211

1	2520
---	------

7	salua
---	-------

REGISTRATION #29296



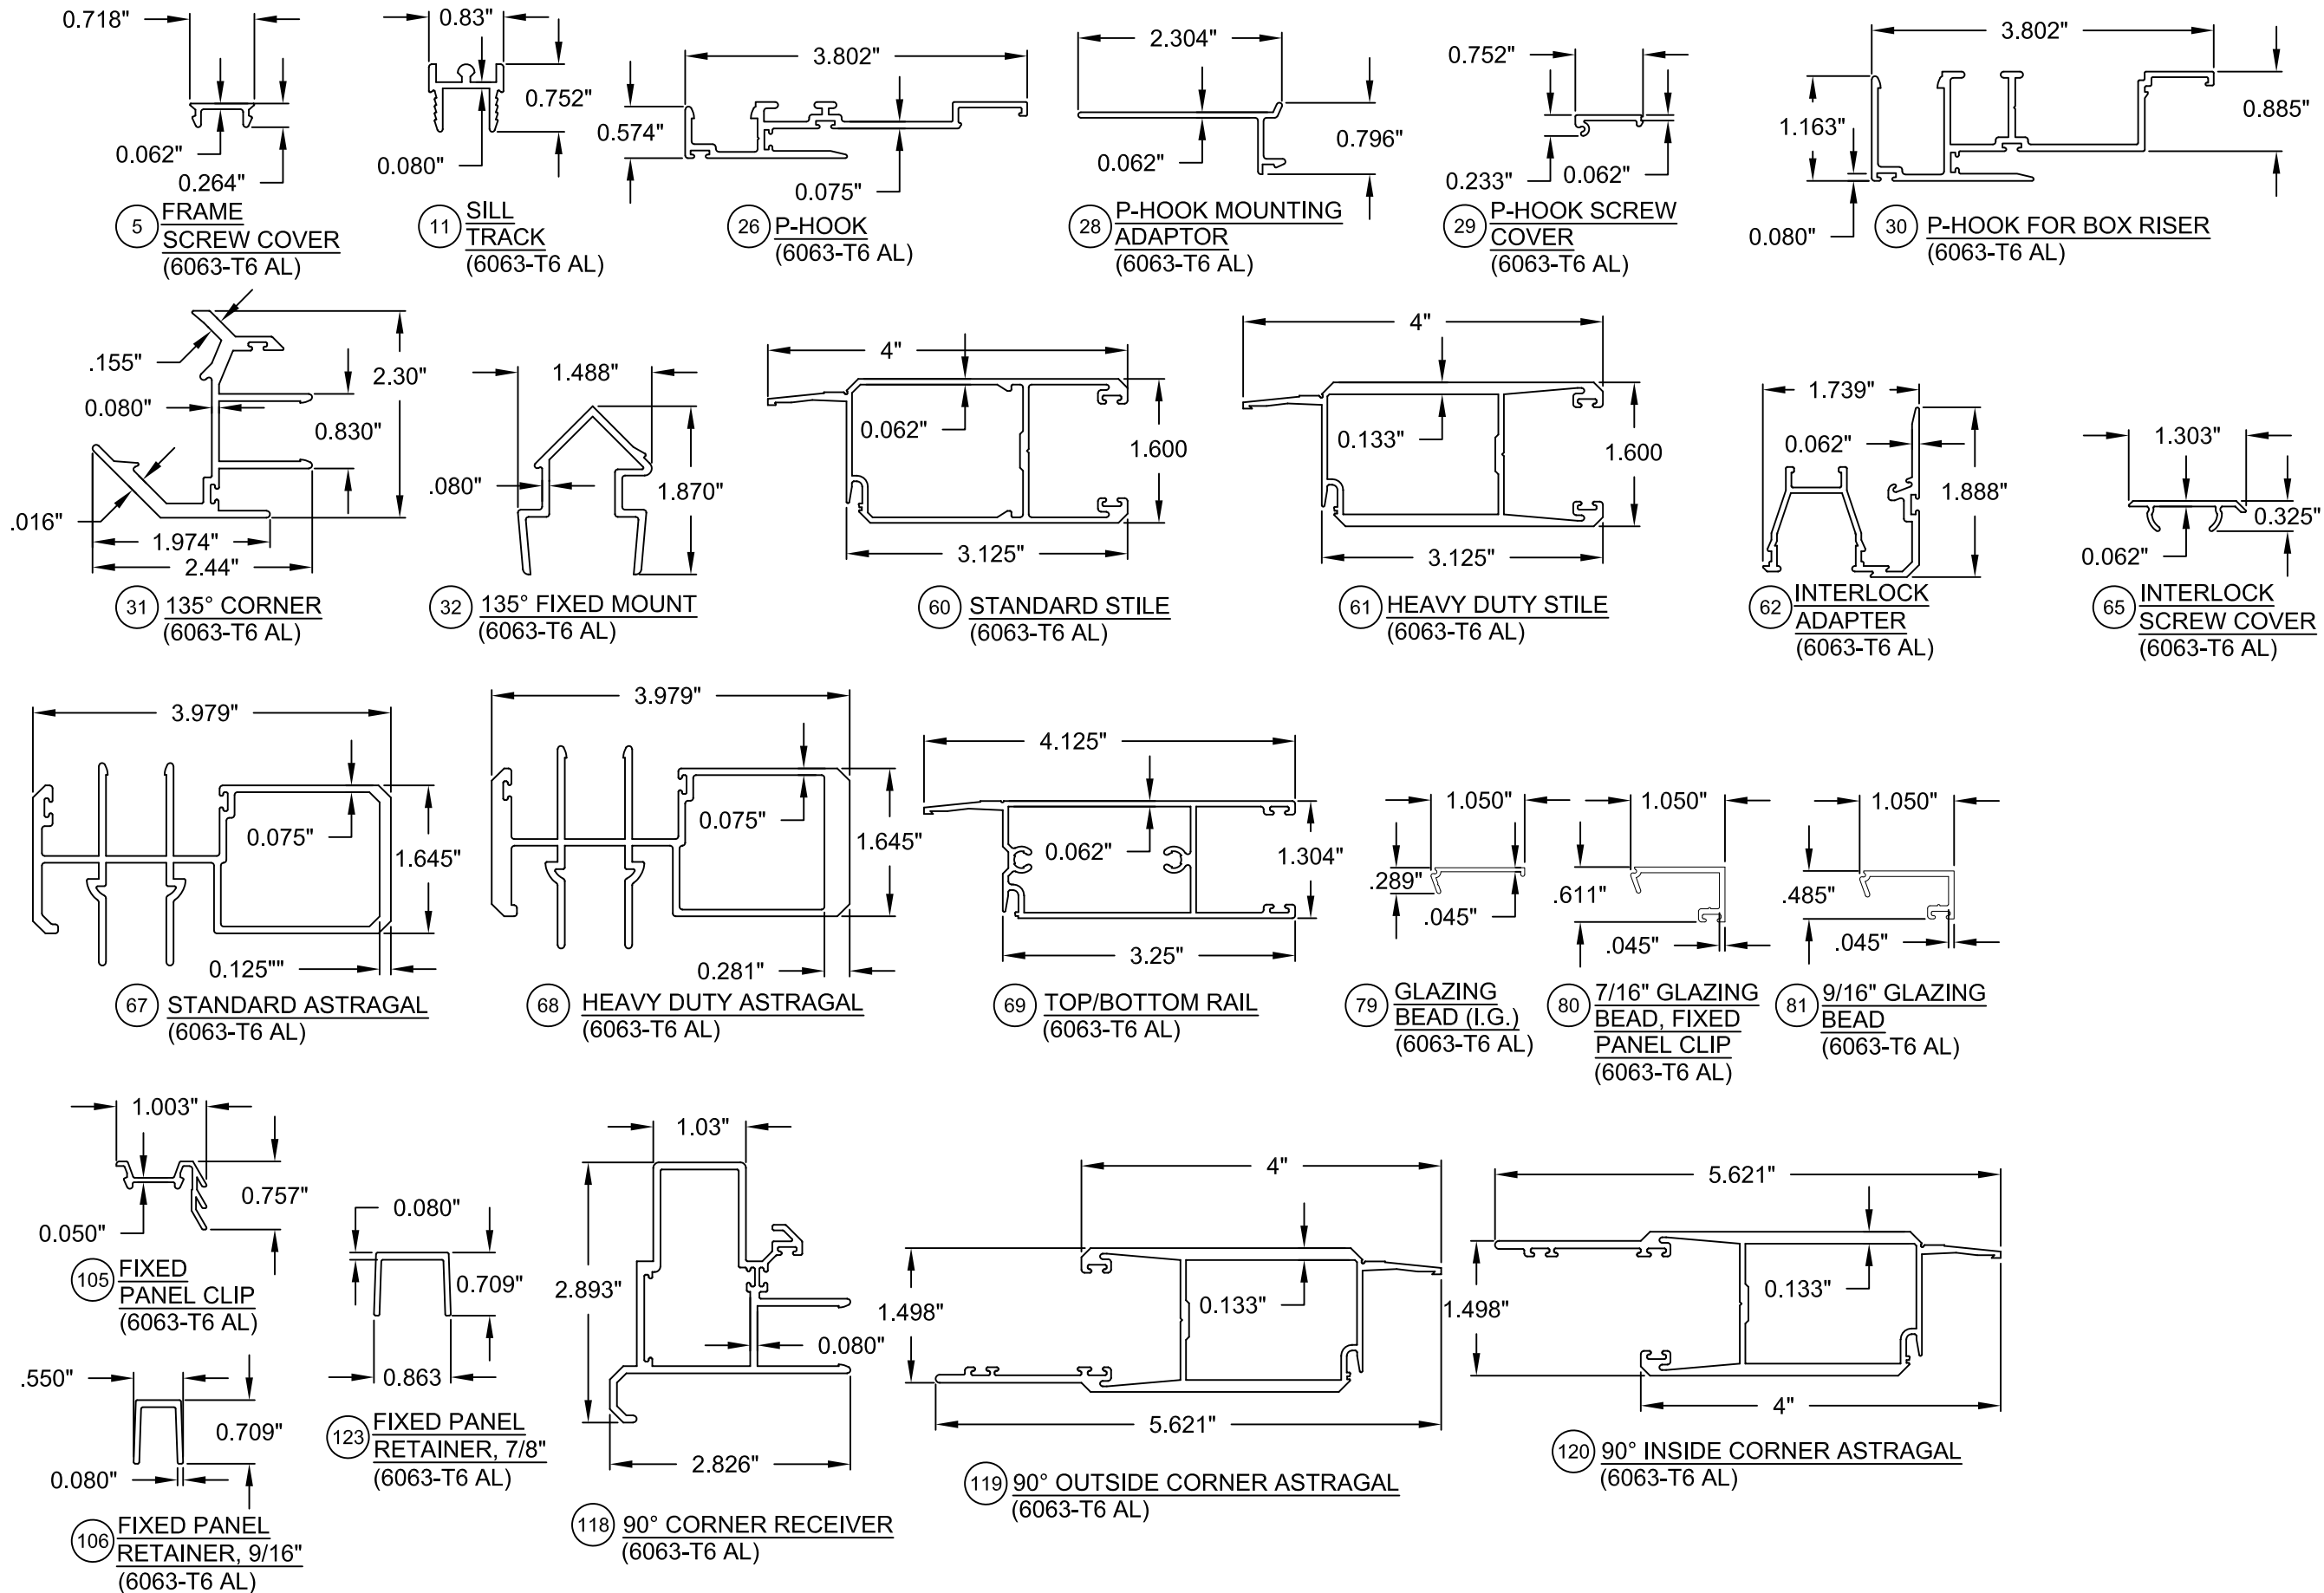

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
**NOA-No. 22-0407.11**  
**Expiration Date: 02/12/2025**  
By: *Manuel Perez*  
**Miami-Dade Product Control**

Revision:

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)480-1600

COPYRIGHT © 2022 PGT INDUSTRIES, INC.



REGISTRATION #29296

Rev.	E
PGT0129	
Drawn	JENS ROSOWSKI
By	JENS ROSOWSKI
Date	02/28/22
Sheet	22 OF 22
Series	SGD-770W
Title	ALUM. SLIDING GLASS WINDOW (LM)
Desc.	EXTRUSIONS

