

## DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599 www.miamidade.gov/economy

## **NOTICE OF ACCEPTANCE (NOA)**

Union Corrugating Company P.O. Box 229 Fayetteville, NC 28302

#### SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (in Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

#### **DESCRIPTION:** Master Rib® Metal Roof Panel

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

Sterrage

This NOA renews NOA# 17-0808.03 and consists of pages 1 through 5. The submitted documentation was reviewed by Alex Tigera.



NOA No.: 22-0720.02 Expiration Date: 09/05/27 Approval Date: 08/25/22

Page 1 of 5

## **ROOFING ASSEMBLY APPROVAL:**

**Category:** Roofing

Sub-Category: Non-Structural Metal Roofing

Material:SteelDeck Type:WoodMaximum Design PressureSee Table A

## TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	Test Specifications	Product  Description
Master Rib Metal Roof Panel	Length: varies Width: 41" (Coverage width: 36") Height: 3/4" Min. Thickness 0.019" Min. Yield Strength: 89ksi	TAS 110	Metal Roof panel coated with various approved coatings of CERAM-A-STAR® 1050.

## **MANUFACTURING LOCATIONS:**

1. Ocala, FL

2. Fayeteville, NC

## **EVIDENCE SUBMITTED:**

<b>Test Agency</b>	<b>Test Identifier</b>	Test Name/Report	<b>Date</b>
Akzo Nobel Coatings, Inc.	CA49810	ASTM B-117/ASTM G155	08/31/18
PRI Asphalt Technologies, Inc.	UCC-002-02-01	TAS 100	05/22/02
Hurricane Test Laboratory, Inc.	0293-0417-02 0293-0611-05	TAS 125	06/14/02 06/28/05
PRI Construction Materials Technologies	UCC-010-02-01 UCC-009-02-01	TAS 100 TAS 125	04/20/12 04/20/12



NOA No.: 22-0720.02 Expiration Date: 09/05/27 Approval Date: 08/25/22

Page 2 of 5

### **APPROVED ASSEMBLIES:**

**System:** "Master Rib" 26 Ga. Metal Panel

**Deck Type:** Wood, Non-Insulated

**Deck Description:** New Construction <sup>19</sup>/<sub>32</sub>" or greater plywood or wood plank.

Slope Range: 2": 12" or greater

Maximum Uplift See Table A below

**Pressure:** 

**Deck Attachment:** In accordance with applicable Building Code, but in no case it shall be less than 8d, 2-1/2"

long annular ring shank nails spaced at 6" o. c. In reroofing, where the deck is less than 19/32" thick (Minimum 15/32"), the above attachment method must be in addition to

existing attachment.

**Underlayment:** Minimum underlayment shall be an ASTM D 226 Type II installed with a minimum 4"

side-laps and 6" end-laps. Underlayment shall be fastened with corrosion resistant tin-caps and 1¼" annular ring-shank nails, spaced 6" o.c. at all laps and two staggered rows 12" o.c.

in the field of the roll.

**Fire Barrier Board:** Any approved fire barrier having a current NOA. Refer to a current fire directory listing for

fire ratings of this roofing system assembly as well as the location of the fire barrier within

the assembly. See Limitation # 1.

Valleys: Valley construction shall be in compliance with Roofing Application Standard RAS 133

and with Union Corrugating Company's current published installation instructions.

Metal Panels and Accessories:

Install the "Master Rib Roofing Panel" and accessories in compliance with Union Corrugating Company's current published installation instructions and details. Flashing, penetrations, valley construction and other details shall be constructed in compliance with the minimum requirements provided in Roofing Application Standards RAS 133.

Master Rib Roofing Panels shall be fastened with a minimum of #10-14 x 1-1/2" Hex Head Wood corrosion resistant fasteners with sealing washer. Fasteners shall of sufficient length to penetrate through the sheathing a minimum of  $^{3}/_{16}$ ". Fasteners shall be place in accordance with fastener detail herein as follows:

- 1. Panel side ribs shall be fastened along side of the panel inside rib, one fastener at the overlap. Field panel ribs shall be fastened with one fastener per rib the side of the panel.
- 2. All fasteners at center ribs and overlap rib shall be spaced at a maximum distance as noted in **Table A** below parallel to the roof slope. See detail herein.
- 3. Panel overlap shall be fastened at the high point with ½-7/8" long Hex Head corrosion resistant fasteners with sealing washer spaced at a maximum distance as noted in **Table** A below parallel to the roof slope. See detail herein.

TABLE A MAXIMUM DESIGN PRESSURES					
Roof Areas	Field	Perimeter and Corner <sup>1</sup>			
Maximum Design Pressures	-75 psf	-135 psf			
Maximum Clip Spacing	24" o.c.	12" o.c.			
Extrapolation shall not be allowed					



NOA No.: 22-0720.02 Expiration Date: 09/05/27 Approval Date: 08/25/22 Page 3 of 5

## **SYSTEM LIMITATIONS:**

- 1. Fire classification is not part of this acceptance; refer to a current Approved Roofing Materials Directory for fire ratings of this product.
- 2. The maximum designed pressure listed herein shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners).
- **3.** Panels may be rolls formed in continuous lengths from eave to ridge. Maximum lengths shall be as described in Roofing Application Standard RAS 133.
- 4. All panels shall be permanently labeled with the manufacturer's name and/or logo, and the following statement: "Miami-Dade County Product Control Approved" or with the Miami-Dade County Product Control Seal as seen below. All clips shall be permanently labeled with the manufacturer's name and/or logo, and/or model.




5. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.




NOA No.: 22-0720.02 Expiration Date: 09/05/27 Approval Date: 08/25/22

Page 4 of 5

## **DRAWINGS**



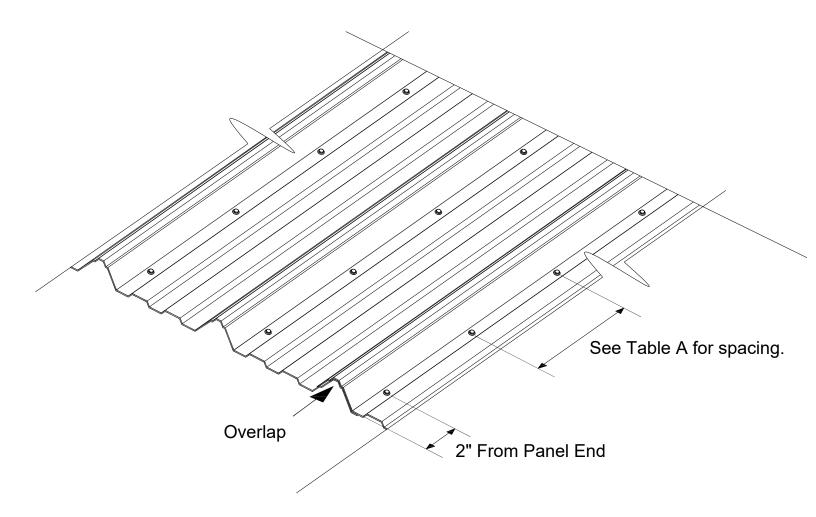

# MASTER RIB PANEL END OF THIS ACCEPTANCE



NOA No.: 22-0720.02 Expiration Date: 09/05/27 Approval Date: 08/25/22 Page 5 of 5