

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION NOTICE OF ACCEPTANCE (NOA)

Eurotech Industries, Inc. 4201 NE 12 Terrace Oakland Park, FL 33334

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Aluminum Outswing Entrance Door-LMI

APPROVAL DOCUMENT: Drawing **No. W04-01 Rev H,** titled "Aluminum Outswing Entrance Door", sheets 1, 1.1, 2 through 5 of 5, dated 01/15/04 and last revised on JUN 19, 2023, prepared by AL-Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact

Limitations:

- See Design Pressure (DP) capacity Single doors & Double doors VS locks + bolts, glazing types and water ratings in sheet <u>2</u>. Higher DP Single/Double Doors at <u>active</u> leaf require 3-point lock and manual Flush bolts at top/bottom.
- **2.** Single or double doors may be mulled with approved clipped mullion or sidelites or transom (under separate approvals), lower design rating shall apply and such installation to be reviewed & approved by AHJ.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and series and following statement: "Miami-Dade County Product Control Approved", noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises & renews NOA # 20-1216.19 and consists of this page 1 and evidence pages E-1, E-2, E-3 & E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by Ishaq I. Chanda, P.E.



Ishaq 1. Chandes

NOA No. 23-0622.01 Expiration Date: June 10, 2029 Approval Date: September 21, 2023 Page 1

1. Evidence submitted under previous approvals

A. DRAWINGS

1.

- 1. Manufacturer's die drawings and sections (Submitted under files below)
- 2. Drawing **No. W04-01 Rev C**, titled "Aluminum Outswing Entrance Door", sheets 1 through 5 of 5, dated 01/15/04 and last revised on FEB 01, 2012, prepared by AL-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

B. TESTS (Submitted under files # 14-0303.09/#12-0208.03/#09-0310.05)

- Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94
 - 5) Large Missile Impact Test per FBC, TAS 201-94
 - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with installation diagram of aluminum outswing door, prepared by Hurricane Engineering Testing Inc., Test Report No(s). **HETI- 08-2021, 08-2022, 08-2023** and **08-2024**, all dated 03/15/08, signed and sealed by Candido Font, P.E.

- 2. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94
 - 5) Large Missile Impact Test per FBC, TAS 201-94
 - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with installation diagram of aluminum outswing door, prepared by Hurricane Engineering Testing Inc., Test Report No(s). **HETI- 03-1882, 08-1889, 08-18890** and **08-2024,** dated 01/15/04 thru 02/09/2004, all signed and sealed by Rafael E. Droz-Seda, P.E. (transferred from file # **08-0507.10**)

3. Tensile Test prepared by Hurricane Engineering & Testing, Test No. HETI-04-T100, dtd 01/29/04, tested per ASTM E8-01, signed & sealed by Rafael E. Droz-Seda, P.E.

C. CALCULATIONS

- 1. Anchor Calculations and structural analysis, dated 07/23/15, prepared by Al-Farooq Corp., signed and sealed by Javad Ahmad, P.E.
- 2. Glazing complies w/ ASTME-1300-04 & -09.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

- Notice of Acceptance No. 14-0916.11 issued to Kuraray America., Inc. for their "Sentry Glas (Clear and White) Glass Interlayer", expiring on 07/04/18.
- 2. Notice of Acceptance No. **14-0916.10** issued to Kuraray America., Inc. for their "Butacite **PVB Interlayer**", expiring on 12/11/16.

F. STATEMENTS

- 1. Statement letter of conformance to FBC 2014 & no financial interests, prepared by Al Farooq Corporation, dated 07/23/15, signed and sealed by Javad Ahmad, P.E.
- 2. Lab compliance as part of the above referenced test report.

G. OTHER

- 1. This NOA renews NOA # 14-0303.09, expiring on June 10, 2019.
- 2. Test proposal # 07-3527 approved by BCCO.

Ishag 1. Chanda

2. Evidence submitted under #18-0116.03

A. DRAWINGS

1. Drawing No. W04-01 Rev F, titled "Aluminum Outswing Entrance Door", sheets 1, 1.1, 2 through 5 of 5, dated 01/15/04 and last revised on MAY 08, 2018, prepared by AL-Farooq Corporation, signed and sealed by Javad Ahmad, P. E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 16-1116.01 issued to Kuraray America., Inc. for their "Trofosil ultra clear, clear & color PVB Interlayer", expiring on 07/08/19.

F. STATEMENTS

1. Statement letter of conformance to **FBC 6th Edition (2017)** and of no financial interest, prepared by Al Farooq Corporation, dated 12/10/17, signed and sealed by Javad Ahmad, P.E.

G. OTHER

1. This NOA revises NOA # 18-0116.03, expiring 06/10/2019.

3. Evidence submitted under previous submittal

A. DRAWINGS

1. Drawing No. W04-01 Rev F, titled "Aluminum Outswing Entrance Door", sheets 1, 1.1, 2 through 5 of 5, dated 01/15/04 and last revised on MAY 08, 2018, prepared by AL-Farooq Corporation, signed and sealed by Javad Ahmad, P. E.

B. TESTS (Reference current test submitted under files #15-0707.02)

- 1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94
 - 5) Large Missile Impact Test per FBC, TAS 201-94
 - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with installation diagram of aluminum outswing door, prepared by American Test Lab of South Florida, Test Report No(s). **ATLSF 0304.01-15**, dated 05/26/15, signed and sealed by Stephen Warter, P.E.

Ishag 1. Chands

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 16-1116.01 issued to Kuraray America., Inc. for their "Trofosil ultra clear, clear & color PVB Interlayer", expiring on 07/08/19.

F. STATEMENTS

1. Statement letter of conformance to **FBC 6th Edition (2017)** and of no financial interest, prepared by Al Farooq Corporation, dated 02/28/19, signed and sealed by Javad Ahmad, P.E.

G. OTHER

1. This NOA **renews NOA # 18-0116.03**, expiring 06/10/2024, subjected to verification in next renewal cycle.

4. Evidence submitted under previous approval

A. DRAWINGS

1. Drawing **No. W04-01 Rev G**, titled "Aluminum Outswing Entrance Door", sheets 1, 1.1, 2 through 5 of 5, dated 01/15/04 and last revised on DEC 11, 2020, prepared by AL-Farooq Corporation, signed and sealed by Jalal Farooq, P. E.

B. TESTS

1. None.

C. CALCULATIONS

Anchor verification calculations and structural analysis, complying with FBC 6th Edition (2020), dated 12/11/20, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **19-0305.02** issued to **Kuraray America, Inc.** for their "**Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers**" dated 05/09/19, expiring on 07/08/24.

D. STATEMENTS

1. Statement letter of conformance, complying with **FBC** 7th **Edition (2020)**, dated 11/12/20, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

G. OTHER

1. This NOA revises NOA No. 19-0318.01, expiring 06/10/24.

Ishag 1. Chank

5. New Evidence submitted

A. DRAWINGS

1. Drawing **No. W04-01 Rev H,** titled "Aluminum Outswing Entrance Door", sheets 1, 1.1, 2 through 5 of 5, dated 01/15/04 and last revised on JUN 19, 2023, prepared by AL-Farooq Corporation, signed and sealed by Jalal Farooq, P. E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **19-0305.02** issued to **Kuraray America, Inc.** for their "**Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers**" dated 05/09/19, expiring on 07/08/24.

F. STATEMENTS

1. Statement letter of conformance, complying with FBC 8th Edition (2023), dated 06/10/23, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

G. OTHER

1. This NOA revises & renews NOA # 20-1216.19 and updates to FBC 2023, expiring 06/10/29.

Ishag 1. Chanda

SEE SEPARATE NOA FOR TRANSOM RATING AND DETAILS TRIBUTARY END LOAD LOWER DESIGN PRESSURE OF TRANSOM, DOOR OR AND ANCHORS TO BE TRANSOM MULLION SHALL CONTROL DESIGN PRESSURE REVIEWED BY AHJ FOR ENTIRE ASSEMBLY G

ALUMINUM OUTSWING ENTRANCE DOOR

APPROVAL APPLIES TO SINGLE (X) AND DOUBLE (XX) LEAF DOORS. ALSO SINGLE AND DOUBLE DOORS IN COMBINATION WITH SIDELITES USING MIAMI-DADE COUNTY APPROVED MULLIONS IN BETWEEN. ALSO SINGLE AND DOUBLE DOORS WITH OR WITHOUT SIDELITES IN COMBINATION WITH TRANSOMS USING MIAMI-DADE COUNTY APPROVED MULLION IN BETWEEN.

LOWER DESIGN PRESSURES FROM DOOR, SIDELITE OR MULLION APPROVAL WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2020 (7TH EDITION)/2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2020/2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC.


CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.


PRODUCT RENEWED

as complying with the Florida Building Code NOA-No. 23-0622.01

Shag 1. Chandes By Miami-Dade Product Control

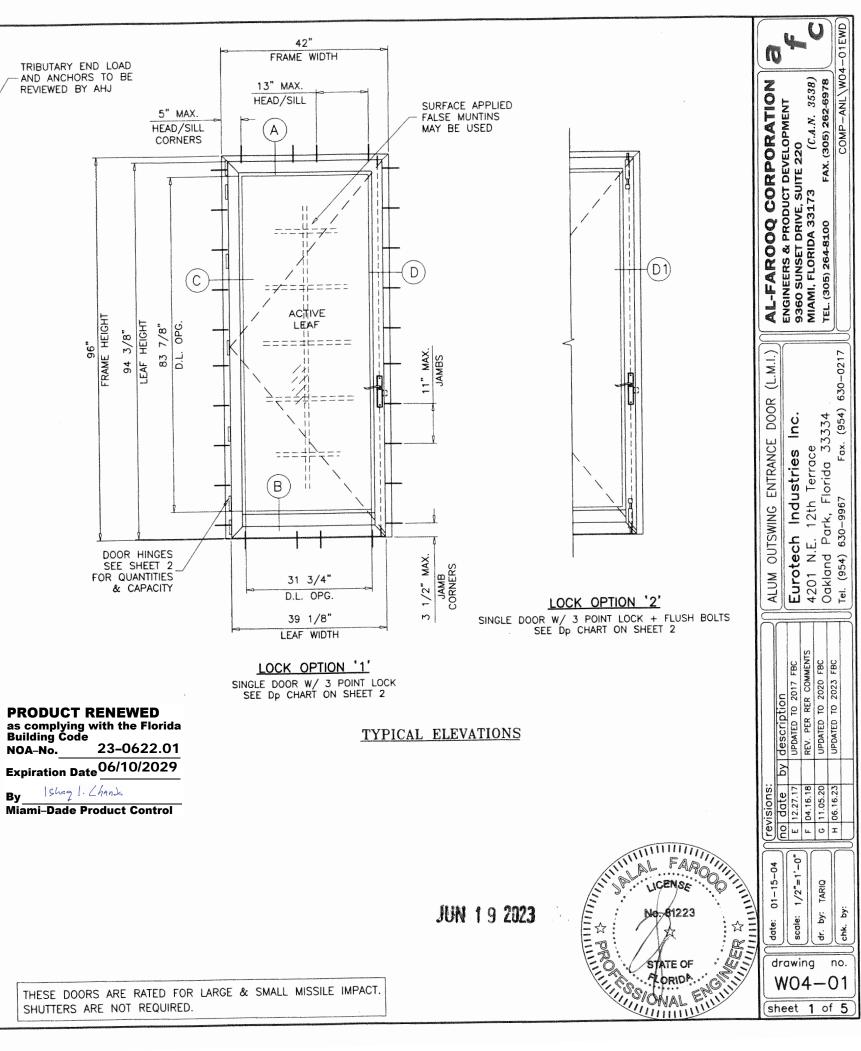


SHUTTERS ARE NOT REQUIRED

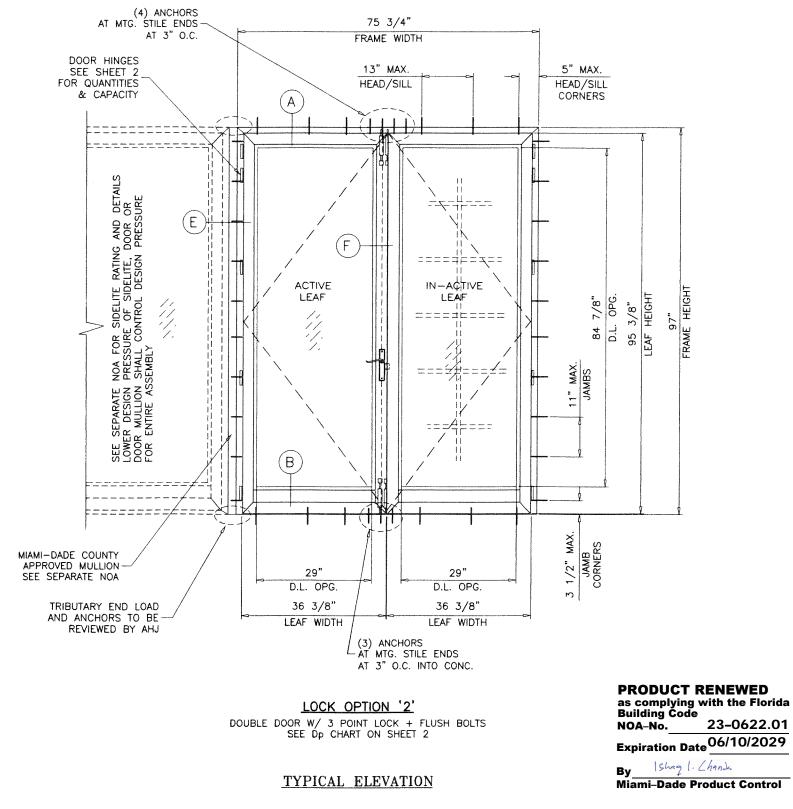




23-0622.01 Expiration Date^{06/10/2029}

Ishag 1. Chanda Miami-Dade Product Control

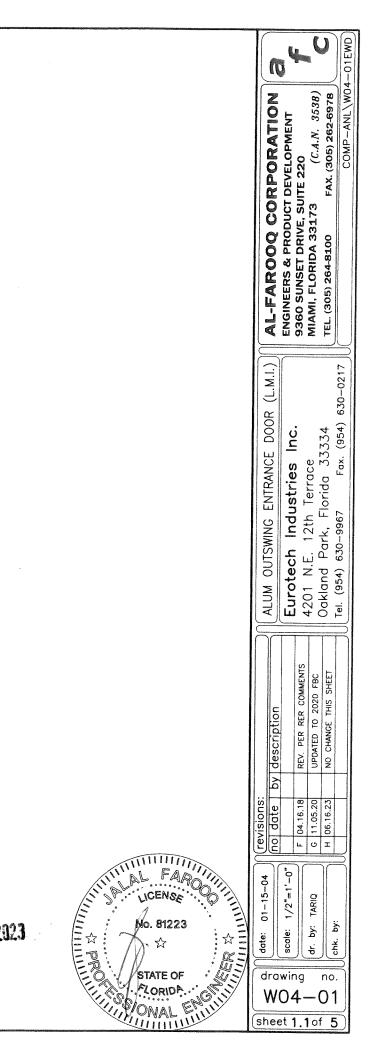

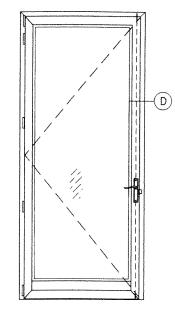


		CAPACITY (X) DOOR	
DOOR SIZE		GLASS TYPE 'A'	
WIDTH	HEIGHT	EXT. (+)	INT. (-)
2/6		75.0	85.0
3/0	6/8	75.0	85.0
3/6		75.0	85.0
2/6		75.0	85.0
3/0	7/0	75.0	85.0
3/6		75.0	85.0
2/6		75.0	85.0
3/0	8/0	75.0	85.0
3/6		75.0	85.0
	ATER INF	FOR INSTAL	

LOCKS SINGLE DOORS: (OPTION #1)

3 POINT LOCK SYSTEM AT ACTIVE LOCK STILE 36" FROM BOTTOM, KEY OPERATED ON EXTERIOR AND THUMB TURN ON INTERIOR. STRIKE PLATE 1-1/4" X 1/4" X 16-1/4" LONG ATTACHED WITH (2) #8 X 3/4" SMS

HINGES SINGLE DOORS:

TWO-HANDED COMB HING EXTRUDED ALUMINUM BRIDGE 2 BY 'GIESSE' (5) PER LEAF AT 6", 12", 35", 63-1/2" AND 92-1/2" FROM TOP OF DOOR

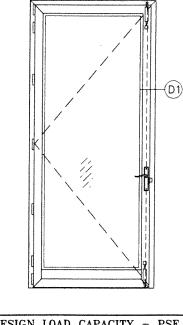

DOOR SIZE		GLASS TYPE 'B'	
WIDTH	HEIGHT	EXT. (+)	INT. (-)
2/6		100.0	140.0
3/0	6/8	100.0	140.0
3/3		100.0	140.0
2/6		100.0	140.0
3/0	7/0	100.0	140.0
3/3		100.0	140.0
2/6		100.0	140.0
3/0	8/0	100.0	140.0
3/3		100.0	140.0
		FOR INSTAL	

LOCKS SINGLE DOORS: (OPTION #2)


MANUALLY OPERATED FLUSH BOLTS AT TOP AND BOTTOM OF ACTIVE LEAF PART #02181 ATTACHED WITH (4) $\#10 \times 1-1/2$ " SMS.

3 POINT LOCK SYSTEM AT ACTIVE LOCK STILE 36" FROM BOTTOM, KEY OPERATED ON EXTERIOR AND THUMB TURN ON INTERIOR. STRIKE PLATE

1-1/4" X 1/4" X 16-1/4" LONG ATTACHED WITH (2) #8 X 3/4" SMS

HINGES SINGLE DOORS:

TWO-HANDED COMB HING EXTRUDED ALUMINUM BRIDGE 2 BY 'GIESSE' (7) PER LEAF AT 7/0 AND 8/0 DOORS AT 3", 9" AND 26-3/8" FROM TOP AND BOTTOM, ONE AT MIDSPAN (6) PER LEAF AT 6/8 DOORS AT 3", 9" AND 26-3/8" FROM TOP AND BOTTOM

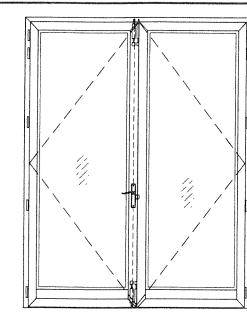

	N LOAD OUBLE	CAPACITY (XX) DOOI	
DOOR SIZE		GLASS TYPE	E 'A' OR 'B'
WIDTH	HEIGHT	EXT. (+)	INT. (-)
5/0	6/8	75.0	75.0
6/4		75.0	75.0
5/0	7/0	75.0	75.0
6/4		75.0	75.0
5/0	8/1	75.0	75.0
6/4		75.0	75.0
LOADS SHOWN ABOVE ARE FOR INSTALLATIONS WHERE WATER INFILTRATION RESISTANCE IS NOT REQUIRED. LIMIT EXTERIOR(+) LOADS TO 48 PSF FOR INSTALLATIONS WHERE WATER			
		STANCE IS RI	

LOCKS DOUBLE DOORS: (OPTION #2)

ACTIVE LEAF:

MANUALLY OPERATED FLUSH BOLTS AT TOP AND BOTTOM OF ACTIVE LEAF PART #02181 ATTACHED WITH (4) $\#8 \times 1-1/2$ " SMS.

3 POINT LOCK SYSTEM AT ACTIVE LOCK STILE 36" FROM BOTTOM, KEY OPERATED ON EXTERIOR AND THUMB TURN ON INTERIOR.


INACTIVE LEAF

MANUALLY OPERATED CONCEALED FLUSH BOLTS AT TOP AND BOTTOM OF INACTIVE LEAF PART #02168 ATTACHED WITH (4) $\#8 \times 1-1/2"$ SMS.

HINGES DOUBLE DOORS:

TWO-HANDED COMB HING EXTRUDED ALUMINUM BRIDGE 2 BY 'GIESSE' (5) PER LEAF AT 6", 12", 35", 63-1/2" AND 92-1/2" FROM TOP OF DOOR


7	ITEM #	PART #	REQD.	DESCRIPTION
l I	1	ER006	AS REQD.	DOOR FRAME
	2	ER012	AS REQD.	DOOR LEAF
	3	VZ1566	1/ LEAF	DOOR BASE BOARD
	4	VZ-1483	1/ DOOR	FRAME SILL
	5	-	1/ DOOR	SILL BASE
h	6	VZ-1481	AS REQD.	ASTRAGAL STILE
	7	VZ-1535	4/ LEAF	GLAZING BEAD
	8	2801	AS REQD.	GLAZING GASKET
	9		1	SHEAR CLIP
	10	1001/50	1/ CORNER	CORNER KEY
	11	00600X	4/ LEAF	HINGES
-	12	#10 X 3/8"	4/ HINGE	HINGE INSTALLATION SC
	13	-	AS REQD.	BULB W'STRIPPING
	14	#10 × 2"	AS REQD.	ASSEMBLY SCREWS
	15	#12 X 1-1/4		FRAME ASSEMBLY SCRE

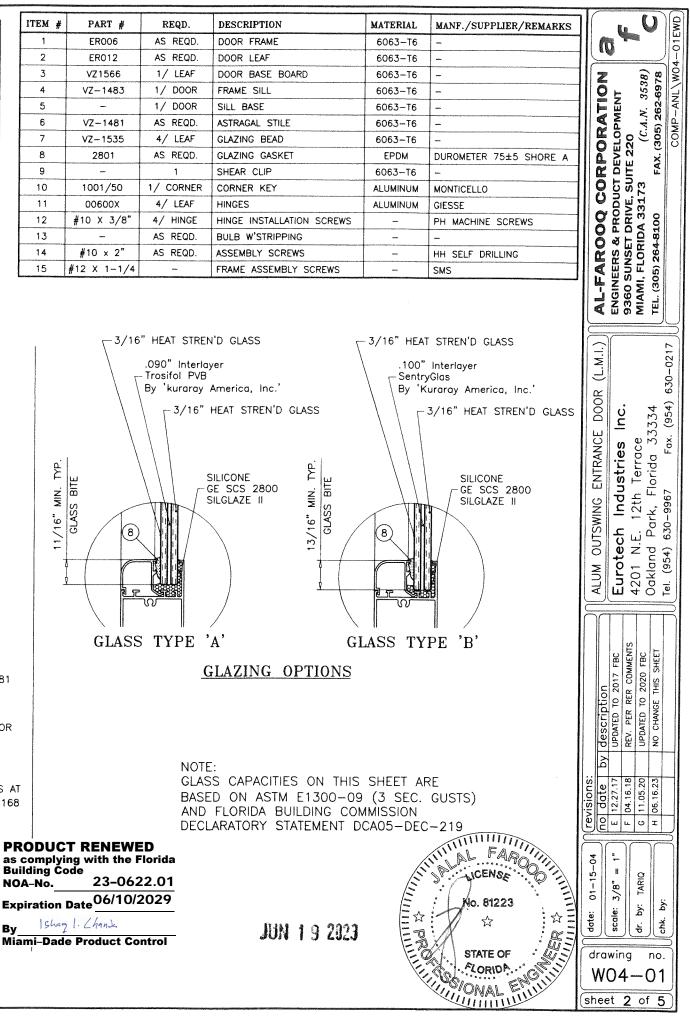


PRODUCT RENEWED

Building Co NOA–No.	23-0622.01
Expiration I	Date 06/10/2029
	1. Chandes

NOTE: TOP AND BOTTOM FLUSH BOLTS MUST BE ENGAGED DURING PERIODS OF HURRICANE WARNING.

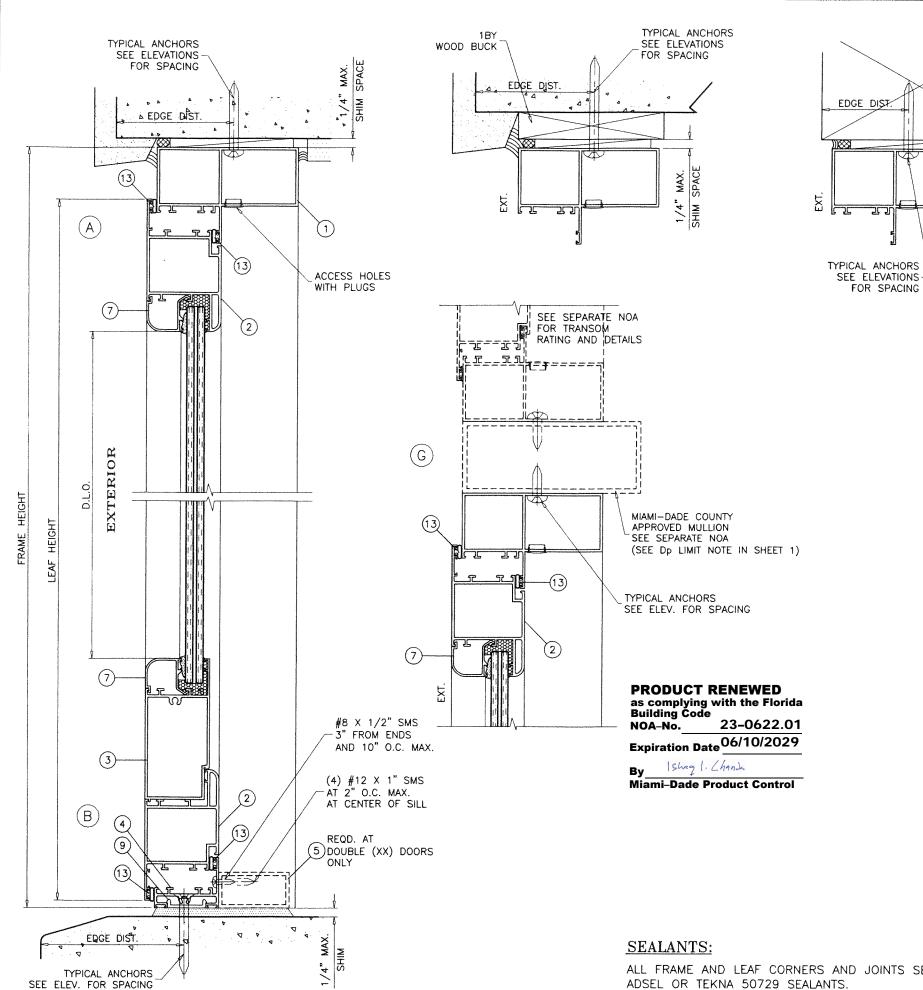

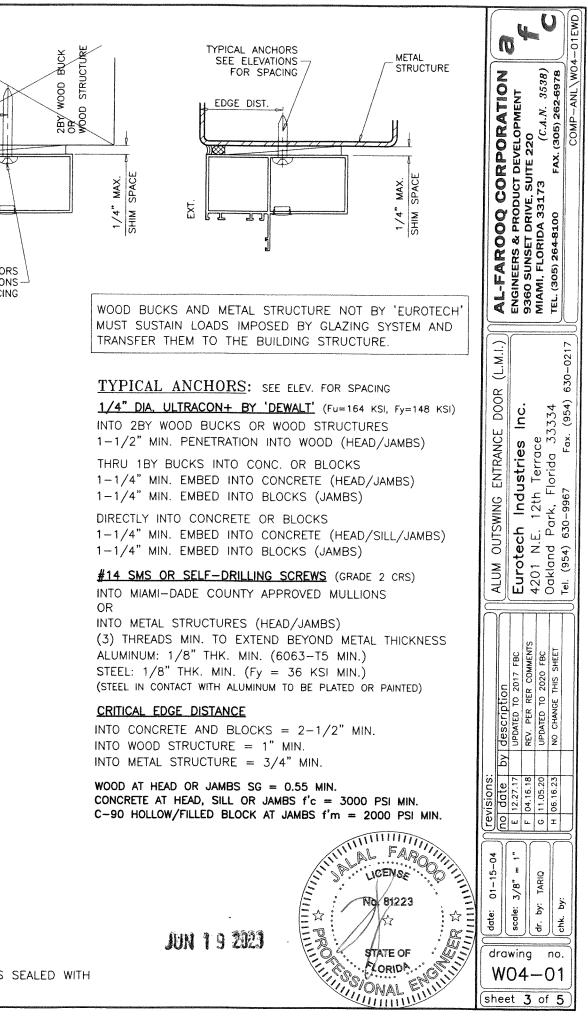

ALL FRAME AND LEAF CORNERS AND JOINTS SEALED WITH

