

#### DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION NOTICE OF ACCEPTANCE (NOA)

#### Schlage Lock Company 11819 N. Pennsylvania Street Carmel, IN 46032

#### SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

**DESCRIPTION:** SteelCraft H Series Single Flush Inswing Commercial Steel Doors w/ Mortise Lock w/dead bolt

**APPROVAL DOCUMENT:** Drawing No **776W-3 Rev N**, titled "Steelcraft H series Single Door (Inswing)", sheets 1 through 11 of 11, prepared by Building Drops, Inc., dated 05-01-02 and last revised on 07/11/2023, signed and sealed by Hermes F. Norero, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

#### **MISSILE IMPACT RATING:** Large Missile Impact Resistant

#### Limitations:

- 1. See Design pressure (w/ Standard or Stainless-Steel lock strike options) in sheet 1.
- 2. Doors are <u>Not</u> Rated for Water infiltration requirements or Fire ratings, to be reviewed by Building official.
- 3. (5) EMA anchors  $|\underline{D}|$  in sheet 7 must be into Concrete for DP > 120 PSF up to 170 PSF, unless (6)-anchors used
- 4. Non-grouted 2" face header will require head anchors per sheets <u>6</u>, <u>7</u>, <u>8</u> & <u>9</u>, Grouted 4" header required no anchors.

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, Cincinnati, Ohio and Series and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA #21-1228.04** and consists of this page 1 and evidence pages E-1, E-2, E-3, E-4 & E-5, as well as approval document mentioned above.

The submitted documentation was reviewed by Sifang Zhao, P.E.



6.2.

12/07/2023

NOA No. 23-0821.13 Expiration Date: February 24, 2027 Approval Date: December 07, 2023 Page 1

#### 1. Evidence submitted in previous NOAs

#### A. DRAWINGS

- 1. Manufacturer's parts and sections drawings (Submitted under file as below).
- 2. Drawing No **776W-3 Rev I**, titled "Steelcraft H series Single Door (Inswing)", sheets 1 through 9 of 9, prepared by Building Drops, Inc., dated 05-01-02 and last revised on 02/22/17, signed and sealed by Hermes F. Norero, P.E.

#### B. TESTS (Submitted under files #15-0427.04/#13-1217.11/#13-0617.31/#11-0921.12/ #10-1206.02)

- 1. Test report on
  - 1) Air Infiltration Test, per TAS 202-94
  - 2) Uniform Static Air Pressure Test, Loading per TAS 202-94
  - 3) Large Missile Impact Test per FBC, TAS 201-94
  - 4) Cyclic Wind Pressure Loading per FBC, TAS 203-94
  - 5) Forced Entry Test, per PA 202-94

Along with manufacturer's parts and section drawings of Single Steel doors w/ Stainless steel continuous Hinges & modified Hat stiffeners, marked by Certified Testing Lab, Test Reports No(s). **CTLA-3045W** dated February 16, 2015, signed and sealed by Ramesh Patel, P.E.

- 2. Test report on
  - 1) Air Infiltration Test, per TAS 202-94
  - 2) Uniform Static Air Pressure Test, Loading per TAS 202-94
  - 3) Large Missile Impact Test per FBC, TAS 201-94
  - 4) Cyclic Wind Pressure Loading per FBC, TAS 203-94
  - 5) Forced Entry Test, per PA 202-94

Along with manufacturer's parts and section drawings of double outswing steel doors w/CVC panic exit and Peep hole, marked by Element Material Technology, Test Reports No(s). **ESP011623P** dated May 14, 2013, signed and sealed by Jason Sheen, P.E.

- 3. Test report on
  - 1) Air Infiltration Test, per TAS 202-94
  - 2) Water Resistance Test per FBC TAS 202-94(Not conducted)
  - 3) Uniform Static Air Pressure Test, Loading per TAS 202-94
  - 3) Large Missile Impact Test per FBC, TAS 201-94
  - 4) Cyclic Wind Pressure Loading per FBC, TAS 203-94
  - 5) Forced Entry Test, per PA 202-94

along with manufacturer's parts and section drawings of Single flush Inswing / Outswing steel doors, marked by Certified Testing Lab, Test Reports No(s). **CTLA-776W -2 & CTLA-776W -3** both dated Junes 07, 2002, both signed and sealed by Ramesh Patel, P.E. Note: Test report No. **CTLA-776W -2** has been issued an addendum letter dated 12/03/09, issued by Certified Testing Lab, signed and sealed by Ramesh Patel, P.E.

4. Additional Reference test reports per CTLA 776W-1 and CTLA 1035W-2 for anchor options qualifications.

#### C. CALCULATIONS:

- 1. Anchor verification calculation and analysis prepared by Building Drops, Inc., dated 11-28-16 and last revised on 02/11/2017, signed and sealed by Hermes F. Norero, P.E.
- 2. Hinge Load Evaluation report dated 01/04/04, prepared, signed & sealed by Thomas Gordon, P.E. (submitted under **#09-0929.04**).

#### **D. QUALITY ASSURANCE BY**

- 1. Miami Dade Department of Regulatory and Economic Resources (RER).
- **E. MATERIAL CERTIFICATIONS** (submitted under file # listed above)
  - 1. Tensile test report # CTLA-776W (0194H), dated 02/25/02 prepared by CTL Architectural Division, sheet samples, tested per ASTM E8, signed & sealed by Ramesh Patel, P.E.
  - 2. Test Report No. **3094867SAT-001**, April 13, 2006, issued by Intertek for "Surface Burning Characteristics of Building material" per ASTME84 and self-Ignition per ASTM1929D for "EPS", issued to Falcon Foam, a Div. of Atlas Roofing, re-named as "ATLAS EPS'.
  - 3. Tensile Test report No. A103W1-Test 1, 2 & 3 dated 23 APR 03 per ASTME-8 for steel face sheet, prepared by Certified Testing laboratory, signed and sealed by Ramesh Patel, P.E.
  - 4. Test Report No. **16206-122543** (**1015P200(3)**), dated November 29, 2004 for "Surface Burning Characteristics of Building material" per ASTME84 and self-Ignition per ASTM1929D for "Polyisocyanurate" issued by Omega Point Lab, Inc. to Elliot Company, Indianapolis, IN.
  - 5. Material Safety Data Sheet for "Pyrophoric core PSL P250-C60" manufactured by Pyrophobic System LTD, Canada.
  - 6. Material Safety Data sheet for "Calcium Silicate Mineral Block" manufactured by Marshfield Door System Inc., Wisconsin.
- F. STATEMENTS: Except items #1 & 2, all the balanced items submitted under files listed above.
  - 1. Letter of adoption of another Engineer's work per FLA rule 61G15-27, dated NOV 11, 2016, prepared by Building Drops, Inc., signed and sealed by Hermes F. Norero, P.E.
  - Letter of conformance to FBC 2014 (5<sup>th</sup> Edition), dated 11/11/16, prepared by Building Drops, Inc., signed and sealed by Hermes F. Norero, P.E.
  - 3. Ingersoll–Rand press release, dated 12/10/12, integrating the brands of Ingersoll–Rand and Schlage among others.
  - 4. Department of State Certification of Reinstatement for SCHLAGE LOCK COMPANY, LLC as a limited liability company, active and organized under the laws of the State of Florida, dated 03/17/06 and filed with the Secretary of State
  - 5. Certification of Formation dated 12-08-2003 of Schlage Lock Company, LLC, issued by Secretary of State of Delaware.
  - 6. Statement letter dated Nov. 26, 2013 issued by Ingersoll-Rand for name change, signed by Jim Donlan, Compliance Engineer.
  - 7. Laboratory Statement of compliance, part of the above referenced test reports.
  - 8. Addendum letter dated Jan 20, 2011, issued by Certified Testing Lab confirming testing of Alum continuous hinges w/ marked-up drawings, signed and sealed by Ramesh Patel, P.E.
  - 9. Addendum letter dated DEC 19, 2011, issued by Certified Testing Lab verifying wire anchors, strength of grout, stud anchor, Strike plate and MA series Mortise Lock, supplemented w/ marked-up drawings, signed and sealed by Ramesh Patel, P.E.

- **G. OTHER** (*Except items #1*, all other items submitted under files listed above)
  - 1. This NOA revises & renews NOA #15-0427.04, expiring on 02/24/2022.
  - 2. Test proposal # 14-1086 dated AUG 29, 2014 approved by RER.
  - 3. Test proposal dated 12/03/09 for continuous hinges & SS strike plate, approved by BCCO.
  - 4. Additional marked-up drawings provided as part of addendum letters by Certified Testing laboratory, Inc.
  - 5. Photo of Stainless-Steel Strike plate supplied by Ingersoll-Rand.
  - 6. Schlage & Falcon Mortise Locks brochures / catalogs supplied by Ingersoll-Rand.
  - 7. Technical brochures of butt Hinges & continuous Hinges supplied by Ingersoll-Rand.

#### 2. Evidence submitted under previous submittal.

#### A. DRAWINGS

- 1. Drawing No **776W-3 Rev J**, titled "Steelcraft H series Single Door (Inswing)", sheets 1 through 9 of 9, prepared by Building Drops, Inc., dated 05-01-02 and last revised on 10/24/17, signed and sealed by Hermes F. Norero. P.E. Note: This revision consists of editorial FBC 2017 compliance note only.
- B. TEST
  - 1. None

# C. CALCULATIONS

1. None

# D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

# E. MATERIAL CERTIFICATIONS

1. None.

# F. STATEMENTS

- 1. Statement letter of conformance to FBC 2017 (6<sup>th</sup> Edition) dated 09/20/17, prepared by Building Drops, Inc., signed and sealed by Hermes F. Norero, P.E.
- 2. Statement letter of extent of drawing changes dated 12/11/17, prepared by Building Drops, Inc., signed and sealed by Hermes F. Norero, P.E

# G. OTHER

1. This NOA revises NOA # 16-1206.04, expiring 02/24/22.

# **3.** Evidence submitted under previous approval.

# A. DRAWINGS

- 1. Drawing No **776W-3 Rev K**, titled "Steelcraft H series Single Door (Inswing)", sheets 1 through 9 of 9, prepared by Building Drops, Inc., dated 05-01-02 and last revised on 03/04/2020, signed and sealed by Hermes F. Norero. P.E. (Note: This revision consists of address change only).
- B. TEST
  - 1. None

# C. CALCULATIONS (submitted under file #17-1026.24)

1. None.

#### D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

#### E. MATERIAL CERTIFICATIONS

1. None.

#### F. STATEMENTS

- Statement letter of conformance to FBC 2017 (6<sup>th</sup> Edition) dated 09/20/17, prepared by Building Drops, Inc., signed and sealed by Hermes F. Norero, P.E. (submitted under file #17-1026.24)
- 2. Application request of address change only by Schlage Lock company, signed by Donlan James.

#### G. OTHER

1. This NOA revises NOA # 17-1026.24, expiring 02/24/22.

#### 4. Evidence submitted under previous approval.

#### A. DRAWINGS

1. Drawing No **776W-3 Rev L**, titled "Steelcraft H series Single Door (Inswing)", sheets 1 through 9 of 9, prepared by Building Drops, Inc., dated 05-01-02 and last revised on 09/13/2020, signed and sealed by Hermes F. Norero. P.E.

#### B. TEST

1. None.

#### C. CALCULATIONS

1. None.

#### D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

#### E. MATERIAL CERTIFICATIONS

1. None.

#### F. STATEMENTS

- 1. Statement letter of conformance to FBC 2020 (7<sup>th</sup> Edition) dated 01/29/21, prepared by Building Drops, Inc., signed and sealed by Hermes F. Norero, P.E.
- 2. Statement letter dated 09/02/20 issued by Allegion in reference to DWG. revision changes, signed by Donlan James, code compliance Engineer.

#### G. OTHER

1. This NOA revises NOA # 20-0310.02, expiring 02/24/22.

#### 5. New Evidence submitted.

#### A. DRAWINGS

1. Drawing No **776W-3 Rev N**, titled "Steelcraft H series Single Door (Inswing)", sheets 1 through 11 of 11, prepared by Building Drops, Inc., dated 11/23/2021 and last revised on 07/11/2023, signed and sealed by Hermes F. Norero. P.E.

#### B. TEST

1. None.

#### C. CALCULATIONS

1. None.

#### D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

#### E. MATERIAL CERTIFICATIONS

1. None.

#### F. STATEMENTS

1. Statement letter of conformance to FBC 2023 (8<sup>th</sup> Edition) and of no financial interest dated 07/13/2023, prepared by Building Drops, Inc., signed and sealed by Hermes F. Norero, P.E.

#### G. OTHER

1. This NOA revises NOA # 21-1228.04, expiring 02/24/27.

# SCHLAGE LOCK COMPANY, LLC STEELCRAFT H SERIES SINGLE FLUSH INSWING COMMERCIAL STEEL DOOR W/ MORTISE LOCKS

#### GENERAL NOTES:

- 1. THESE PRODUCTS HAVE BEEN TESTED TO HVHZ PROTOCOLS TAS 201, 202, & 203-94 AND COMPLY WITH THE 2023 (8TH EDITION) FLORIDA BUILDING CODE.
- 2. THE DOORS ARE LARGE MISSILE IMPACT RATED.
- 3. DISSIMILAR MATERIAL IN CONTACT SHALL MEET FBC REQUIREMENTS.

#### NOTES:

- 1. ONE ROW OF PS074 WEATHERSTRIPPING PER JAMB AND HEAD. INSTALL PER SHEET 5
- 2. ANCHORING REQUIREMENTS: SEE SHEETS 6, 7, 8 AND 9 FOR APPROVED ANCHOR AND INSTALLATION REQUIREMENTS.
- HINGE REQUIREMENTS: MINIMUM (3) HINGES LOCATIONS: 9.75" FROM RABBET IN HEAD TO CL OF TOP 3. HINGE 10.38 FROM FLOOR TO CL OF BOTTOM HINGE, EQUALLY SPACED IN BETWEEN OR (1) CONTINUOUS HINGE
- 4. SEE SHEET 4 & 5 FOR AVAILABLE STANDARD DOOR / FRAME CONFIGURATIONS.
- 5. HARDWARE INSTALLATION AS PER MANUFACTURER'S INSTRUCTIONS.
- 4" FACE HEAD IS AVAILABLE WHEN FRAME IS GROUTED WITH CONCRETE, TO MAX FRAME HEIGHT 6. SHOWN
- 7. APPLY CAULK AS NEEDED.
- 8. PRODUCT IS NOT APPROVED WHERE WATER INFILTRATION REQUIREMENT IS NEEDED.
- 9. SEE SHT. 2 FOR ELEVATION AND SIZE.
- 10. SEE SHT. 6, 7, 8 AND 9 FOR WALL CONSTRUCTION, ANCHORING SYSTEM OPTIONS AND INSTALLATION
- 11. SEE SHT. 5 FOR AVAILABLE OPENING SIZES, JAMB DEPTHS AND SPECIFICATIONS.
- 12. APPROVED HARDWARE SHOWN. INSTALLATION IS PER MANUFACTURER'S INSTRUCTIONS.
- 13. STUD WALL CONSTRUCTION STRUCTURAL MEMBERS MUST BE DESIGNED TO COMPLY WITH APPROVED DESIGN PRESSURE RATING WITH 283#/FT BASIS.
- 14. NUMBER OF ANCHORS FOR VARIOUS OPENING HEIGHTS IS LIMITED BY MAXIMUM DISTANCE BETWEEN ANCHORS, SHOWN ON SHEETS 6, 7, 8 AND 9.
- 15. HEAD SECTION CAN HAVE 4" FACE DIMENSION WHEN IT'S GROUTED FULL. 2" FACE HEAD WITHOUT GROUT REQUIRES (3) EXPANSION OR LAG BOLTS IN HEAD 6" FROM EACH JAMB AND EQUALLY SPACED.
- 16. ELEVATIONS SHOWN FROM INTERIOR FOR INSWING APPLICATIONS.

#### CONSTRUCTION NOTES:

- 1. DOOR CONSTRUCTION
- 1.1. NOMINAL DOOR THICKNESS 1 3/4"
- 1.2. DOORS AVAILABLE IN FLAT AND EMBOSSED SURFACE MODELS (SEE TABLE.1)
- 1.3. ALL DOORS ARE FLUSH NO LITES OR LOUVERS APPROVED
- 1.4. DOOR VIEWERS ARE PERMITTED TO BE USED IN A DOOR WITH A DESIGN RATING OF +/-75 PSF OR LESS
- 2. FRAME CONSTRUCTION
- 2.1. NOMINAL JAMB DEPTH 5 3/4", STOP HEIGHT 5/8"
- 2.2. FRAMES AVAILABLE AS FLUSH (F-SERIES) AND MULTI-USE (MU-SERIES) (SEE TABLE. 4)
- FOR DOOR/FRAME MATERIAL SPECIFICATIONS REFERENCE SEE TABLE 2 AND 3.
- FRAME CORNER WELD: CONTINUOUS BACK WELD WITH FULL PENETRATION TO FACE SEAM. GRIND, 4. SMOOTH, PRIME, & PAINT. WELD CLASSIFICATION - E70XX. SEE SHEET 5 FOR DETAIL.

	TABLE OF CONTENTS
SHEET	SHEET DESCRIPTION
1	TOC, DESIGN PRESSURE TABLE & NOTES
2	OPENING DIMENSIONS & BOM
3	DOOR & FRAME SECTION VIEWS
4	DOOR PANEL & CORE DETAILS
5	FRAME DETAILS & CORNER CONSTRUCTION
6	ANCHORS - WIRE, WOOD STUD, STEEL STUD
7	ANCHORS - EMA IN CONCRETE OR CMU
8	ANCHORS - EMA IN WOOD STUD, MASONRY T IN CMU
9	ANCHOR DETAILS
10	HINGES, TRESHOLDS AND CHANNEL REINFORCEMENT
11	HINGES, TRESHOLDS AND CHANNEL REINFORCEMENT (CONT.)
12	LATCH & STRIKE HARDWARE DETAILS

	DESIGN PRESSURE RATING (INSWING DOOR)		
LOCK/STRIKE PLATE OPTION	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED	WHERE WATER INFILTRATION REQUIREMENT IS <u>NOT</u> NEEDED*	
STANDARD	NOT APPROVED	+120 PSF / -120 PSF	LARGE AND SMALL MISSILE IMPACT (LMI - 50 FPS)
STAINLESS STEEL SS 304 OR 306 FY MIN= 31.2 KSI	NOT APPROVED	+170 PSF / -170 PSF	

WATER INFILTRATION RESISTANCE IS NOT REQUIRED WHEN DOOR ASSEMBLIES INSTALLED IN NON-HABITABLE AREAS WHERE THE DOOR ASSEMBLY AND AREA ARE DESIGNED TO ACCEPT WATER INFILTRATION, OR IF PROTECTED BY OVERHANG WITH RATIO LENGTH/HEIGHT EQUAL OR GREATER THAN 1.

DOOR ASSEMBLIES MEET THE 2020 (7TH EDITION) FBC AIR INFILTRATION REQUIREMENTS


SCHLAGE LOCK COMPANY LLC 11819 N. PENNSYLVANIA STREET CARMEL, IN 46032

SCHLAGE


MANUFACTURING FACILITY STEELCRAFT 9017 BLUE ASH ROAD CINCINNATI, OH 45242 PH· (317) 715-/073


	PH: (317) 715-4073
	TITLE:STEELCRAFT H SERIES SINGLE FLUSH INSWING COMMERCIAL STEEL DOOR W/ MORTISE LOCKS TOC, DESIGN PRESSURE TABLE & NOTES PREPARED BY: BUILDING DROPS, INC. 398 E. DANIA BEACH, ET 33004 PH: (954)399-8478 DANIA BEACH, ET 33004 PH: (954)399-8478 BUILDING DROPS, WEB: WWW. buildingdrops.com
	REMARKS BY DATE
	ADDRESS UPDATE - 02.25.20
	2020 FBC UPDATE SM 07.05.20
	FORMAT UPDATE LL 11.30.21
	2023 FBC UPDATE OL 07.11.23 THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
	AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIRERMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT. DEVIATION IN NOA FOR HVHZ WILL REQUIRE ONE-TIME APPROVAL FROM MIAMI-DADE COUNTY.
	HERMES F. HORRO, P.E. FLORIDA P.E. NO 73778 BUILDING DROPS, INC 398 E. DANIA BEACH BLYD. # 338 DANIA BEACH, FL 33004 FBPE CERT. OF AUTHORIZATION NO. 29578
	DATE: 11.23.21
	DWG. BY: CHK. BY:
	SCALE: NTS
PRODUCT REVISED as complying with the Florida	DWG. #:776W-3 REV N
Building Code NOA-No. 23-0821.13	SHEET:
Expiration Date <u>02/24/2027</u>	
By Co	U
Miami-Dade Product Control	OF 12

ITEM	QUANTITY	DECODIDION	MATERIAL	CIZE	
	-		MATERIAL	SIZE	
1	1	HEAD SEE SHT 3 & 5. ASTM A366	.053" MIN. STL	MAX. 40"	
2	1	STRIKE JAMB. SEE SHT 5. ASTM A366	.053" MIN. STL	MAX. 86"-88"	
3	1	HINGE JAMB SEE SHT 5. ASTM A366	.053" MIN. STL	MAX. 86"-88"	
4	1	DOOR SLAB	SEE SHT 5	3'0"(36") X 7'0"(84") MAX.	
5	1	LOCK SIDE REINFORCEMENT CHANNEL SHT 11	.099" MIN. STL	3.5" X 81.44" MAX.	
6	NOTE 3, SHT1.	HINGE REINFORCEMENT DOOR ASTM A621 SHT 10	.167" MIN. STL.	1.23" X 9.19"	
7	NOTE 3, SHT1.	HINGE REINFORCEMENT FRAME ASTM A621 SHT 10	.167" MIN. STL.	1.28" X 9.19"	
0		4.5" X 4.5" BUTT HINGES (SEE SHT. 11)	.134 MIN.	(4) #12-24 MS PER HINGE	
8	NOTE 3, SHT1.	OPTIONAL CONTINUOUS HINGE (SEE SHT. 11)	.750" MIN.STL /.11 ALUM.	MAX. 84"	
		CORE MATERIAL:			
		D) HONEYCOMB C) STEEL STIFFENED			
9	1	A&F) POLYSTYRENE B&F) POLYURETHANE	SEE SHEET 4	35.66" X 81.5" MAX.	
		E) MINERAL BOARD TEMPERATURE RISE CORE			
		LOCKING HARDWARE - LOCKSET			
10	1	1) SCHLAGE L/LV9400 SERIES MORTISE LOCK W/DEADBOLT	SEE SHEET 12		
		2) FALCON MA-SERIES MORTISE LOCK W/ DEADBOLT			
		THRESHOLD SILL W/BUMPER GASKET. SHT. 10			
11	1	1) PEMKO 2005AS 3) ZERO 566A	.125" ALUM. 6063 T5	5.5" X 0.5" X 36" MAX	
		2) NAT'L GUARD 950A	.078" ALUM. 6063 T5		
12	NOTE 2, SHT1.	JAMB ANCHOR (LOCK-IN OR WELD-IN) MIN 18 GA	SEE SHTS. 6, 7 & 8		
13	3	PSO74 WEATHER STRIPPING. SHEET 10	TPE	MAX. 21'	
14	1	FAS-SEAL DOOR SWEEP	TPE	MAX. 35.66"	
15	2	END CHANNEL ASTM A924 (14 GAGE) SHT 4	.070" MIN. STL	.69" X 1.66" X 35.66" MAX.	
16	AS NEEDED	BUTYL RUBBER OR 100% SILICONE			
17	1	TOP CAP GALV. A60 ASTM A924 (24 GAGE) SHT 4	.020" MIN. STL	0.5" X 1.76" X 36" MAX	
18	1	STRIKE REINFORCEMENT FRAME ASTM A366 SHT 3	.053" MIN. STL	1.31" X 8.38"	
19		IVES 698/U698 VIEWER SHT 10	BRASS		
20	NOTE 3, SHT1.	.045" (19 GA.) WIRE DOOR HINGE SPACER SHT 10	.045" MIN. STL		

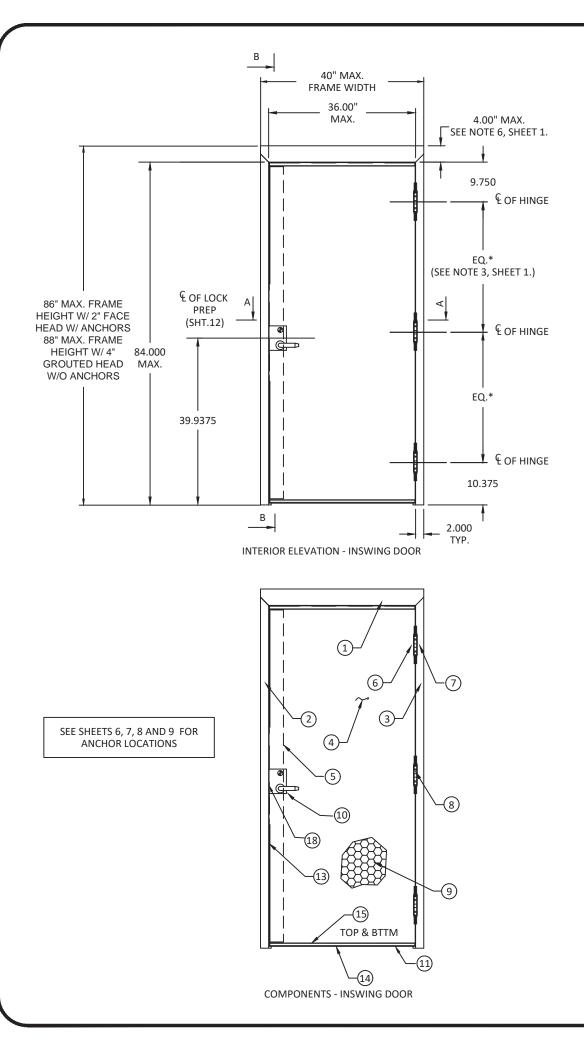

	<b>REVISED</b> g with the Florida
Building Coc NOA–No.	
Expiration D	ate <u>02/24/2027</u>
Ву	2
Miami-Dade	Product Control

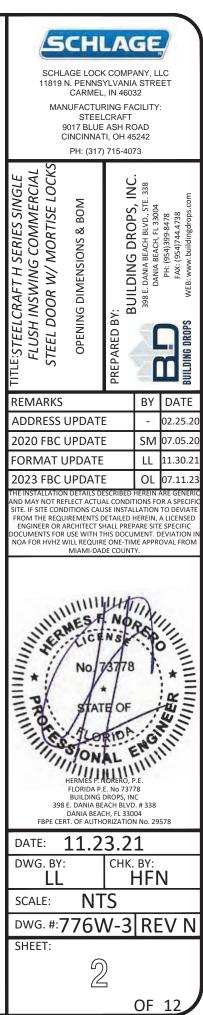

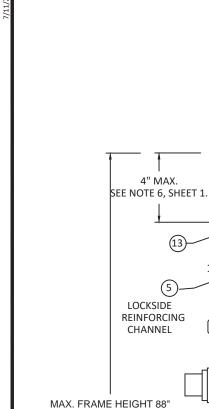



Ð

EXTERIOR

SEE SHT 10

SEE SHT 10

(14)


11


INTERIOR

INT.

(13)


MAX. FRAME HEIGHT 86"

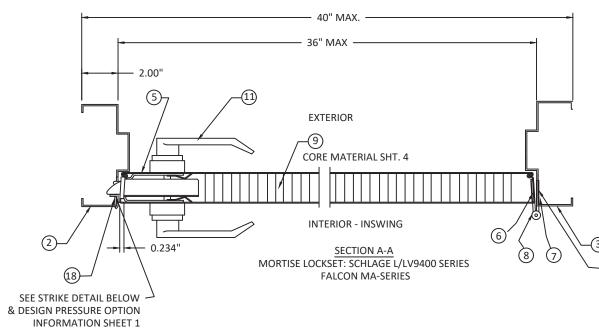




2" MAX.

SEE NOTE 6, SHEET 1.




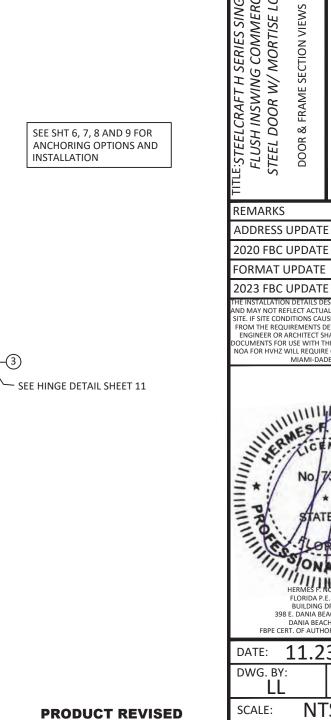

as complying with the Florida Building Code NOA-No. 23-0821.13 NOA-No.

Expiration Date <u>02/24</u>/2027

00 By Miami-Dade Product Control

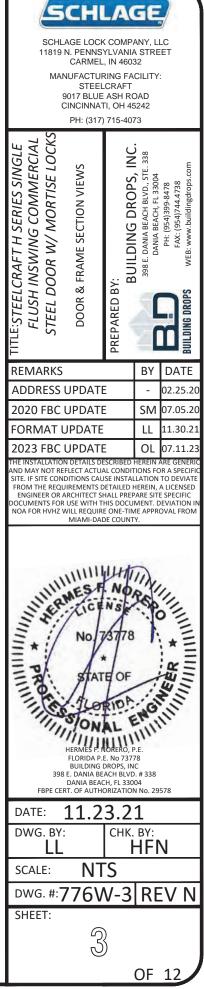


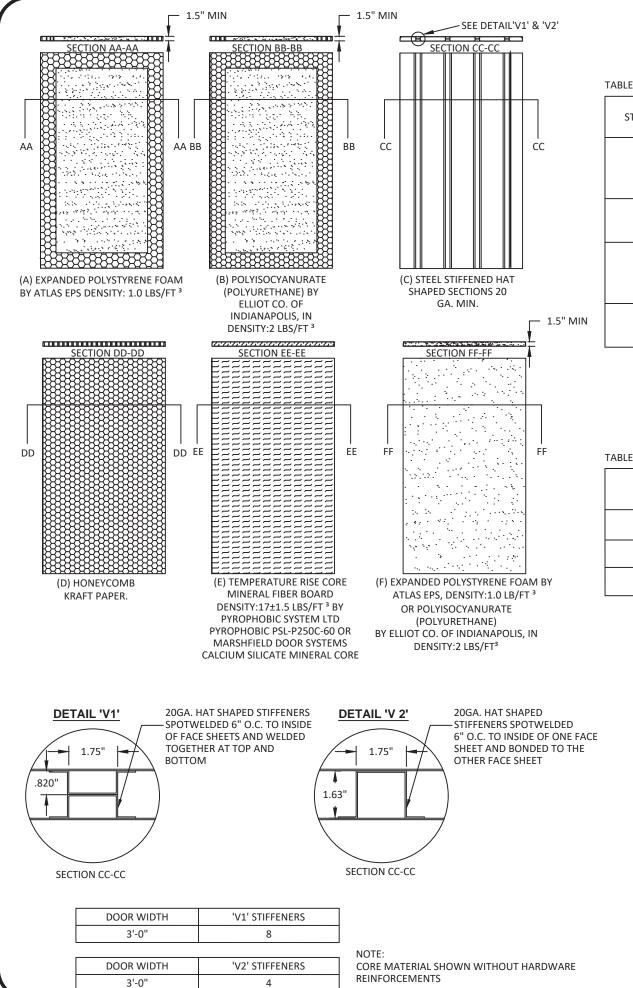


TABLE 1.	AVAILABLE STEELCRAFT	DOOR CONFIGURATIONS	(SEE CONSTRUCTION NOTE 1, SI	HEET 1.)
----------	----------------------	---------------------	------------------------------	----------


STEELCRAFT H SERIES DOOR TYPE	CORE MATERIAL	MAXIMUM OPENING SIZE		SKIN MATERIAL	
STELECKALL TO SERIES DOOR THE	PER THIS SHEET	WIDTH	HEIGHT	DESCR.	GA./MIN. THK
FLUSH	HONEYCOMB POLYSTYRENE POLYURETHANE	3'0"	7'0"	CRS GALV	16/.053" 14/.067"
STEEL STIFFENED	STEEL STIFFENED	3'0"	7'0"	CRS GALV	16/.053" 14/.067"
TEMPERATURE RISE CORE	MINERAL FIBER	3'0"	7'0"	CRS GALV	16/.053" 14/.067"
EMBOSSED PANELS	POLYSTYRENE/ HONEYCOMB	3'0"	7'0"	GALV	16/.053"

#### TABLE 2. STEEL DOOR MECHANICAL PROPERTIES.

MATERIAL	ASTM REF.	DOOR		
MATERIAL	ASTIMILEI.	YIELD (KSI)	TENSILE (KSI)	
CRS	ASTM A366	44.7 MIN.	50.2 MIN.	
HRS	ASTM A1011	44.7 MIN.	50.2 MIN.	
GALV: A60	ASTM A924	44.7 MIN.	50.2 MIN.	




24 GA TOP CAP (17)




TOP & BOTTOM CHANNEL L=FULL DOOR WIDTH 14 GAGE






# SCHLAGE SCHLAGE LOCK COMPANY, LLC 11819 N. PENNSYLVANIA STREET CARMEL, IN 46032 MANUFACTURING FACILITY: STEELCRAFT 9017 BLUE ASH ROAD CINCINNATI, OH 45242 PH: (317) 715-4073 TLE:STEELCRAFT H SERIES SINGLE FLUSH INSWING COMMERCIAL STEEL DOOR W/ MORTISE LOCK INC. 3UILDING DROPS, I 398 E. DANIA BEACH BLVD., STE. DANIA BEACH, FL 33004 PH: (954)399-8478 CORE DETAILS DOOR PANEL & .: B REPARED B REMARKS BY DATE 02.25.2 ADDRESS UPDATE SM 07.05.20 2020 FBC UPDATE LL 11.30.21 FORMAT UPDATE 2023 FBC UPDATE OL 07.11.2 THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENER AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIF SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIAT FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT. DEVIATION II NOA FOR HVHZ WILL REQUIRE ONE-TIME APPROVAL FROM MIAMI-DADE COUNTY. No 73778 No 73778 STATE OF HERMES F. NOREO, P.E. FLORIDA ENDINE FLORIDA P.E. No 73778 BUILDING DROPS, INC 398 E. DANIA BEACH BLVD. # 338 DANIA BEACH, FL 33004 FBPE CERT. OF AUTHORIZATION No. 29578 DATE: 11.23.21 DWG. BY: CHK. BY: HFN LL SCALE: NTS DWG. #:776W-3 REV N SHEET: OF 12

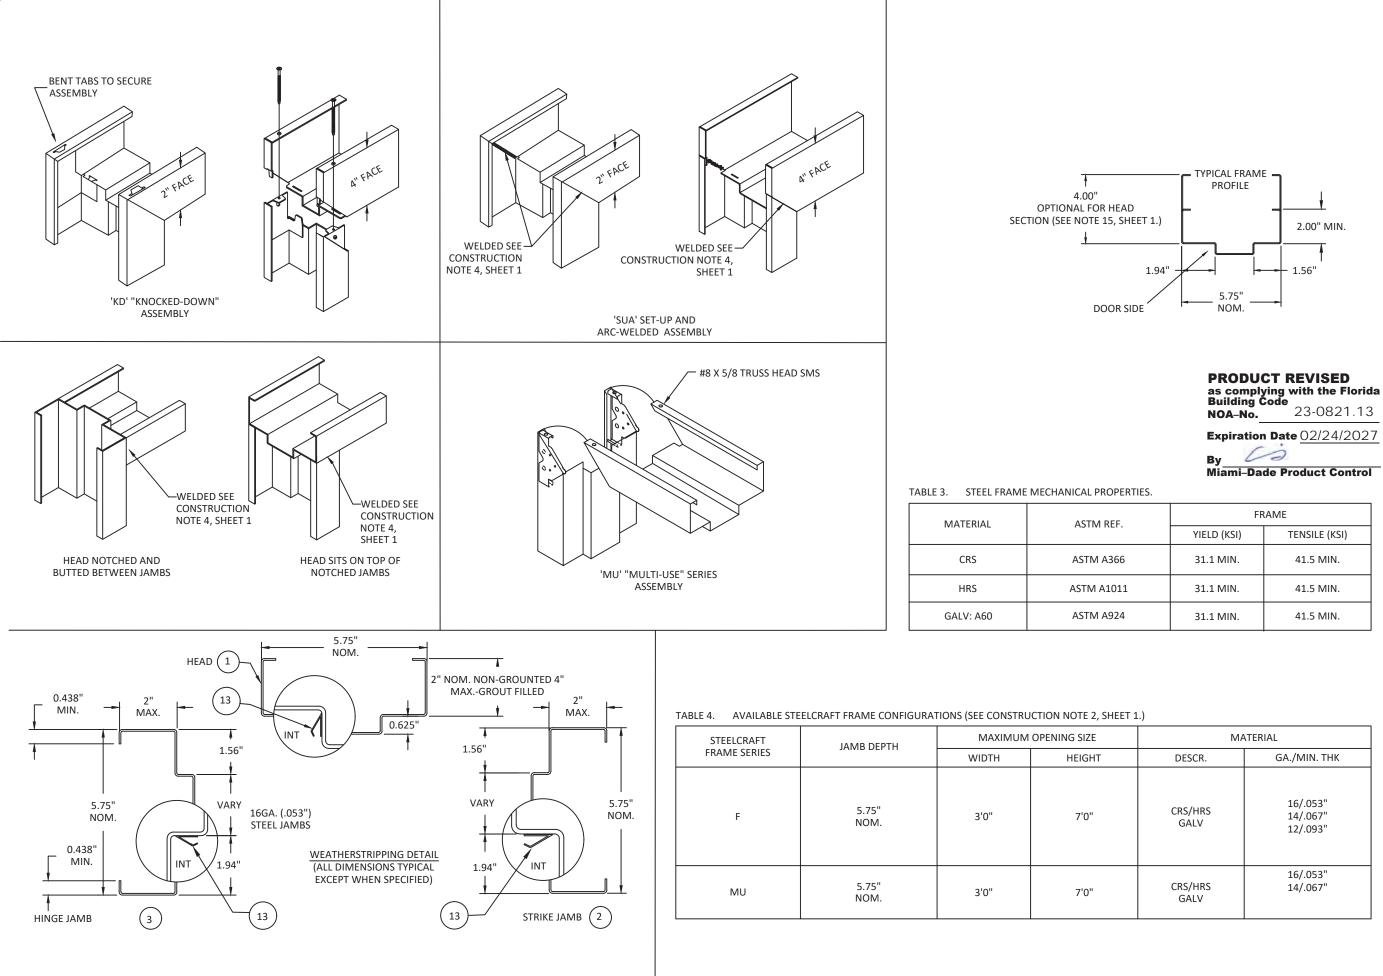



FF	AME
YIELD (KSI)	TENSILE (KSI)
31.1 MIN.	41.5 MIN.
31.1 MIN.	41.5 MIN.
31.1 MIN.	41.5 MIN.


MATERIAL		
DESCR.	GA./MIN. THK	
CRS/HRS GALV	16/.053" 14/.067" 12/.093"	
CRS/HRS GALV	16/.053" 14/.067"	

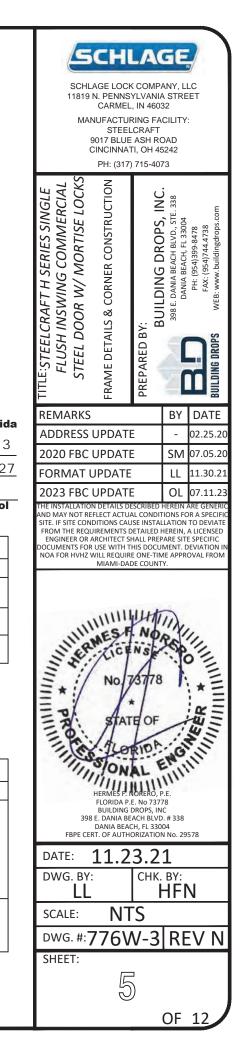



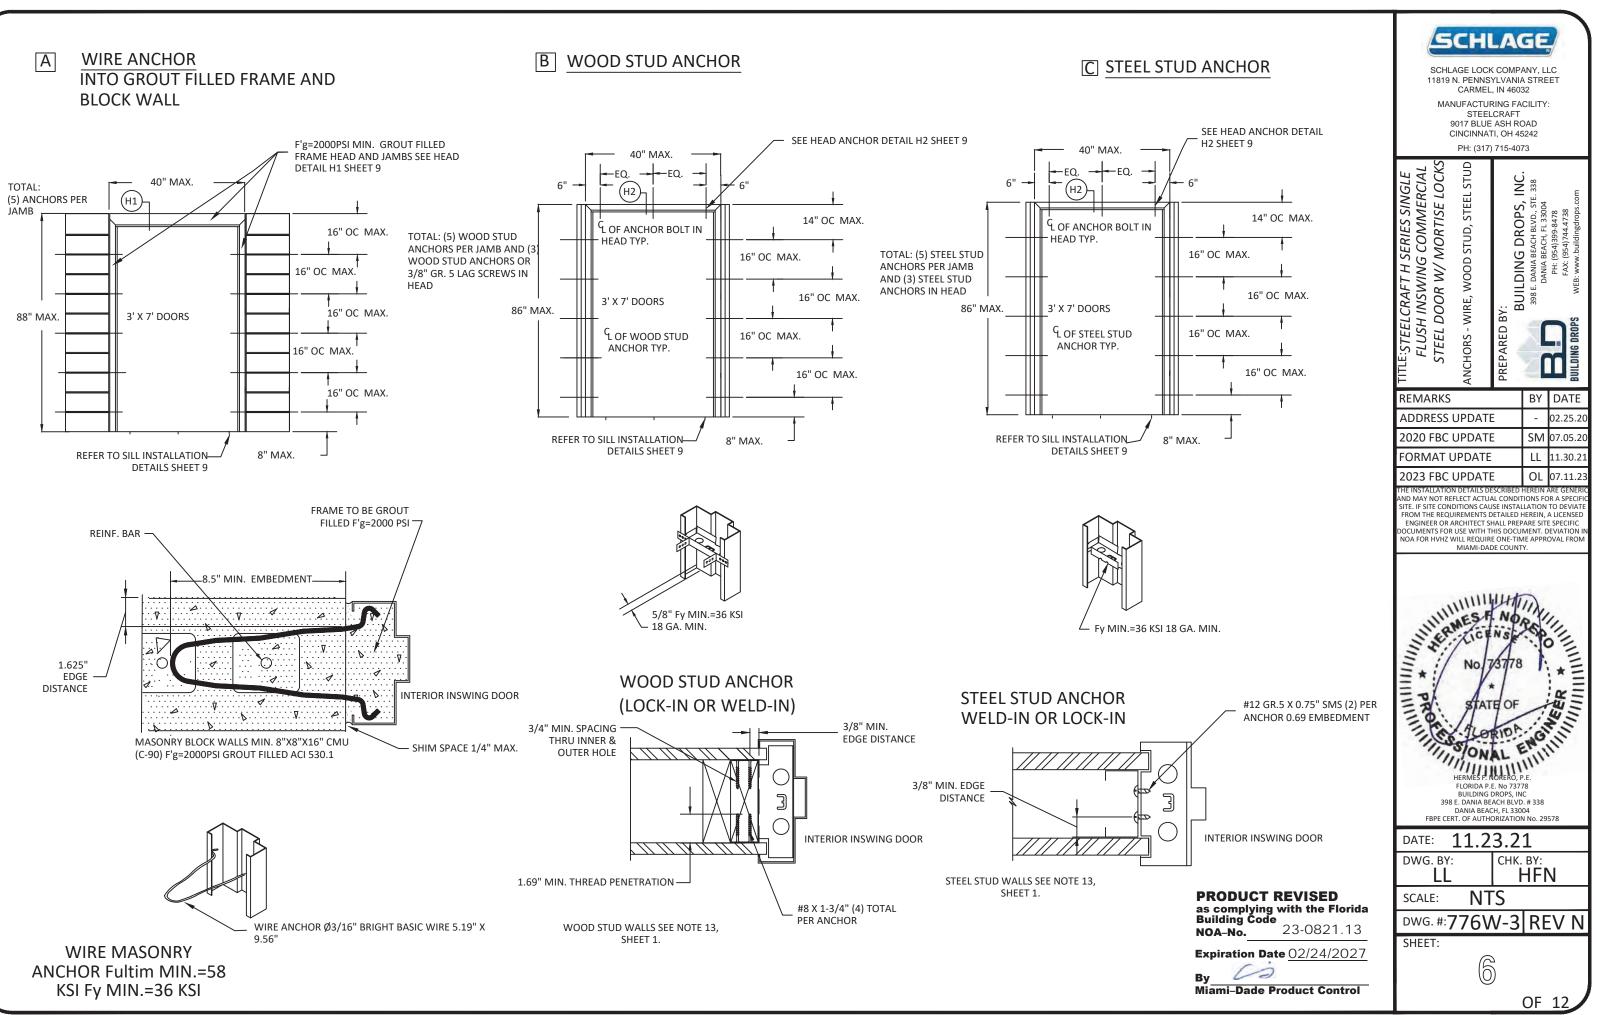

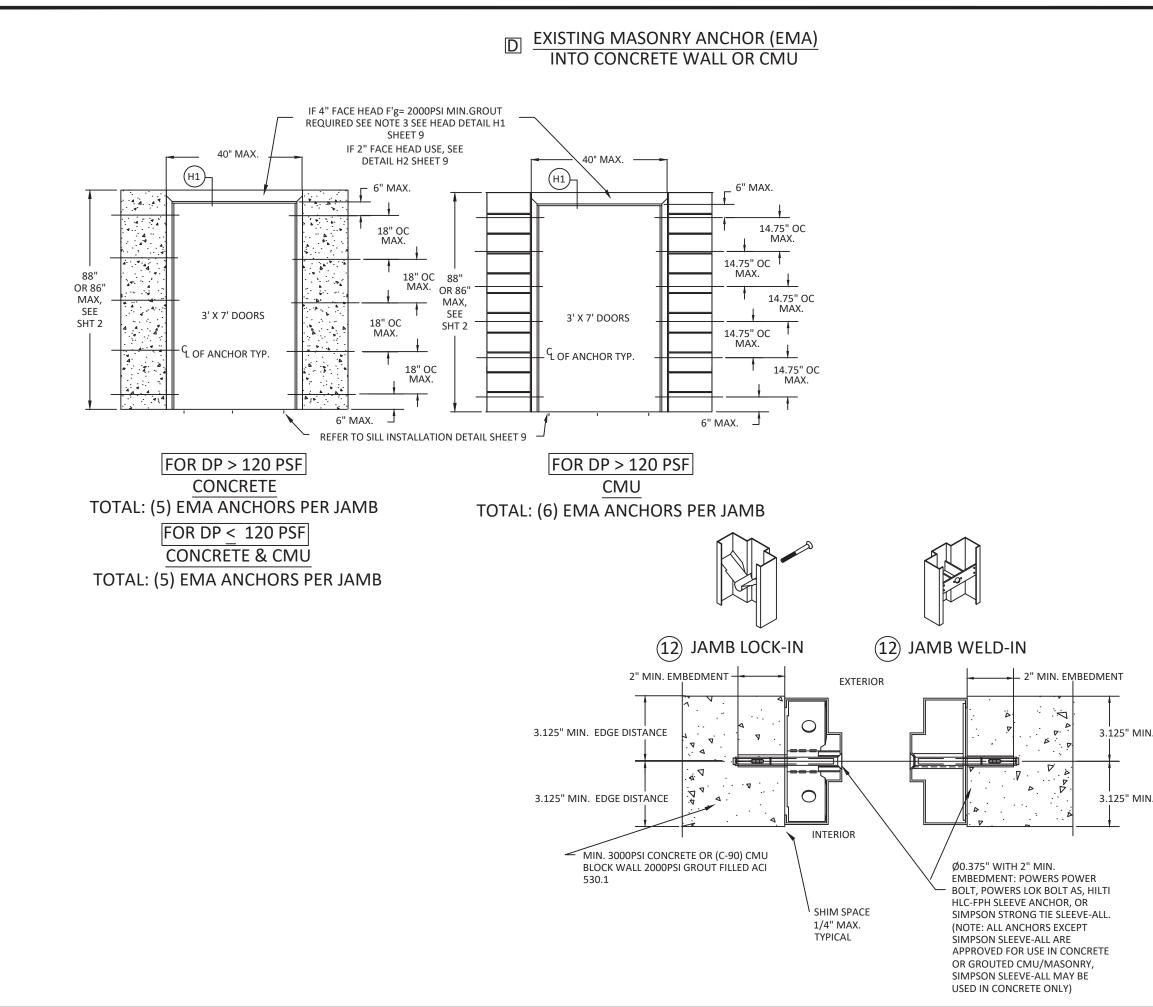


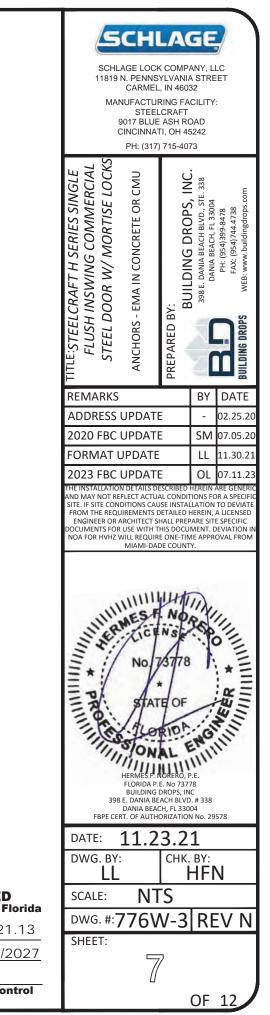



3.125" MIN. EDGE DISTANCE


3.125" MIN. EDGE DISTANCE




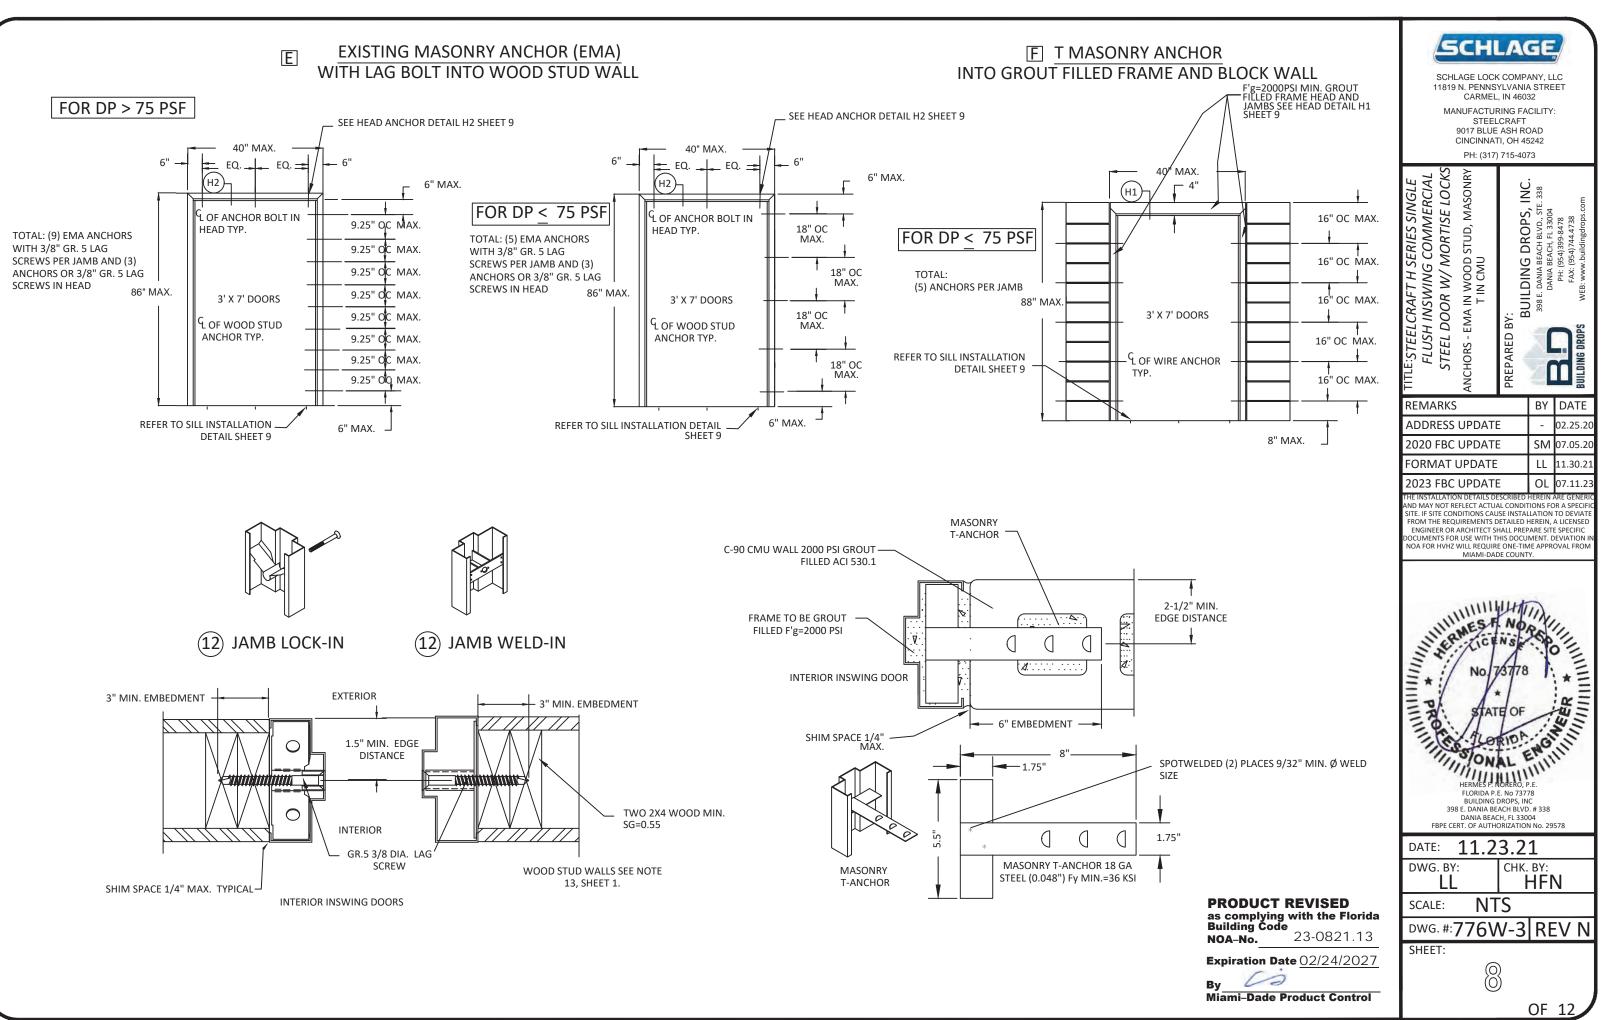

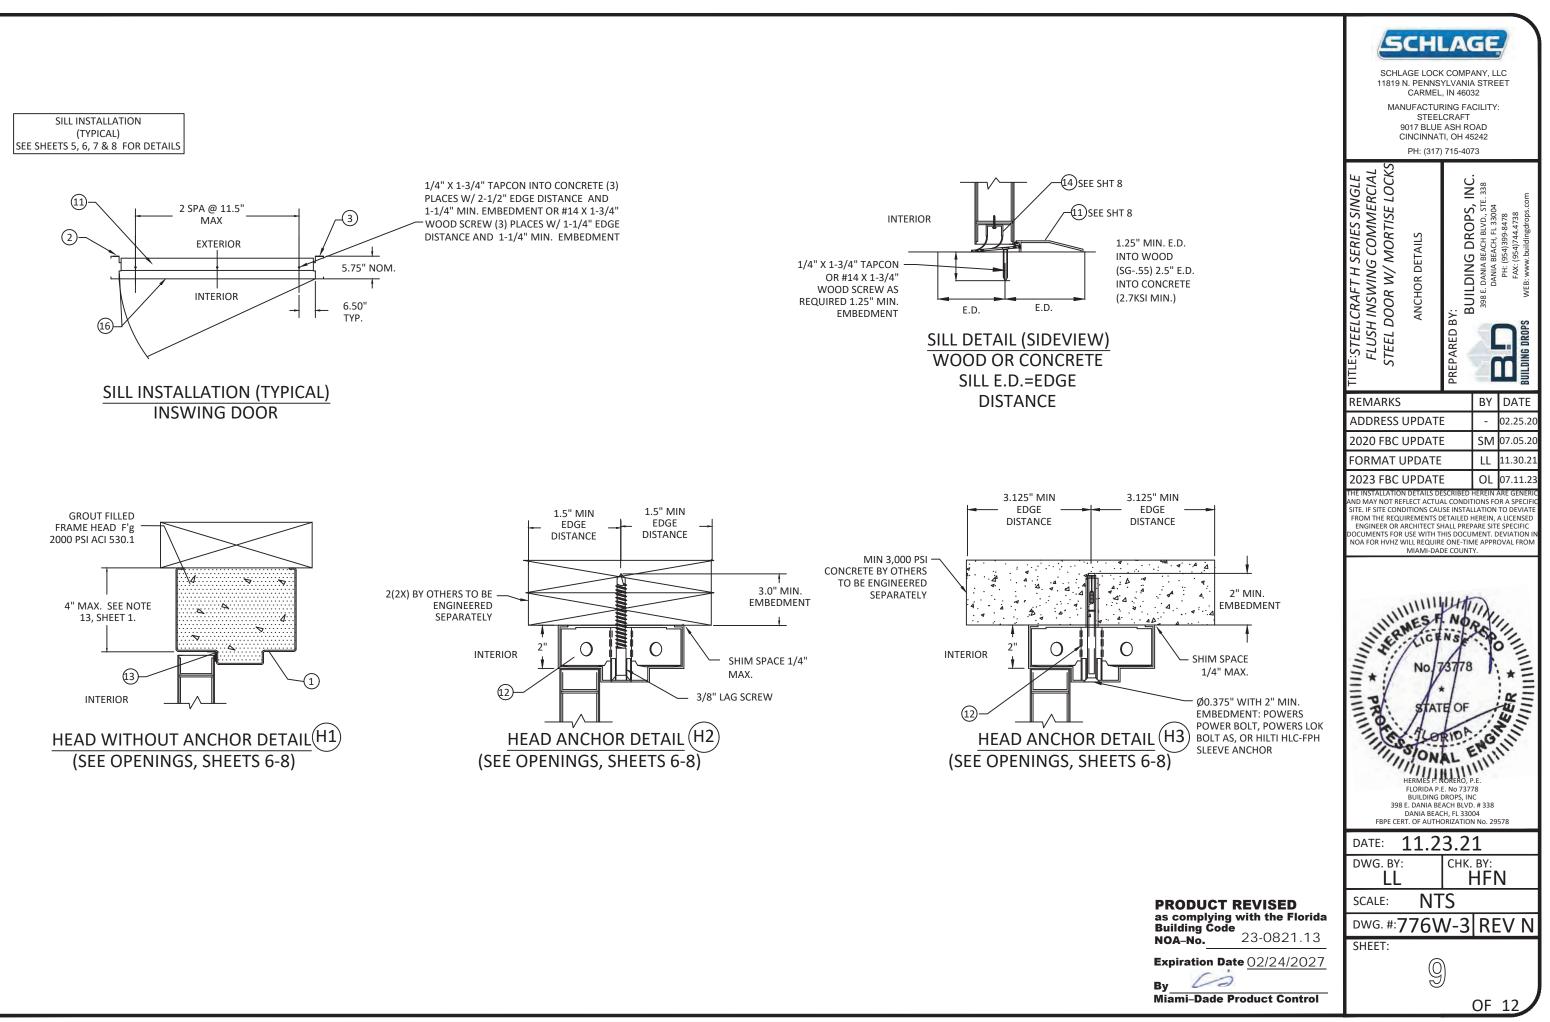

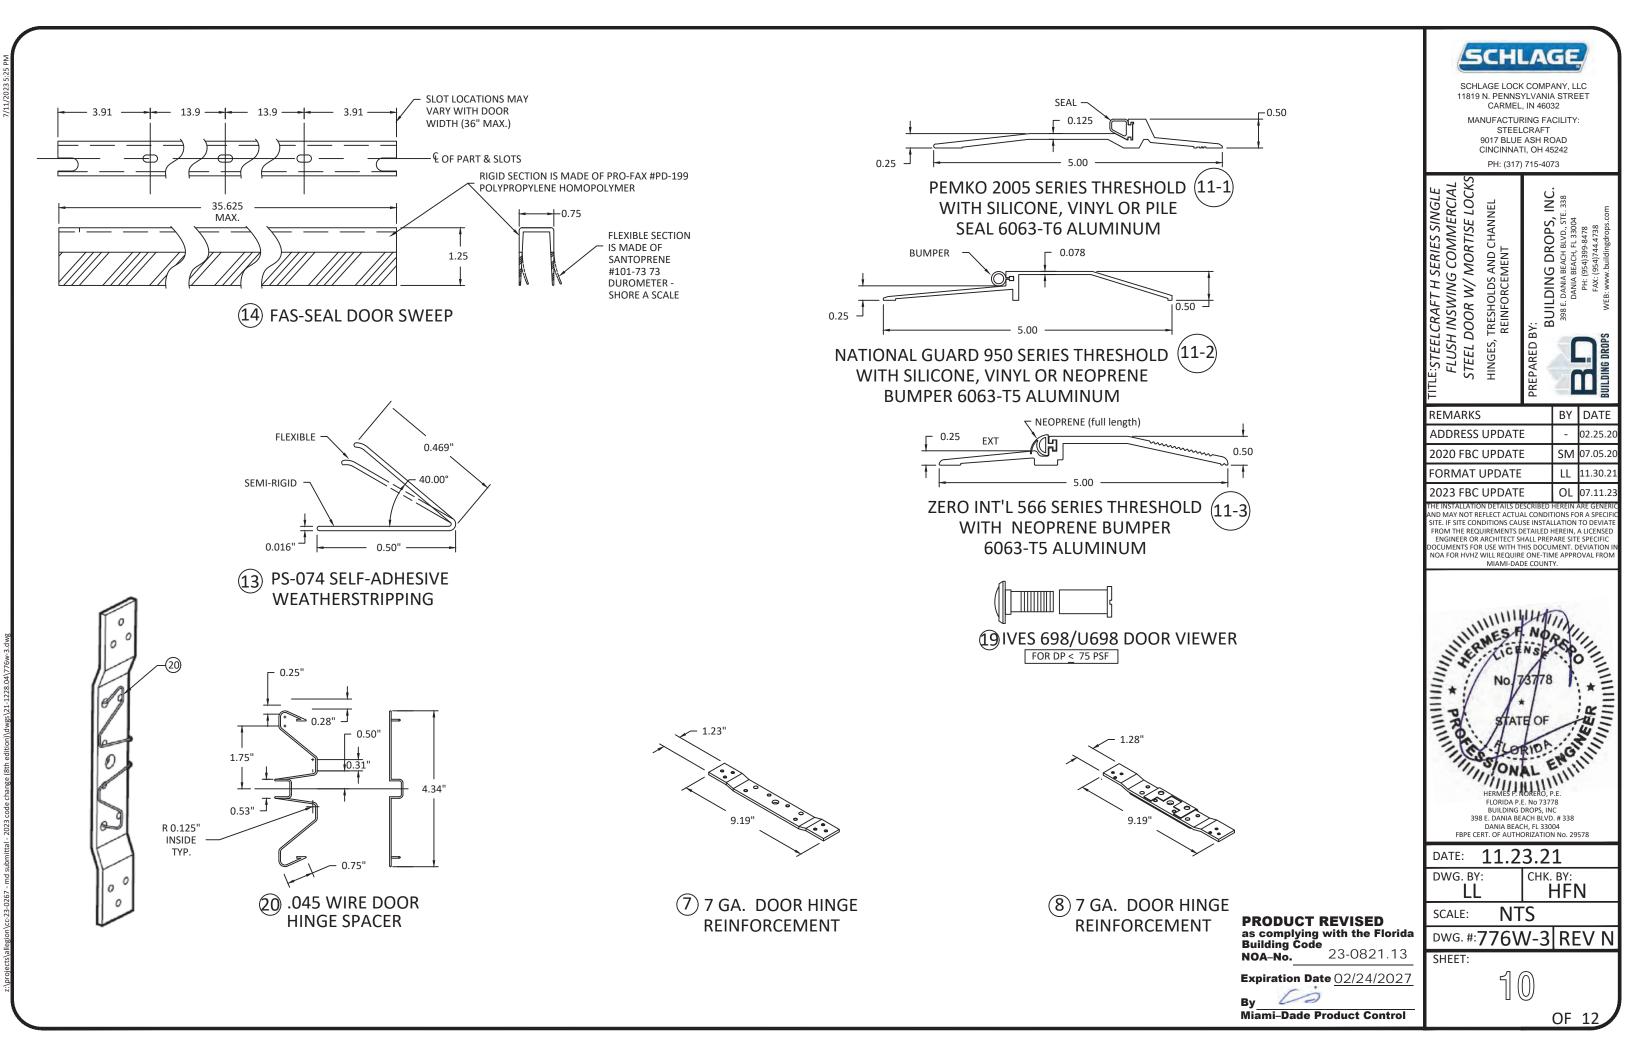

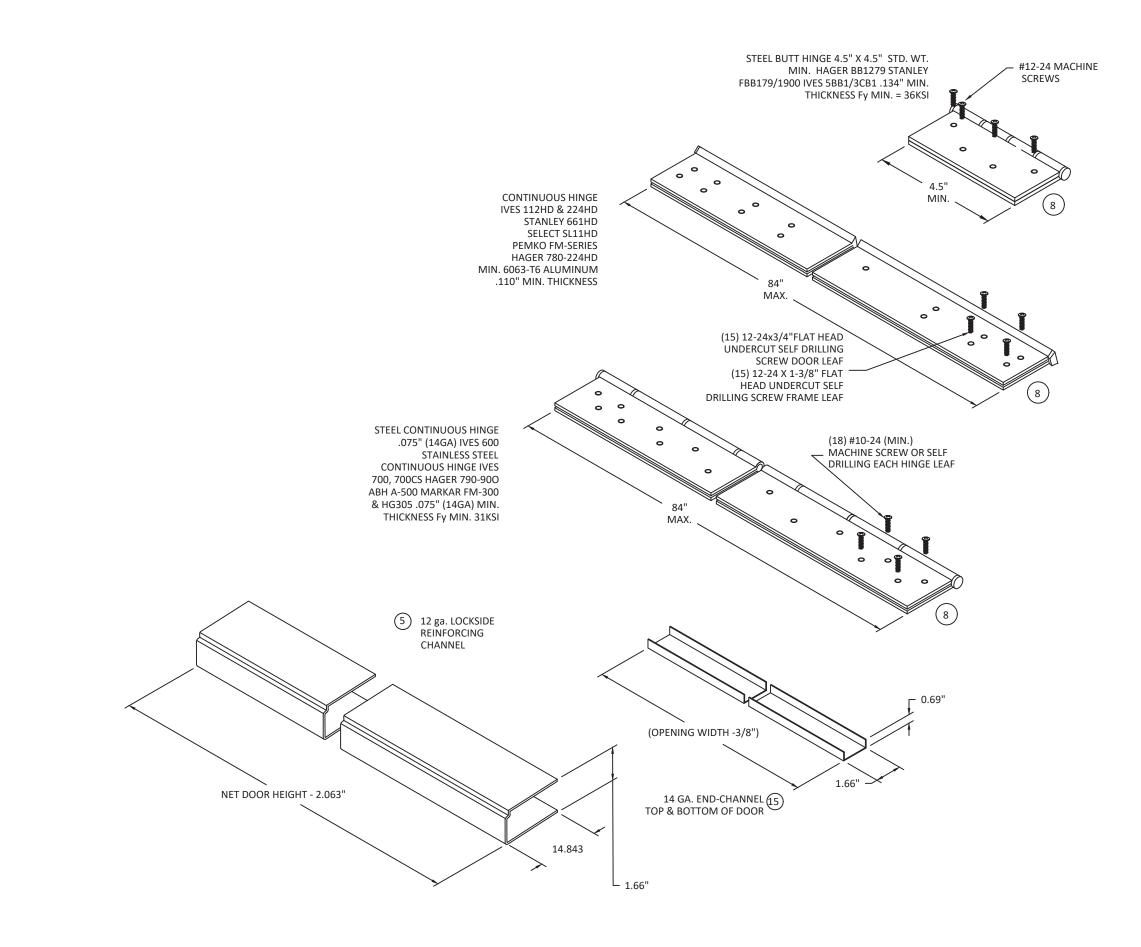

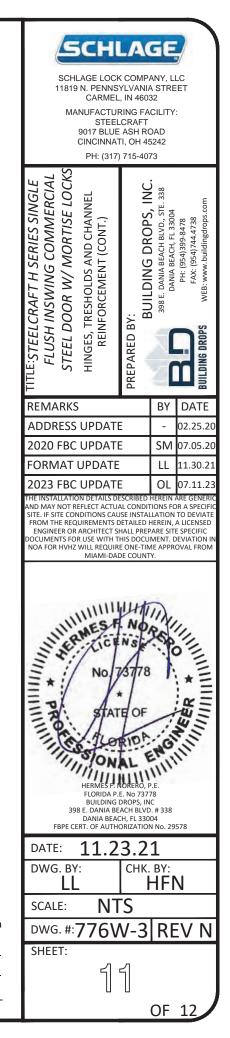

#### PRODUCT REVISED as complying with the Florida Building Code NOA-No. 23-0821.13

Expiration Date 02/24/2027

By \_\_\_\_\_ Miami-Dade Product Control

