

MIAMI–DADE COUNTY PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315–2590 F (786) 315–2599 www.miamidade.gov/building

Tecnoglass, LLC 3550 NW 49 Street Miami, FL 33142

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami–Dade County RER–Product Control Section to be used in Miami–Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami–Dade County Product Control Section (In Miami–Dade County) and/or the AHJ (in areas other than Miami–Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami–Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "500Y" Aluminum Single Hung Window – S.M.I.

APPROVAL DOCUMENT: Drawing No. **W03-111**, titled "Series 500Y Alum Single Hung Window (S.M.I.)", sheets 1 through 10 of 10, dated 12/11/03, with revision **K** dated 09/14/23, prepared by Al–Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami–Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami–Dade County Product Control Section.

MISSILE IMPACT RATING: Small Missile Impact Resistant.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, **Barranquilla**, **Colombia S.A.**, series and following statement: "Miami–Dade County Product Control Approved" unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami–Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA No. 20-1202.09** and consists of this page 1, evidence pages E-1, E-2, E-3 and E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

(MIAMI-DADE COUNTY) APPROVED

10/17/23

NOA No. 23-0928.11 Expiration Date: June 23, 2025 Approval Date: October 26, 2023 Page 1

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. (Submitted under NOA's No. 07-0706.07 and 05-0519.01)
- Drawing No. W03-111, titled "Series 500Y Alum Single Hung Window (S.M.I.)", sheets 1 through 10 of 10, dated 12/11/03, with revision J dated 11/20/20, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 20-1202.09)

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Small Missile Impact Test per FBC, TAS 201-94
 - 5) Large Missile Impact Test per FBC, TAS 201-94
 - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Fenestration Testing Laboratories, Inc., Test Report No. **FTL-5988**, dated 08/31/09, signed and sealed by Julio E. Gonzalez, P.E. *(Submitted under NOA No. 07-0706.07)*

- Test report on: 1) Pendulum Impact Test, per CPSC 16 CFR 1201 Category II, along with marked-up drawings and installation diagram of an aluminum fixed window, prepared by Fenestration Testing Laboratories, Inc., Test Report No. FTL-5321, dated 07/05/07, signed and sealed by Carlos S. Rionda, P.E. (Submitted under NOA No. 07-0706.07)
- **3.** Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Small Missile Impact Test, per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading, per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Fenestration Testing Laboratories, Inc., Test Reports No. **FTL-4526** and **FTL-4352**, dated 02/18/05 and 01/10/05 respectively, both signed and sealed by Edmundo Largaespada, P.E.

(Submitted under NOA No. 05-0519.01)

Manue

Manuel Perez, P.E. Product Control Examiner NOA No. 23-0928.11 Expiration Date: June 23, 2025 Approval Date: October 26, 2023

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

B. TESTS (CONTINUED)

Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94

 Cyclic Wind Pressure Loading per FBC, TAS 203-94
 along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Fenestration Testing Laboratories, Inc., Test Report No.

 FTL-4268, dated 01/10/05, signed and sealed by Edmundo Largaespada, P.E.

 (Submitted under NOA No. 05-0519.01)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, dated 04/07/15 and updated on 02/16/18, to comply with **FBC 6th Edition (2017)**, and updated on 11/20/20 to comply with **FBC 7th Edition (2020)**, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

(Submitted under NOA No. 20-1202.09)

2. Glazing complies with **ASTM E 1300-09**

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 18-0725.11 issued to Kuraray America, Inc. for their "Kuraray SentryGlas[®] Xtra[™] (SGX[™]) Clear Glass Interlayer" dated 05/23/19, expiring on 05/23/24.
- 2. Notice of Acceptance No. 19-0305.02 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 05/09/19, expiring on 07/08/24.
- 3. Notice of Acceptance No. 20-0622.01 issued to Eastman Chemical Company (MA) for their "Saflex PVB Clear and Color Glass Interlayers" dated 08/06/20, expiring on 05/21/21.

F. STATEMENTS

- Statement letter of conformance, complying with FBC 6th Edition (2017), with FBC 7th Edition (2020) and of no financial interest, dated November 20, 2020, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 20-1202.09)
- 2. Asset purchase agreement dated 06/19/14, signed by Mr. Raul Casares, for and on behalf of R.C. Aluminum Industries, Inc. and Mr. José M. Daes, for and on behalf of Tecnoglass, LLC.

(Submitted under NOA No. 14-0923.06)

Manuel Perez, P.E. Product Control Examiner NOA No. 23-0928.11 Expiration Date: June 23, 2025 Approval Date: October 26, 2023

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

F. STATEMENTS (CONTINUED)

- 3. Statement letter dated 07/15/14, issued by R.C. Aluminum Industries, Inc. of sales of asset and relinquishing of all rights of NOA No. 12-0330.07, signed by Raul Casares, for and on behalf of R.C. Aluminum Industries, Inc. (Submitted under NOA No. 14-0923.06)
- 4. Department of State Certification of **TECNOGLASS**, LLC as a limited liability company, active and organized under the laws of the State of Florida, dated 03/03/14 and signed by Ken Detzner, Secretary of State. *(Submitted under NOA No. 14-0923.06)*
- Laboratory compliance letters for Test Reports No.'s FTL-4521, dated 01/18/05 and FTL-4353, dated 02/18/05, both issued by Fenestration Testing Laboratories, Inc., signed and sealed by Edmundo J. Largaespada, P.E. (Submitted under NOA No. 05-0519.02)

G. OTHERS

1. Notice of Acceptance No. **20-0310.18**, issued to Tecnoglass, LLC, for their Series "500-Y" Aluminum Single Hung Window – S.M.I., approved on 05/07/20 and expiring on 06/23/25.

Manuel Perez, P.E. Product Control Examiner NOA No. 23-0928.11 Expiration Date: June 23, 2025 Approval Date: October 26, 2023

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **W03-111**, titled "Series 500Y Alum Single Hung Window (S.M.I.)", sheets 1 through 10 of 10, dated 12/11/03, with revision **K** dated 09/14/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 22-1116.01 issued to Kuraray America, Inc. for their "SentryGlas® (Clear and White) Glass Interlayers" dated 12/15/22, expiring on 07/04/28.
- 2. Notice of Acceptance No. 20-0915.22 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 11/19/20, expiring on 07/08/24.
- 3. Notice of Acceptance No. 21-0216.01 issued to Eastman Chemical Company (MA) for their "Saflex PVB Interlayers Clear and Colored for Glass" dated 04/29/21, expiring on 05/21/26.

F. STATEMENTS

Statement letter of conformance, complying with FBC 7th Edition (2020), with FBC 8th Edition (2023) and of no financial interest, dated September 25, 2023, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

G. OTHERS

1. Notice of Acceptance No. **20-1202.09**, issued to Tecnoglass, LLC, for their Series "500-Y" Aluminum Single Hung Window – S.M.I., approved on 02/25/21 and expiring on 06/23/25.

Manuel Perez, P.E. Product Control Examiner NOA No. 23-0928.11 Expiration Date: June 23, 2025 Approval Date: October 26, 2023

THESE WINDOWS ARE RATED FOR SMALL MISSILE IMPACT MIAMI-DADE COUNTY APPROVED IMPACT RESISTANT SHUTTERS ARE REQUIRED FOR INSTALLATIONS UPTO 30 FT. OF GRADE. SHUTTERS NOT REQUIRED FOR INSTALLATIONS ABOVE 30 FT. OF GRADE.

SERIES 500Y

ALUMINUM SINGLE HUNG WINDOW

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE COMBINATIONS OF S.H. TO S.H. OR S.H./FIX. TO S.H./FIX. IN MODULES OF TWO OR MORE WINDOWS USING MIAMI-DADE COUNTY APPROVED MULLIONS IN BETWEEN

FOR S.H. WINDOW CAPACITY SEE CHARTS ON SHEETS 3 & 4. FOR WINDOWALL BOTTOM LITE CAPACITY SEE CHART ON SHEET 7. FOR WINDOW MULLION CAPACITY SEE CHART ON SHEET 7. LOWER DESIGN PRESSURES FROM CHARTS ABOVE WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2020 (7TH EDITION)/2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.


ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.


MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2020/2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC

CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.


DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'

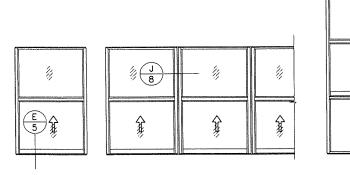


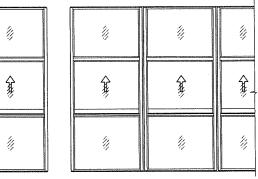


APPROVED CONFIGURATIONS

APPROVAL APPLIES TO INDIVIDUAL UNITS OF SINGLE HUNG WINDOWS OR SINGLE HUNG OVER FIXED WINDOWS. ALSO SIDE BY SIDE COMBINATIONS OF S.H. TO S.H. OR S.H./FIX. TO S.H./FIX. IN MODULES OF TWO OR MORE UNITS USING MULLIONS.

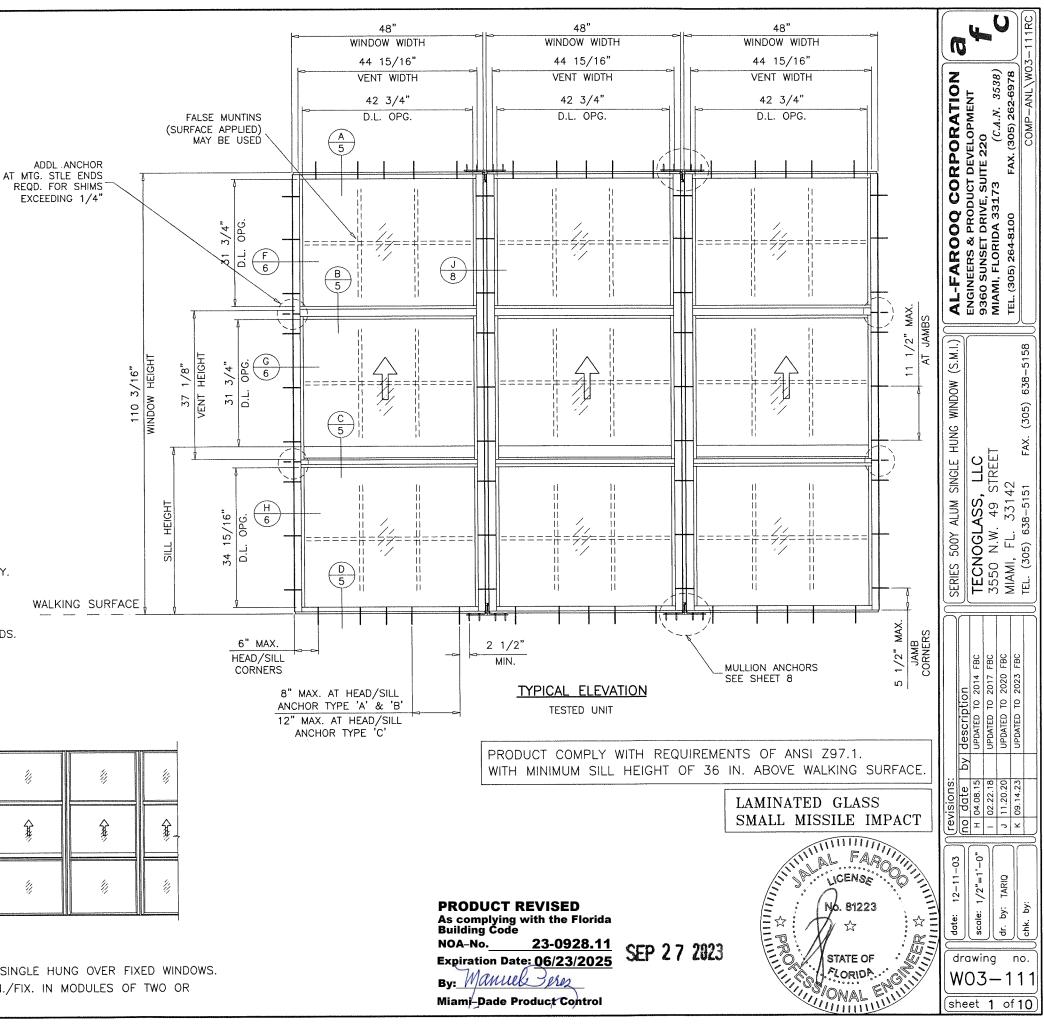

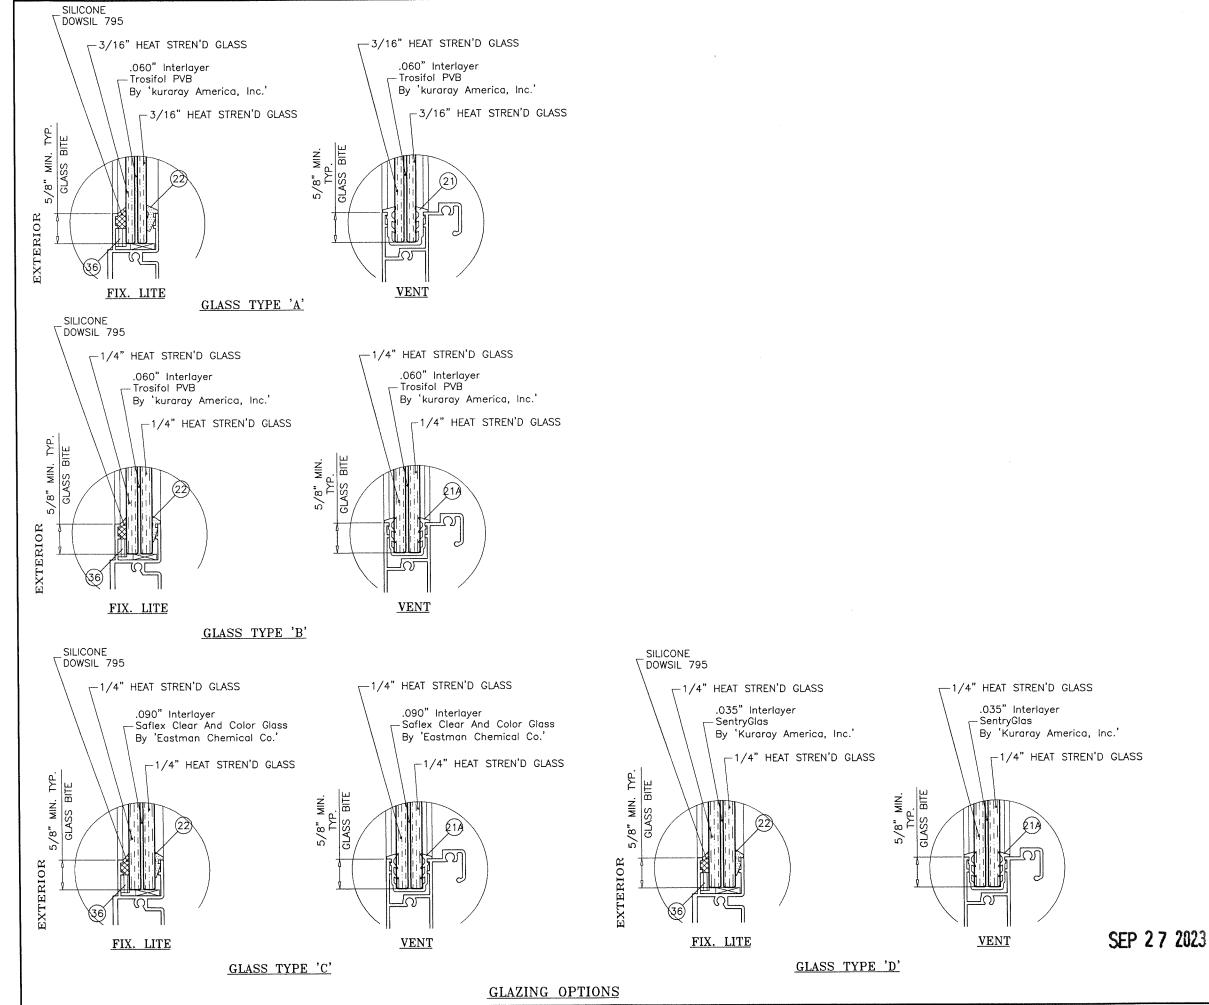


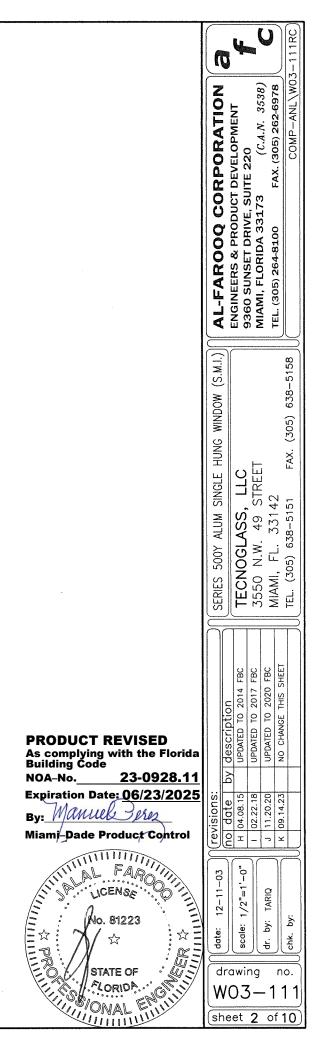


			ITES SINGL N LOAD C							-	ITES SINGI GN LOAD C				
		T	IN LOAD C		X. SHIMS					Γ		3/8" MA		0184	
WINDOW	V DIMS.	GLASS TYP	E'A'&'B'		TYPE 'C'	GLASS	TYPE 'D'	WINDO	W DIMS.	GLASS TYP	'E 'A' & 'B'	· · · · · · · · · · · · · · · · · · ·	TYPE 'C'	GLASS	TYPE 'D'
WIDTH	HEIGHT	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	WIDTH	HEIGHT	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-
36"	<u>HEIOIN</u>	100.0	130.0	100.0	140.0	100.0	130.0	36"		100.0	130.0	100.0	140.0	100.0	130.0
42"		100.0	130.0	100.0	140.0	100.0	130.0	42"	84"	100.0	130.0	100.0	140.0	100.0	130.0
42 48"		100.0	130.0	100.0	140.0	100.0	130.0	48"		100.0	125.1	-		_	-
40 54"	36"	100.0	130.0	100.0	140.0	100.0	130.0	36"		100.0	130.0	100.0	140.0	100.0	130.0
	30	89.7	116.6	89.7	116.6	83.3	108.3	42"	89-1/4"	100.0	130.0		_	100.0	130.0
60"		67.0	87.1	67.0	87.1	62.2	80.9	48"	03-174	100.0	124.7	_			
66" 72"		51.3	66.7	51.3	66.7	47.7	62.0	36"		100.0	130.0	100.0	140.0	100.0	130.0
	****		130.0	100.0	140.0	100.0	130.0	42"	90"	100.0	130.0	_		100.0	130.0
36"		100.0		100.0	140.0	100.0	130.0	36"		100.0	130.0	100.0	140.0	100.0	130.0
42"		100.0	130.0		140.0	100.0	130.0	42"	96"	100.0	130.0	-	-	100.0	130.0
48"		100.0	130.0	100.0	+		130.0	42		100.0	130.0	I	<u></u>	100.0	1 100.0
54"	42"	100.0	130.0	100.0	140.0	100.0									
60"		77.9	101.3	77.9	101.3	72.4	94.1								
66"		58.0	75.4	58.0	75.4	53.9	70.1			Ą		1			
72"		44.4	57.7	44.4	57.7	41.2	53.6								
36"		100.0	130.0	100.0	140.0	100.0	130.0								
42"		100.0	130.0	100.0	140.0	100.0	130.0					1			
48"		100.0	130.0	100.0	140.0	100.0	130.0			HEIGHT					
54"	48"	96.5	125.5	96.5	125.5	89.6	116.5			μ					
60"		69.2	90.0	69.2	90.0	64.3	83.6				· · 2	\land			
66"		51.4	66.9	51.4	66.9	47.8	62.1					ĴĮ,			
72"		39.3	51.1	39.3	51.1	36.5	47.4					1			
36"		100.0	130.0	100.0	140.0	100.0	130.0			<u> </u>			<u>⊢</u> 4		
42"		100.0	130.0	100.0	140.0	100.0	130.0						HEIGHT		
48"		100.0	130.0	100.0	140.0	100.0	130.0				W	IDTH	뀌		
54"	54"	87.7	114.0	87.7	114.0	81.5	105.9							ALKING SU	DEVCE
60"		62.7	81.5	62.7	81.5	58.2	75.7				EQUAL	LITES	W		
66"		46.4	60.3	46.4	60.3	-	-			S	SINGLE HUI	NG WINDOW	IS		
72"		35.3	45.9	-	-	-	-								
36"		100.0	130.0	100.0	140.0	100.0	130.0								
42"		100.0	130.0	100.0	140.0	100.0	130.0								
48"		100.0	130.0	100.0	140.0	100.0	130.0								
54"	60"	81.0	105.3	81.0	105.3	75.2	97.8								
60"		57.6	74.8	57.6	74.8	-									
66"		42.4	55.2			-									
36"		100.0	130.0	100.0	140.0	100.0	130.0								
42"	1	100.0	130.0	100.0	140.0	100.0	130.0								
48"	66"	100.0	130.0	100.0	133.7	100.0	130.0								
54"		75.8	98.5	75.8	98.5	-	-								
60"		53.5	69.6	-	_	-	-								
36"		100.0	130.0	100.0	140.0	100.0	130.0								
42"	70"	100.0	130.0	100.0	140.0	100.0	130.0]							
48"	72"	100.0	130.0	100.0	129.4	100.0	130.0								
54"		71.7	93.2	-	_	-	-	ļ							
36"		100.0	130.0	100.0	140.0	100.0	130.0								
42"		100.0	130.0	100.0	140.0	100.0	130.0]							
	78"	100.0	130.0	_	_	100.0	129.4	1							
48"		100.0	100.0	1			1	1							


VISED h the Florida Building Code
 NOA-No.
 23-0928.11
 SEP 27 2023


 Expiration Date: 06/23/2025
 By:
 Manuel Pres
 NOA-No. Miami-Dade Product Control

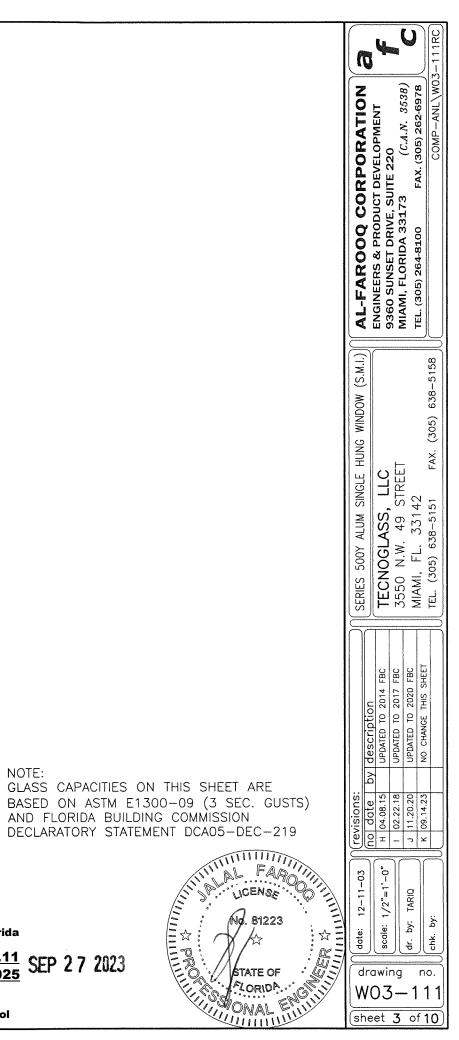


							G WINDOW - PSF		N LOAD C		01				
	prove and the second			. SHIMS	1/4" MAX					C. SHIMS	3/8" MAX				
Ŷ			GLASS T	YPE 'C'	GLASS 7	E'A'&'B'	GLASS TYP	YPE 'D'	GLASS T	YPE 'C'	GLASS 7	'A' & 'B'	GLASS TYPE	DIMS.	WINDO
		1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	HEIGHT	WIDTH
		-	-	-		-	-	130.0	100.0	140.0	106.7	130.0	100.0		36"
누	18-3/4" VENT	-	-		-	_		130.0	100.0	140.0	106.7	130.0	100.0		42"
НЕІСНТ	.L.О. МІ VENT	-	-	-	-	-	-	130.0	100.0	140.0	106.7	130.0	100.0		48"
I	18–3/4" D.L.O. MIN. VENT		-	-	-	-	-	121.8	93.7	110.5	81.9	110.5	81.9	48"	54"
			-		-	_	-	86.7	66.7	79.3	58.7	79.3	58.7		60"
		-	-	-	-	-	_	64.0	49.2	58.9	43.6	58.9	43.6		66"
Į.		-			-	-	-	48.6	37.4	45.0	33.3	45.0	33.3		72"
			-		-			130.0	100.0	140.0	106.7	130.0	100.0		36"
	WIDTH -					-	-	130.0	100.0	140.0	106.7	130.0	100.0		42"
NG SURFACE			-				-	130.0	100.0	140.0	106.7	130.0	100.0		48"
	UNEQUAL LITES (ORIEL)		-			-	-	114.3	87.9	101.1	74.9	101.1	74.9	54"	54"
S	SINGLE HUNG WINDOWS	-	-				-	80.4	61.9	72.1	53.4	72.1	53.4		60"
	(GLASS TYPES A, B & C)				-	-	-	-	-	53.3	39.5	53.3	39.5		66"
				-				-	-	-		40.6	30.1		72"
			-			-	-	130.0	100.0	140.0	106.7	130.0	100.0		36"
		_	_	-		-	-	130.0	100.0	140.0	106.7	130.0	100.0		42"
		_				-	-	130.0	100.0	139.2	103.1	130.0	100.0		48"
		_			-	-	-	109.7	84.4	94.7	70.1	94.7	70.1	60"	54"
		_	_	_					-	67.0	49.6	67.0	49.6		60"
		_	_	_		-	-		-	-		49.3	36.5		66"
		_			_			-	-	-	-	37.3	27.7		72"
		_	_	_		_		130.0	100.0	140.0	106.7	130.0	100.0		36"
			_		_	-		130.0 130.0	100.0	140.0	106.7	130.0	100.0		42"
		_	_		_				100.0	135.9	100.6	130.0	100.0		48"
			_			_	<u> </u>			90.5	67.1	90.5	67.1	66"	54"
			_		_			_				63.5 46.3	47.0		60"
		_							_			34.9	34.3 25.9		66" 72"
					_	<u> </u>	<u> </u>	130.0	100.0	140.0	106.7	130.0	100.0		36"
		-	_					130.0	100.0	140.0	106.7	130.0	100.0		42"
		_	_		-	_		130.0	100.0	135.0	100.0	130.0	100.0		48"
				_	-	-	-	_	-	-	-	88.2	65.4	72"	-+0 54"
		-	-		_	-	- 1			-		61.1	45.3		60"
		_	-		-		- 1	-		-		44.2	32.8		66"
		- 1	-	-	-	-	-	130.0	100.0	140.0	106.7	130.0	100.0	1	36"
		-	-		-	-	-	130.0	100.0	140.0	106.7	130.0	100.0		42"
		-	-	135.0	100.0	130.0	100.0	-	-	128.4	100.0	128.4	100.0	78"	48"
		-		-		-	-	-	-	-	-	87.6	64.9		54"
NOTE:		-	-	-		-	-	-	-	-	-	59.8	44.3		60"
GLASS			_	-	-	_	-	130.0	100.0	140.0	106.7	130.0	100.0		36"
BASED		-		-	-	-	-	130.0	100.0	140.0	106.7	130.0	100.0	84"	42"
AND FL		-			_	-	_	-	-	-	-	130.0	100.0	84	48"
DECLAR		_	-	-	_	-	_	-	-	-	-	87.6	64.9		54"
		-	-		-	-	-	130.0	100.0	140.0	106.7	130.0	100.0		36"
		130.0	100.0	-		-	-	129.1	100.0	_	-	130.0	, 100.0	89-1/4"	42"
					-	130.0	100.0	-		-		120.8	100.0		48"
			_	-		-	-	130.0	100.0	140.0	106.7	130.0	100.0		36"
		130.0	100.0			-	-	127.8	100.0	-	-	130.0	100.0	90"	42"
g with the Florida e		-				130.0	100.0		-	-	-	119.5	100.0		48"
23-0928.11 Ste: 06/23/2025	NOA-No				-	-	-	130.0	100.0	140.0	106.7	130.0	100.0		36"
ate: 00/23/2023		-	-	-		-		130.0	100.0		-	130.0	100.0	96"	42"
	By: Manuel	-	1 -	- 1	_		_		_		 	130.0	100.0	1	48"

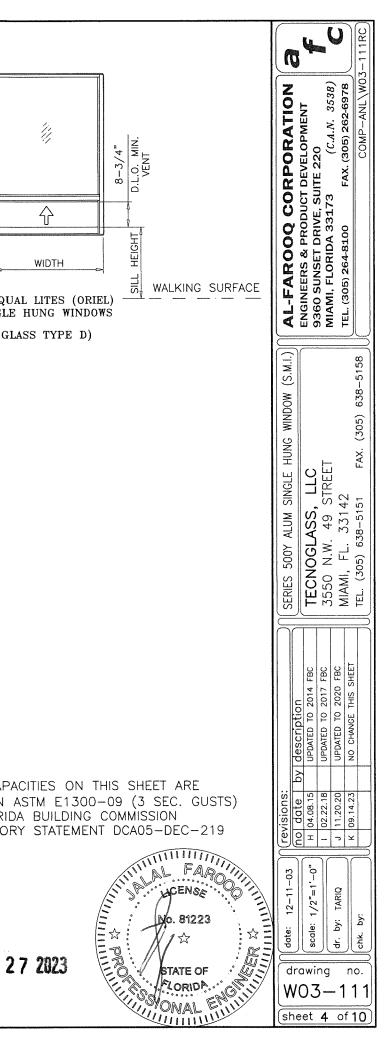

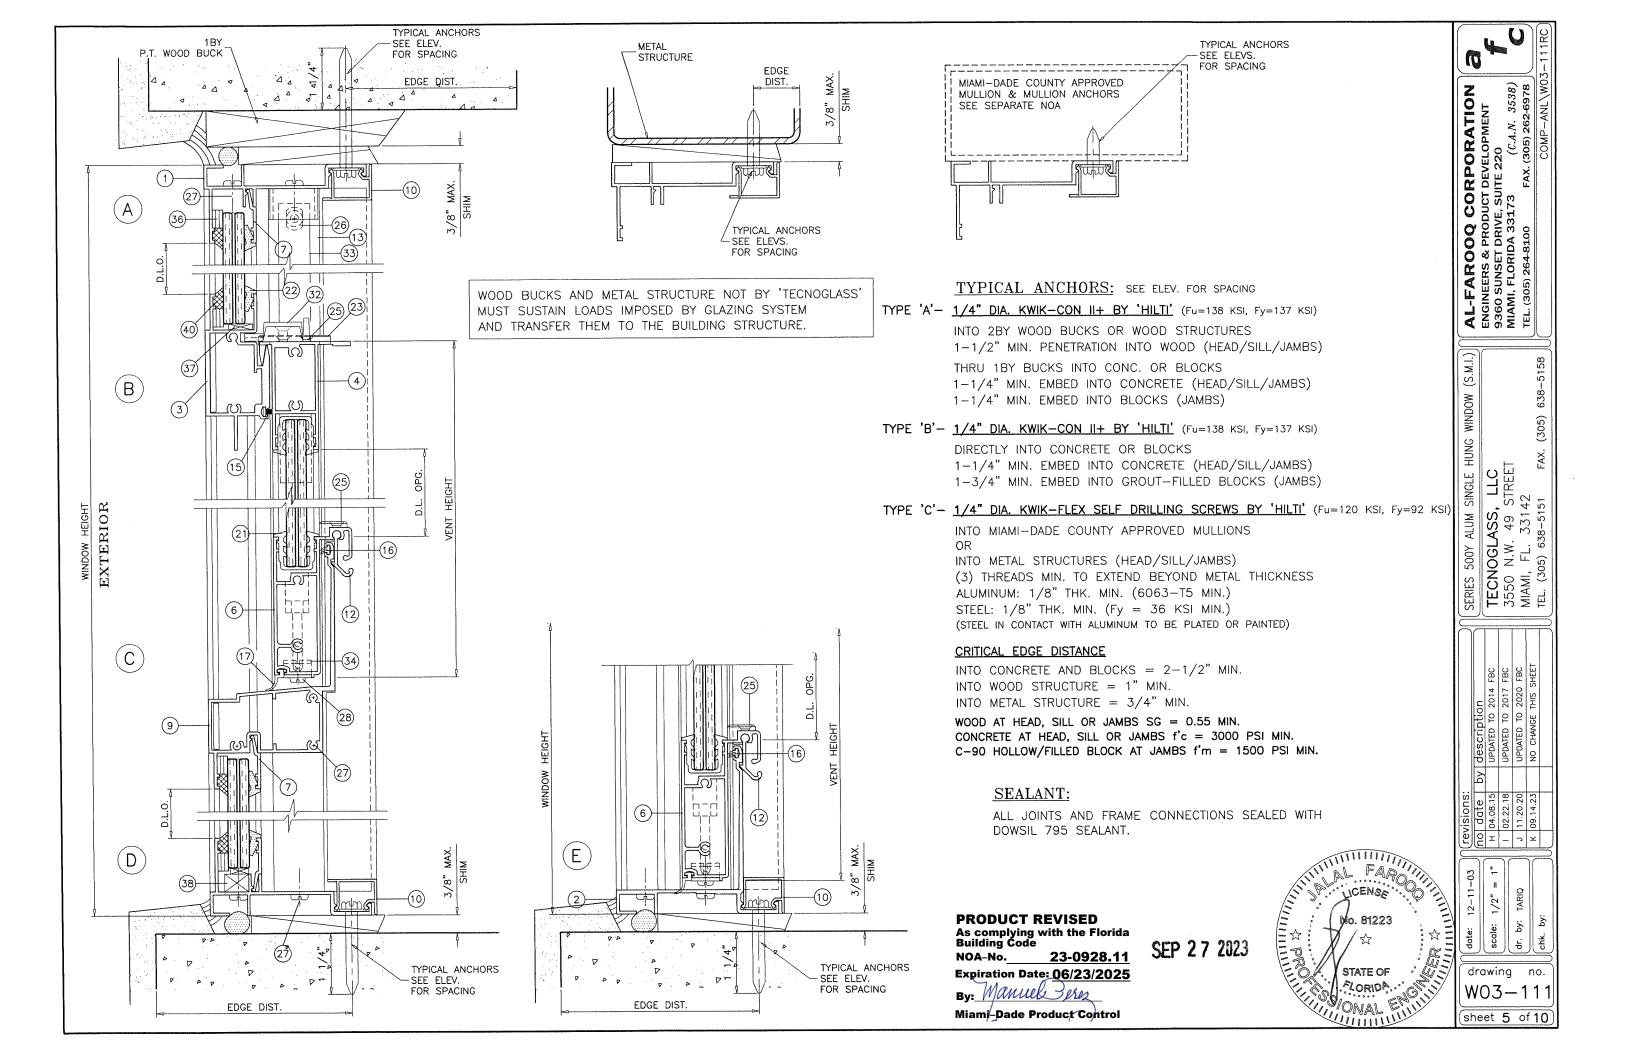

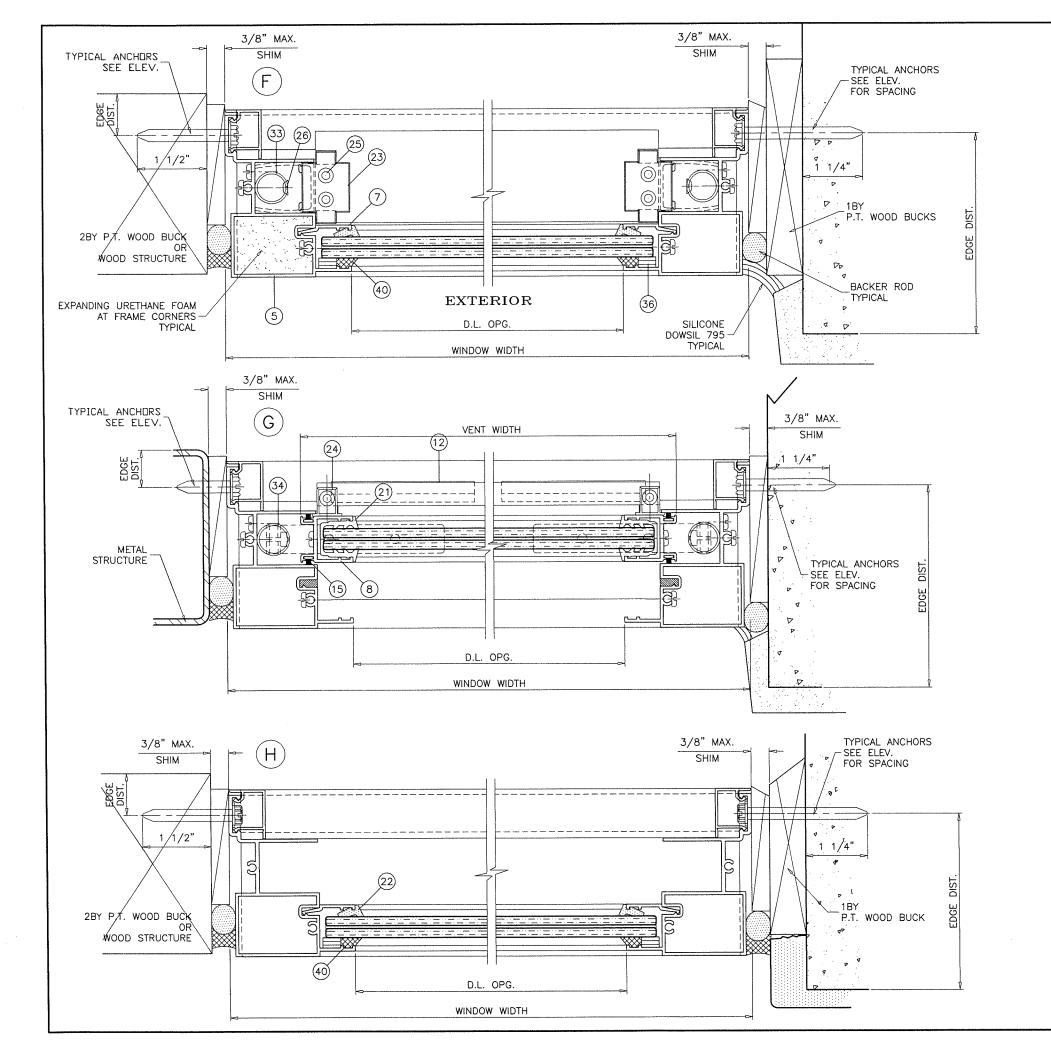

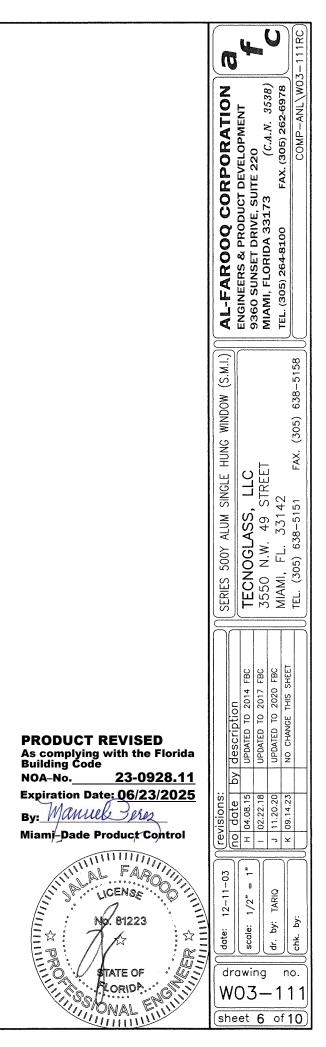

SEP 27 2023

WINDOWALL BOTTOM LITE CAPACITY					
DES	SIGN LOAD	CAPACITY -	PSF		
WINDO	V DIMS.	GLASS TYPE 'A	''B''C'&'D'		
WIDTH	HEIGHT	EXT.(+)	1NT.(-)		
24"		100.0	130.0		
30"		100.0	130.0		
36"	38-3/8"	100.0	130.0		
42"		100.0	130.0		
48"		100.0	130.0		
24"		100.0	130.0		
30"		100.0	130.0		
36"	42"	100.0	130.0		
42"		91.5	119.0		
24"		100.0	130.0		
30"	48"	100.0	130.0		
36"		100.0	130.0		

NOMINAL WINDOW HEIGHT

I

SINGLE HUNG OVER FIXED WINDOWS


14

Â.

W

NOMINAL WINDOW HEIGHT

I

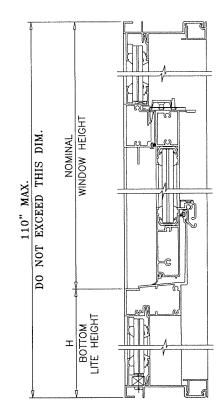

REFER TO	SHEETS	3	& 4	TO	OBTAIN	CAPACIT	Y OF	
WINDOW P	ORTION F	OR	CON	NFIG	URATION	/GLASS	USED.	•

REFER TO CHART ABOVE TO OBTAIN CAPACITY OF BOTTOM LITE OF WINDOWALL.

11

Ŷ

11

W

REFER TO CHARTS AT RIGHT OF THIS PAGE TO OBTAIN MULLION CAPACITY.

USE LOWEST VALUES OF OPTIONS CONSULTED.

	MULL	ION CAPACIT	FY CHART	– PSF		мт	J
	WINDO	W DIMS.		ULLION FORCED		WINDOW	V
	WIDTH (W)	MULL SPAN	EXT.(+)	INT.(-)]	WIDTH (W)	h
	36"		100.0	130.0	-	36"	
	42"		100.0	130.0		42"	
	48"		100.0	130.0		48"	
	54"	48"	100.0	130.0		54"	
	60"		100.0	130.0		60"	
	66"		100.0	130.0		66"	
	72"		100.0	130.0	1	72"	L
	36"		100.0	130.0	-	36"	
	42"		100.0	130.0		42"	
	48"	54"	100.0	130.0		48"	
	54"		100.0	130.0		54"	
	60"		100.0	130.0		60"	ĺ
	36"		100.0	130.0	1	66"	
	42"	60"	100.0	130.0	-	72"	Ĺ
	48"		100.0	130.0		36"	
	54"		100.0	130.0		42"	
	36"		100.0	130.0	-	48"	
	42"	66"	100.0	130.0		54"	
	48"		100.0	130.0		60"	
	36"		100.0	130.0		66"	
	42"	72"	100.0	130.0	-	36"	
	48"		100.0	130.0]	42"	
			_			48"	
			ſ			54"	
						60"	
			ſ			36"	
L L		\mathbb{R}	L h			42"	
			L			48"	
						54"	Ļ
						36"	ļ
			1			42"	
STD. MULL	ION	STD. MULLION		MULLION		48"	
UNREINFOR		REINFORCED		NFORCED		54"	┞
				1		36"	
	Г		I		Ą	42"	
						48"	╞
						36"	
					z	42"	
		Â.	A	ÎI ĝ.	AN	48"	L
	Z Z	7	3	∞	SPAN		
	SPAN				PRO	DUCT RE	١
Ŷ	Σ M				As co Build	omplying wi ing Code	t
步		14	- 59	× .	NOA-		2
	╡ <u></u> Ŷ L	1	L	<u></u>	🚽 Expir	ation Date:	(
			⊸-3/4"		By:	Manuel	
		W1	W2	-	•	j-Dade Proc	1
	-						

WIDTH (W) = $\frac{W1 + W2}{2} + 3/4"$

14

Ŷ

W1


4

â

W2

SEP 27

	MULLION CAPACITY CHART - PSF						U	(J	111RC
INDO	V DIMS.	STD. M REINFO		H.D. MU REINFO			<u>}</u>			<u>3-11</u>
	MULL SPAN	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	Ιz		6	82	COMP-ANL\W03-
6"		100.0	130.0	100.0	130.0	ō	F	35.3	69	F
2"		100.0	130.0	100.0	130.0		EN	C. 4. N. 35.38	FAX. (305) 262-6978	A
5"		100.0	130.0	100.0	130.0	1	Σd	A A	5) 2 2	ЧЪ
4"	66"	100.0	130.0	100.0			29	ູຮ	305	Ö
	00				130.0	Ιŭ	23	Ň	×	
)" ~"		100.0	130.0	100.0	130.0	2	ă	=	FA	
6 "		100.0	130.0	100.0	130.0	Ö	50	2 2		
2" 6"		100.0	130.0	100.0	130.0	0	ק	ц н Н		
		100.0	130.0	100.0	130.0	l õ	n n n	έ	8	
2"		100.0	130.0	100.0	130.0		201 201	20	81	
3"		100.0	130.0	100.0	130.0	ן אַ ון אַ	ŝ	N N	264	
4"	72"	100.0	130.0	100.0	130.0	2		ŠĽ	ິດ	
0"		100.0	130.0	100.0	130.0		Z	ΩΞ	30	
6"		100.0	130.0	100.0	130.0	AL-FAROOQ CORPORATION	ENGINEERS & PRODUCT DEVELOPMENT	9360 SUNSET DRIVE, SULLE ZZO MIAMI. FLORIDA 33173	TEL. (305) 264-8100	
2"		100.0	130.0	100.0	130.0		ш (2 10	-	
6"		100.0	130.0	100.0	130.0	\subseteq	$\overline{)}$			=
2"		100.0	130.0	100.0	130.0					58
~ 8"		100.0	130.0	100.0	130.0	(S.M.				
4"	78"	100.0	130.0	100.0	130.0	≥				638-51
4 0"	70				130.0	WINDOW				
		100.0	130.0	100.0		1				(305)
6"		100.0	130.0	100.0	130.0	HUNG				<u>·</u>)
6"		100.0	130.0	100.0	130.0	E		┣		FAX.
2"		100.0	130.0	100.0	130.0			STREE		-
8"	84"	100.0	130.0	100.0	130.0	SINGLE		L H	\sim	
4"		100.0	130.0	100.0	130.0	S			33142	151
0"		100.0	130.0	100.0	130.0	ALUM	ASS.	49	Μ	638-515
6"		100.0	130.0	100.0	130.0	A				638
2"	0.0"	100.0	130.0	100.0	130.0	500Y	recnog	N.N.	Ľ	
8"	90"	100.0	130.0	100.0	130.0	2	ž	0	É	(30
4"		100.0	130.0	100.0	130.0	ERIES		3550	MIAMI,	EL. (305)
6"		100.0	130.0	100.0	130.0	SE	F	ň	Σ	ΗĽ
2"		100.0	130.0	100.0	130.0		<u></u>			\equiv
2 8"	96"	100.0	130.0	100.0	130.0	\square				
		100.0								
4"		<u> </u>	116.6	100.0	130.0		FBC	FBC	FBC	SHEET
6"	100"	100.0	130.0	100.0	130.0		4	7 F	ч I 0	5
2"	108"	100.0	118.4	100.0	130.0		2014		2020	2 H
8"		100.0	103.6	100.0	130.0			6	2	Ę.
6"		100.0	130.0	100.0	130.0		티머	ED		CHANGE
2"	110"	100.0	114.1	100.0	130.0		DEACTIPTION	UPDATED		
8"		99.9	99.9	100.0	130.0	1 IF		12		2
T RE	VISED	ida				'isions:	H 04.08.15	1 02.22.18		K 09.14.23
ing wi ode	th the Flor <u>23-0928.</u> <u>06/23/20</u>		1111111	FAR	TIT	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~				
ing wi ode	<u>23-0928.</u>		IIIIII AL	FAR		-03) 			
ing wi ode Date:	23-0928. 06/23/20 Ins	25	ALAL	FAR		-11-03	11		ARIQ	
Date:	<u>23-0928.</u> <u>06/23/20</u> <u>Jeres</u> Juc <u>t</u> Contro	25 3	": n	FAR CENSE		12-11-03	1 / 2"	- 1	: TARIQ	
Date:	<u>23-0928.</u> <u>06/23/20</u> <u>Jeres</u> Juc <u>t</u> Contro	25 3	": n	FAR CENSE		V	1 / 2"	- (.	Ä	k. by:
ing wi ode Date: WL e Proc	<u>23-0928.</u> <u>06/23/20</u> <u>Jeres</u> Juc <u>t</u> Contro	25 3	": n	FAR ENSE .81223		date: 12-11-03	11	- (.	1	chk. by:
ing wi ode Date: WL e Proc	<u>23-0928.</u> <u>06/23/20</u> <u>Jeres</u> Juc <u>t</u> Contro	25 3	": n	FAR CENSE .81223 ☆		∏ date:	scale: 1/2"		dr. by:	chk.
ing wi ode Date: WL e Proc	<u>23-0928.</u> <u>06/23/20</u> <u>Jeres</u> Juc <u>t</u> Contro	25 3	": n	FAR CENSE .81223 ☆ ATE OF	MEER &	<u>p</u> date:	Scale: 1/2"	ng	dr. by:	
ing wi ode Date: WL e Proc	<u>23-0928.</u> <u>06/23/20</u> <u>Jeres</u> Juc <u>t</u> Contro	25 3	": n	FAR CENSE .81223 ☆ ATE OF ORIDA		<u>p</u> date:	scale: 1/2"	ng	dr. by:	chk.
ng wi ode Date: WK	<u>23-0928.</u> <u>06/23/20</u> <u>Jeres</u> Juc <u>t</u> Contro	25 3	": n			A p date:	Scale: 1/2"	ng	یم بو ۲	chk.

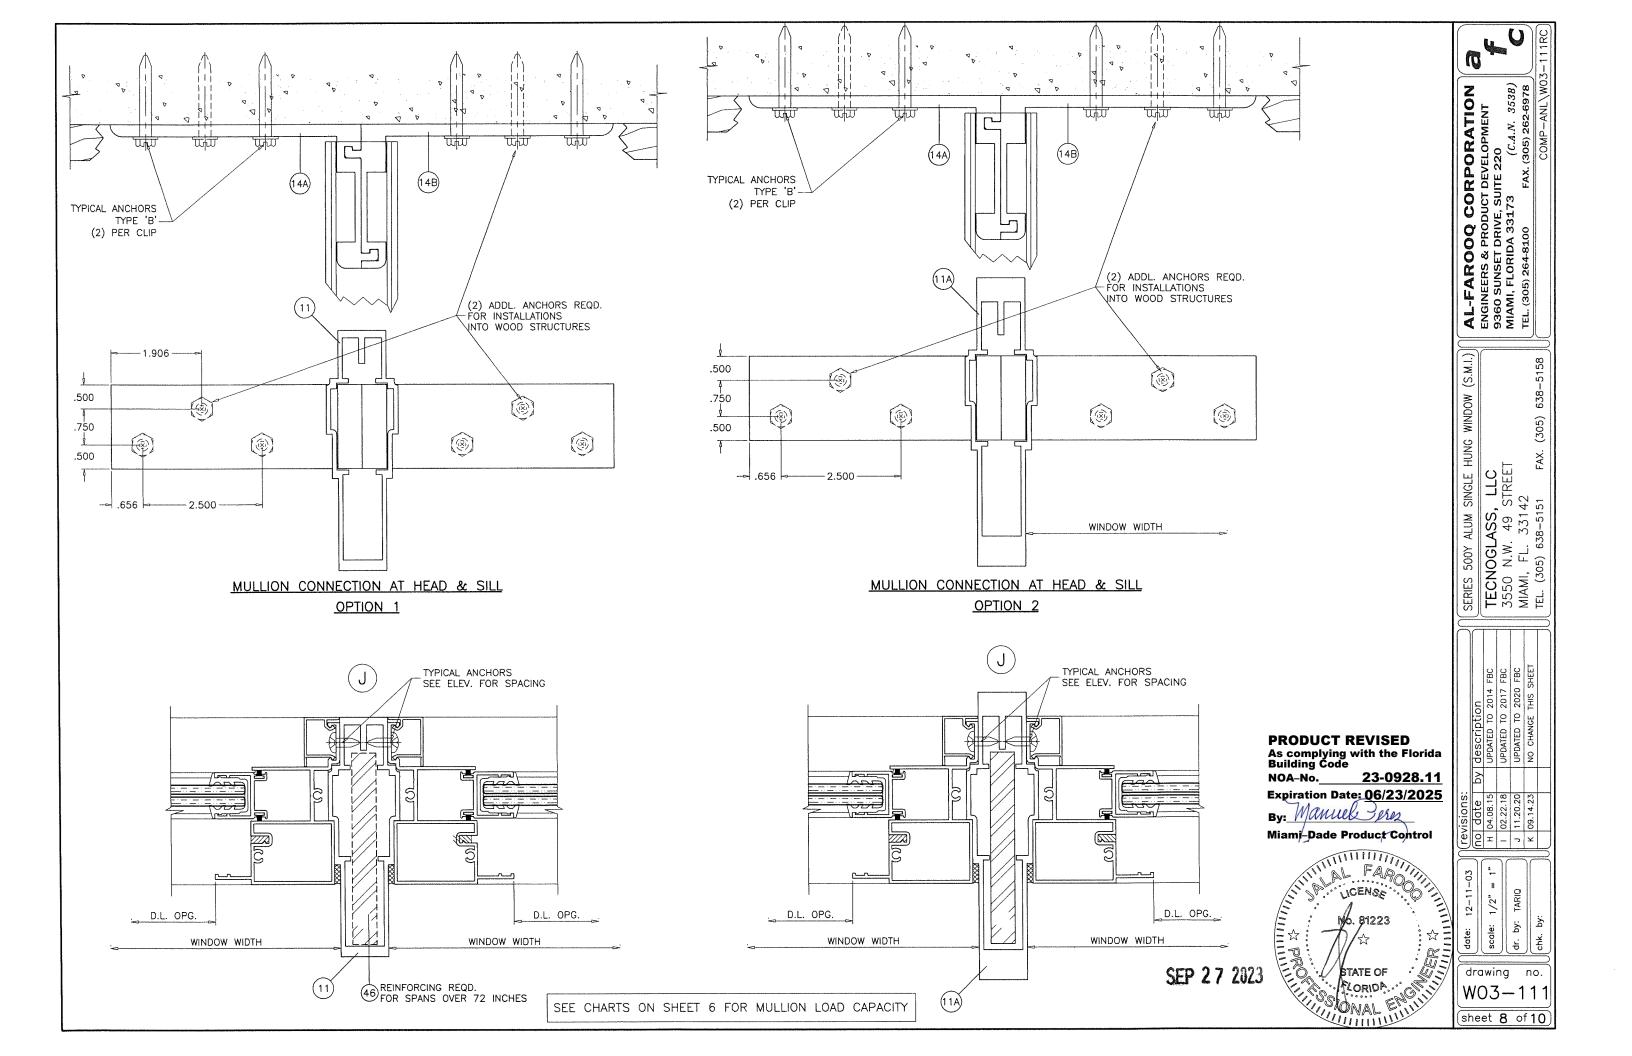

VENT	CORNER	DETAIL

		ITEM #	PART #	REQD.	DESCRIPTION	Τ
		1	500Y-001	AS REQD.	HEAD & FIXED SILL	+
	Ψ Ψ	2	500Y-002	AS REQD.	FRAME SILL	
		3	500Y-003	1	MEETING RAIL	T
		4	500Y-004	1	VENT TOP	
		5	500Y-005	2	JAMB	
		6	500Y-006	1	VENT BOTTOM	
		7	500Y-007	AS REQD.	GLAZING BEAD	
		8	500Y-008	2	VENT SIDE	
		9	500Y-009	AS REQD.	SILL MEETING RAIL	
		10	500Y-010	AS REQD.	TRACK COVER (OPTIONAL)	
		11	500Y-023	AS REQD.	STD. MULLION	T
		11A	500Y-029	AS REQD.	H.D. MULLION	
		12	500Y-012	2/VENT	HANDICAP FINGER LOCK	
		13	500Y-013	1	VENT STOP	
		14A	500Y-024	AS REQD.	FEMALE ANCHOR CLIP	T
(27)		14B	500Y-025	AS REQD.	MALE ANCHOR CLIP	T
		15	W33261NK	AS REQD.	WEATHERSTRIPPING PILE	T
		16	WV-3189	AS REQD.	W'STIPPING GASKET (DUROMETER 65 SHORE A)	1
		17	V-048	AS REQD.	W'STRIPPING GASKET (DUROMETER 60±5 SHORE A)	
		21	V-052	-	GLAZING GASKET (DUROMETER 75 SHORE A)	-
		21A	V-049	-	GLAZING GASKET (DUROMETER 75 SHORE A)	
		22	V-053	_	GLAZING WEDGE (DUROMETER 70±5 SHORE A)	1
		23	P-012	2/ VENT	VENT TOP GUIDE PLASTIC M&M (ROCKWELL R 110)	+
		24	P-013		VENT BOTTOM GUIDE PLASTIC M&M (ROCKWELL R 110)	
		25			#8 X 3/8" LG. FH. SMS. ST/ST PHILLIPS	1
		26		2	#8 X 1" LG. FH. SMS. ST/ST PHILLIPS	+
		27			#10 X 1" LG. PH. SMS. ST/ST PHILLIPS	-
		28	_	6	#10 X 3/4" LG. PH. SMS. ST/ST PHILLIPS	
		29	_		_	+
		32	PD-203	2/ WDW	SASH LOCK	+
		33	_		ULTRA-LIFT BALANCE #30	-
		34			ULTRA-LIFT NON TILT BRACKET	+
		36	_		1/4" X 1/2" FOAM TAPE SINGLE FACE	+
(27)		37	_		1/8" X 1/2" X 4" LG. SETTING BLOCK	+
						+
			DC-795			
			-	_	-	-
				AS REOD	1/2" X 4" X 104" LG. STEEL.	+
		L	<u>.</u>			
		38 40 42 46	DC-795		3/8" X 1/2" X 4" LG. SETTING BLOCK GLAZING COMPOUND - 1/2" X 4" X 104" LG. STEEL. PRODUCT REV As complying with Building Code NOA-No. 23 Expiration Date: 00 By: Miami-Dade Product SEP 27	

	MATERIAL	MANF./SUPPLIER/REMARKS	DRATION LOPMENT 20 (<i>C.A.N.</i> 3538) (<i>C.A.N.</i> 3538) 305) 262-6978 305) 262-6978 CCMP-ANL/W03-111RC
	6063-T6	AT FRAME	
	-	AT FRAME	
	6005-T5	AT FRAME	AL-FAROOQ CORPORATION ENGINEERS & PRODUCT DEVELOPMENT 9360 SUNSET DRIVE, SUITE 220 MIAMI, FLORIDA 33173 (C.A.N. 3538) TEL. (305) 2648100 FAX. (305) 262-6978 COMP-ANL/WC
	6005-T5	SASH VENT	TI EN 62-6
	6063-T6	AT FRAME	MP 14.1
	6063-T6	SASH VENT	
	6063-T6	AT FIXED GLASS	AX HEAD
	6063-T6	SASH VENT	AL-FAROOQ CORPORATIC ENGINEERS & PRODUCT DEVELOPMENT 9360 SUNSET DRIVE, SUITE 220 MIAMI, FLORIDA 33173 (C.A.N. 36 TEL. (305) 264-8100 FAX. (305) 262-61 COMP-ANI
	6005-T5	AT FRAME	0 000
	6063-T6	AT FRAME	O Darge of
	6063-T6	AT FRAME	AL-FAROOQ ENGINEERS & PRC 9360 SUNSET DRI MIAMI, FLORIDA 3 TEL (305) 264-8100
	6063-T6	AT FRAME	C C C C C C C C C C C C C C C C C C C
	6063-T6	SASH VENT	FL , FL
	6063-T6	AT TOP OF FRAME	
	6063-T6	TOP & BOTTOM OF MULL	MIA MIA
	6063-T6	TOP & BOTTOM OF MULL	
	-	AT VENT SIDE MEETING RAIL	() 88
E A)	VINYL	SILL & SILL MEETING RAIL	00W (S.M.I.) 638-5158
HORE A)	NEOPRENE	BOTTOM OF SASH VENT	
N)	VINYL	_	
N)	VINYL	-	4G WINI (305)
A)	VINYL	-	HUNG T Fax. (3
R 110)	NYLON	TOP OF SASH VENT	FAX.
ELL R 110)	NYLON	BOTTOM OF SASH VENT	SERIES 500Y ALUM SINGLE HTECNOGLASS, LLC3550 N.W. 49 STREETMIAMI, FL. 33142TEL. (305) 638–5151FA
	_	AT P-012, P-013 & PD-203	SIN SIN SIN 151
	-	AT TOP OF BALANCE	RIES 500Y ALUM ECNOGLASS 550 N.W. 49 IAMI, FL. 331 L. (305) 638-51
		ASSEMBLY SCREWS	638 638
5		AT BALANCE CLIP	DOG N.V DG
	_	-	(30 N I)
		AT TOP OF SASH	AIAI S355
		AT FRAME	ES F ≈ Z H
	_		
	NEOPRENE	DUROMETER 85±5 SHORE A	FBC FBC FBC FBC SHEET
	NEOPRENE	DUROMETER 85±5 SHORE A	20 F
	SILICONE		description uPDATED TO 2014 FBC UPDATED TO 2017 FBC UPDATED TO 2020 FBC UPDATED TO 2020 FBC
	_		description UPDATED TO 20 UPDATED TO 20 UPDATED TO 20 NO CHANGE TH
		AT MULLION	UPDATED UPDATED UPDATED UPDATED NO CHAN
			py
			15: 15: 23 23 23
			revisions: 10 date H 04.08.15 J 11.20.20 K 09.14.23
OUCT REVI			
nplying with t Ig Code	he Florida:		
lo. <u>23</u> -	0928.11	IN AL FARMIN	
tion Date: 06		LICENSE	12-11-03 1/2" = 1 TARIO
1- 0-	res	EI	12-11. 1/2" = TARIO
Dade Produc	t Control	N6. 81223	
			date: scale: dr. by chk. b
13 per page - 13 mag	1314		
SEP 27	2023	E2: 1/1	
SEP 27	2023	ATATE OF	drawing no.
SEP 27	2023	NO. 81223	drawing no. W03—111

