

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION NOTICE OF ACCEPTANCE (NOA)

Florida Window Systems Corp. 7191 NW 77th Terrace Medley, FL 33166

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER–Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "FWS-200" Aluminum Single Hung Window – L.M.I.

APPROVAL DOCUMENT: Drawing No **W04-20**, titled "Series FWS-200 Alum Single Hung Window. (L.M.I.)", sheets 1 through 5 of 5, dated 03/11/04, with revision J dated 07/13/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami–Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA No. 20-1202.11** and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

MIAMI-DADE COUNTY APPROVED

11/3/23

NOA No. 23-0928.25 Expiration Date: July 29, 2024 Approval Date: November 09, 2023 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. *(Submitted under NOA No. 04-0528.03)*
- Drawing No. W04-20, titled "Series FWS-200 Alum Single Hung Window (L.M.I.)", sheets 1 through 5 of 5, dated 03/11/04, with revision I dated 11/05/20, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 20-1202.11)

B. TESTS

1. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94

2) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Hurricane Engineering and Testing, Inc. Test Reports No. **HETI-03-1820A** dated 09/09/03 and **HETI-03-1820B** dated 02/12/04, both signed and sealed by Rafael E. Droz-Seda, P.E.

(Submitted under NOA No. 04-0528.03)

- 2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Hurricane Engineering and Testing, Inc. Test Reports No. **HETI-03-1322A** dated 06/05/03 and **HETI-03-1322B** dated 01/01/04, both signed and sealed by Rafael E. Droz-Seda, P.E.

(Submitted under NOA No. 04-0528.03)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with FBC 7th Edition (2020), dated 10/26/20, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

(Submitted under NOA No. 20-1202.11)

2. Glazing complies with ASTM E1300-09

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

Nanne Manuel Perez, P.E

Product Control Examiner NOA No. 23-0928.25 Expiration Date: July 29, 2024 Approval Date: November 09, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 20-0622.01 issued to Eastman Chemical Company (MA) for their "Saflex Clear and Color Glass Interlayers" dated 08/06/20, expiring on 05/21/21.
- 2. Notice of Acceptance No. 20-0622.07 issued to Oldcastle BuildingEnvelope®, Inc. for their "StormGlassTM Glass Interlayer", dated 08/03/20, expiring on 12/11/23.

F. STATEMENTS

Statement letter of conformance, complying with FBC 6th Edition (2017), with FBC 7th Edition (2020) and of no financial interest, dated October 26, 2020, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 20-1202.11)

G. OTHERS

1. Notice of Acceptance No. **18-0322.09**, issued to Florida Window Systems Corp. for their Series "FWS-200" Aluminum Single Hung Window – L.M.I., approved on 05/17/18 and expiring on 07/29/19.

Nanu Manuel Perez.

Product Control Examiner NOA No. 23-0928.25 Expiration Date: July 29, 2024 Approval Date: November 09, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **W04-20**, titled "Series FWS-200 Alum Single Hung Window (L.M.I.)", sheets 1 through 5 of 5, dated 03/11/04, with revision J dated 07/13/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 21-0216.01 issued to Eastman Chemical Company (MA) for their "Saflex PVB Interlayers Clear and Colored for Glass" dated 04/29/21, expiring on 05/21/26.
- 2. Notice of Acceptance No. 23-0713.04 issued to Oldcastle BuildingEnvelope[®], Inc. for their "StormGlassTM Glass Interlayer", dated 08/17/23, expiring on 12/11/28.

F. STATEMENTS


Statement letter of conformance, complying with FBC 7th Edition (2020), with FBC 8th Edition (2023) and of no financial interest, dated July 18, 2023, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

G. OTHERS

1. Notice of Acceptance No. 20-1202.11, issued to Florida Window Systems Corp. for their Series "FWS-200" Aluminum Single Hung Window – L.M.I., approved on 04/01/21 and expiring on 07/29/24.

Manu

Manuel Perez, P.E. Product Control Examiner NOA No. 23-0928.25 Expiration Date: July 29, 2024 Approval Date: November 09, 2023

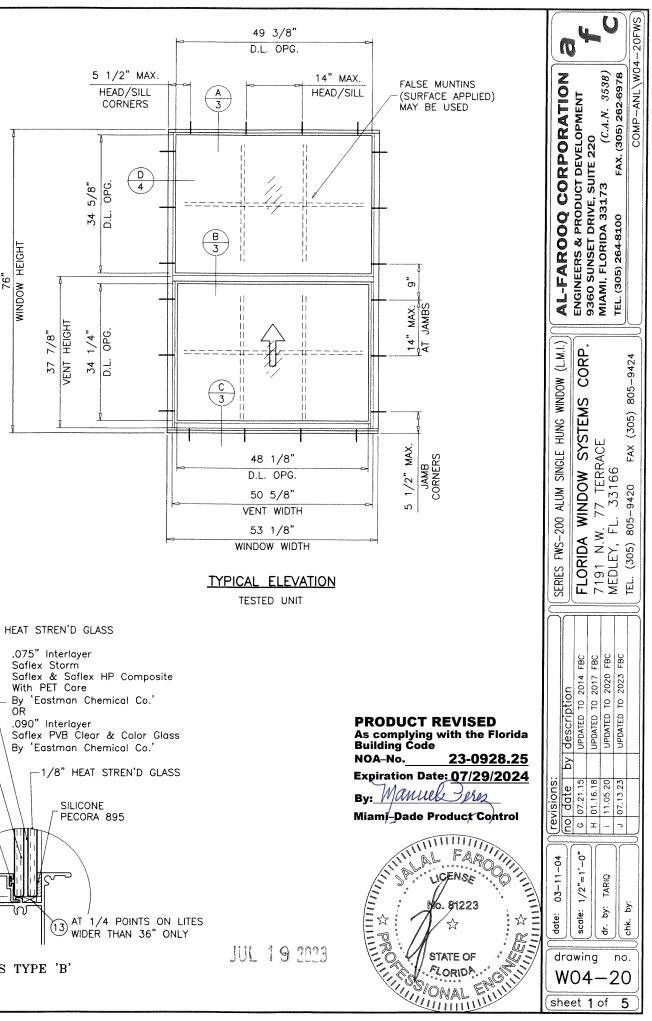

THESE WINDOWS ARE RATED FOR LARGE & SMALL MISSILE IMPACT. SHUTTERS ARE NOT REQUIRED.

<u>SERIES FWS-200</u> ALUMINUM SINGLE HUNG WINDOW

DESIGN LOAD RATINGS FOR THESE WINDOWS TO BE AS PER CHARTS SHOWN ON SHEET 2.

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE COMBINATIONS OF S.H./S.H. OR SINGLE HUNG WITH OTHER WINDOW TYPES IN MODULES OF TWO OR MORE WINDOWS USING MIAMI-DADE COUNTY APPROVED MULLIONS IN BETWEEN. LOWER DESIGN PRESSURE FROM WINDOWS OR MULLION APPROVAL WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2020 (7TH EDITION)/2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.


ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2020/2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC.

CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.

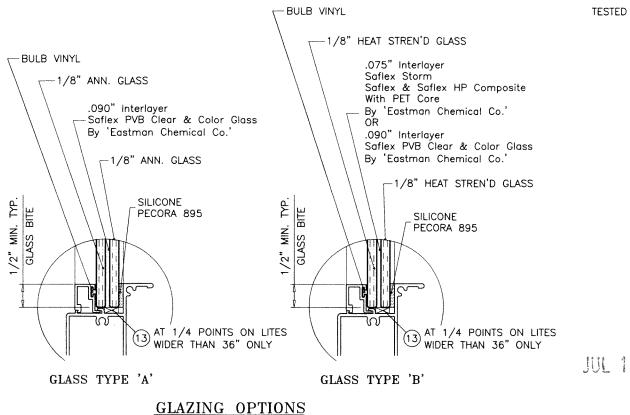

		1			CITY -	1		una :-	143750
				AR CLIP		WITH SHEAR CLIPS AT JAMI			
WINDOW DIMS.		GLASS TYPE 'A'		GLASS TYPE 'B'		GLASS TYPE 'A'		GLASS TYPE 'B'	
WIDTH	HEIGHT	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)
19-1/8"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
26-1/2"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
32"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
37"	26" (3)	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
42"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
48"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
53-1/8"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
19-1/8"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
26-1/2"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
32"	70 7/0"	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
37"	38-3/8"	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
42"	(4)	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
48"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
53-1/8"		60.0	65.0	66.7	73.5	60.0	65.0	66.7	75.0
19-1/8"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
26-1/2"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
32"	50 5 /9"	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
37"	50-5/8" (4)	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
42"	(4)	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
48"		60.0	65.0	66.7	69.6	60.0	65.0	66.7	75.0
53-1/8"		60.0	60.2	60.2	60.2	60.0	65.0	66.7	75.0
19-1/8"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
26-1/2"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
32"	57"	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
37"	(6)	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
42"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
48"		60.0	64.9	64.9	64.9	60.0	65.0	66.7	75.0
53-1/8"		55.8	55.8	55.8	55.8	60.0	65.0	66.7	75.0
19-1/8"	63" (6)	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
26-1/2"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
32"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
37"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
42"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
48"		60.0	61.7	61.7	61.7	60.0	65.0	66.7	75.0
53-1/8"		-	-	52.6	52.6	-	-	66.7	75.0
19-1/8"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
26-1/2"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
32"	76"	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0 75.0
37"	(6)	60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0
42" 48"		<u> </u>		66.7 57.4	74.2 57.4		_	66.7 66.7	75.0
48 53–1/8"		<u> </u>		48.1	57.4 48.1			66.7	75.0


* NO. IN PARENTHESIS INDICATE NO. OF ANCHORS PER JAMB.


WINDOW DIMS. W/O SHEAR CLIPS WITH SHEAR CLIPS AT JAMBS WINDOW DIMS. GLASS TYPE			DES			S WIN Acity –					let O
bit bit<		**************************************			*****			HEAR C	LIPS AT	JAMBS	
b0.0 63.0 66.7 75.0 66.7 75.0 37" 50-5/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 42" (5) 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 31" - - 61.4 61.4 - - 66.7 75.0 31" - - 61.4 61.4 - - 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 42" - - 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 66.7 75.0 42" - - 66.7 75.0 66.7 75.0 66.7 75.0 32" - - 66.7 <t< th=""><th colspan="2">WINDOW DIMS.</th><th colspan="3">GLASS TYPE GLASS TYPE</th><th colspan="3">GLASS TYPE GLASS TYPE</th><th>TYPE</th><th colspan="2">00N 1538)</th></t<>	WINDOW DIMS.		GLASS TYPE GLASS TYPE			GLASS TYPE GLASS TYPE			TYPE	00N 1538)	
Construct <		·		······	ļ		<u> </u>				EN EN
Construct <	19-1/8"	<u>†</u>	+			+					PPM 5) 2
37" (5) 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 42" (5) 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 48" - - 61.4 61.4 - - 66.7 75.0 9-1/8" - - 61.4 61.4 - - 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" - - 66.7 75.0 60.0 65.0 66.7 75.0 42" (5) - - 66.7 75.0 60.0 65.0 66.7 75.0 31-1/8" - - 66.7 75.0 - - 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 - - 66.7 75.0	26-1/2"		60.0	65.0	66.7	75.0	60.0	65.0	66.7	75.0	
37" (5) 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 42" (5) 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 48" - - 61.4 61.4 - - 66.7 75.0 9-1/8" - - 61.4 61.4 - - 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 - - 66.7 75.0 9-1/8" - - 66.7 75.0 60.0 65.0 66.7 75.0 32" - - 66.7 75.0 - - 66.7 75.0 32" - - 66.7 75.0 - - 66.7 75.0			60.0	65.0	66.7	75.0	60.0	65.0	66.7		X D
46" 60.0 65.0 66.7 71.2 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 46" - - 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0			60.0	65.0	66.7		60.0	65.0	66.7	+	
46" 60.0 65.0 66.7 71.2 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 57" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 46" - - 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0		(5)		65.0	66.7	75.0	60.0		66.7		
42 <td< td=""><td></td><td></td><td>60.0</td><td>65.0</td><td>66.7</td><td>71.2</td><td>60.0</td><td>65.0</td><td>66.7</td><td>+</td><td></td></td<>			60.0	65.0	66.7	71.2	60.0	65.0	66.7	+	
42 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>+</td><td>O HA NO</td></td<>										+	O HA NO
42 <td< td=""><td></td><td><u> </u></td><td>60.0</td><td>65.0</td><td></td><td></td><td>60.0</td><td>65.0</td><td></td><td></td><td>O & LI R 4</td></td<>		<u> </u>	60.0	65.0			60.0	65.0			O & LI R 4
42 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>+</td><td></td></td<>										+	
42 -						+					NEE VEE
42 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>											
48" - - 66.7 68.3 - - 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 63" - - 66.7 75.0 - - 66.7 75.0 9-1/8" (6) - - 66.7 75.0 - - 66.7 75.0 9-1/8" (6) - - 66.7 75.0 - - 66.7 75.0 9-1/8" (6) - - 66.7 75.0 - - 66.7 75.0 9-1/8" 76" (6) - - 66.7 75.0 - - 66.7 75.0 32" * NO. IN PARENTHESIS INDICATE NO. OF - - - 66.7 75.0 - - 66.7 75.0 10 - - - - - <t< td=""><td></td><td>(5)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td> I</td><td>A R S R</td></t<>		(5)								I	A R S R
B33-1/8" - - 58.2 58.2 - - 66.7 75.0 9-1/8" 60.0 65.0 66.7 75.0 60.0 65.0 66.7 75.0 32" 63" - - 66.7 75.0 60.0 65.0 66.7 75.0 32" 63" - - 66.7 75.0 - - 66.7 75.0 9-1/8" (6) - - 66.7 75.0 - - 66.7 75.0 9-1/8" (6) - - 66.7 75.0 - - 66.7 75.0 9-1/8" 76" 60.0 65.0 66.7 75.0 - - 66.7 75.0 9-1/8" 76" 60.0 65.0 66.7 75.0 - - 66.7 75.0 26-1/2" 76" 60.0 66.7 75.0 - - 66.7 75.0 32" • NO. IN PARENTHESIS INDICATE NO. OF - - 66.7 75.0											
DVCITIES ON THIS SHEET VDE			l							+	
DVCITIES ON THIS SHEET VDE		·	+								RI (L.W
DACITIES ON THIS SHEET VAR			}								N N
DACITIES ON THIS SHEET VAR			I			+				· · · · · · · · · · · · · · · · · · ·	N IN
DVCITIES ON THIS SHEET VDE		63"								+ 1	N N
DACITIES ON THIS SHEET VIE NO CHANGE THIS SHEET THIS SHEET THIS SHEET TO 2017 FBC NO CHANGE THIS SHEET THIS SH		(6)		_			_			/	
DACITIES ON THIS SHEET VAR		 	<u> </u>	65.0			60.0				
DVCITIES ON THIS SHEET VDE		1									RA CI
DACITIES ON THIS SHEET VAR		(6)	00.0					00.0			10 EF
								Transmission of the local division of the lo			
	N ASTM RIDA BU ORY STA PRODU As comp Building NOA-No	E1300-C ILDING CC ATEMENT JCT REV plying with Code	99 (3 S DMMISSI DCA05- ISED the Flor 3-0928	SEC. GU ON -DEC-2 rida <u>.25</u> JU	219	2023	VEN '8'			3 ☆	date: 0.3-11-04 (fevisions: date: 0.3-11-04 (fevisions: scale: 1/2" = 1" No CHANGE THIS SHEET scale: 1/2" = 1" H 01.16.18 dr. by: TARIO 11.105.20 dr. by: TARIO NO CHANGE THIS SHEET
By: Manuel Jeres W04-20	I ASTM IDA BU DRY STA PRODU As comp Building NOA-No Expiratio	E1300-C ILDING CC ATEMENT JCT REV olying with Code . 23 on Date: 0	99 (3 S DMMISSI DCA05- ISED the Flor 3-0928	SEC. GU ON -DEC-2 rida <u>.25</u> JU	219	2023	15-5/8" 11/1////////////////////////////////		FA UCENSE 0.8122 ☆ STATE OI	3 ☆	date: 03-11-04 date: 03-11-04 for date: 03-11-04 for date: by description scale: 1/2" = 1" dr. by: TARIO i 11.05.20 u 07.15.13 u 07.15.20 u 2017 FBC dr. by: 107.13.33 u 07.13.33

NOTE: GLASS BASED AND FL DECLARA

Ŷ

11

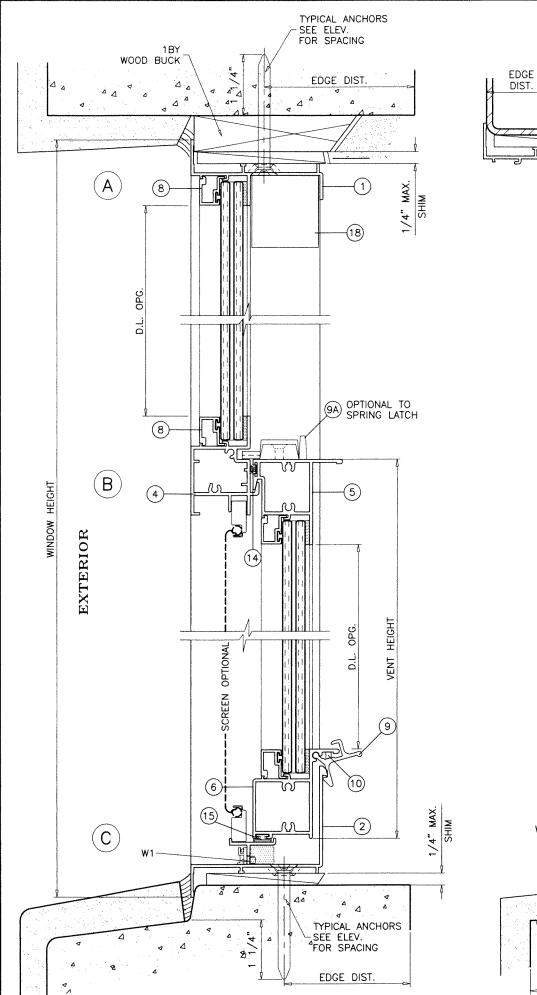

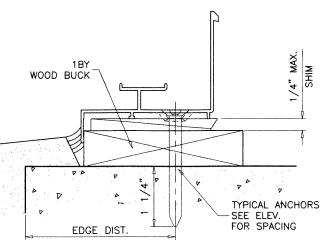

TYPICAL ANCHORS

METAL

MAX

1/4"

ALL JOINTS AND FRAME CONNECTIONS SEALED WITH

W1 = 1 - 1/2" X 3/16" WEEPHOLES AT 2-1/4" FROM

SCHNEE-MOREHEAD 5504 SEALANT.

SEALANT:

WEEPHOLES:

EACH END

STRUCTURE

SEE ELEVS.

TYPICAL ANCHORS SEE ELEV. FOR SPACING MIAMI-DADE COUNTY APPROVED MULLION & MULLION ANCHORS SEE SEPARATE NOA EDGE DIST EDGE DIST. TYPICAL ANCHORS SEE ELEV. FOR SPACING

MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

TYPICAL ANCHORS: SEE ELEV. FOR SPACING

INTO 2BY WOOD BUCKS OR WOOD STRUCTURES

THRU 1BY BUCKS INTO CONC. OR BLOCKS 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

DIRECTLY INTO CONCRETE OR BLOCKS 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

INTO METAL STRUCTURES (HEAD/SILL/JAMBS) ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.) (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

INTO MIAMI-DADE COUNTY APPROVED MULLIONS


CRITICAL EDGE DISTANCE

INTO CONCRETE AND BLOCKS = 2-1/2" MIN. INTO WOOD STRUCTURE = 1" MIN. INTO METAL STRUCTURE = 3/4" MIN.

WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN.


PRODUCT REVISED As complying with the Florida Building Code NOA-No. 23-0928.25 Expiration Date: 07/29/2024 By: Manuel Peres


Miami-Dade Product Control

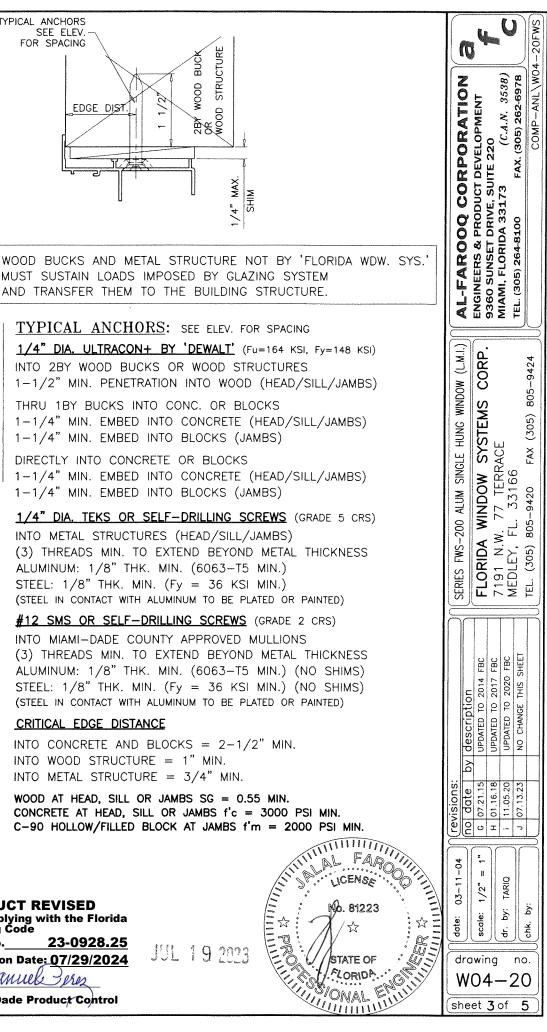


MIAMI-DADE COUNTY APPROVED MULLION SEE SEPARATE NOA	TYPICAL ANCHORS - SEE ELEV. FOR SPACING
WINDOW WIDTH	WINDOW WIDTH

HEAD SILL JAMB ITG. RAIL OP RAIL OP RAIL OP RAIL DE RAIL DE RAIL BEAD TCH @ 10-3/4" FROM ENDS PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE BOX SCREEN	6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 7 CRS EPDM - VINYL - VINYL - ALUMINUM -		LE HUNG WINDOW (L.M.I.) SYSTEMS CORP. AL-FAROOQ CORPORATION ENGINEERS & PRODUCT DEVELOPMENT BAGE SUNSET DRIVE, SUITE 220 MIAMI, FLORIDA 33173 (C.A.N. 3538) TEL. (305) 264-8100 FAX. (305) 805-9424 TEL. (305) 264-8100 FAX. (305) 805-9424
JAMB ITG. RAIL DP RAIL DTTOM RAIL DTTOM RAIL DE RAIL BEAD ITCH @ 10-3/4" FROM ENDS PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN "STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 ZAMAK STEEL - CRS EPDM - VINYL - VINYL - ALUMINUM -		AL-FAROOQ CORPC ENGINEERS & PRODUCT DEVE 9360 SUNSET DRIVE, SUITE 23 MIAMI, FLORIDA 33173 TEL. (305) 264-8100 FAX. (3
ITG. RAIL PRAIL PRAIL DTTOM RAIL DE RAIL BEAD TCH @ 10-3/4" FROM ENDS PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 ZAMAK STEEL - CRS EPDM - VINYL - VINYL - ALUMINUM -		AL-FAROOQ CORPC ENGINEERS & PRODUCT DEVE 9360 SUNSET DRIVE, SUITE 23 MIAMI, FLORIDA 33173 TEL. (305) 264-8100 FAX. (3
DP RAIL DTTOM RAIL DE RAIL DE RAIL BEAD TCH @ 10-3/4" FROM ENDS DE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE DIRAL BALANCE JIDE SCREWS TOP	6063-T6 6063-T6 6063-T6 6063-T6 6063-T6 ZAMAK STEEL - CRS EPDM - VINYL - VINYL - ALUMINUM -		AL-FAROOQ CORPC ENGINEERS & PRODUCT DEVE 9360 SUNSET DRIVE, SUITE 23 MIAMI, FLORIDA 33173 TEL. (305) 264-8100 FAX. (3
DTTOM RAIL DE RAIL BEAD TCH @ 10-3/4" FROM ENDS PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	6063-T6 6063-T6 6063-T6 2AMAK STEEL - CRS EPDM - VINYL - VINYL - ALUMINUM -	INTALLED W/ (2) #8 X 3/4" FH SMS - PECORA PH SMS DUROMETER 80±5 SHORE A ULTRAFAB FH FH	AL-FAROOQ CORPC ENGINEERS & PRODUCT DEVE 9360 SUNSET DRIVE, SUITE 23 MIAMI, FLORIDA 33173 TEL. (305) 264-8100 FAX. (3
DE RAIL BEAD TCH @ 10-3/4" FROM ENDS PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP	6063-T6 6063-T6 2AMAK STEEL CRS EPDM - VINYL - VINYL - ALUMINUM -	- - - INTALLED W/ (2) #8 X 3/4" FH SMS - PECORA PH SMS DUROMETER 80±5 SHORE A ULTRAFAB - - FH - - FH - -	AL-FAROOQ CORPC ENGINEERS & PRODUCT DEVE 9360 SUNSET DRIVE, SUITE 23 MIAMI, FLORIDA 33173 TEL. (305) 264-8100 FAX. (3
BEAD TCH @ 10-3/4" FROM ENDS PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	6063-T6 6063-T6 ZAMAK STEEL - CRS EPDM - VINYL - VINYL - ALUMINUM -	- - INTALLED W/ (2) #8 x 3/4" FH SMS - PECORA PH SMS DUROMETER 80±5 SHORE A ULTRAFAB - - FH - - FH - -	AL-FAROOQ COI ENGINEERS & PRODUCT 9360 SUNSET DRIVE, SUI MIAMI, FLORIDA 33173 TEL. (305) 264-8100
TCH © 10-3/4" FROM ENDS PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	6063-T6 ZAMAK STEEL - CRS EPDM - VINYL - VINYL - ALUMINUM -	INTALLED W/ (2) #8 X 3/4" FH SMS PECORA PH SMS DUROMETER 80±5 SHORE A ULTRAFAB FH FH	AL-FAROOQ COI ENGINEERS & PRODUCT 9360 SUNSET DRIVE, SUI MIAMI, FLORIDA 33173 TEL. (305) 264-8100
PE SWEEP LOCK SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	ZAMAK STEEL – CRS EPDM – VINYL – ALUMINUM –	INTALLED W/ (2) #8 X 3/4" FH SMS - PECORA PH SMS DUROMETER 80±5 SHORE A ULTRAFAB FH FH	AL-FAROOQ (ENGINEERS & PROD 9360 SUNSET DRIVE MIAMI, FLORIDA 33: TEL. (305) 264-8100
SPRING COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	STEEL - CRS EPDM - VINYL - ALUMINUM -	- PECORA PH SMS DUROMETER 80±5 SHORE A ULTRAFAB FH - FH FH	
COMPOUND & VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	- CRS EPDM - VINYL - ALUMINUM -	PH SMS DUROMETER 80±5 SHORE A ULTRAFAB - - - FH - -	
& VENT ASSEMBLY SCREWS BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	CRS EPDM - VINYL - ALUMINUM -	PH SMS DUROMETER 80±5 SHORE A ULTRAFAB - - - FH - -	
BLOCKS STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	EPDM - VINYL - ALUMINUM -	DUROMETER 80±5 SHORE A ULTRAFAB - - FH - - - - - - - - - - - - -	
STRIPPING WITH PLASTIC FIN 'STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	- VINYL - ALUMINUM -	ULTRAFAB FH	
STRIPPING AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	VINYL 	- - - FH - -	
AND TACKLE BALANCE PIRAL BALANCE JIDE SCREWS TOP JIDE	– ALUMINUM –	- FH - -	
PIRAL BALANCE JIDE SCREWS TOP JIDE	-	 FH 	TEMS CORP.
JIDE SCREWS TOP JIDE	-	FH 	JNG WINDOW (L.M.I. TEMS CORP.
IOP JIDE	-	-	TEMS COF
JIDE	-	-	TEMS C
BOX SCREEN		OPTIONAL	TEI JNC
	•		••• **• •
1/4" SHIM MAX.	2BY WOOD OR WOOD STR	D BUCK RUCTURE	By description SERIES FWS-200 ALUM UPDATED TO 2014 FBC FLORIDA WINDO UPDATED TO 2017 FBC 7191 N.W. 77 TE UPDATED TO 2020 FBC 7191 N.W. 77 TE NO CHANGE THIS SHEET MEDLEY, FL. 331
	L SEE ELEV FOR SPAC	NO. 81223	$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$
	CT REVISED lying with the Florida Code 23-0928.25	CT REVISED lying with the Florida Code 23-0928.25	CT REVISED lying with the Florida

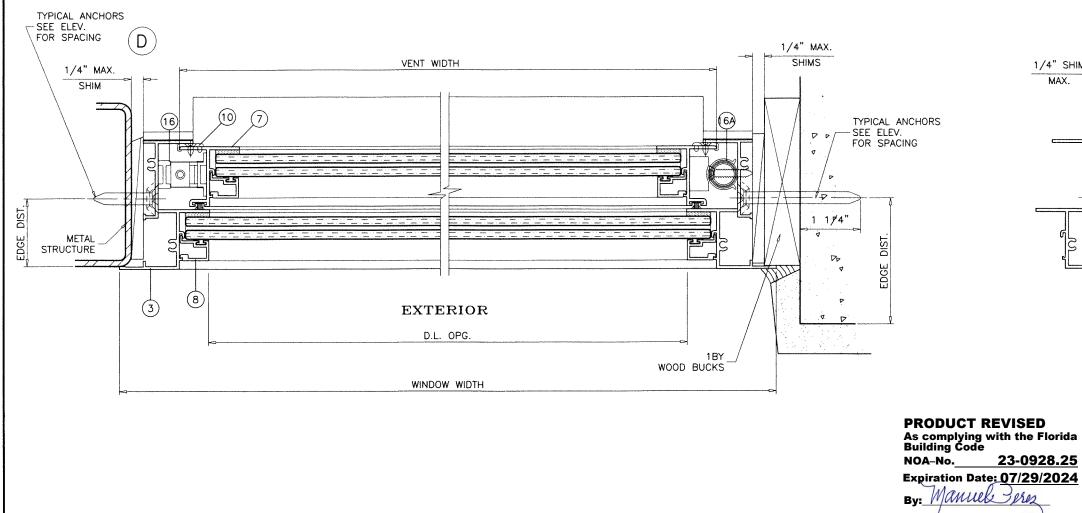

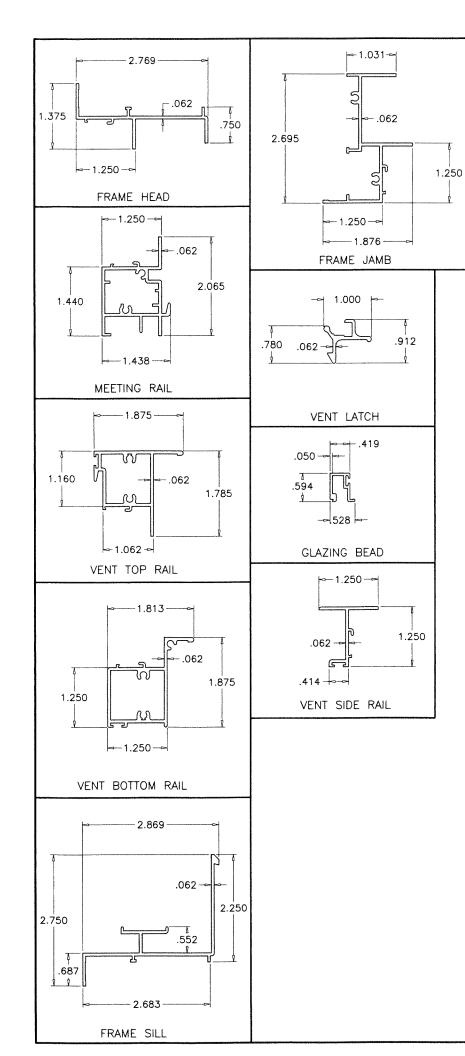

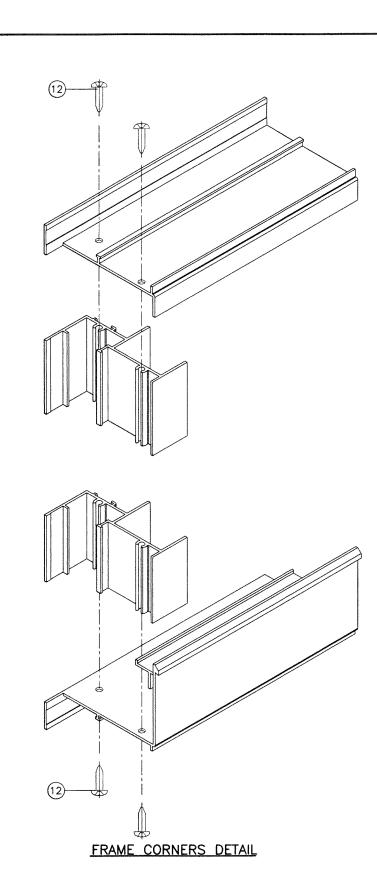

PRODUCT REVISED As complying with the Florida Building Code 23-0928.25 NOA-No. Expiration Date: 07/29/2024 By: Manuel Peres Miamj-Dade Product Control

