

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

R)

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

PRODUCT CONTROL SECTION

www.miamidade.gov/building

MIAMI-DADE COUNTY

NOTICE OF ACCEPTANCE (NOA)

Lawson Industries, Inc. 8501 NW 90 Street Medley, FL 33166

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "3200" Outswing Aluminum Casement Window – L.M.I.

APPROVAL DOCUMENT: Drawing No. **L3200-0801**, titled "Series: 3200 Outswing Impact Casement Window", sheets 1 through 7 of 7, dated 07/27/08, with revision **G** dated 09/29/23, prepared by manufacturer, signed and sealed by Thomas J. Sotos, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA No. 20-0814.07 and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

MIAMI-DADE COUNTY
APPROVED

10/25/23

NOA No. 23-1010.05 Expiration Date: March 04, 2024 Approval Date: November 02, 2023 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. (Submitted under NOA No. 08-1020.08)
- 2. Drawing No. **L3200-0801**, titled "Series: 3200 Outswing Impact Casement Window", sheets 1 through 7 of 7, dated 07/27/08, with revision **F** dated 08/10/20, prepared by manufacturer, signed and sealed by Thomas J. Sotos, P.E. (Submitted under NOA No. 20-0814.07)

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202-94

along with marked-up drawings and installation diagram of a series 3200 outswing aluminum casement window, prepared by Fenestration Testing Laboratory, Inc., Test Report No. FTL-10570, dated 02/08/19, signed and sealed by Idalmis Ortega, P.E. (Submitted under NOA No.19-0227.06)

- 2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202-94

along with marked-up drawings and installation diagram of a series 3200 outswing aluminum casement window, X configuration, w/5/16" ann. lami glass w/PVB laminate by DuPont, Test Reports No. **HETI-08-2099A**, **HETI-08-2102A**, **HETI-08-2097A**, **HETI-08-2103A** and **HETI-08-2131A**, all dated 07/10/08, signed and sealed by Candido F. Font, P.E.

(Submitted under NOA No. 08-1020.08)

- 3. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94
 - 2) Cyclic Wind Pressure Loading per FBC, TAS 203-94 along with marked-up drawings and installation diagram of a series 3200 outswing aluminum casement window, X configuration, w/5/16" ann. lami glass w/PVB laminate by DuPont, Test Reports No. HETI-08-2099B, HETI-08-2100, HETI-08-2101, HETI-08-2102B, HETI-08-2097B, HETI-08-2103B, HETI-08-2104, HETI-08-2105, HETI-08-2106, HETI-08-2125, and

HETI-08-2131B, all dated 07/10/08, signed and sealed by Candido F. Font, P.E.

(Submitted under NOA No. 08-1020.08)

Manuel Perez, P.E. Product Control Examiner NOA No. 23-1010.05

Expiration Date: March 04, 2024 Approval Date: November 02, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA'S (CONTINUED)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with FBC 6th Edition (2017), dated 03/01/19, prepared by manufacturer, signed and sealed by Thomas J. Sotos, P.E.

(Submitted under NOA No.19-0227.06)

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 18-0725.11 issued to Kuraray America, Inc. for their "Kuraray SentryGlas® XtraTM (SGXTM) Clear Glass Interlayer" dated 05/23/19, expiring on 05/23/24.
- 2. Notice of Acceptance No. 19-0305.02 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 05/09/19, expiring on 07/08/24.
- 3. Notice of Acceptance No. 20-0622.01 issued to Eastman Chemical Company (MA) for their "Saflex PVB Clear and Color Glass Interlayers" dated 08/06/20, expiring on 05/21/21.

F. STATEMENTS

- 1. Statement letter of conformance to FBC 7th Edition (2020), dated August 3, 2020, issued by the manufacturer, signed and sealed by Thomas J. Sotos, P.E. (Submitted under NOA No.20-0814.07)
- Testing Proposal issued by the Product Control Section, dated December 12, 2018, signed by Manuel Perez, P.E.
 (Submitted under NOA No.19-0227.06)
- 3. Laboratory compliance letter for Test Reports No.'s HETI-08-2099A, HETI-08-2102A, HETI-08-2097A, HETI-08-2103A, HETI-08-2131A, HETI-08-2099B, HETI-08-2100, HETI-08-2101, HETI-08-2102A, HETI-08-2102B, HETI-08-2097B, HETI-08-2103B, HETI-08-2104, HETI-08-2105, HETI-08-2106, HETI-08-2125 and HETI-08-2131B, all dated 07/10/08, all issued by Hurricane Engineering & Testing, Inc., signed and sealed by Candido F. Font, P.E.

(Submitted under NOA No. 08-1020.08)

G. OTHERS

1. Notice of Acceptance No. 19-0227.06 issued to Lawson Industries, Inc. for their Series "3200" Outswing Aluminum Casement Window – L.M.I., approved on 04/04/19 and expiring on 03/04/24.

Manuel Pérez, P.E. Product Control Examiner NOA No. 23-1010.05

Expiration Date: March 04, 2024 Approval Date: November 02, 2023

Lawson Industries, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **L3200-0801**, titled "Series: 3200 Outswing Impact Casement Window", sheets 1 through 7 of 7, dated 07/27/08, with revision **G** dated 09/29/23, prepared by manufacturer, signed and sealed by Thomas J. Sotos, P.E.

B. TESTS

1. None

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. **22-1116.01** issued to **Kuraray America**, **Inc.** for their "SentryGlas® (Clear and White) Glass Interlayers" dated 12/15/22, expiring on 07/04/28.
- 2. Notice of Acceptance No. 20-0915.22 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 11/19/20, expiring on 07/08/24.
- 3. Notice of Acceptance No. 21-0216.01 issued to Eastman Chemical Company (MA) for their "Saflex PVB Interlayers Clear and Colored for Glass" dated 04/29/21, expiring on 05/21/26.

F. STATEMENTS


- 1. Statement letter of conformance, complying with **FBC 8th Edition (2023)**, dated October 4, 2023, issued by the manufacturer, signed and sealed by Thomas J. Sotos, P.E.
- 2. Statement letter of no financial interest, dated October 4, 2023, issued by the manufacturer, signed and sealed by Thomas J. Sotos, P.E.
- 3. Proposal No. 23-0461R issued by Product Control Section, dated 06/13/23 and revised on 06/16/23, signed by Manuel Perez, P.E.

G. OTHERS

1. Notice of Acceptance No. **20-0814.067** issued to Lawson Industries, Inc. for their Series "3200" Outswing Aluminum Casement Window – L.M.I., approved on 10/15/20 and expiring on 03/04/24.

Manuel Pérez, P.E. Product Control Examiner NOA No. 23-1010.05

Expiration Date: March 04, 2024 Approval Date: November 02, 2023

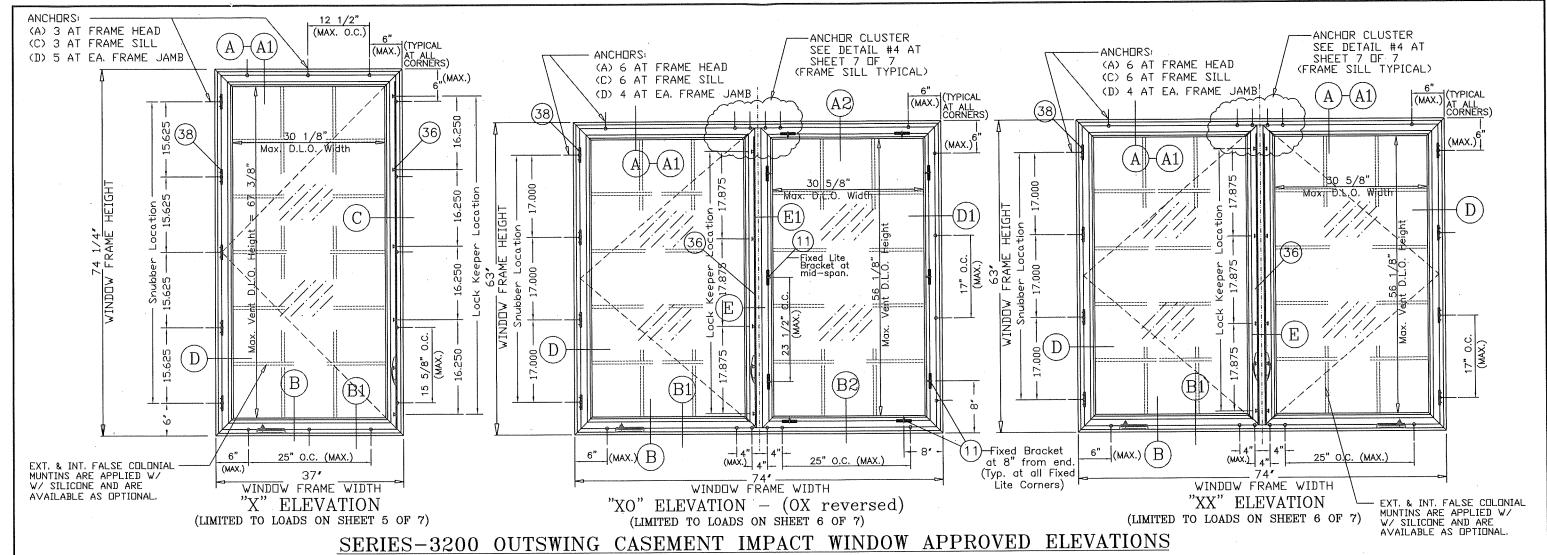

General Notes:

- 1.) THIS WINDOW SYSTEM IS DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE (2020-7th Edition & 2023-8th Edition) INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ) AND ASTM 1300-98. THIS PRODUCT IS IMPACT RESISTANT AND DOES NOT REQUIRED SHUTTERS.
- 2.) 1X or 2 X WOOD BUCKS SHALL BE INSTALLED AND ANCHORED SO THAT THE BUILDING RESISTS THE SUPERIMPOSED LOADS IN ACCORDANCE WITH REQUIREMENTS OF F.B.C. & TO BE REVIEWED BY BUILDING OFFICIAL
- 3.) ANCHORS SHOWN ABOVE ARE AS PER TEST UNITS. ON CENTER (O.C.) ANCHOR SPACINGS WILL VARY WITH UNIT DIMENSIONS, AND THE NUMBER OF ANCHORS REQUIRED, AS SPECIFIED ON THE LOAD TABLES AT SHEETS 5 & 6.
- 4.) ANCHOR CONDITIONS NOT DESCRIBED IN THESE DRAWING'S ARE TO BE ENGINEERED ON A SITE SPECIFIC BASIS, UNDER SEPARATE APPROVAL AND TO BE REVIEWED BY BUILDING OFFICIAL.
- 5.) SEE SHEET #4 OF 7 FOR BILL OF MATERIALS AND DETAILS.
- 6.) SEE SHEET #5 & 6 OF 7 FOR GLAZING DETAILS & OPTIONS AND CHARTS FOR MAX. DESIGN PRESSURES.
- 7.) WOOD BUCKS IN CONTACT WITH CONCRETE MUST BE PRESSURE TREATED AND ANCHORED PRIOR TO WINDOW INSTALLATION (BY OTHERS). (SEE SHEETS #2 & 3 FOR DETAIL & NOTES)
- 8.) MATERIALS INCLUDING BUT NOT LIMITED TO STEEL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF FLORIDA BUILDING CODE.
- 9.) EXT. & INT. FALSE COLONIAL MUNTINS ARE OPTIONAL & AND ARE APPLIED W/ SILICONE
- 10.) FRAME SILL ANCHOR CLIPS TO BE MEASURED FROM THE INSIDE EDGE OF THE WINDOW FRAME AND TO BE LOCATED WITHIN A +/-1/2" TOLERANCE. TOTAL OF ANCHORS REQUIRED AT SILL TO BE THE SAME AS FRAME HEAD
- 11.) SEE SHEET # 4 OF 10 FOR FLANGE PERIMETER CAULK/ INSTALLATION DETAIL.
- 12.) EXT. & INT. FALSE COLONIAL MUNTINS ARE OPTIONAL & AND ARE APPLIED W/ SILICONE

GENERAL ANCHORS NOTE

SEE SHEETS 2 & 3 of 7 FOR ANCHOR TYPES, DESCRIPTIONS AND ANCHOR LOAD CAPACITIES.

ALL ANCHORS WITH A MINIMUM OF 1 1/4" EMBEDMENT INTO MASONRY, WOOD OR COMCRETE.

WOOD BUCKS AND METAL STRUCTURES NOT BY LAWSON IND. MUST SUPPORT LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

PRODUCT REVISED As complying with the Florida Building Code 23-1010.05 NOA-No.

Expiration Date: 03/04/2024 By: Manuel Peres

1 OF 7

Miami-Dade Product Control

L3200-0801

8501 N.W. 90 ST. MEDLEY, FLORIDA 33166 PH No. (305) 696-8660 (INDUSTRIES, MANUFACTURER OF QUALITY ALUMINUM WINDOWS AND GLASS DOORS Prod Category: Series/Model: Item Reference #: Revision #: Part Class:

raw Class ASSEMBLY WINDOW LCNOA 08-01

Series: 3200 Outswing Impact Casement Window GENERAL NOTES & APPROVED ELEVATIONS (X, XX, XO or OX)

CASEMENT3200-08NOA-01

FL LIC. # 55225 90 STATE-OF

THOMAS J. SOTOS


PROFESSIONAL ENGINEER


D. Revised to Comply w/ 2017 FBC E. Revised and Updated per FTL Test #10570 F. Revised to Comply w/ 2020 FBC G. Revised to Comply w/ 2023 FBC N. ERAZO 07/27/08 Date Revised: 09/29/23 Revised By: N. ERAZO levision Level: Soale:


B. Renewal and Revision to sheet 5 & 6 of 7

C. Revised to Comply w/ 2014 FBC

evision Notes

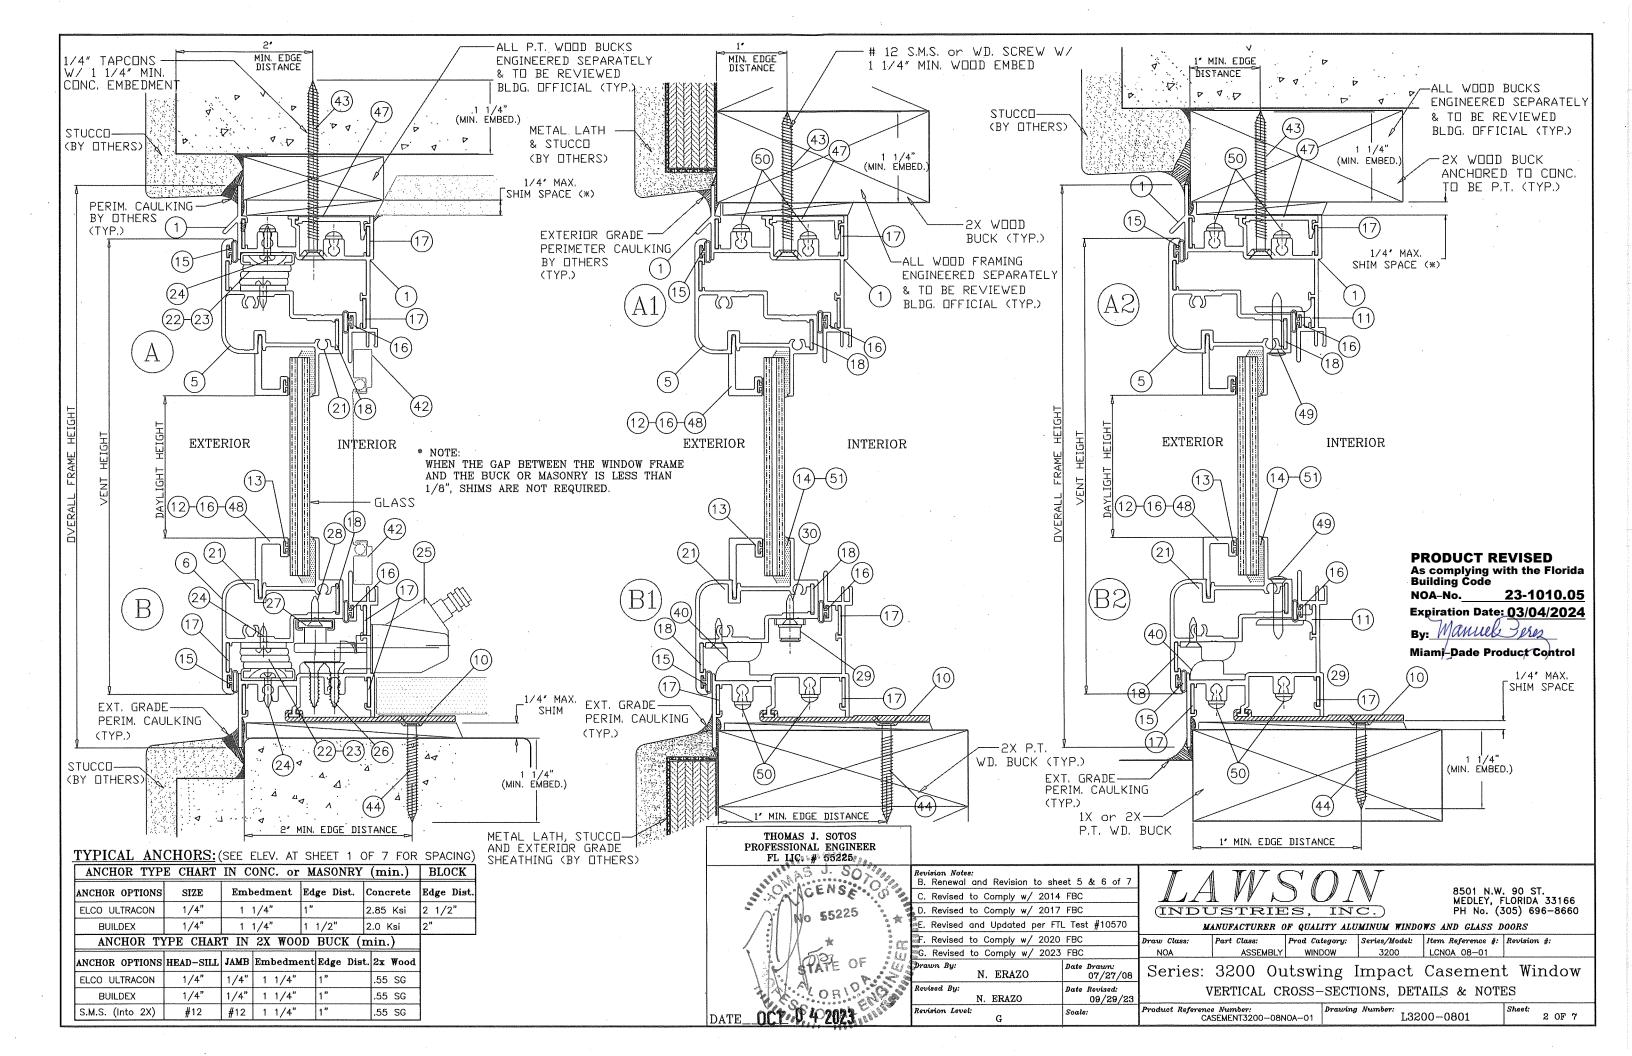

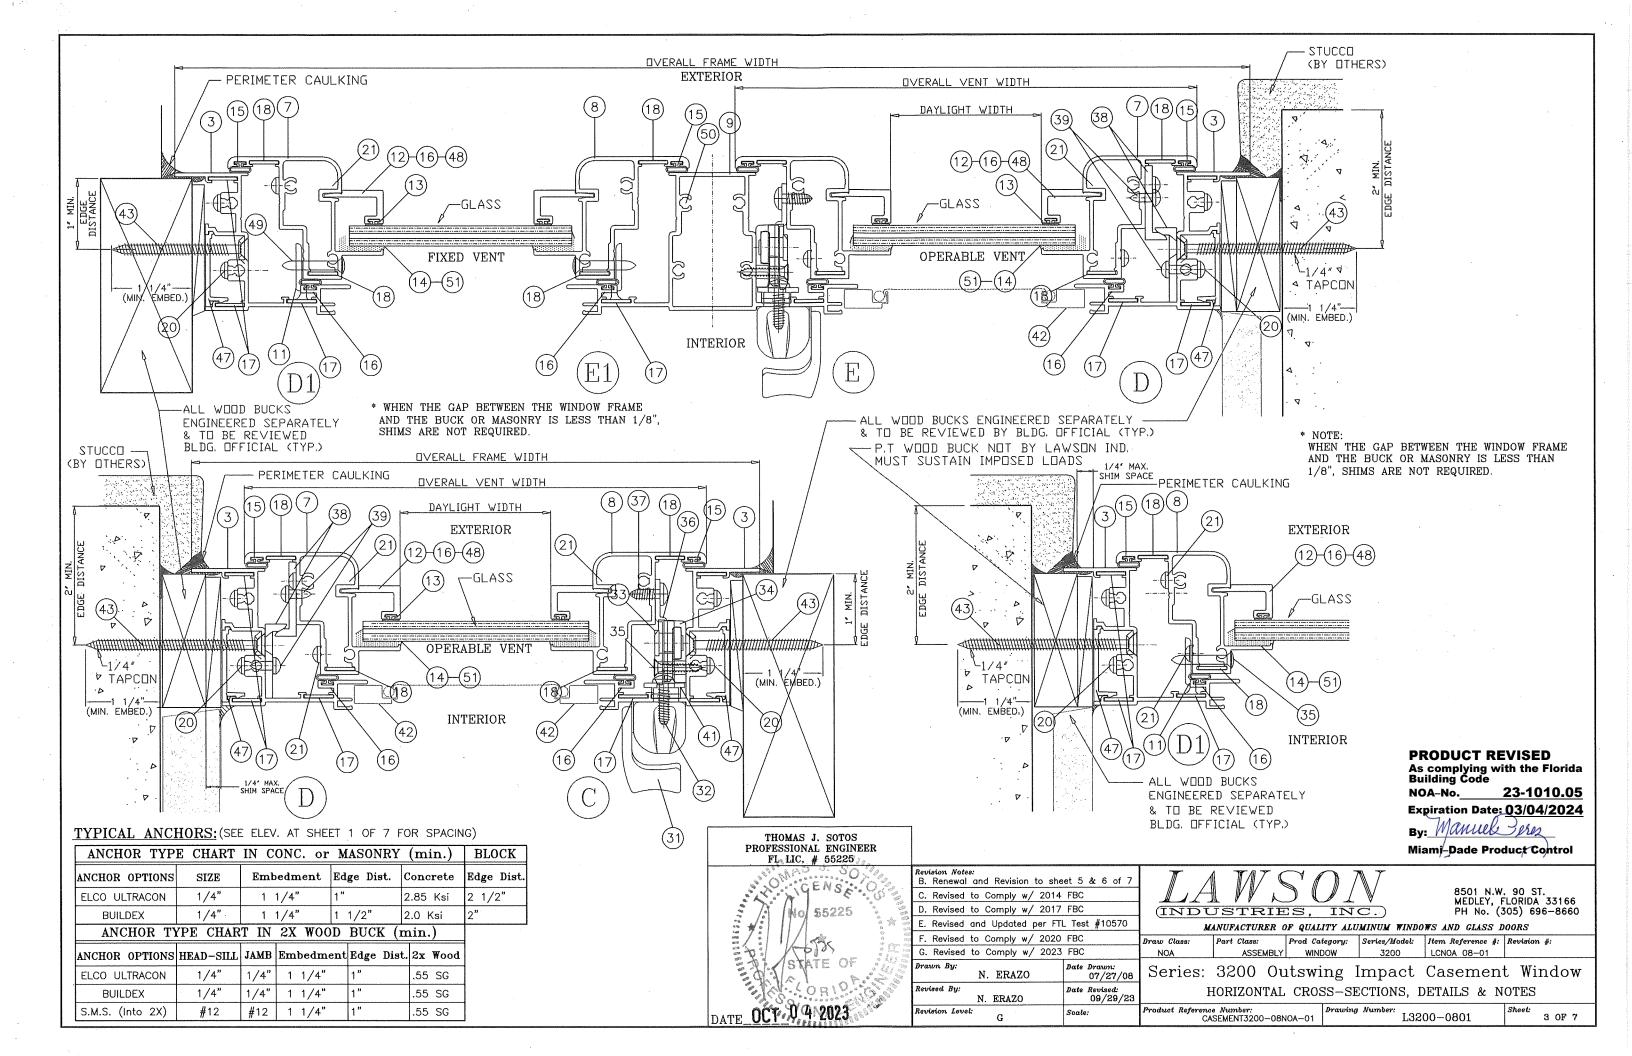

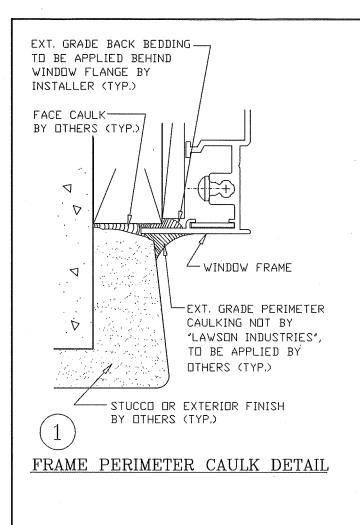

5X M00D-

EXT, GRADE BACK BEDDING


TO BE APPLIED BEHIND


WINDOW FLANGE BY


INSTALLER (TYP.)


BUCK (TYP.)

MIN. ÉMBED.)

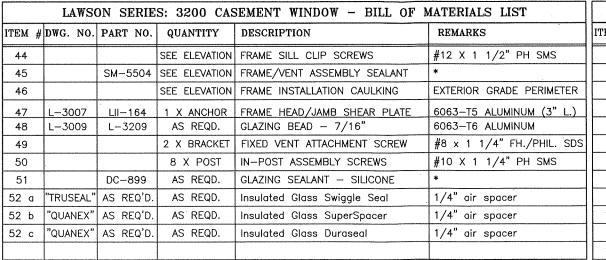

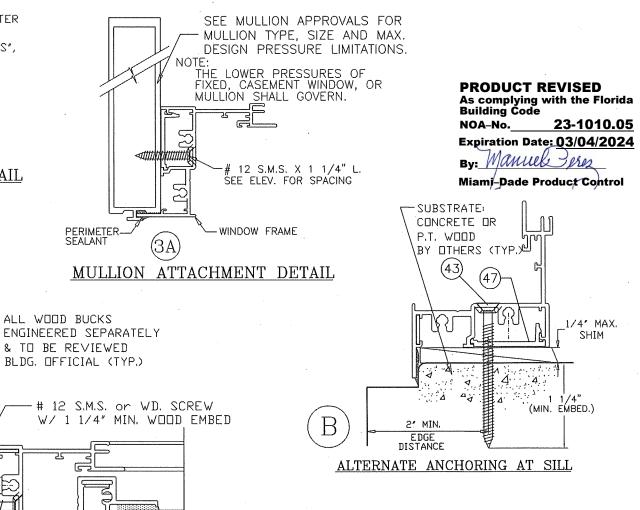

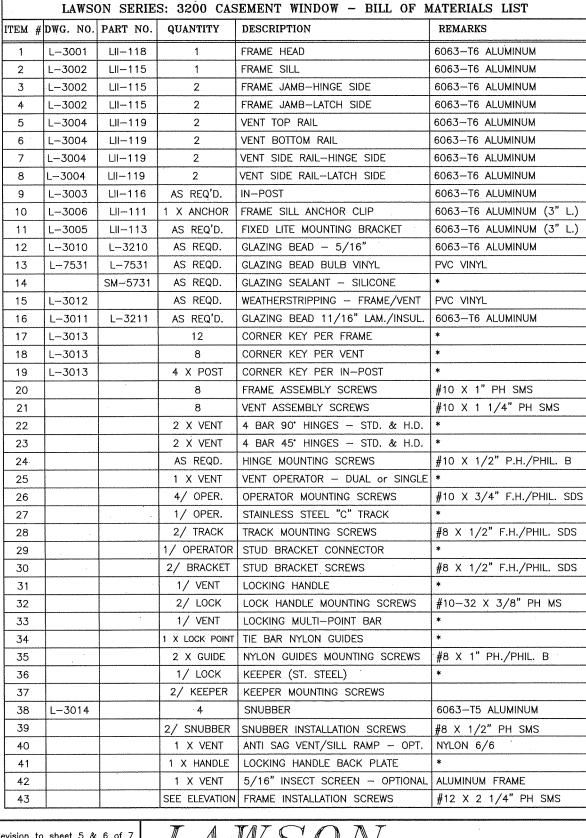



B. Renewal and Revision to sheet 5 & 6 of 7 C. Revised to Comply w/ 2014 FBC D. Revised to Comply w/ 2017 FBC E. Revised and Updated per FTL Test #10570 F. Revised to Comply w/ 2020 FBC G. Revised to Comply w/ 2023 FBC rawn By: N. ERAZO 07/27/08

N. ERAZO

evision Level:

(INDUSTRIES, INC.

Part Class:

8501 N.W. 90 ST. MEDLEY, FLORIDA 33166 PH No. (305) 696-8660

MANUFACTURER OF QUALITY ALUMINUM WINDOWS AND GLASS DOORS

Prod Category: Series/Model: Item Reference #: Revision #:

ASSEMBLY WINDOW 3200 LCNOA 08-01

Series: 3200 Outswing Impact Casement Window BILL OF MATERIALS LIST AND DETAILS

WOOD FRAME INSTALLATION DETAIL

EXTERIOR GRADE

BY OTHERS (TYP.)

METAL LATH, STUCCO

AND EXTERIOR GRADE

SHEATHING (BY OTHERS)

PERIMETER CAULKING

رححح)

1/2"

25

roduct Reference Number:
CASEMENT3200-08NOA-01


raw Class:

Date Revised: 09/29/23

Scale:

L3200-0801

4 OF 7

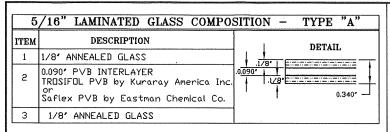


5	5/16" LAMINATED GLASS COMPO	OSITION - TYPE "B"
ITEM	DESCRIPTION	DETAIL
1	1/8" HEAT-STRENGHTENED GLASS	1/8'
ء ۔	0.090' PVB INTERLAYER Saflex PVB by Eastman Chemical Co.	0.090"
3	1/8' HEAT-STRENGHTENED GLASS	1 0.570


5	/16" LAMINATED GLASS COMP	OSITION - TYPE "C"
ITEM	DESCRIPTION	DETAIL
1	1/8" HEAT-STRENGHTENED GLASS	1 1 4
2	0.090' INTERLAYER SentryGlass Interlayer by: Kuraray America Inc.	0.090' 1/28'
3	1/8" HEAT-STRENGHTENED GLASS	. 0,340 —


7	/16" LAMINATED GLASS COMP	OSITION - TYPE "D"
ITEM	DESCRIPTION	DETAIL
1	3/16' ANNEALED GLASS	0.090' 1
2	0.090' PVB INTERLAYER Saflex PVB by Eastman Chemical Co.	.187
3	3/16' ANNEALED GLASS	'

1	1/16" LAMINATED GLASS COM	POSITION TYPE "E"
ITEM	DESCRIPTION	DETAIL
1	1/8' ANNEALED GLASS	1/8'
2	0.090' PVB INTERLAYER Saflex PVB by Eastman Chemical Co.	4 1/4
3	1/8' ANNEALED GLASS	090' (2)
4	1/4" INSULATED AIR SPACE	0.340′
5	1/8' ANNEALED GLASS	

LAMINATED GLASS TYPES







DETAILS

NOTE: WINDOWS WITH GLASS TYPES "E" INSTALLED ABOVE 30ft. IN THE HVHZ, THE I.G. EXTERIOR LITE SHALL BE TEMPERED TO COMPLY WITH THE SMALL MISSILE IMPACT RESISTANCE REQUIREMENTS (FBC-2023, Chapter 24 Section 2411.3.3.7).

(52) Insulated Spacer Types & Options

52 a) "TrueSeal" Swiggle Seal 52 b) "Quanex" SuperSpacer w/ Isomelt M

52 c) "Quanex" Duraseal

	320	0 Impac	t Casem	ent Windo	ow	Glass T	Glass Type "A" Glass Type "B"			Glass Ty	/pe "C"	Glass Ty	/pe "D"	Glass Type "E"	
			guration	the plant of the property of the party of th		5/16" Anne	aled Glass	5/16" H.S. (Glass - PVB	5/16" H.S. C	ass-SGP	7/16" Anne	aled Glass	11/16" Anne	aled Gass
	Size	Width	Height	Anch	ors	DP(+)	DP(-)	DP(+)	DP(-)	DP(+)	DP(-)	DP(+)	DP(-)	DP(+)	DP(-)
-	Code	(in)	(in)	Head/Sill	Jamb	psf	psf	psf	psf	psf	psf	psf	psf	psf	psf
Ī	12	19.125	26	. 2	2	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	13	19.125	38.375	2	3	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
ES	14	19.125	50.625	2	4	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
<u> </u>	15	19.125	63	2	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
တ	16	19.125	74.25	2	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
[H32	26.5	26	3	2	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
ا م	H33	26.5	38.375	3	3	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
OMMODITY	H34	26.5	50.625	3	4	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
\leq	H35	26.5	63	3	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
ة [H36	26.5	74.25	3	5	. 59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
O [22	37	26	3	2	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	23	37	38.375	3	3	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	24	37	50.625	3	4	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	25	37	63	3	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	26	37	74.25	3	5	59.0	59.0	70.0	82.0	-	-	-	-	-	w
	2020	24	24	2	2	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2030	24	36	2	3	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2040	24	48	2	4	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2050	24	60	2	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2060	24	72	2	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2620	30	24	3	2	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
S	2630	30	36	3	3	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
SIZI	2640	30	48	3	4	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2650	30	60	3	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
AR	2660	30	72	3	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2820	32	24	3	2	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
MODUL	2830	32	36	3	3	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
ᅙᅵ	2840	32	48	3	4	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
Σ	2850	32	60	3	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	2860	32	. 72	3 ,	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
Į.	3020	36	24	3	2	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	3030	36	36	3	3	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
].	3040	36	48	3	4	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	3050	36	60	3	5	59.0	59.0	70.0	82.0	70.0	82.0	70.0	73.0	70.0	73.0
	3060	36	72	3	5	59.0	59.0	70.0	82.0	-	-	-	-	-	
														CT REVIS	

As complying with the Florida Building Code 23-1010.05 Expiration Date: 03/04/2024 By: Manuel Peres THOMAS J. SOTOS PROFESSIONAL ENGINEER FL 116. # 55225

Miami-Dade Product Control

Flange Frame Window Glazed with

8501 N.W. 90 ST. MEDLEY, FLORIDA 33166 PH No. (305) 696-8660

MANUFACTURER OF QUALITY ALUMINUM WINDOWS AND GLASS DOORS Part Class: Prod Category: Series/Model: Item Reference #: Revision #:

ASSEMBLY WINDOW 3200 LCNOA 08-01 Series: 3200 Outswing Impact Casement Window GLASS & DP CHARTS AND GLAZING DETAILS FOR "X" UNITS


E. Revised and Updated per FTL Test #10570 F. Revised to Comply w/ 2020 FBC G. Revised to Comply w/ 2023 FBC Date Brawn: 07/27/08 N. ERAZO Date Revised: 09/29/23 N. ERAZO evision Level:

B. Renewal and Revision to sheet 5 & 6 of 7 C. Revised to Comply w/ 2014 FBC D. Revised to Comply w/ 2017 FBC

roduct Reference Number: CASEMENT3200-08NOA-01

L3200-0801

5 OF 7

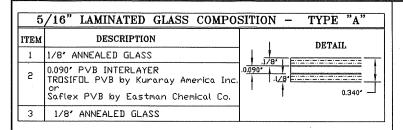


5	/16" LAMINATED GLASS COMP	OSITION - TYPE "B"
ITEM	DESCRIPTION	DETAIL
1	1/8' HEAT-STRENGHTENED GLASS	
2	0.090' PVB INTERLAYER Saflex PVB by Eastman Chemical Co.	0.090"
3	1/8' HEAT-STRENGHTENED GLASS	1 0.540


5	/16" LAMINATED GLASS COMP	OSITION - TYPE "C"
ITEM	DESCRIPTION	DETAIL
1	1/8' HEAT-STRENGHTENED GLASS	1
2	0.090' INTERLAYER SentryGlass Interlayer by: Kuraray America Inc.	0.090' 1/8'
3	1/8" HEAT-STRENGHTENED GLASS	1 . 0.340 —


7	/16" LAMINATED GLASS COMP	OSITION - TYPE "D"
ITEM	DESCRIPTION	DETAIL
1	3/16' ANNEALED GLASS	.0.090* 1
2	0.090' PVB INTERLAYER Saflex PVB by Eastman Chemical Co.	.187
3	3/16' ANNEALED GLASS	

1	1/16" LAMINATED GLASS COM	POSITION TYPE "E"
ITEM	DESCRIPTION	DETAIL
1	1/8' ANNEALED GLASS	1/8'
2	0.090' PVB INTERLAYER Saflex PVB by Eastman Chemical Co.	4 .1/4'
3	1/8' ANNEALED GLASS	.090' (2) 1/8' (1)=
4	1/4" INSULATED AIR SPACE	0.340
5	1/8' ANNEALED GLASS	

LAMINATED GLASS TYPES







GLAZING OPTION DETAILS

NOTE: WINDOWS WITH GLASS TYPES "E" INSTALLED ABOVE 30ft. IN THE HVHZ, THE I.G. EXTERIOR LITE SHALL BE TEMPERED TO COMPLY WITH THE SMALL MISSILE IMPACT RESISTANCE REQUIREMENTS (FBC-2023, Chapter 24 Section 2411.3.3.7).

Insulated Spacer Types & Options

52 a) "TrueSeal" Swiggle Seal

52 b) "Quanex" SuperSpacer w/ Isomelt M

52 c) "Quanex" Duraseal

ptimerinai muutivadikindikit kittimit ihoo	3200 Impact Casement Window		Glass T	iss Type "A" Glass Type "B"			Glass Type "C"		Glass T	ype ''D''	Glass Type "E"				
	Conf	iguratior	n: "XX", '	"XO" or "	OX''	5/16" Anne	aled Gass	5/16" H.S. 0	Glass - PVB	5/16" H.S. (Glass -SGP	7/16" Anne	aled Glass	11/16" Anno	ealed Gass
100000000000000000000000000000000000000	Size	Width	Height	Ancl	nors	DP(+)	DP(-)	DP(+)	DP(-)	DP(+)	DP(-)	DP(+)	DP(-)	DP(+)	DP(-)
	Code	(in)	(in)	Head/Sill	Jamb	psf	psf	psf	psf	psf	psf	psf	psf	psf	psf
ဟ	22	37	26	4	2	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
<u>ii</u>	23	37	38.375	4	3	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
SIZE	24	37	50.625	4	4	70.0	70.0	70.0	73.0	70.0	, 82.0	70.0	73.0	70.0	73.0
1	25	37	63	4	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
<u> </u>	32	53.125	26	4	2	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	33	53.125	38.375	4	3 .	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
COMMODITY	34	53,125	50.625	4	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
Z	35	53.125	63	4	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
민용 [D22	74	26	6	2	70.0	70.0	70.0.	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	D23	74	38.375	6	3	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	D24	74	50.625	. 6	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	D25	74	63	6	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	3020	36	24	4	2	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	3030	36	36	4	3	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	3040	36	48	4	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	3050	36	60	4	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
S	4020	48	24	4	2	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
SIZE	4030	48	36	4	3	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	4040	48	48	4	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
MODULAR	4050	48	60	4	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
ľ	5020	60	24	5	2	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	5030	60	- 36	5	3	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
∥ଧା	5040	60	48	5	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
2	5050	60	60	- 5	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	6020	72	24	. 6	2	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	6030	72	36	6	3	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	6040	. 72	48	6	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
	6050	72	60	6	4	70.0	70.0	70.0	73.0	70.0	82.0	70.0	73.0	70.0	73.0
					<u> </u>										

PRODUCT REVISED As complying with the Florida Building Code 23-1010.05 NOA-No. Expiration Date: 03/04/2024

By: Manuel Peres

Miami-Dade Product Control

L3200-0801

(INDUSTRIES, INC.)

Flange Frame Window Glazed with


8501 N.W. 90 ST. MEDLEY, FLORIDA 33166 PH No. (305) 696-8660

6 OF 7

MANUFACTURER OF QUALITY ALUMINUM WINDOWS AND GLASS DOORS

Prod Category: Series/Model: Item Reference #: Revision #: ASSEMBLY WINDOW 3200 LCNOA 08-01

Series: 3200 Outswing Impact Casement Window GLASS & DP CHARTS AND GLAZING DETAILS FOR "XX-OX-XO" UNITS roduct Reference Number: CASEMENT3200-08NOA-01



THOMAS J. SOTOS

Revision Notes: 3. Renewal and Revision to sheet 5 & 6 of C. Revised to Comply w/ 2014 FBC D. Revised to Comply w/ 2017 FBC E. Revised and Updated per FTL Test #10570 F. Revised to Comply w/ 2020 FBC G. Revised to Comply w/ 2023 FBC Date Drawn: 07/27/08 N. ERAZO Date Revised: 09/29/23 Revised By: N. ERAZO

