

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

MIAMI-DADE COUNTY

The Door Store of America, Inc., 10681 World Trade Blvd. Raleigh, N.C. 27617

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "Complete Collection" Inswing Glazed Wood Doors-L. M. Impact

APPROVAL DOCUMENT: Drawing No. **DSA 0008 Rev 1,** titled "Inswing Opaque Wood Door", sheets 1, 2 (2A-2D), 3 (3A-3D), 4 (4A-4C), 5 (5A-5C), 6-11, 12(12A),13, 14 (14A), 15 (15A-15C), 16 thru 19 of 19 dated 08/03/22 and last revised on 09/06/22, prepared by PTC, signed and sealed by Robert J. Amoruso, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant Limitations:

- 1. Multi-point Ashland applicable to all models. Gu-multi-point limited to Single doors only see sheets 15, 15A-15C.
- 2. Partial raised/Opaque panels are limited to max. 24-1/2" W X 33-7/8" H.
- 3. Max **DLO** (day light opening) = **24-1/2**" wide X **105-1/8**" high. See glazing note 6, sheet 1 (laminated glass at Exterior)
- 4. See approved glazed models' sheets 17 thru 19. Partial opaque permitted. Model with Surface applied Muntin only.
- 5. Limited Water infiltration Rating, see **Positive** DP in sheet 1. See sheets 6, 8 and 9 for sill (thresholds) installation.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, State and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises #20-1130.02 consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Ishaq I. Chanda, P.E.



1 Shag 1. Chands 01/04/24

NOA No. 23-1117.07 Expiration Date: October 13, 2027 Approval Date: January 04, 2024

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

- 1. Manufacturer's parts and sections drawings
- 2. Drawing No. **DSA 0008 Rev 1,** titled "Inswing Opaque Wood Door", sheets 1, 2 (2A-2D), 3 (3A-3C), 4 (4A-4C), 5 (5A-5C), 6-11, 12(12A),13, 14 (14A), 15 (15A-15C), 16 thru 19 of 19 dated 08/03/22 and last revised on 09/06/22, prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E.

B. TESTS

- 1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94 (limited +19.5 PSF)
 - 4) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94
 - 5) Large Missile impact Test per FBC, TAS 201-94
 - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94

Along with marked-up drawings and installation diagram of Rectangular Inswing /Outswing glazed Wood doors, prepared by American Testing Lab, Test Report No(s). **ATLNC 0624.01-19**, dated 05/13/20, signed & sealed by David Johnson, P.E.

(These test reports have been revised by an addendum letter dated 09/21/2022, issued by American Testing Lab, signed & sealed by David Johnson, P.E.)

- 2. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94 (limited +19.5 PSF)
 - 4) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94
 - 5) Large Missile impact Test per FBC, TAS 201-94
 - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94

Along with marked-up drawings and installation diagram of shaped Inswing glazed Wood doors, prepared by American Testing Lab, Test Report No(s). **ATLNC 0624.01-19** (Addendum 2), dated 08/08/22, signed & sealed by David Johnson, P.E

C. CALCULATIONS

- 1. Anchor verification calculations, dated 08/02/2022, prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E.
- 2. Glazing complies with ASTME-1300-09, -12 and -16.

D. QUALITY ASSURANCE

1. Miami Dade department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 17-0808.02 issued to Kuraray America, Inc. for their "SentryGlas® (Clear and White) Glass Interlayers", expiring on 07/04/23.

Ishaq I. Chands

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 23-1117.07
Expiration Date: October 13, 2027

The Door Store of America, Inc.,

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

F. STATEMENTS

1. Statement letters of conformance to FBC 2020 (7th Edition) and "No financial interest", both dated 10/26/20, signed & sealed by prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E.

G. OTHER

- 1. Test proposal # **21-1045** dated 10/12/21, approved by RER.
- 2. Article of incorporation and Business corporation name, issued by State of North Carolina.

Ishaq I. Chands

The Door Store of America, Inc.,

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

- A. DRAWINGS (submitted under previous approval)
 - 1. Drawing No. **DSA 0008 Rev 1,** titled "Inswing Opaque Wood Door", sheets 1, 2 (2A-2D), 3 (3A-3C), 4 (4A-4C), 5 (5A-5C), 6-11, 12(12A),13, 14 (14A), 15 (15A-15C), 16 thru 19 of 19 dated 08/03/22 and last revised on 09/06/22, prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E.
- B. TESTS
 - 1. None.
- C. CALCULATIONS (submitted under previous approval)
 - 1. None.
- D. **OUALITY ASSURANCE**
 - 1. Miami Dade department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 23-0717.30 issued to Kuraray America, Inc. for their "SentryGlas® (Clear and White) Glass Interlayers", expiring on 07/04/28.

F. STATEMENTS

- 1. Statement letters of conformance to FBC 2023 (8th Edition), dated 11/07/23, signed & sealed by prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E
- 2. Statement letters of conformance to FBC 2020 (7th Edition) and "No financial interest", both dated 10/26/20, signed & sealed by prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E. (submitted under previous approval).

G. OTHER

- 1. This NOA revises #20-1103.02 and updates to FBC 2023, expiring 10/13/27.
- 2. Article of incorporation and Business corporation name, issued by State of North Carolina. (submitted under previous approval).

Ishaq I. Chands

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 23-1117.07
Expiration Date: October 13, 2027

The Door Store of America, Inc.,

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

- A. **DRAWINGS** (submitted under previous approval)
 - 1. Drawing No. **DSA 0008 Rev 1**, titled "Inswing Opaque Wood Door", sheets 1, 2 (2A-2D), 3 (3A-3D), 4 (4A-4C), 5 (5A-5C), 6-11, 12(12A),13, 14 (14A), 15 (15A-15C), 16 thru 19 of 19 dated 08/03/22 and last revised on 09/06/22, prepared by PTC, signed and sealed by Robert J. Amoruso, P.E.
- B. TESTS
 - 1. None.
- C. CALCULATIONS (submitted under previous approval)
 - 1. None.
- D. QUALITY ASSURANCE
 - 1. Miami Dade department of Regulatory and Economic Resources (RER).
- E. MATERIAL CERTIFICATIONS
 - 1. Notice of Acceptance No. 23-0717.30 issued to Kuraray America, Inc. for their "SentryGlas® (Clear and White) Glass Interlayers", expiring on 07/04/28.
- F. STATEMENTS
 - 1. Statement letters of conformance to FBC 2023 (8th Edition), dated 11/07/23, signed & sealed by prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E
 - 2. Statement letters of conformance to FBC 2020 (7th Edition) and "No financial interest", both dated 10/26/20, signed & sealed by prepared by PTC, LLC, signed and sealed by Robert J. Amoruso, P.E. (submitted under previous approval).
- G. OTHER
 - 1. This NOA revises #20-1103.02 and updates to FBC 2023, expiring 10/13/27.
 - 2. Article of incorporation and Business corporation name, issued by State of North Carolina. (submitted under previous approval).

Ishaq I. Chands

The Door Store of America, Inc.

Complete Collection, Single and Double Doors, Inswing, Fully and Partially Glazed INSTALLATION ANCHORAGE DETAILS

as complying with the Florida Building Code

NOA-No. 23-<u>1117.07</u>

Expiration Date 10/13/2027

GENERAL NOTES:

- 1. THIS PRODUCT IS DESIGNED TO COMPLY WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE BUILDING AND RESIDENTIAL REQUIREMENTS INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ) AT THE DESIGN PRESSURE(S) STATED HEREIN. THE PRODUCT DETAILS CONTAINED HEREIN ARE BASED UPON SIGNED AND SEALED TEST REPORT NO. ATLNC 0624.01-19, DATED 5/13/20 AND ADDENDUM DATED 07/20/22 AND ASSOCIATED LABORATORY STAMPED DRAWINGS, SIGNED AND SEALED BY DAVID WESLEY JOHNSON, FL PE NO. 61915. TESTING WAS PERFORMED TO THE FOLLOWING:
- 1.1. ASTM E330-02, ASTM E331-00, ASTM E283-04
- 1.2. TAS 201-94, TAS 202-94 AND TAS 203-94
- 2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE / MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE STRUCTURE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 4. IN AREAS WHERE WIND-BORNE DEBRIS PROTECTION REQUIREMENTS EXIST, USE OF AN APPROVED IMPACT PROTECTIVE

 3. VERTICAL AND HORIZONTAL SECTION VIEWS ARE SHOWN ON THE FOLLOWING SHEETS. SYSTEM IS NOT REQUIRED WITH THIS PRODUCT.
- 5. DOOR FRAME AND PANEL MATERIAL: MAHOGANY, KNOTTY-ALDER, WALNUT, WHITE OAK AND ACCOYA. MINIMUM SPECIFIC GRAVITY (SG) = 0.55 FOR BASIC AND 0.68 FOR 12% MC.
- 6. GLAZING: 1" OVERALL THICKNESS: 5/32" TEMPERED, AIR SPACE (1/2" TPS SPACER BY PT ABEBERSA PRATAMA), 5/16" LAMINATED (1/8" ANNEALED x KURARAY AMERICA 0.090 SG INTERLAYER x 1/8" ANNEALED). GLAZED USING DOW 995 STRUCTURAL ADHESIVE GRADE SEALANT.
- 6.1. GLASS MEETS THE REQUIREMENTS OF ASTM E1300-12AE1.
- 7. SITE CONDITIONS THAT DEVIATE FROM THE DETAILS OF THIS DRAWING REQUIRE FURTHER ENGINEERING EVALUATION BY A LICENSED ENGINEER OR REGISTERED ARCHITECT. **PRODUCT REVISED**
- 8. DESIGNATION "X" STANDS FOR OPERABLE PANEL
- 9. HARDWARE (AS-TESTED; SUBSTITUTIONS ALLOWED PER FBC REQUIREMENTS):
- 9.1. MULTI-POINT LOCK AND HANDLES BY:
- 9.1.1. DOUBLE (XX) DOOR: ASHLAND MULTIPOINT HARDWARE; MODEL V-5100-560.
- 9.1.2. SINGLE (X) FOOR: GU MULTIPOINT HARDWARE; MODEL 6-35565-02-R-8B.
- By Ishay 1. Chanda HINGES: (10) STEEL 4-1/2" X 4-1/2" BALL BEARING HINGES BY PHILADELPHIA HARDWAREMIAMI-Dade Product Control
- THRESHOLD: HYDROSILL 2200 SERIES FOR INSWING BY SCHLEGEL
- INTERIOR AND EXTERIOR FINISHING AND PERIMETER SEALING ARE FOR ILLUSTRATIVE PURPOSES ONLY. THESE DRAWINGS CERTIFY THE DOOR INSTALLATION ONLY. WATER SEALING OF THE INSTALLED DOOR IS NOT PART OF THIS INSTALLATION CERTIFICATION. WATER SEALING SHALL BE THE RESPONSIBILITY OF THE INSTALLER 10.1. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH THE FBC RESIDENTIAL AND
- BUILDING AND WITH FMA/AAMA/WDMA PROTOCOLS OR AS RECOMMENDED BY THE MANUFACTURER.

	TABLE OF CONTENTS					
SHEET	DESCRIPTION					
1	NOTES - GENERAL & INSTALLATION					
2, 2A, 2B, 2C & 2D	ELEVATIONS - X & XX RECTANGULAR, ARCH TOP, AND FULL RADIUS					
3, 3A, 3B & 3C	ELEVATION - ANCHOR LAYOUT - WOOD INSTALLATION					
4, 4A, 4B & 4C	ELEVATION - ANCHOR LAYOUT - CONCRETE/MASONRY INSTALLATION					
5, 5A, 5B & 5C	ELEVATIONS - HINGES & BRICK MOULD					
6	WOOD INSTALLATION - DETAILS 1 THRU 6					
7	WOOD INSTALLATION - DETAILS 7 THRU 11					
8	CONCRETE INSTALLATION - DETAILS 1 THRU 6					
9	CONCRETE/MASONRY INSTALLATION - DETAILS 7 THRU 11					
10	DETAILS - MISCELLANEOUS					
11	SECTIONS - VERTICAL - WOOD INSTALLATION					
12 & 12A	SECTIONS - HORIZONTAL - WOOD INSTALLATION					
13	SECTIONS - VERTICAL - CONCRETE INSTALLATION					
14 & 14A	SECTIONS - HORIZONTAL - CONCRETE/MASONRY INSTALLATION					
15, 15A, 15B & 15C	MULTIPOINT LOCK LAYOUT					
16	PANEL CONSTRUCTION - MULTIPOINT LOCK DETAIL					
17 THRU 19	APPROVED CONFIGURATIONS					

INSTALLATION NOTES:

- INSTALLATION ANCHORAGE SHALL BE LOCATED AS SHOWN IN THE FOLLOWING ELEVATION VIEWS.
- 1.1. 2X WOOD FRAMING OR BUCKING SUBSTRATES SHOWN ON SHEET 3. 3A, 3B & 3C.
- 1.2. CONCRETE AND MASONRY SUBSTRATES AS SHOWN ON SHEET 4, 4A, 4B & 4C.
- 2. SPECIFIC INSTALLATION DETAILS ARE SHOWN ON THE FOLLOWING SHEETS.
- 2.1. 2X WOOD FRAMING OR BUCKING AT HEAD, SILLS OR JAMBS 2.1.1. SEE DETAILS ON SHEET 6 FOR HEAD AND SILL INSTALLATION ANCHORAGE REQUIREMENTS.
- SEE DETAILS ON SHEET 7 FOR JAMB INSTALLATION ANCHORAGE REQUIREMENTS.
- 2.2. CONCRETE OR MASONRY AT HEAD, SILLS OR JAMBS (OPTIONAL 1X WOOD BUCK ALLOWED, SEE NOTE 3.1)
- 2.1.1. SEE DETAILS ON SHEET 8 FOR HEAD AND SILL INSTALLATION ANCHORAGE REQUIREMENTS.
- SEE DETAILS ON SHEET 9 FOR JAMB INSTALLATION ANCHORAGE REQUIREMENTS.

- 3.1.1. SEE DETAILS ON SHEET 11 FOR VERTICAL SECTION VIEWS OF HEAD AND SILL.
- SEE DETAILS ON SHEET 12 & 12A FOR HORIZONTAL SECTION VIEWS OF JAMBS.
- 3.2. CONCRETE OR MASONRY AT HEAD, SILLS OR JAMBS (OPTIONAL 1X WOOD BUCK ALLOWED, SEE NOTE 3.1)
- SEE DETAILS ON SHEET 13 FOR VERTICAL SECTION VIEWS OF HEAD AND SILL
- SEE DETAILS ON SHEET 14 & 14A FOR HORIZONTAL SECTION VIEWS OF JAMBS.
- 4. INSTALLATION SCREW (ANCHORAGE) SPECIFICATION
- 4.1. NO. 14 WOOD SCREWS.
- WOOD SCREWS SHALL MEET ANSI B18.6.1 AND BE A MINIMUM GRADE 2 STRENGTH
- MINIMUM EMBEDMENT IS 1-1/2". WOOD SCREW LENGTHS CAN BE VARIED IF NEEDED AS LONG AS MINIMUM EMBEDMENT IS MAINTAINED. THIS REQUIREMENT APPLICABLE TO SUBSTRATE EMBEDDED SCREWS ONLY.
- MINIMUM EDGE DISTANCE AND SPACING BETWEEN SCREW IS 1". 4.1.3.
- 4.2. 1/4" DIAMETER ELCO ULTRACON CONCRETE SCREWS
- MINIMUM EMBEDMENT IS 1-3/4" IN CONCRETE AND 1-1/4" IN MASONRY (CMU).
- MINIMUM EDGE DISTANCE IS 2-1/2".
- MINIMUM SPACING BETWEEN SCREWS IS 4". 4.2.3.
- EXCEPTION: HINGE ANCHORAGE AS SHOWN ON SHEET 9, DETAIL 10 HAS BEEN ACCOUNTED FOR. THE 3.484" SPACING BETWEEN ANCHORS IS ACCEPTABLE.
- 5. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION AT THE MAXIMUM UNIT SIZE SHOWN. SMALLER UNIT SIZES CAN HAVE LESS ANCHORS AS LONG AS THE EDGE DISTANCE AND ON CENTER (O.C.) SPACING ARE THE SAME AS OR LESS THAN THAT SHOWN. INSTALLATION ANCHORS AT THE STRIKE PLATES AND HINGES SHALL REMAIN THE SAME.
- 6. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM SIZE IS 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER. SHIMS MAY NOT BE SHOWN IN THE SECTION VIEWS OF THIS DRAWING FOR CLARITY
- 7. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES (INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER AND SIDING).


PERFORMANCE RATING									
MAXIMUM UNIT DIMENSIONS	DESIGN PRESSURE RATING (PSF)	WATER PENETRATION RATING	IMPACT RATING						
76" X 123-1/16" XX INSWING - RECTANGULAR 76-1/8" X 122-7/8" XX INSWING - ARCH TOP	±70.0 *	SEE NOTE 1 & 2 *	HVHZ						
39-1/4" X 122-7/8" X INSWING - RECTANGULAR 39-1/4" X 122-7/8" X INSWING - ARCH TOP	+19.5 / -70	SEE NOTE 1 & 3	LARGE MISSILE IMPACT						

NOTE 1: PRODUCT TESTED FOR LIMITED WATER PENETRATION RESISTANCE AT 19.5 PSF POSITIVE DESIGN PRESSURE. NOTE 2: THE PRODUCT MUST BE USED WHERE WATER PENETRATION IS NOT REQUIRED OR WHERE AN OVERHANG MEETING THE REQUIREMENTS OF THE CURRENT EDITION OF THE FLORIDA BUILDING AND RESIDENTIAL CODES HAS BEEN EMPLOYED.

NOTE 3: WHERE DP REQUIREMENTS DO NOT EXCEED +19.5/-70 PSF, THE PRODUCT CAN BE USED WITHOUT OVERHANG.


-0601						000000	31212022	DATE	
PROJECT #420-0601						REVISED FOR MD	COMMENTS	DESCRIPTION	
0.24	200000		re al	SATO		<	(RFV	
.:	Raleigh, NC 27617	TITLE: Complete Collection, Single and Double Doors, Inswing, Glazed	NOTES - GENERAL & INSTALLATION	DATE:	8/3/2022	DRAWING NO:	DSA0008	SHEET:	
The Door Store of America, Inc. 10681 World Trade Blvd				DRAWN BY:	RJA	SCALE:	N.T.S.	REV:	
								Phone: 321.690.1788 Fax: 321.690.1789	
		TITLE: Complete Colle		PREPARED BY:			OT GIOGO NOISE TO I GOOD OFF	PICTRODUCT DESIGN SACOT, LA PO BOX 520775	
as complying with the									

Florida Building Code
Date 10/13/2022 NOA# 20-1130.02



RECTANGULAR ELEVATION EXTERIOR


- 1. MAXIMUM OVERALL (O.A.) FRAME SIZE 1.1. 76" X 123-1/16"
- 2. MAXIMUM PANEL SIZE
- 2.1. 36" X 120"
- 3. MINIMUM PANEL THICKNESS
- 3.1. 2-1/4" (NOMINAL)
- 4. MAXIMUM DAYLIGHT OPENING (DLO)
- 4.1. MAXIMUM FULL VIEW LITE DLO 24-1/4" X 105-1/8"
- 4.2. DLO SHOWN IS APPROXIMATE AND MAY VARY.
- 5. FULL VIEW GLAZED LITES SHOWN.
- 6. SEE SHEETS 17, 18 AND 19 FOR ADDITIONAL APPROVED CONFIGURATIONS.
- 7. SEE SHEET 2D FOR PANEL RAIL AND STILE DIMENSIONING.

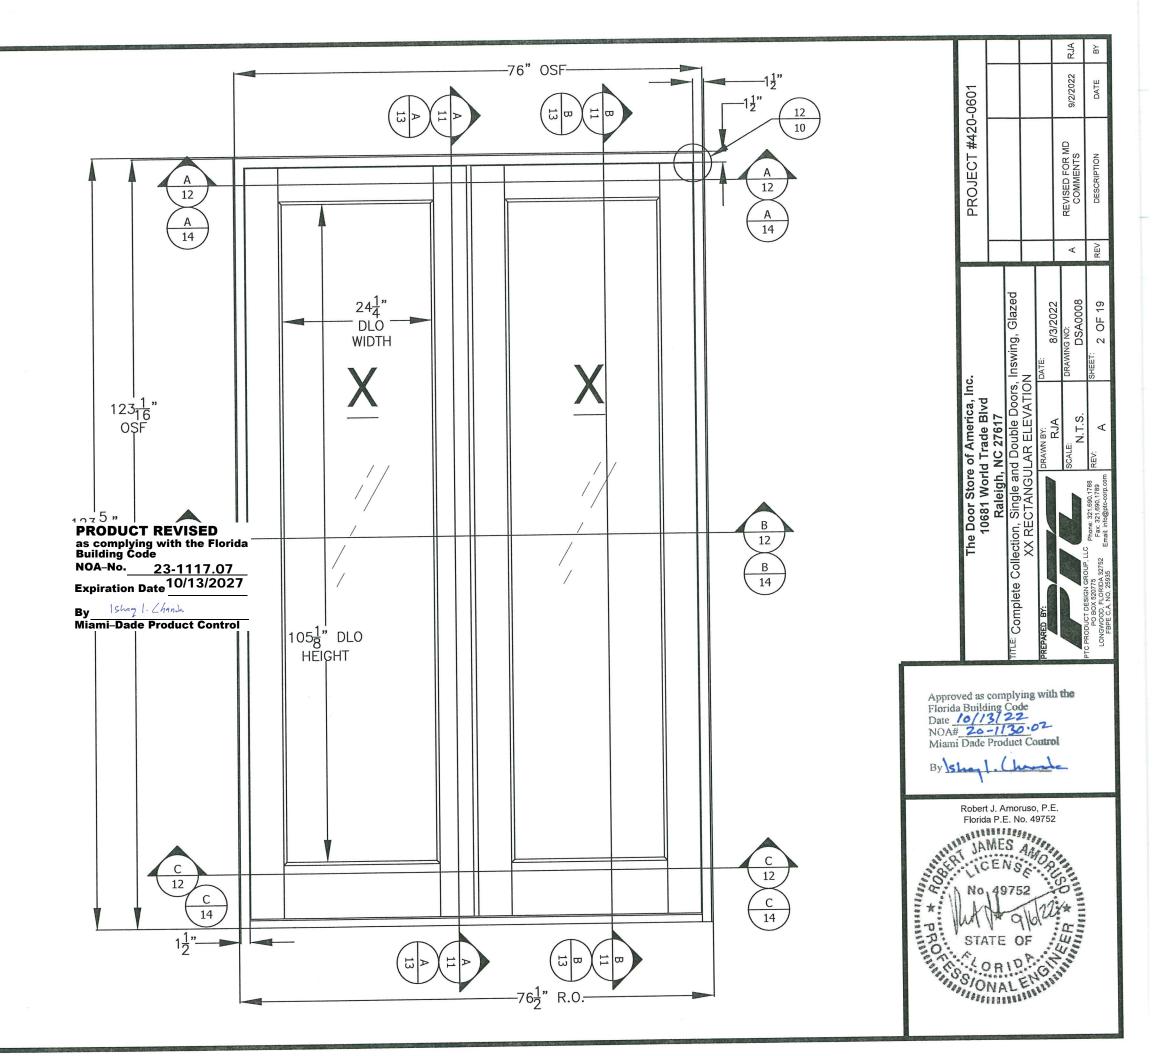

XX PARTIALLY GLAZED RECTANGULAR ELEVATION

EXTERIOR


- 1. MAXIMUM OVERALL (O.A.) FRAME SIZE 1.1. 76-1/8" X 122-7/8"
- 2. MAXIMUM PANEL SIZE
- 2.1. 36" X 120"
- 3. MINIMUM PANEL THICKNESS 3.1. 2-1/4" (NOMINAL)
- 4. MAXIMUM DAYLIGHT OPENING (DLO)
- 4.1. MAXIMUM PARTIALLY GLAZED LITE DLO 24-1/4" X 79-3/4"
- 4.2. DLO SHOWN IS APPROXIMATE AND MAY VARY.
- 5. PARTIALLY GLAZED LITES WITH OPAQUE RAISED PANELS SHOWN.
- 6. SEE SHEETS 17, 18 AND 19 FOR ADDITIONAL APPROVED CONFIGURATIONS.
- 7. SEE SHEET 2D FOR PANEL RAIL AND STILE DIMENSIONING.

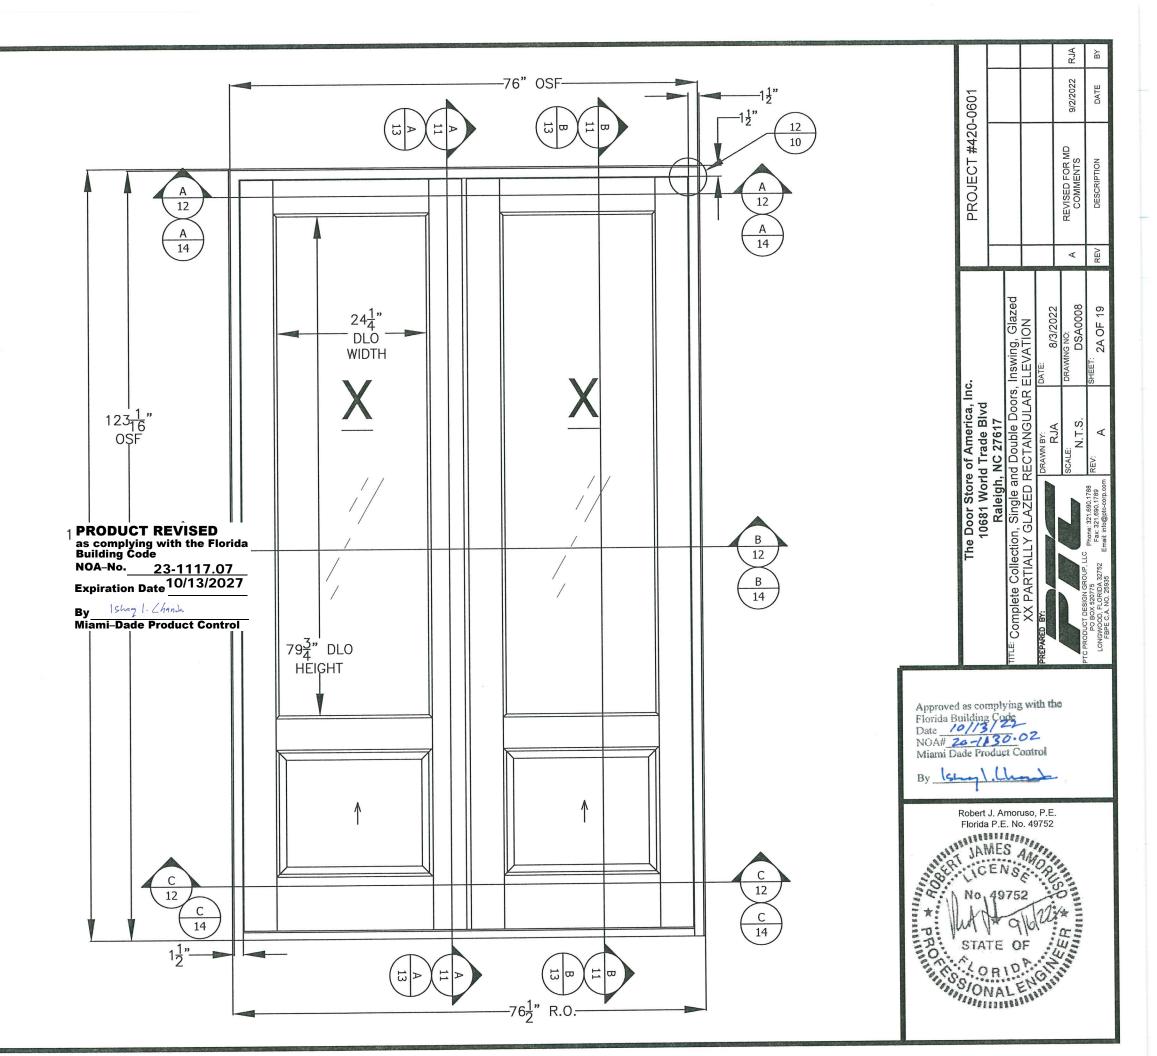

XX PARTIALLY GLAZED ARCH TOP ELEVATION


EXTERIOR


- 1. MAXIMUM OVERALL (O.A.) FRAME SIZE
- 1.1. 39-1/4" X 122-7/8"
- 2. MAXIMUM PANEL SIZE
- 2.1. 36" X 120"
- 3. MINIMUM PANEL THICKNESS
- 3.1. 2-1/4" (NOMINAL)
- 4. MAXIMUM DAYLIGHT OPENING (DLO)
 - 4.1. MAXIMUM PARTIALLY GLAZED LITE DLO 24-1/4" X 79-3/4" & 24-1/4" X 85-3/4".
 - 4.2. DLO SHOWN IS APPROXIMATE AND MAY VARY.
- PARTIALLY GLAZED LITES WITH OPAQUE RAISED PANELS SHOWN.
- 6. SEE SHEETS 17, 18 AND 19 FOR ADDITIONAL APPROVED CONFIGURATIONS.
- 7. SEE SHEET 2D FOR PANEL RAIL AND STILE DIMENSIONING.

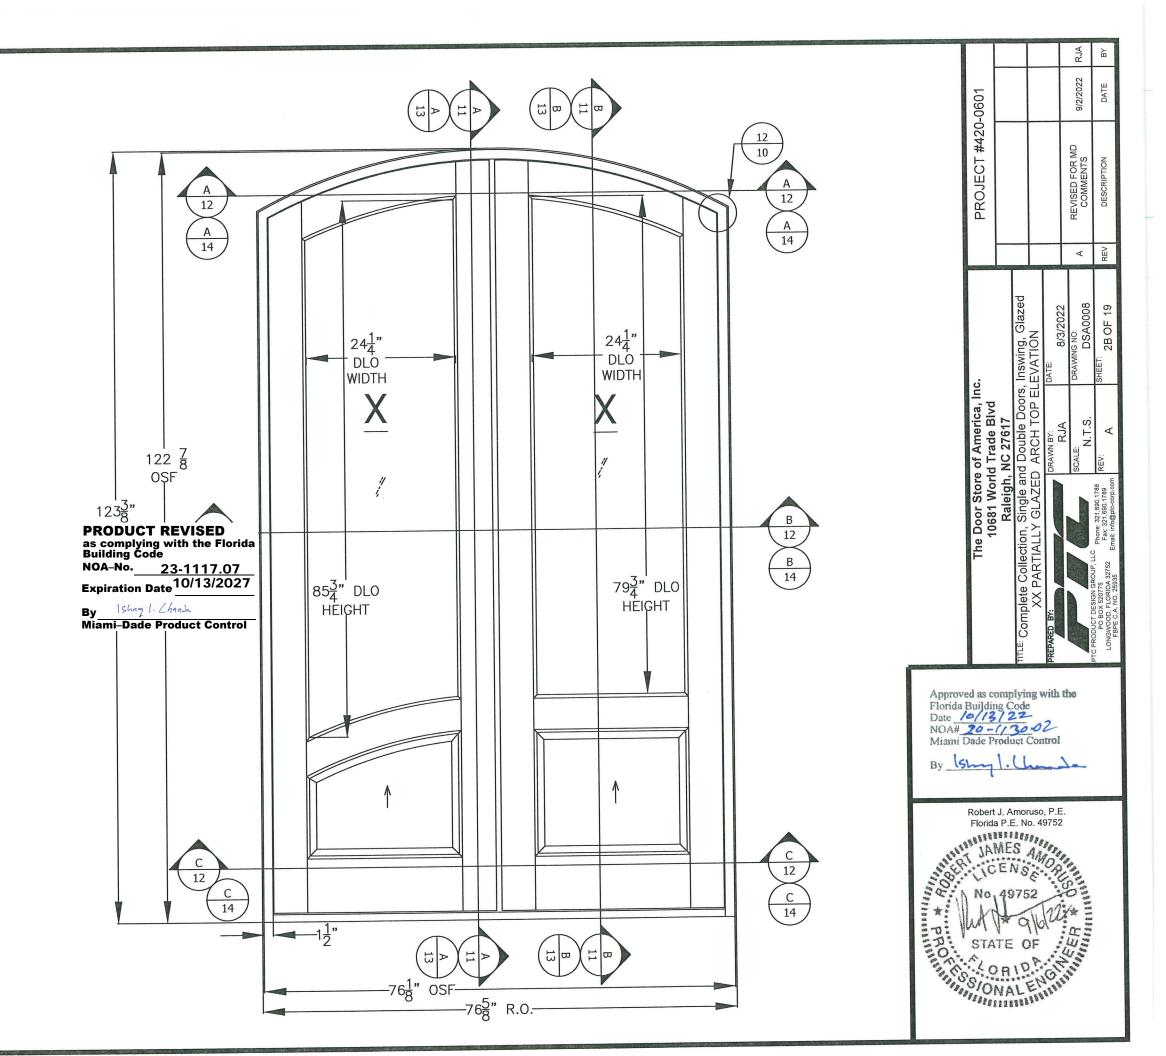



X PARTIALLY GLAZED RECTANGULAR AND ARCH TOP ELEVATIONS EXTERIOR


- 1. MAXIMUM OVERALL (O.A.) FRAME SIZE
- 1.1. 39-1/4" X 122-7/8"
- 2. MAXIMUM PANEL SIZE
- 2.1. 36" X 120"
- 3. MINIMUM PANEL THICKNESS
- 3.1. 2-1/4" (NOMINAL)
- 4. MAXIMUM DAYLIGHT OPENING (DLO)
- 4.1. MAXIMUM PARTIALLY GLAZED LITE DLO 24-1/4" X 79-3/4"
- 4.2. DLO SHOWN IS APPROXIMATE AND MAY VARY.
- PARTIALLY GLAZED LITES WITH OPAQUE RAISED PANELS SHOWN.
- 6. SEE SHEETS 17, 18 AND 19 FOR ADDITIONAL APPROVED CONFIGURATIONS.
- 7. SEE SHEET 2D FOR PANEL RAIL AND STILE DIMENSIONING.

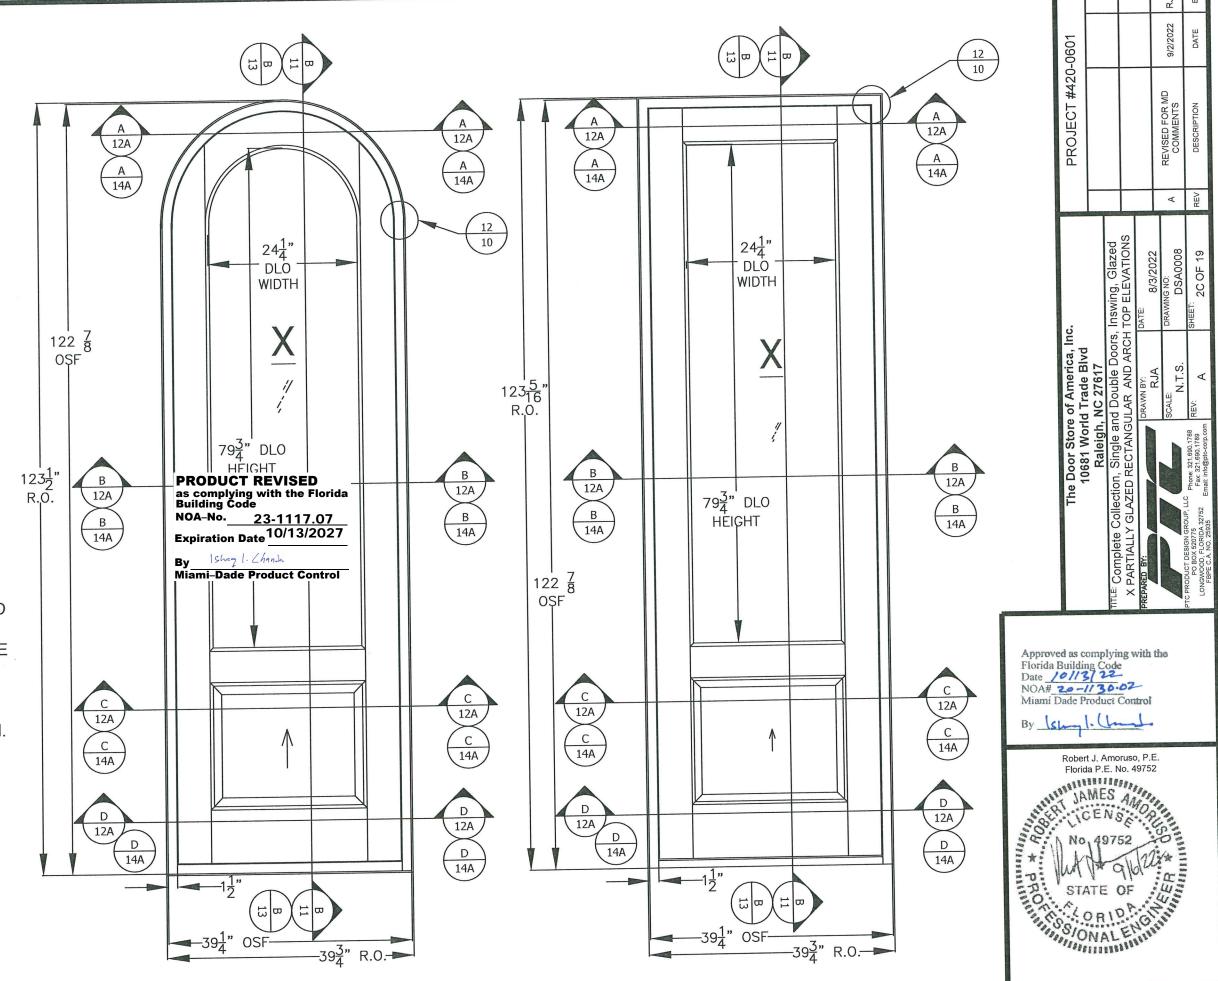


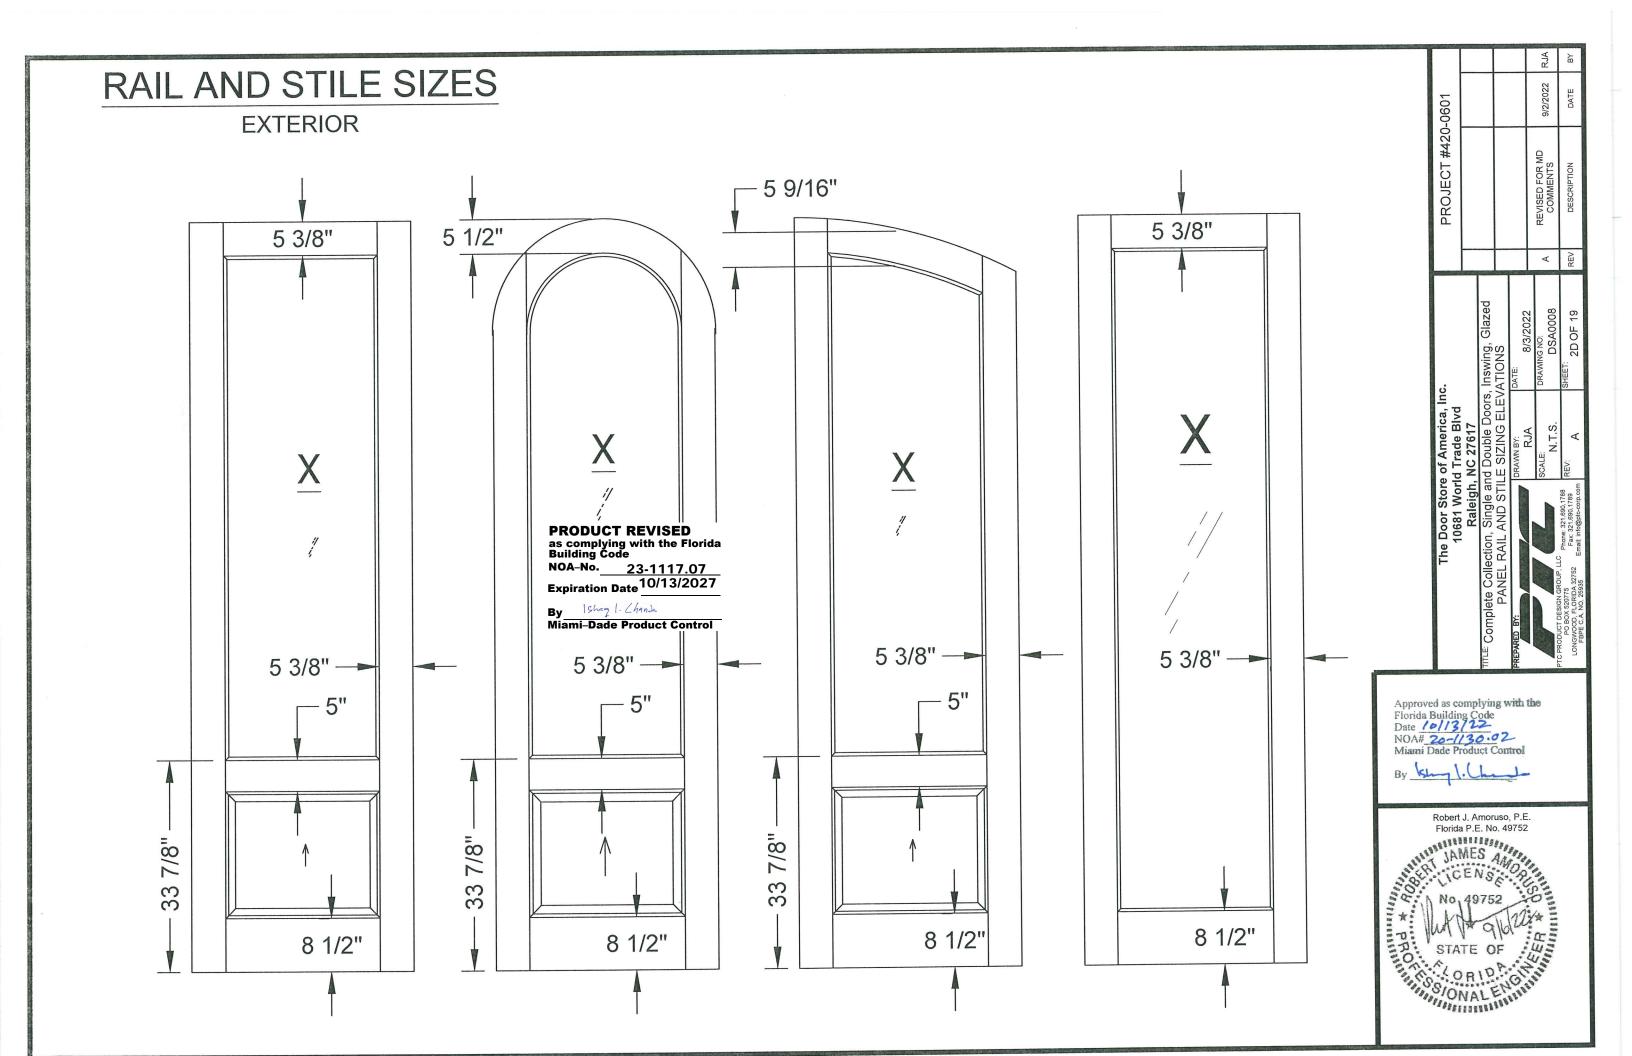


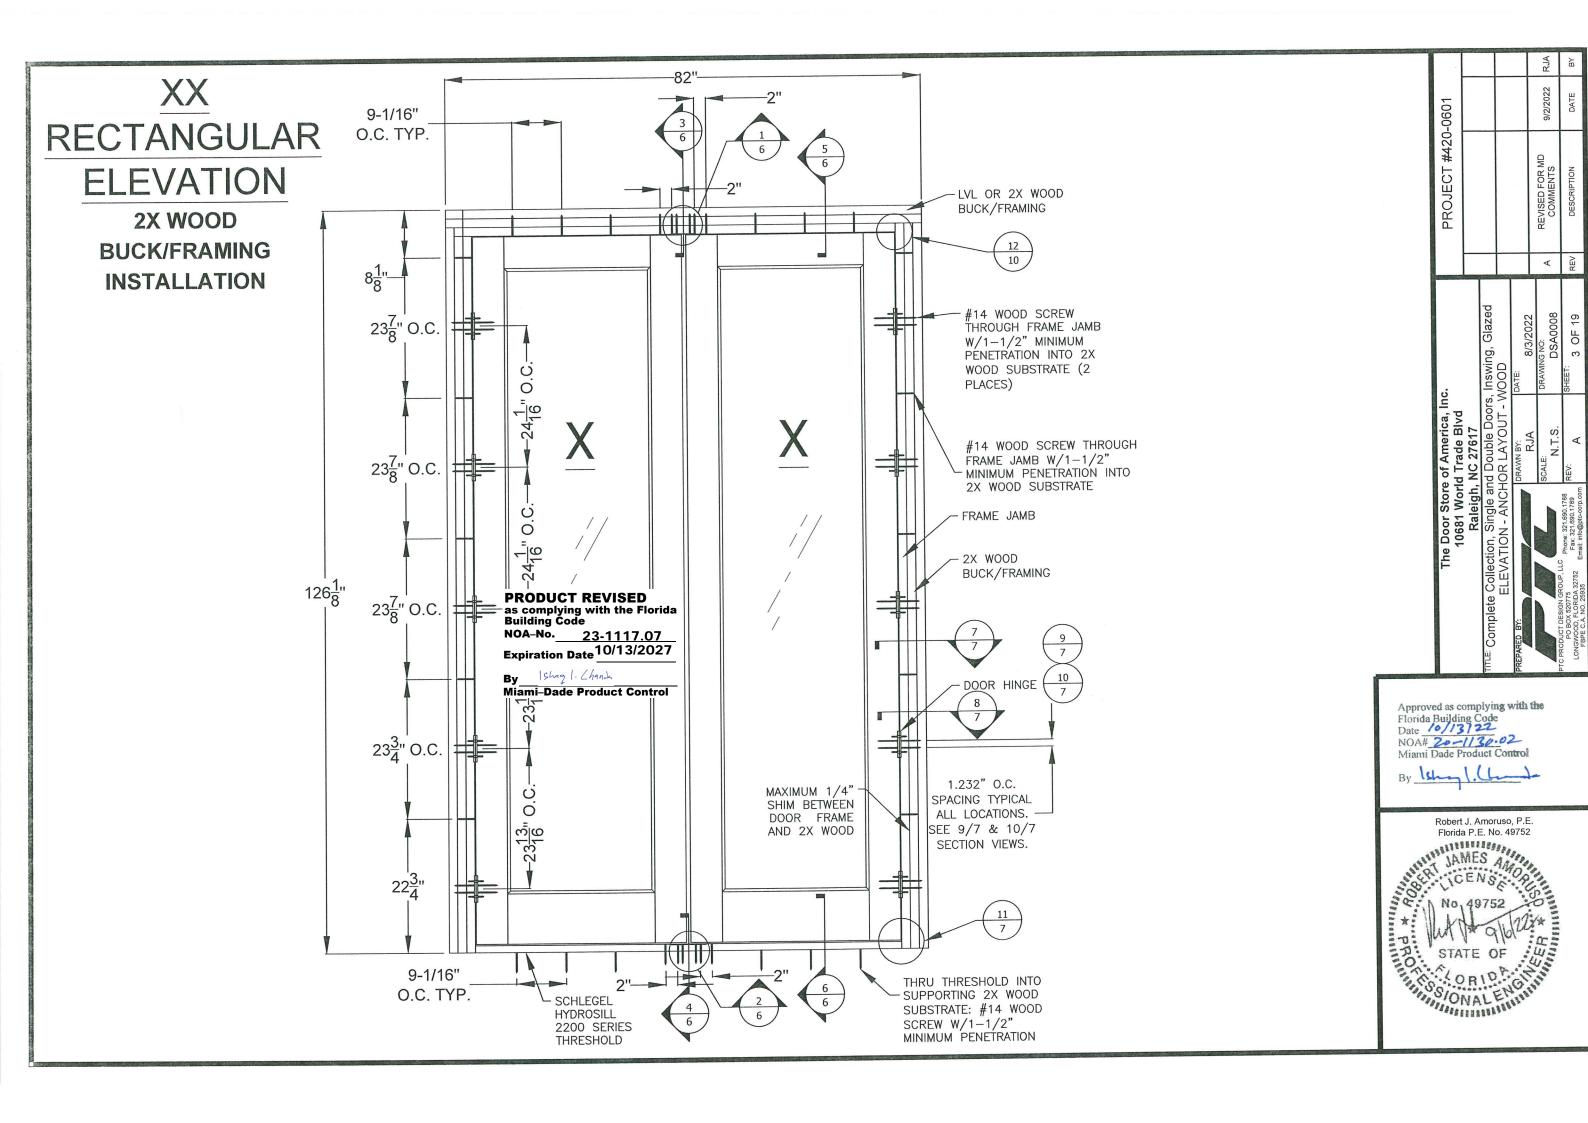


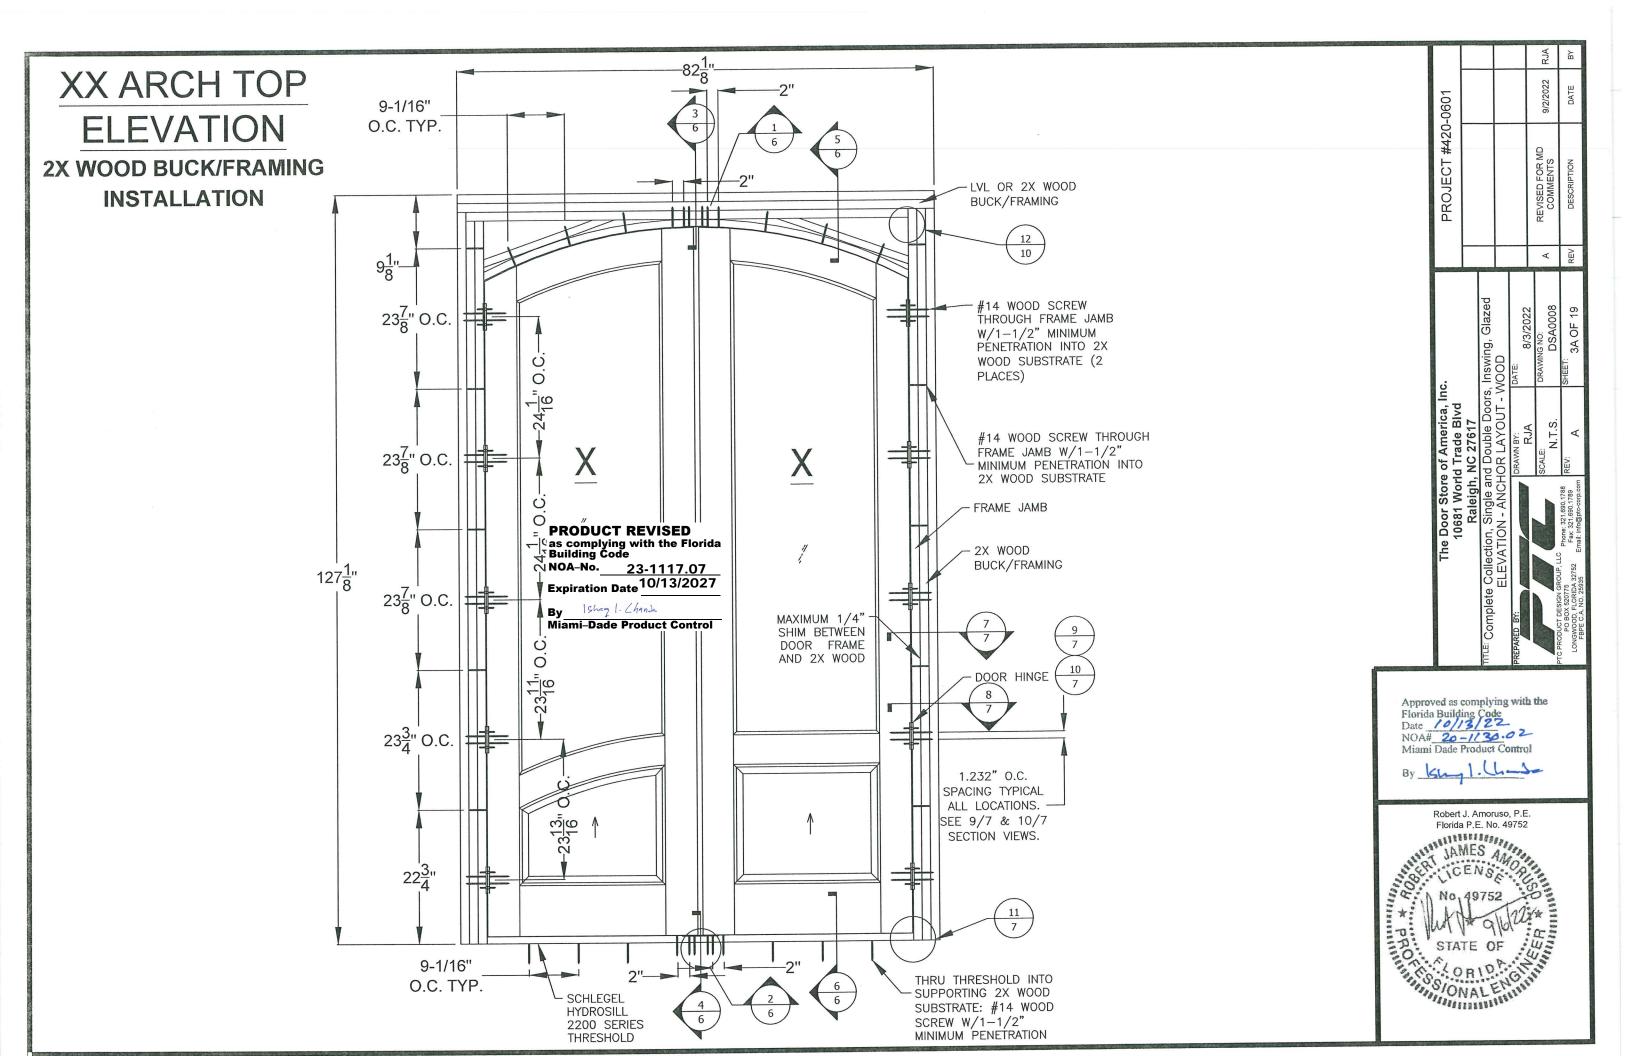


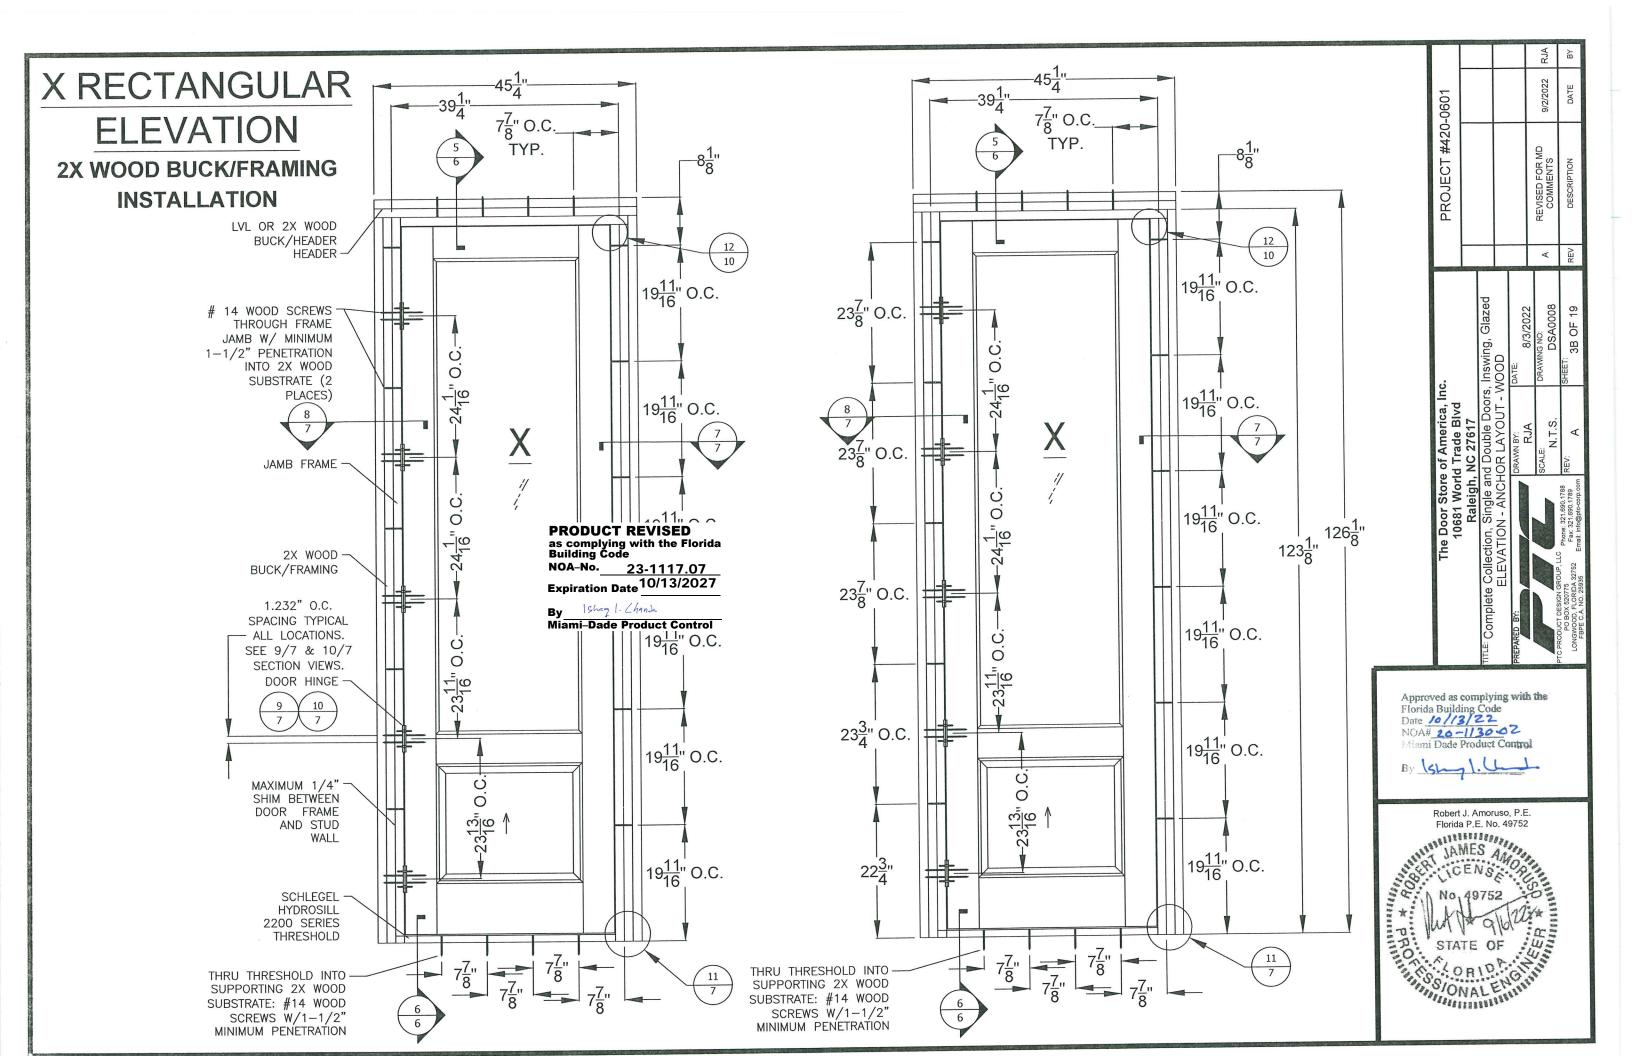


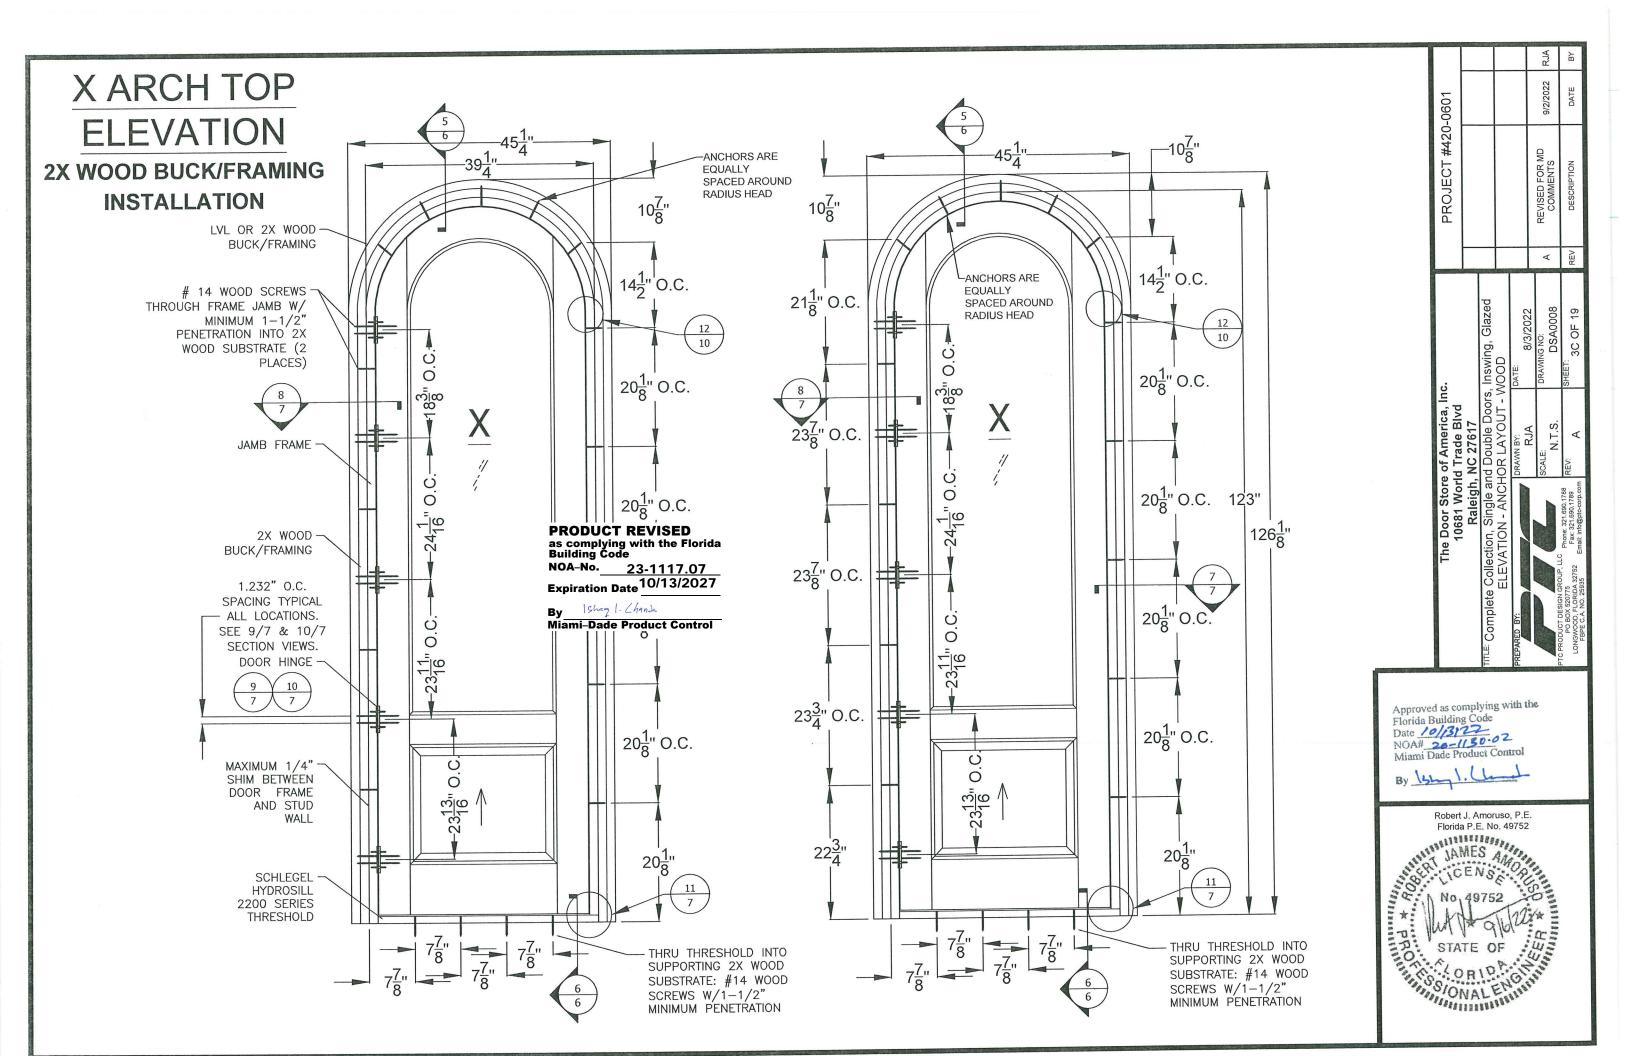


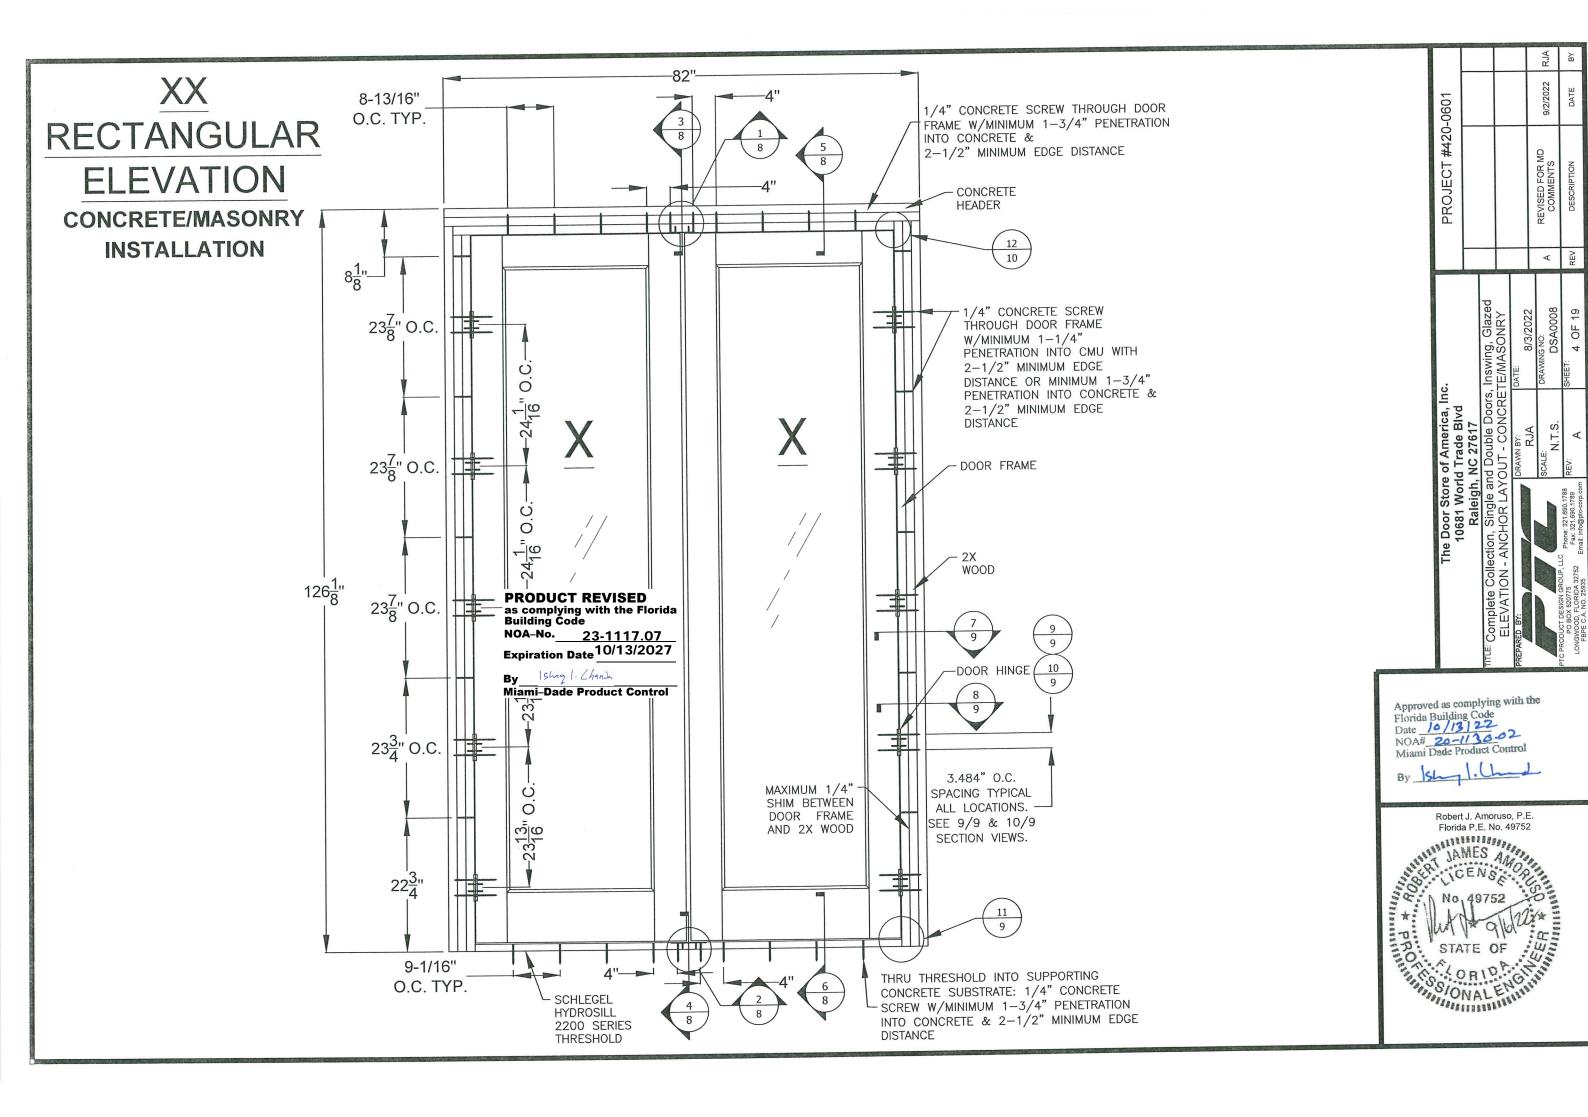


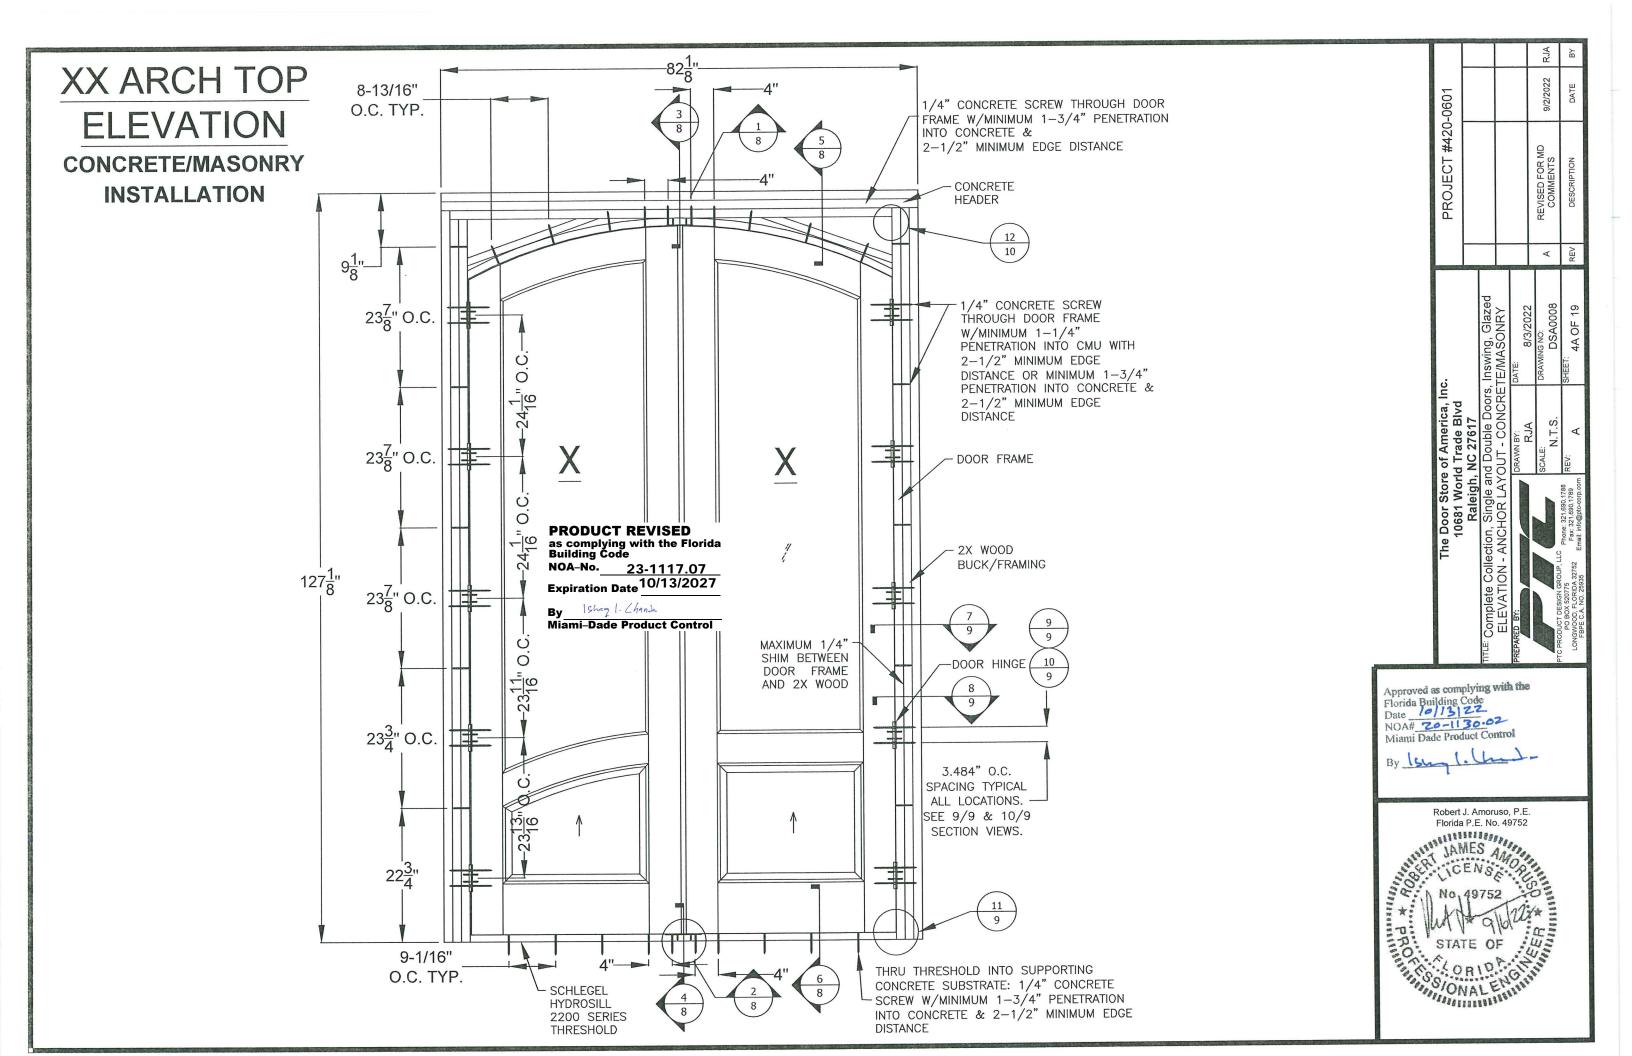


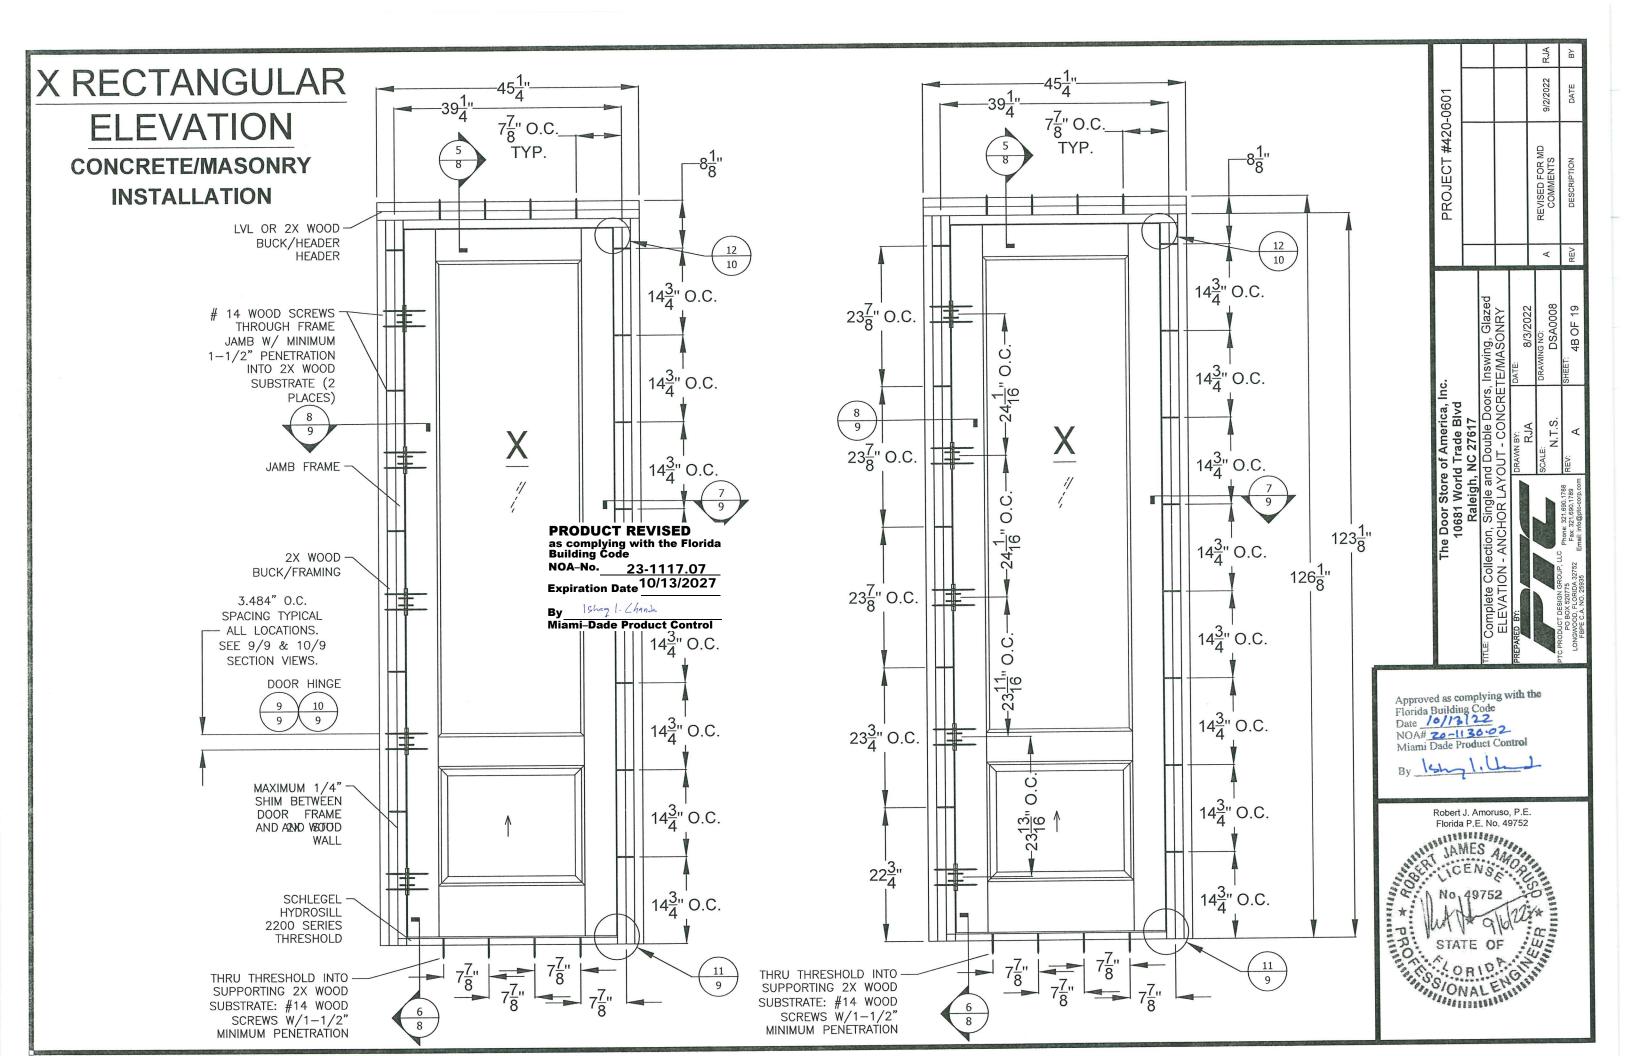


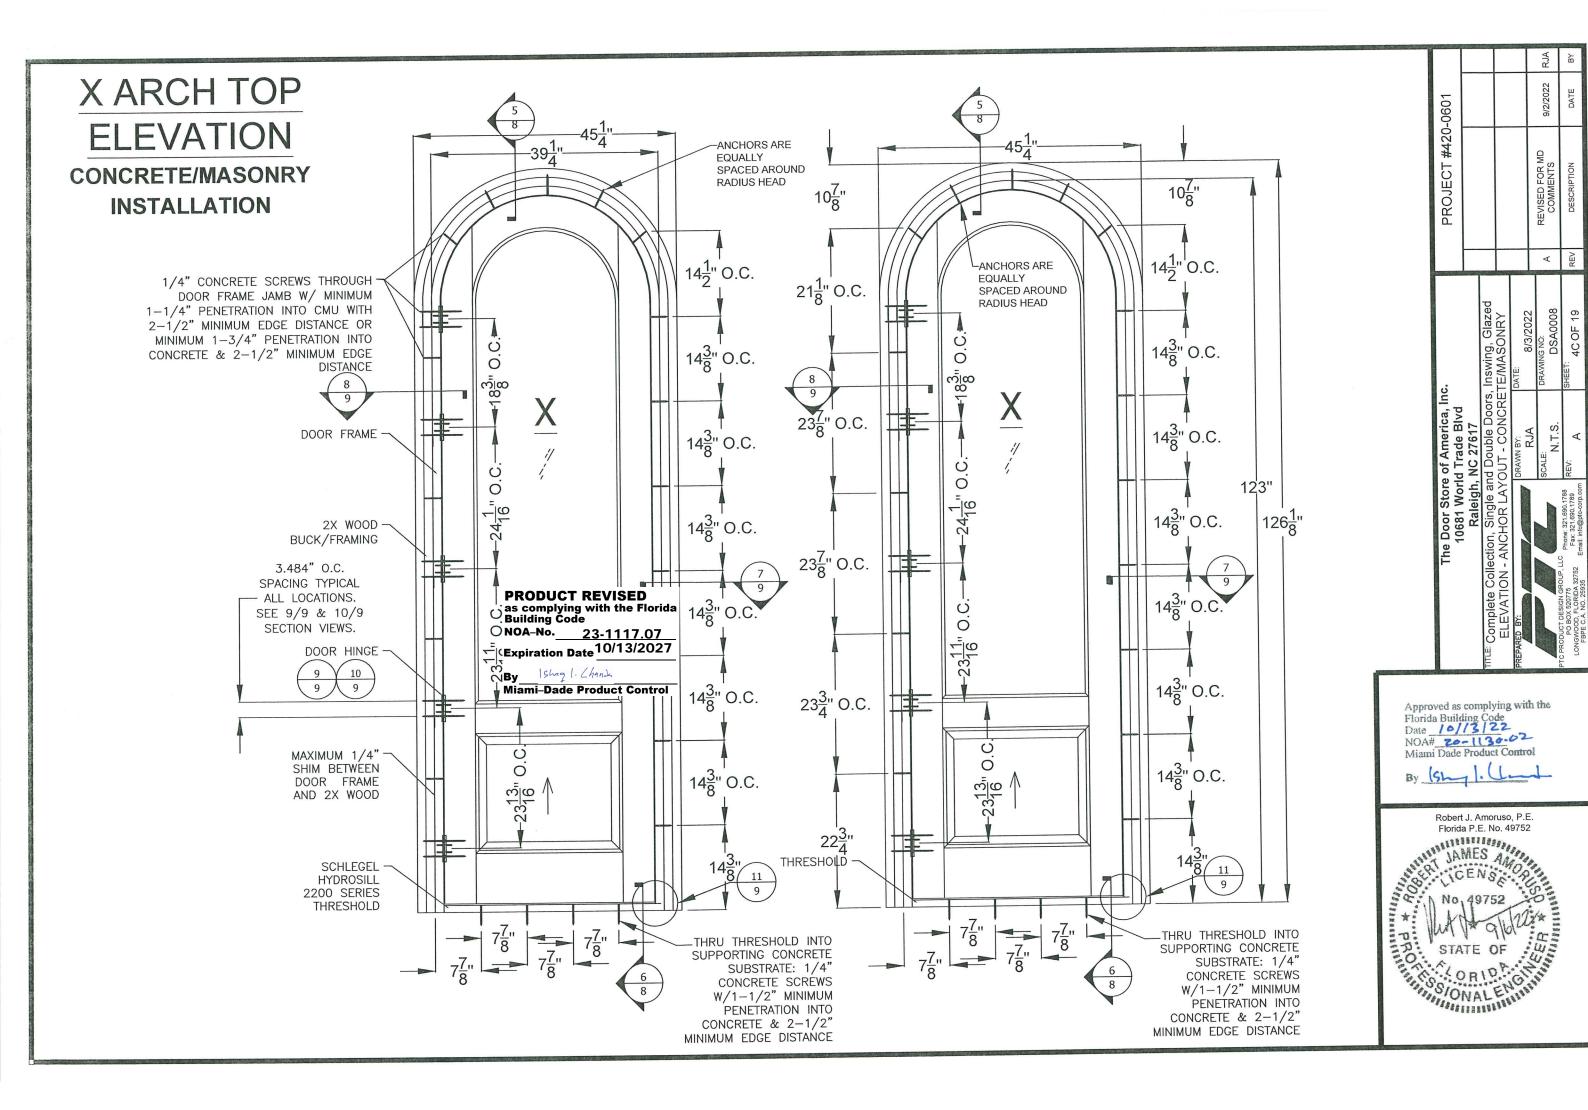


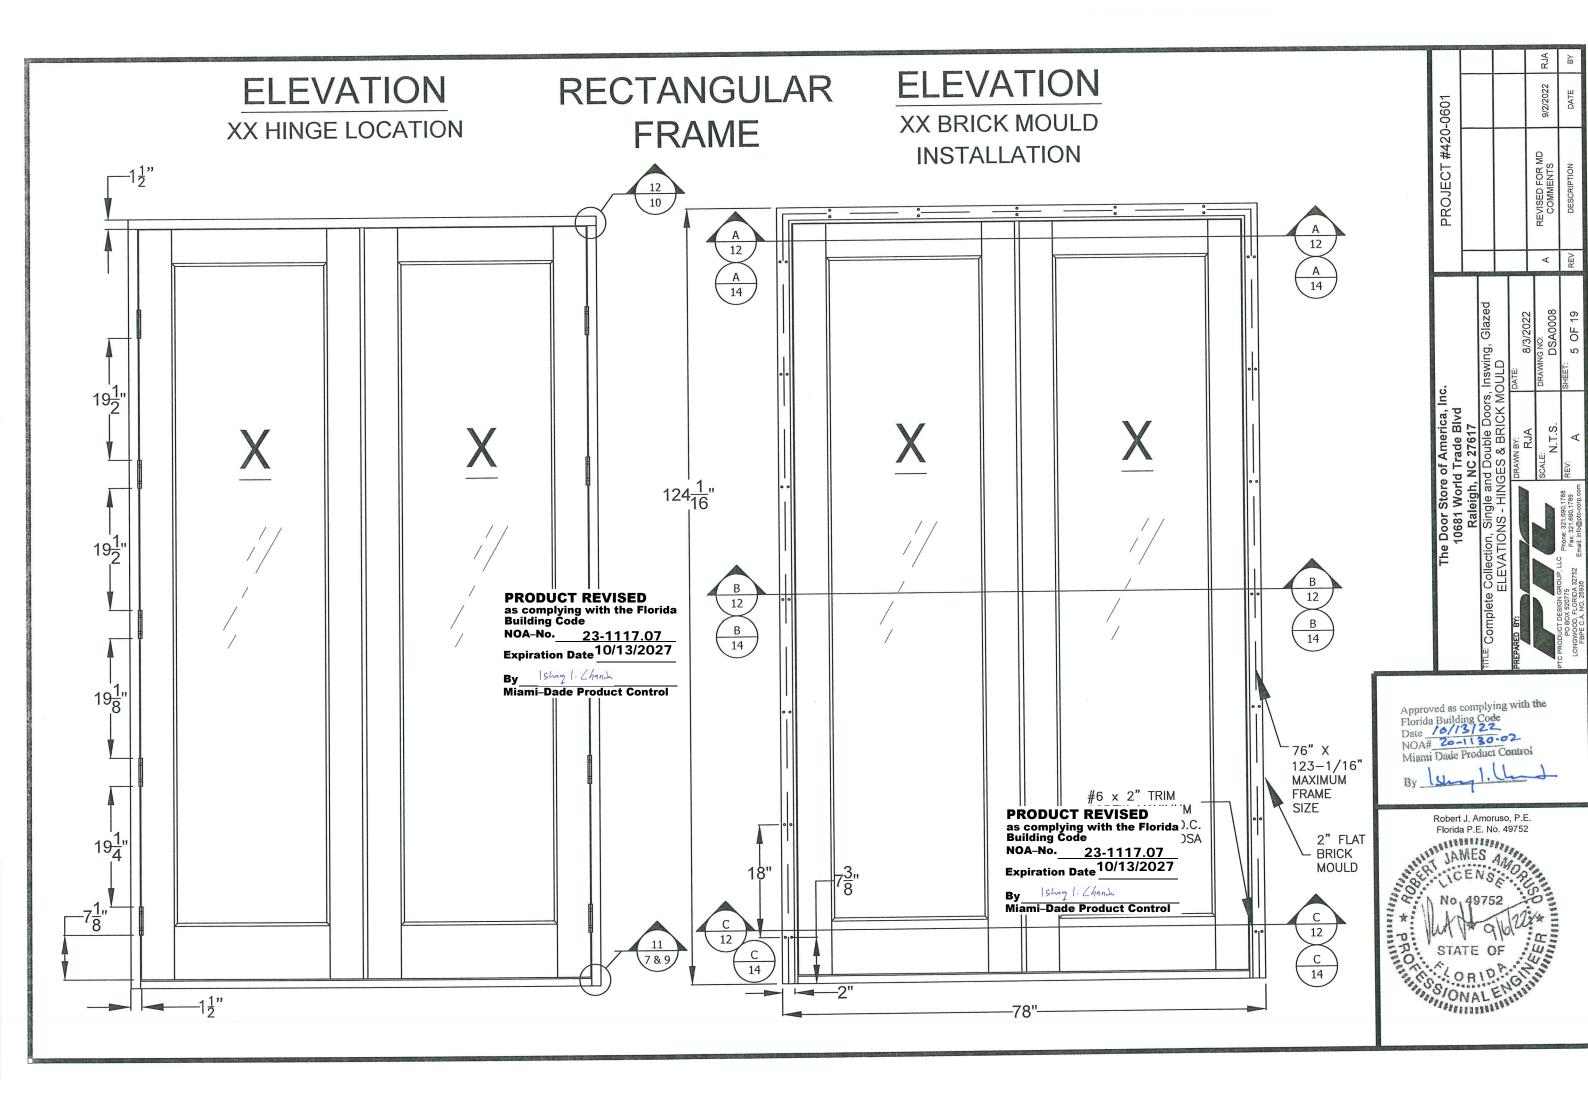


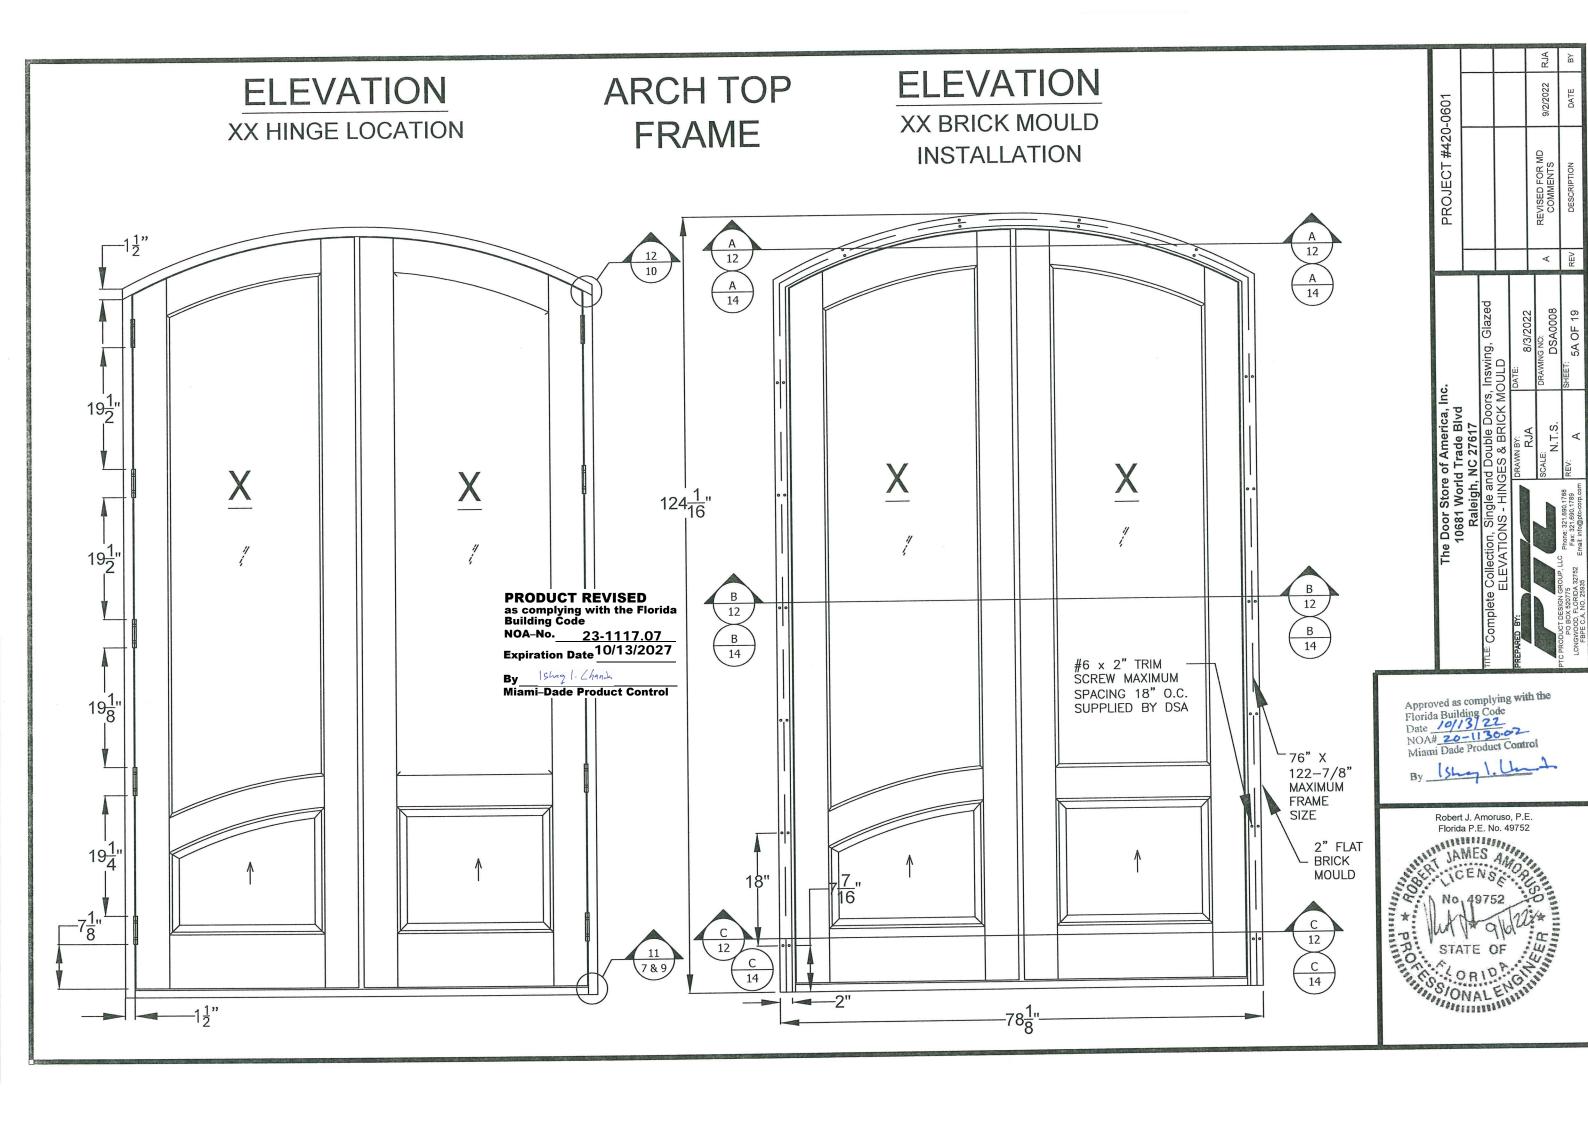

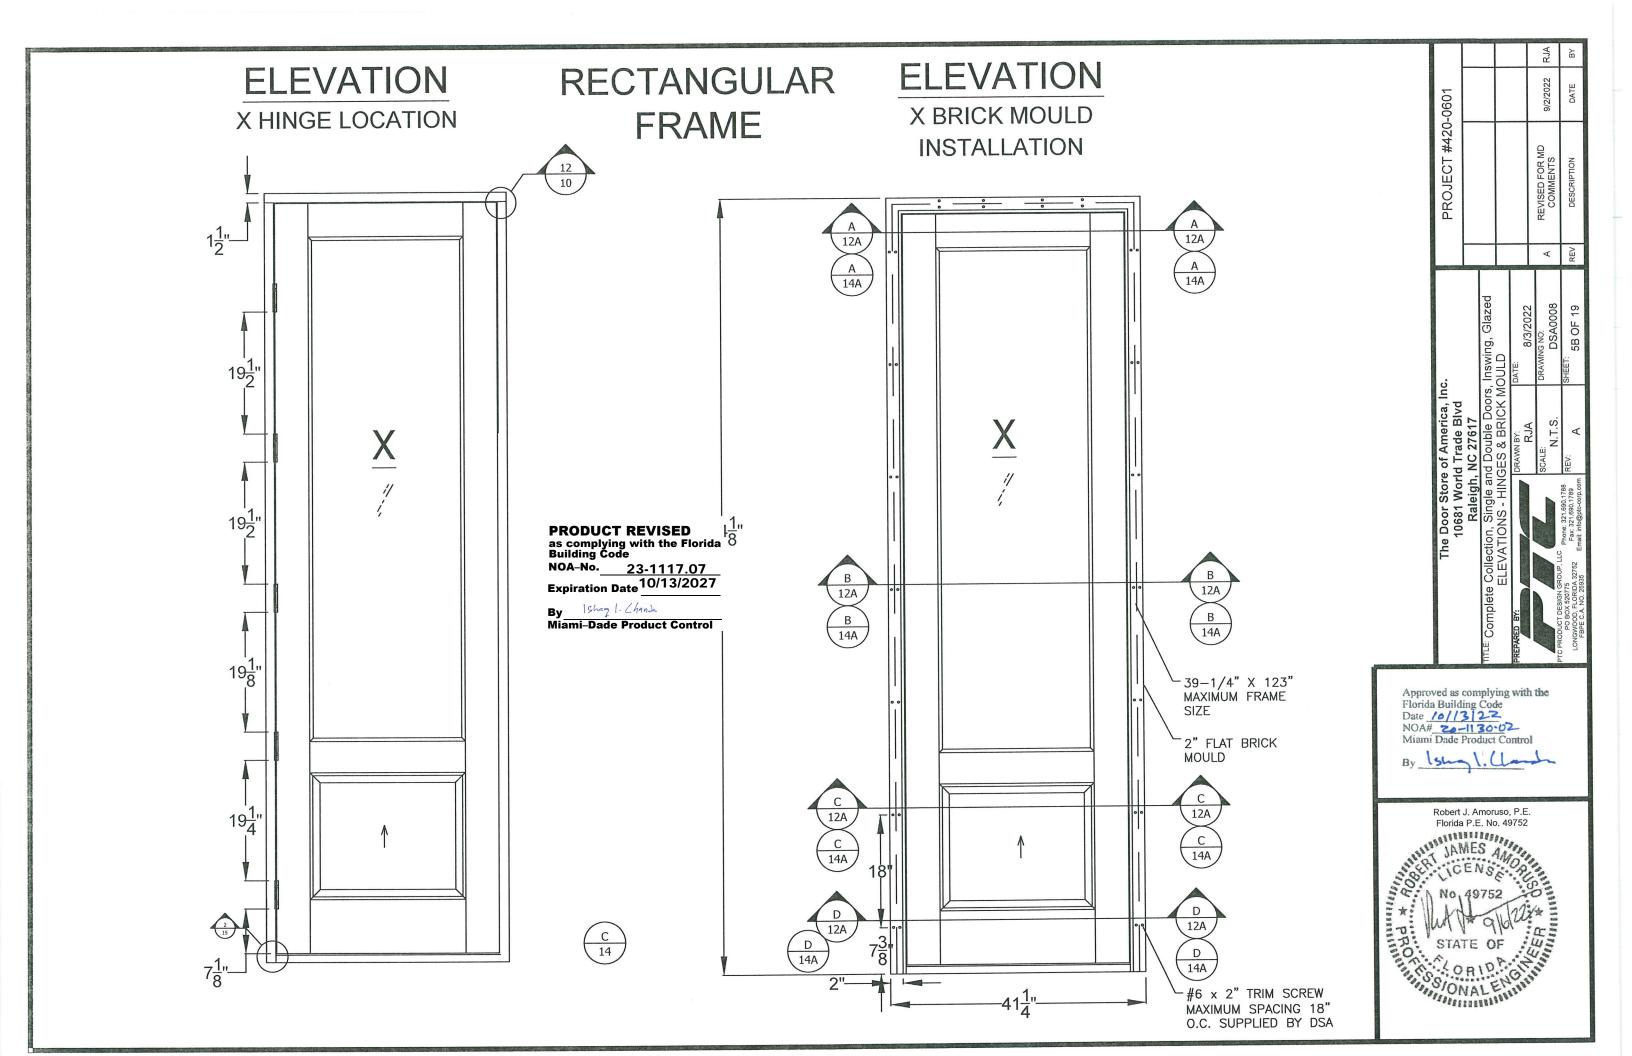

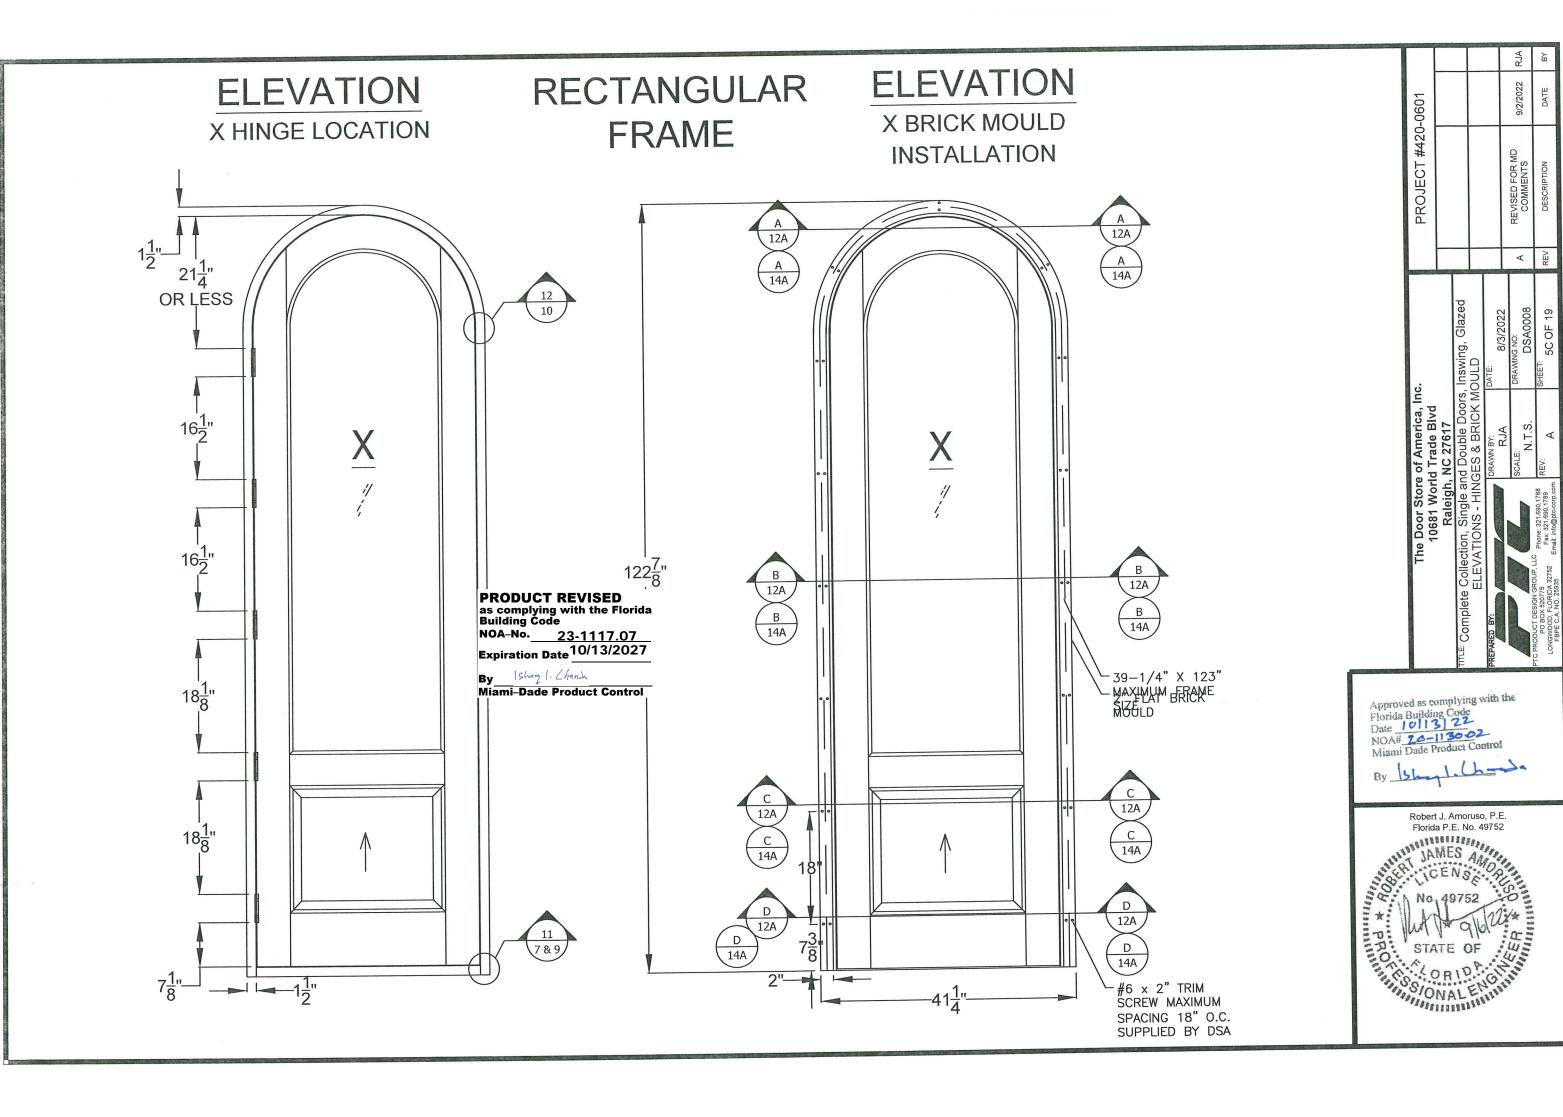

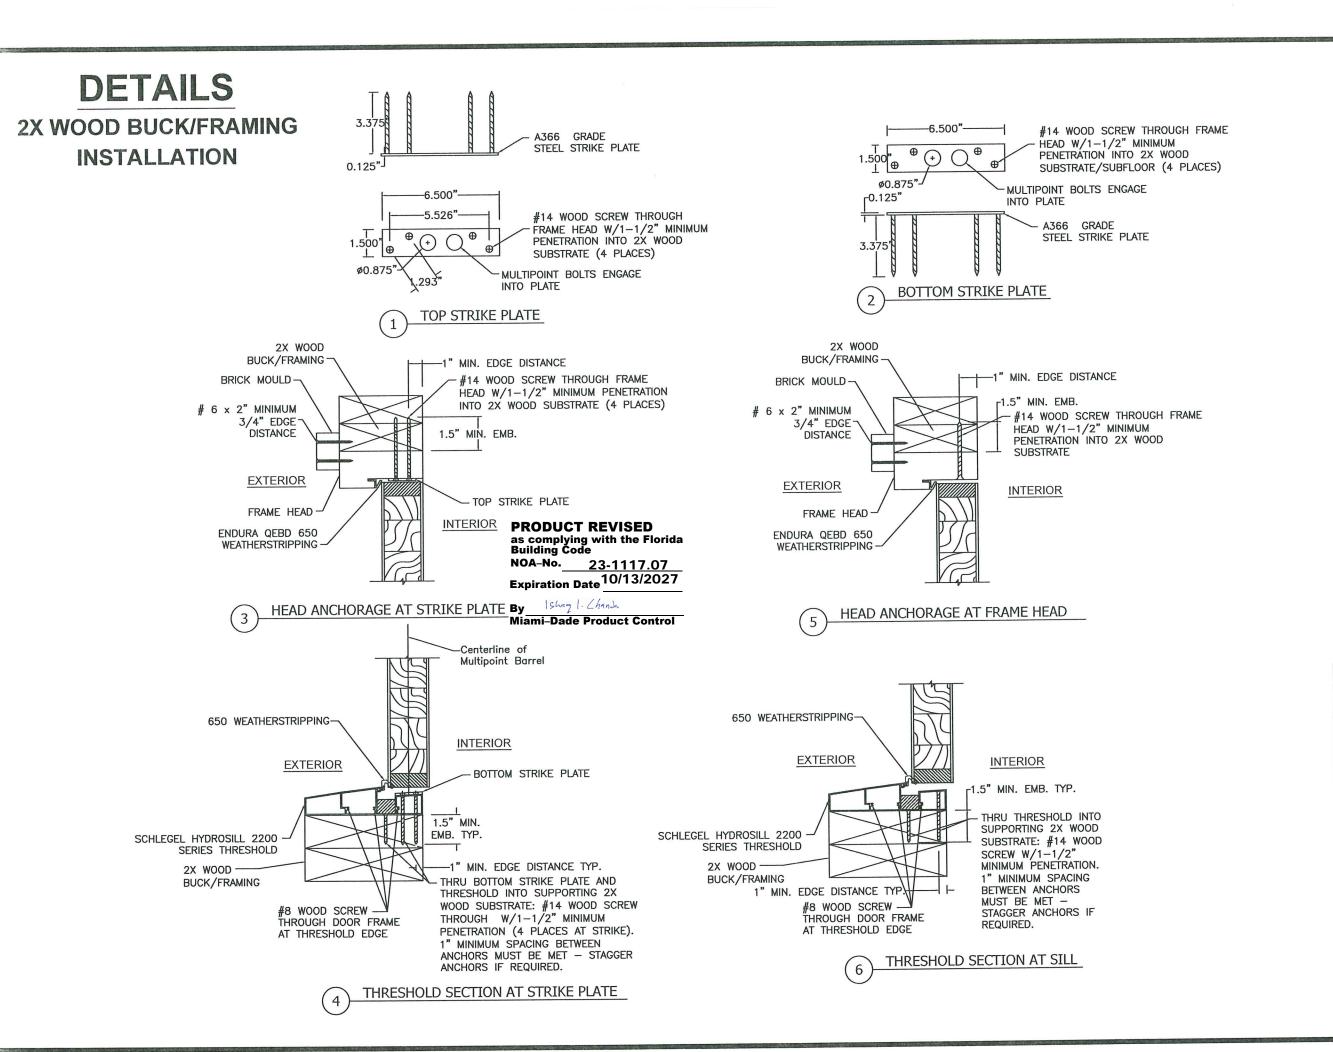



Approved as complying with the Florida Building Code
Date 10/13/22
NOA# 20-1130-02
Miami Dade Product Control

By Shyl. Und

Robert J. Amoruso, P.E. Florida P.E. No. 49752

AMES


No. 49752

*
STATE OF

ORIONALE

ONALE

ONALE

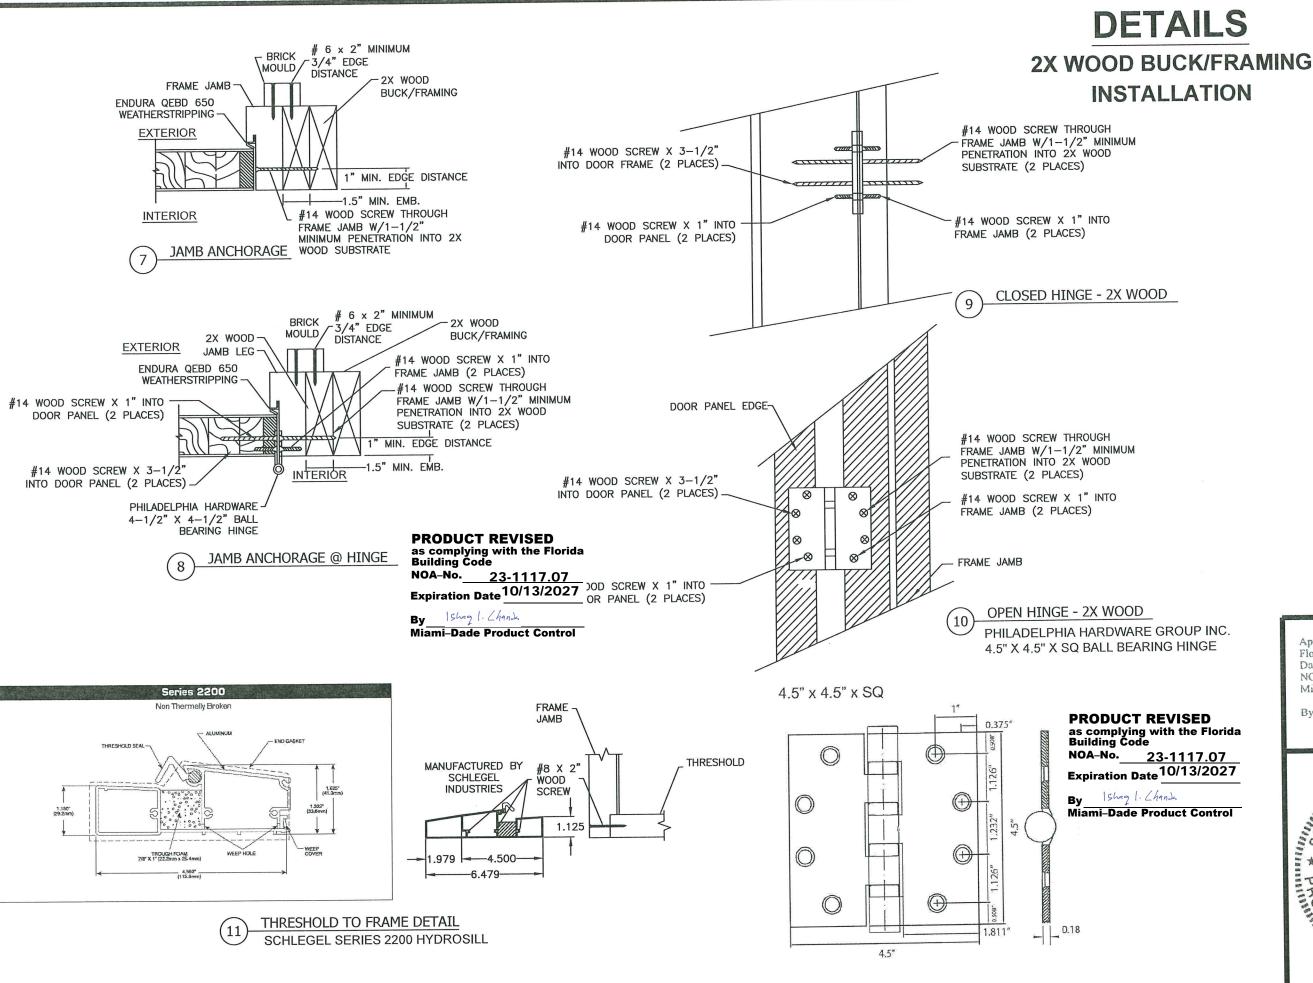



Approved as complying with the Florida Building Code
Date 10113 22
NOA# 20-1130.02
Miami Dade Product Control

By Ishyl. Und

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

JAMES

No. 49752

*
STATE OF


ORIONAL


DETAILS


CONCRETE INSTALLATION


NOTES:

- 1. BRICK MOULD INSTALLATION SHALL USE NO. 6 WOOD SCREW X 2" MINIMUM LENGTH FOR BRICK MOULD-TO-DOOR FRAME INSTALLATION
- 2. ALL ADDITIONAL FASTENING INCLUDING THE USE OF SEALANTS SHALL BE AT THE DISCRETION OF THE INSTALLER OR AS RECOMMENDED BY THE DOOR MANUFACTURER.

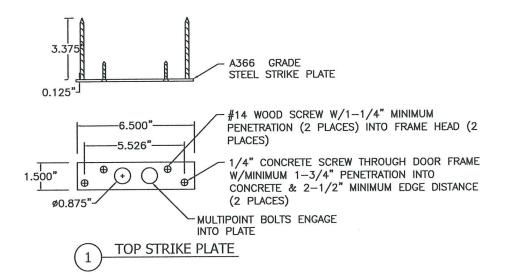


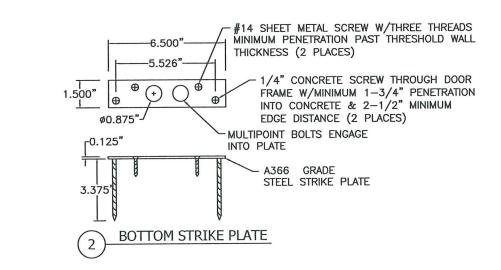

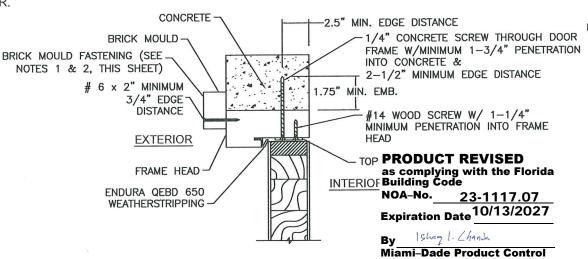


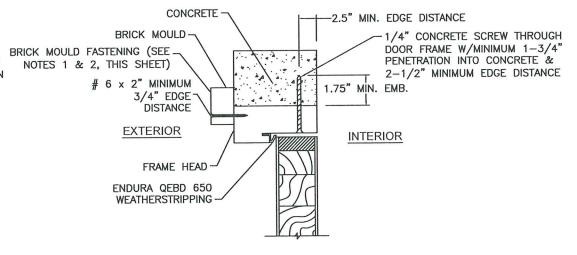

HEAD ANCHORAGE AT FRAME HEAD

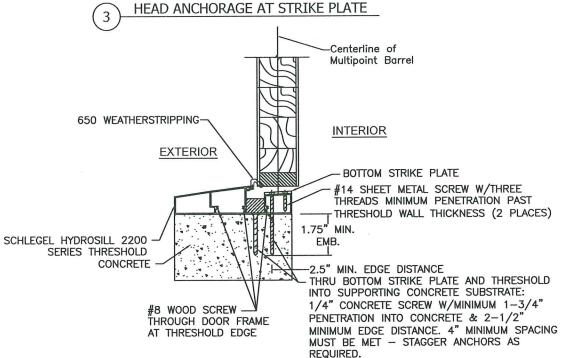

THRESHOLD SECTION AT STRIKE PLATE

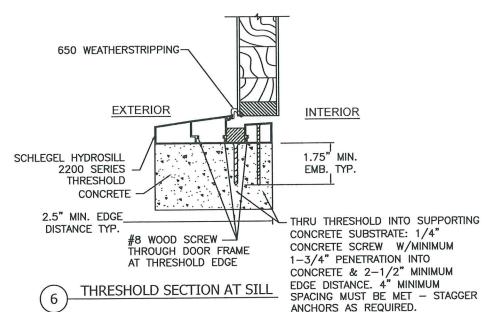

Approved as complying with the Florida Building Code
Date 10/13/22
NOA# 70-1130-02
Miami Dade Product Control

#420-060

PROJECT

×

Inswing, G 1 THRU 6

Robert J. Amoruso, P.E. Florida P.E. No. 49752


JAMES


No. 49752


No. 49752


STATE OF


ORIONAL

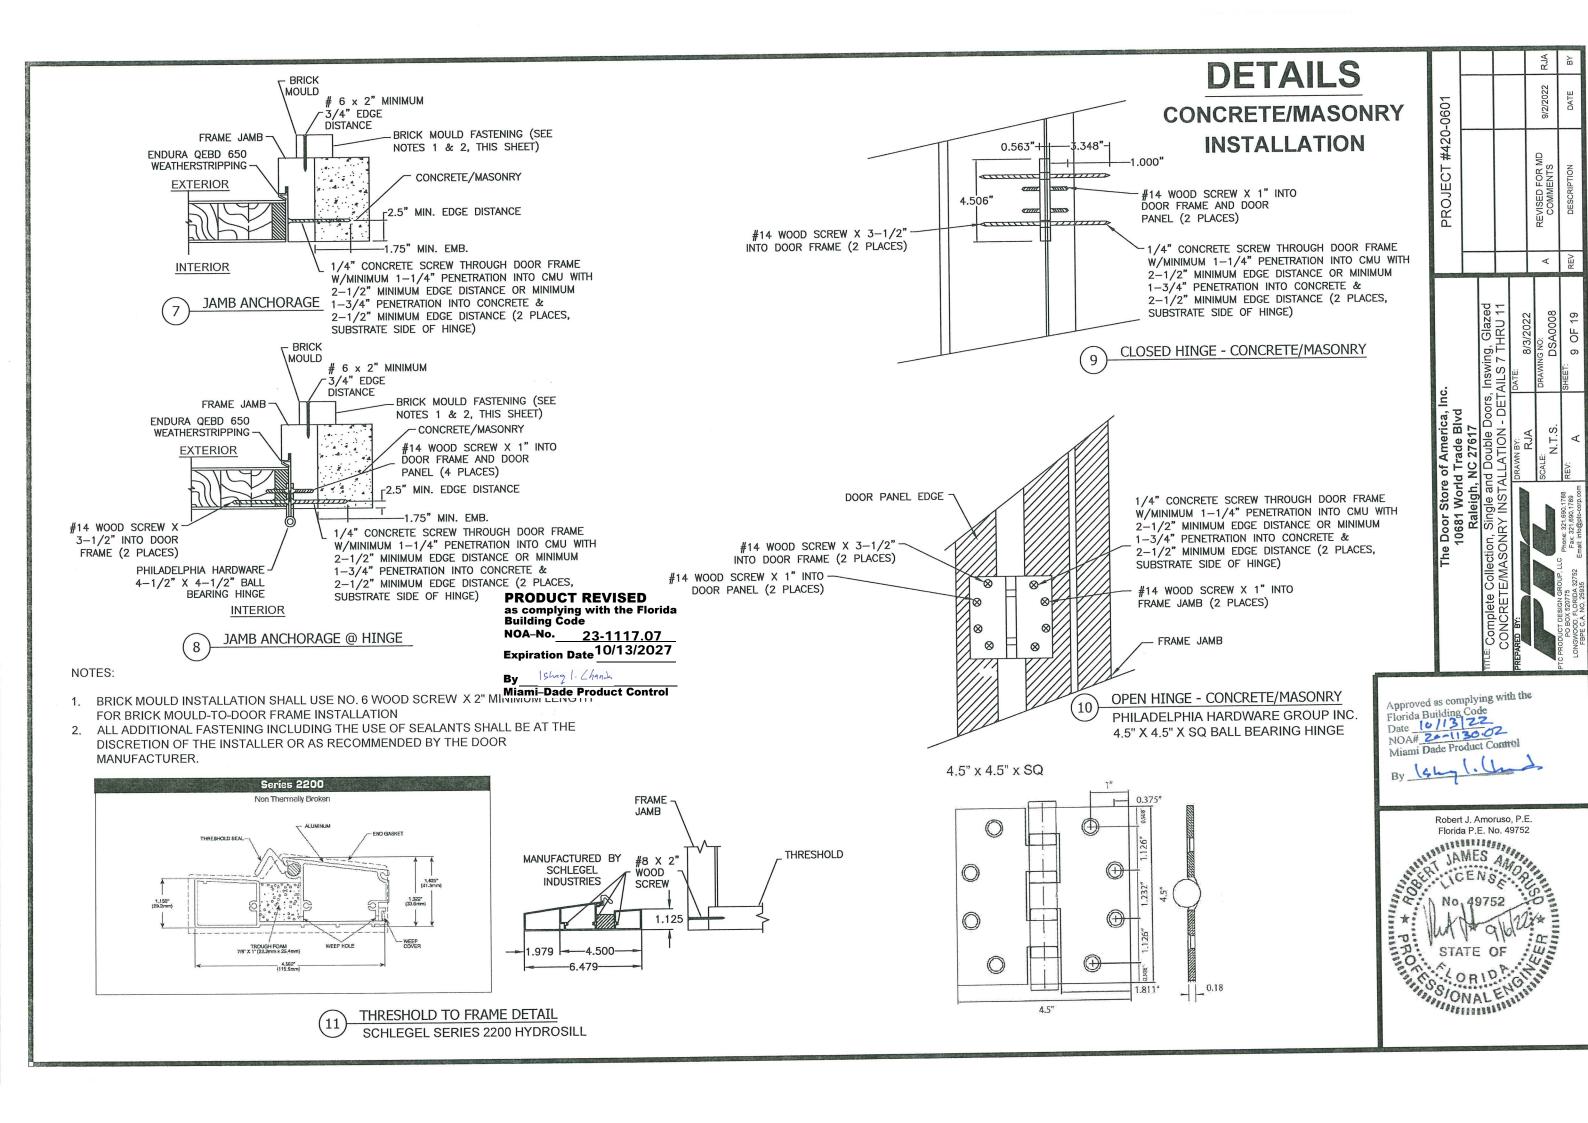


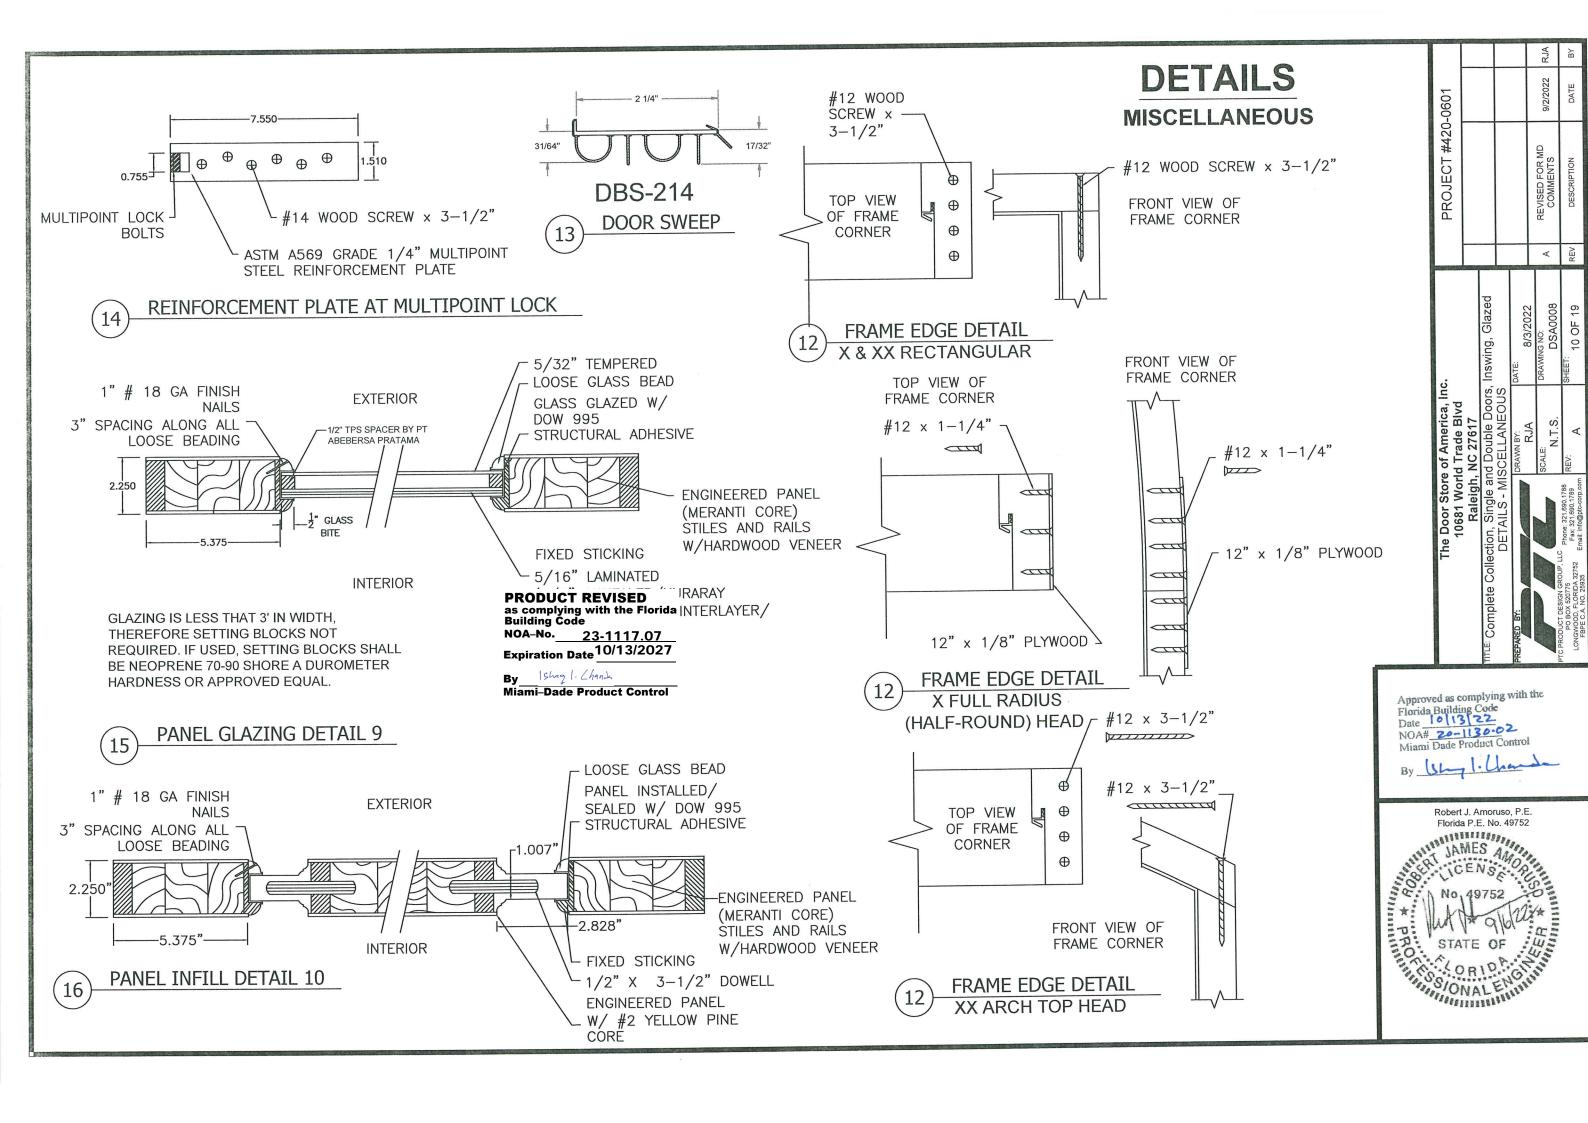


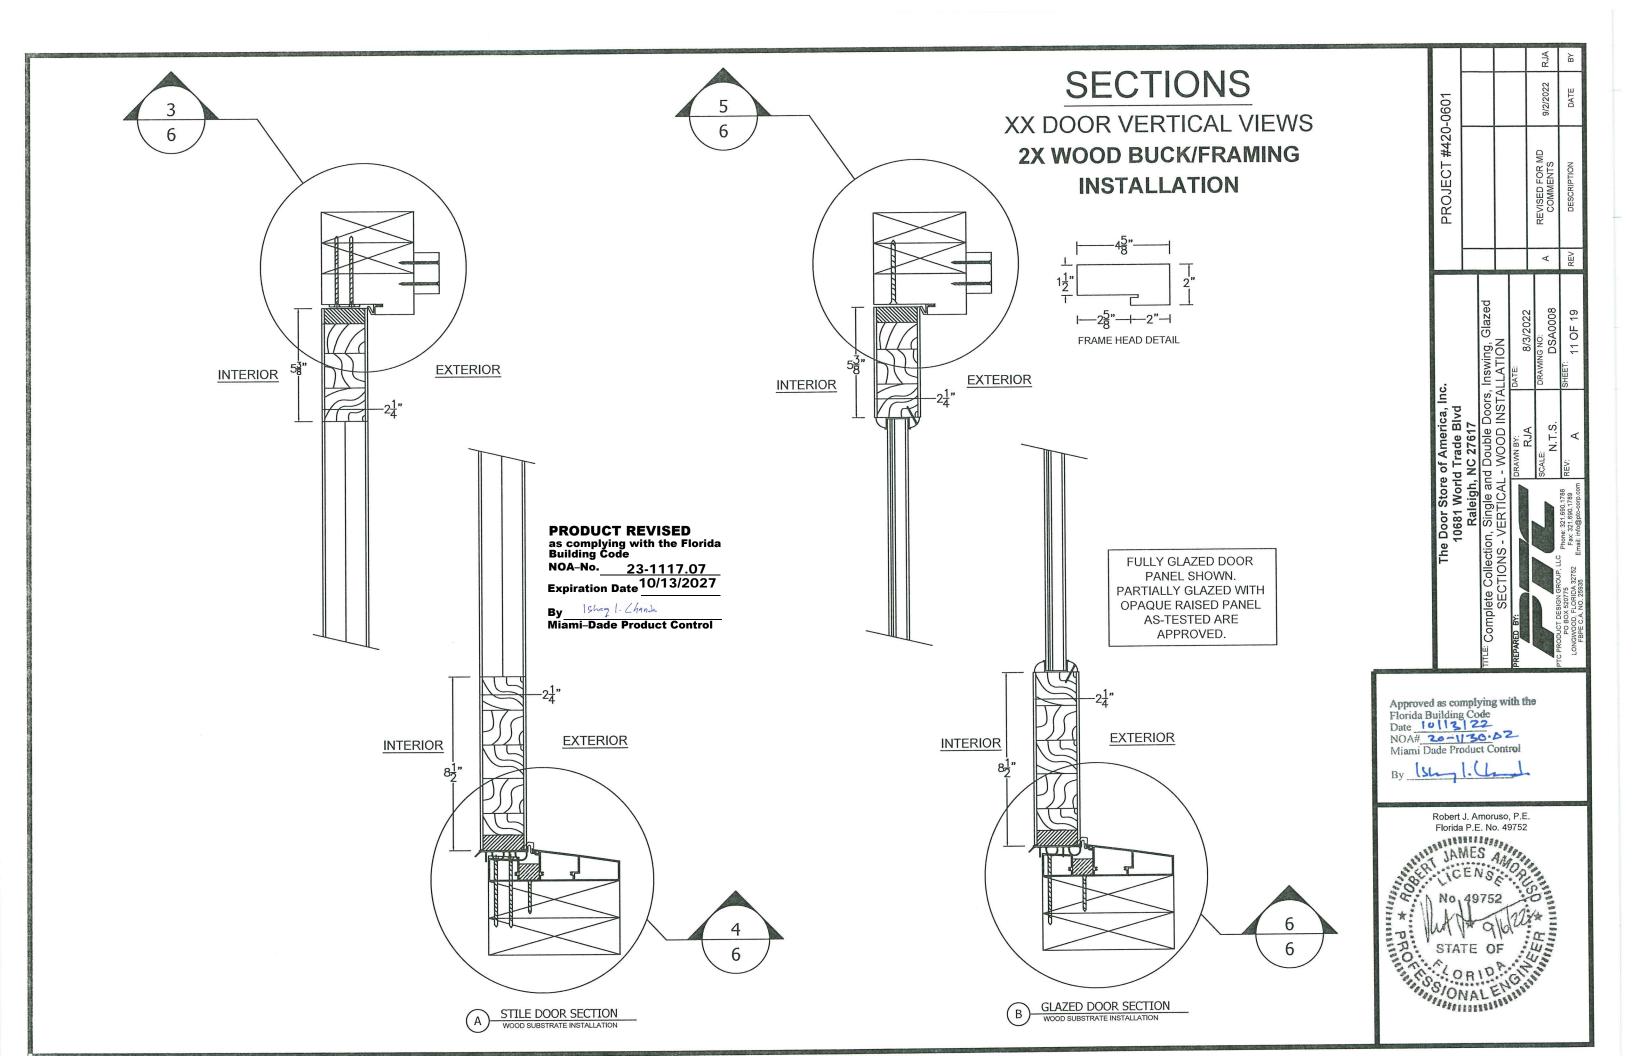


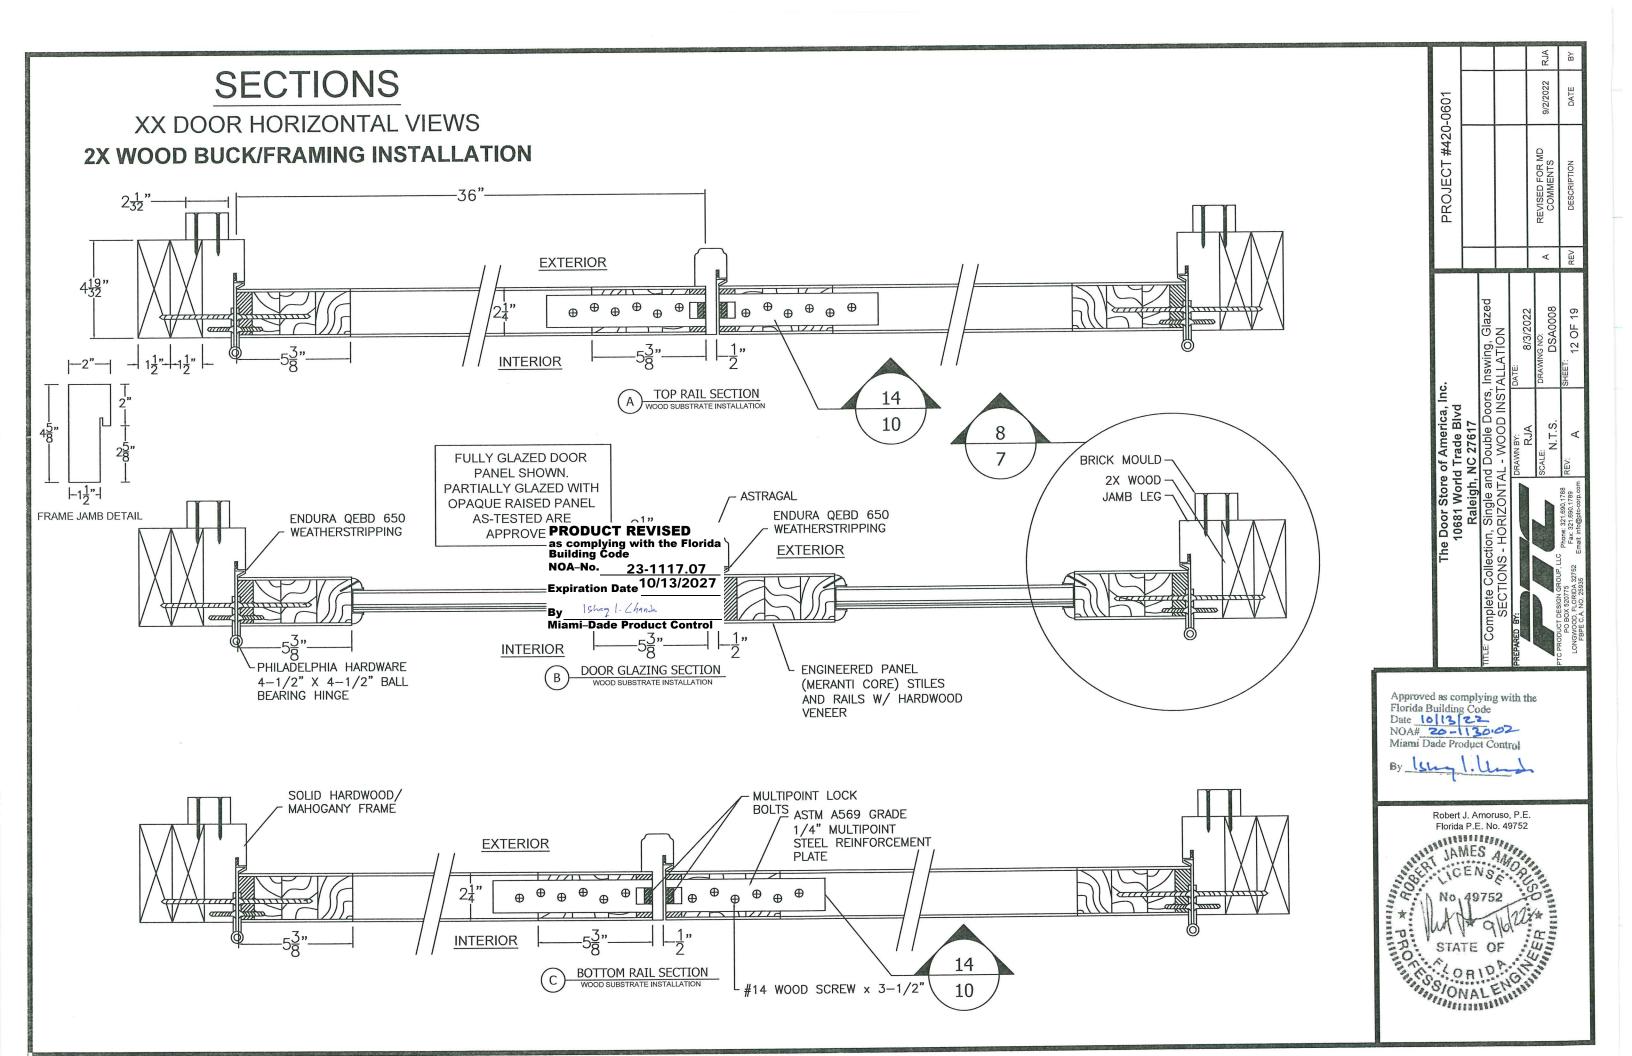

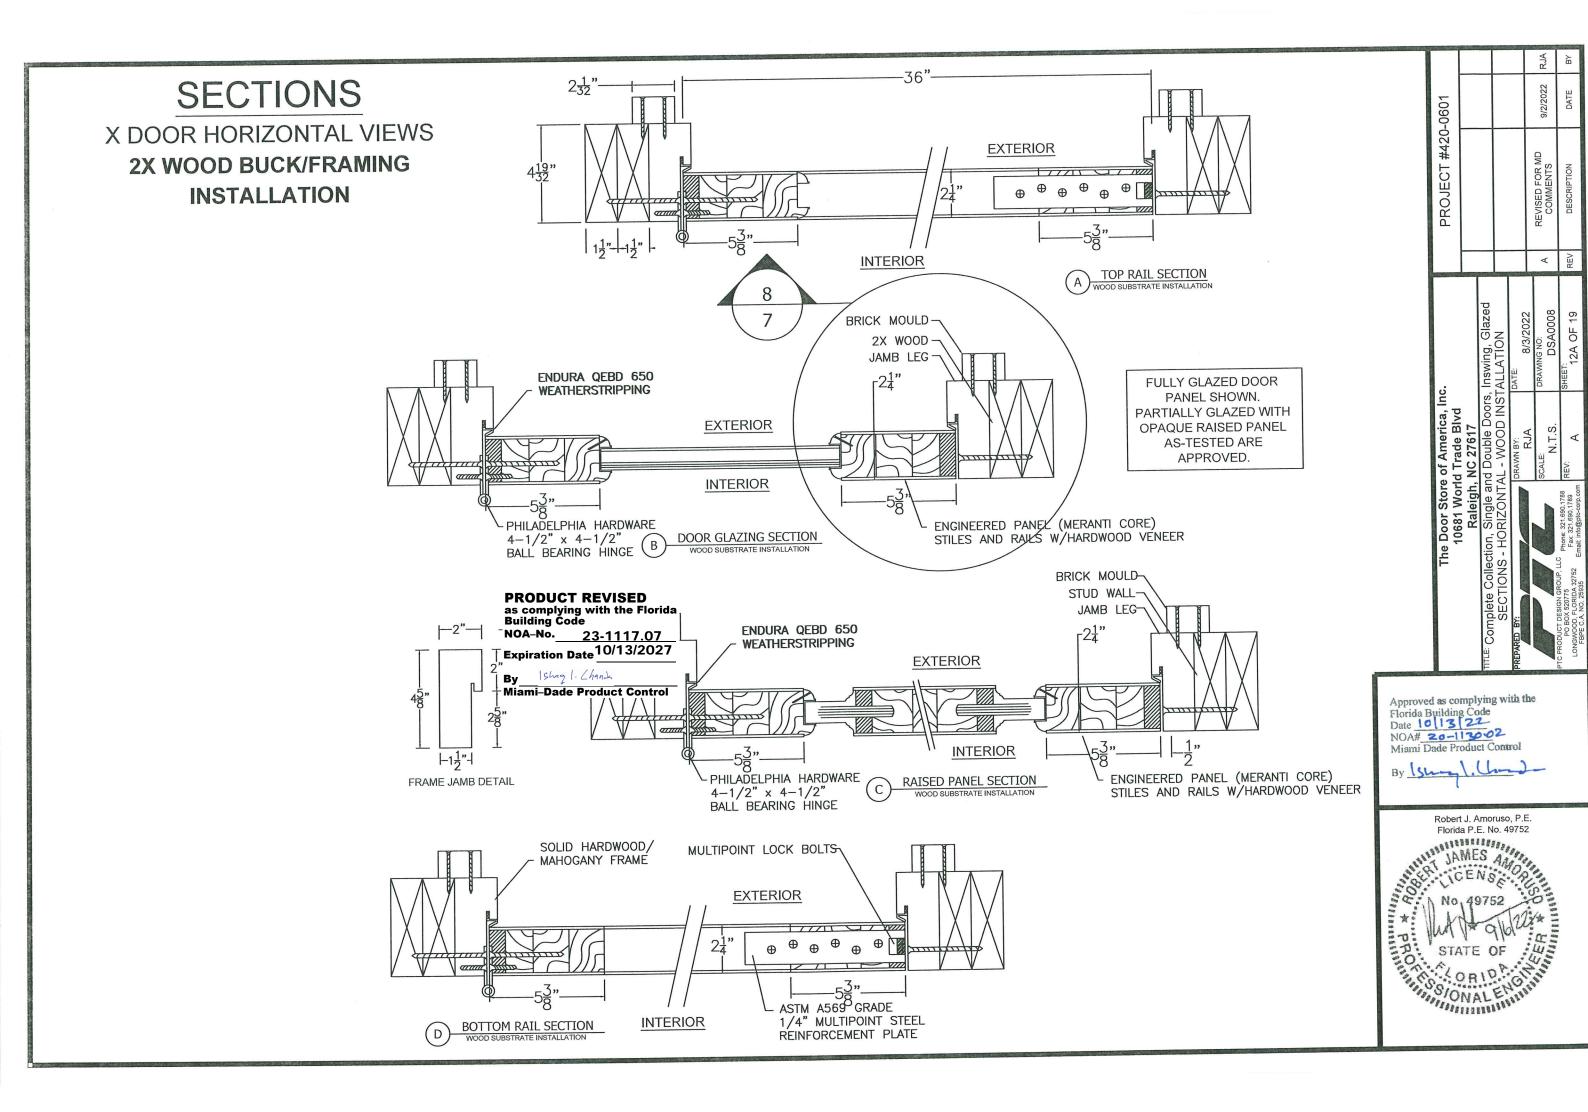

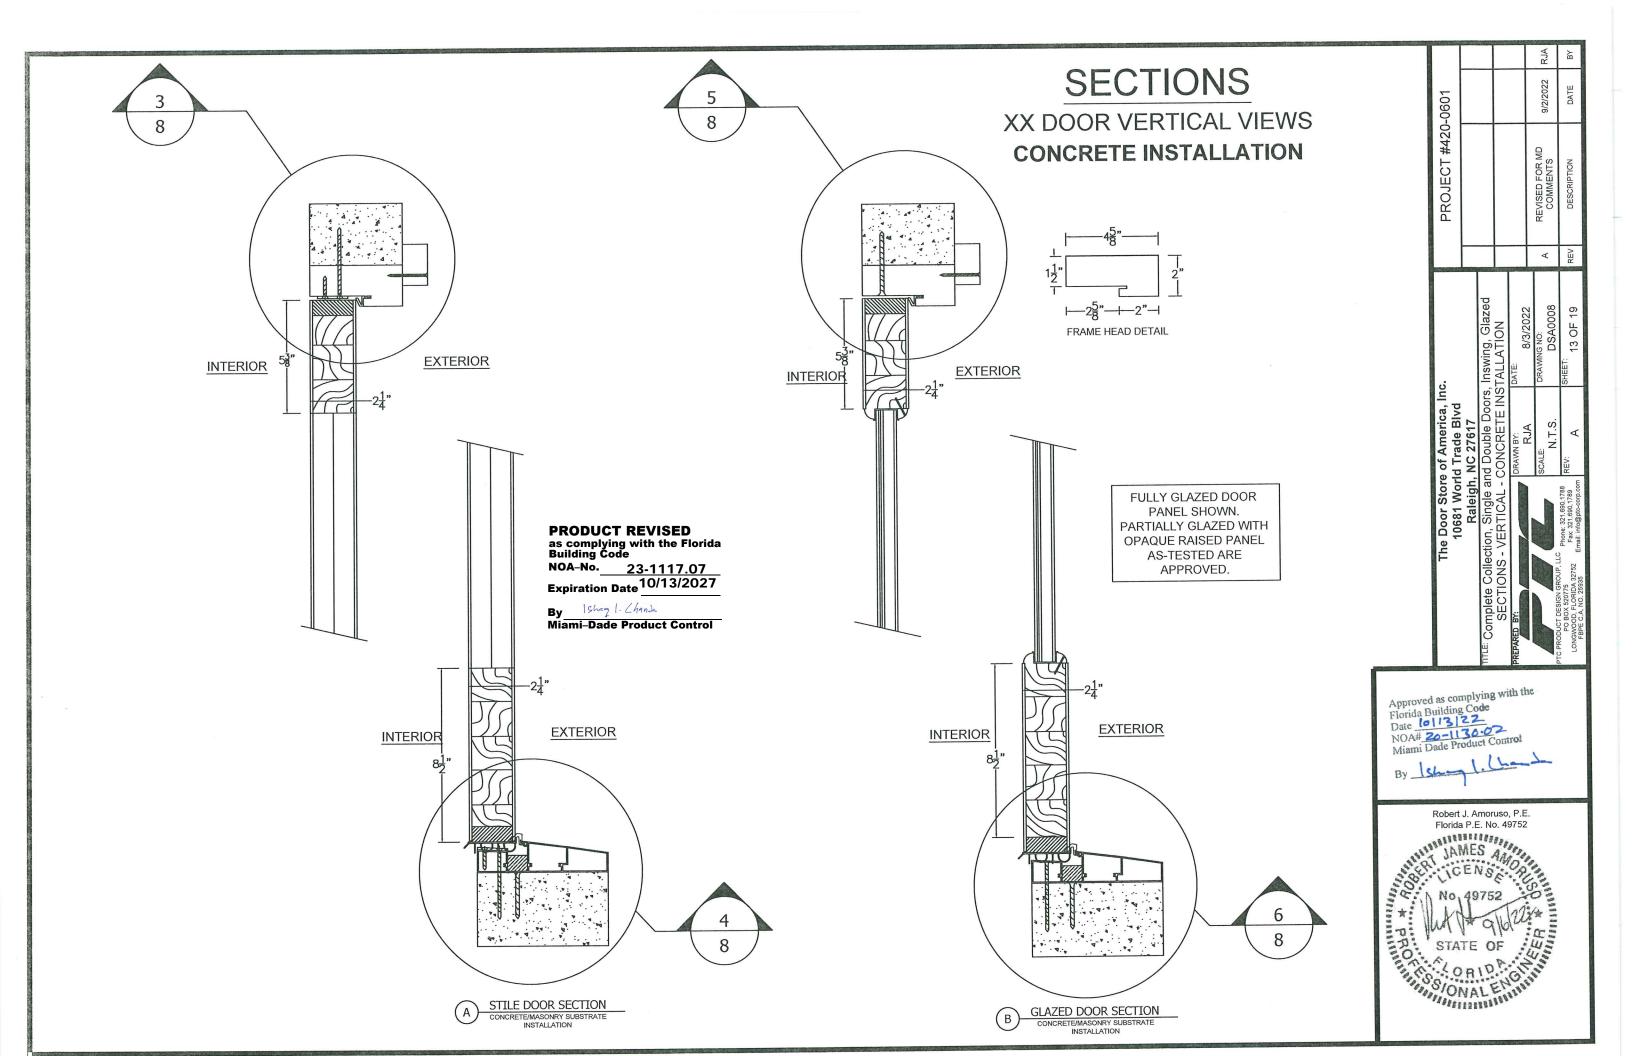


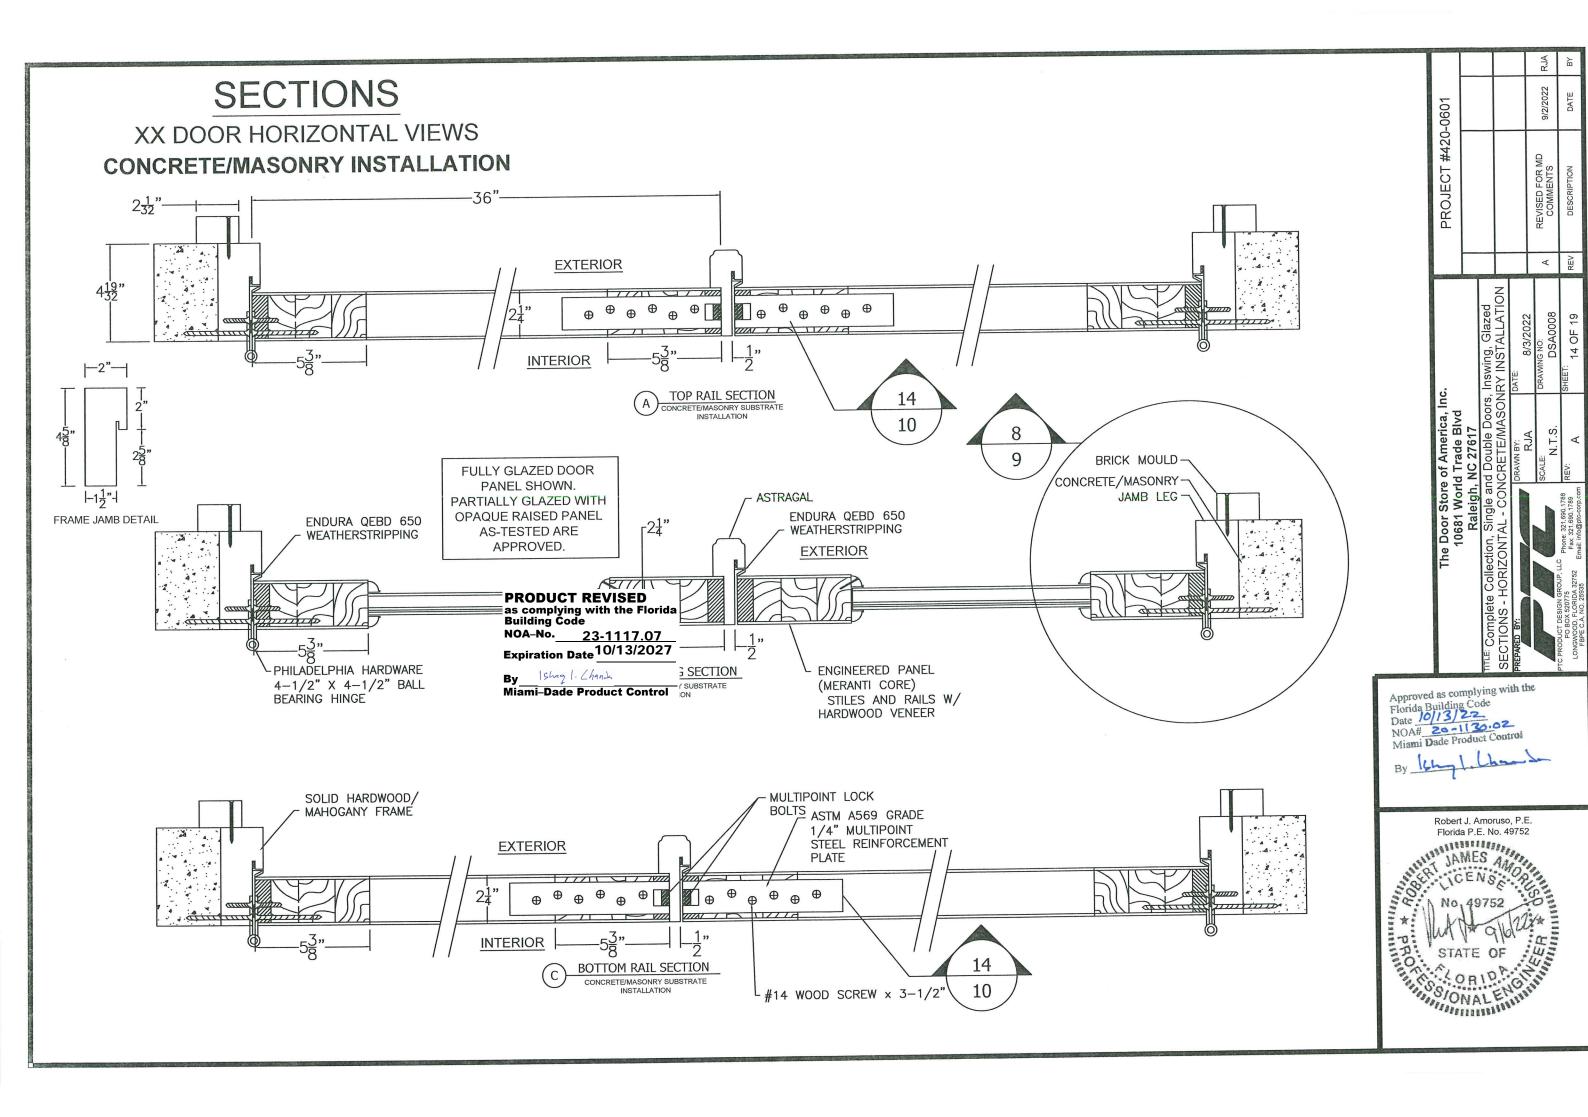

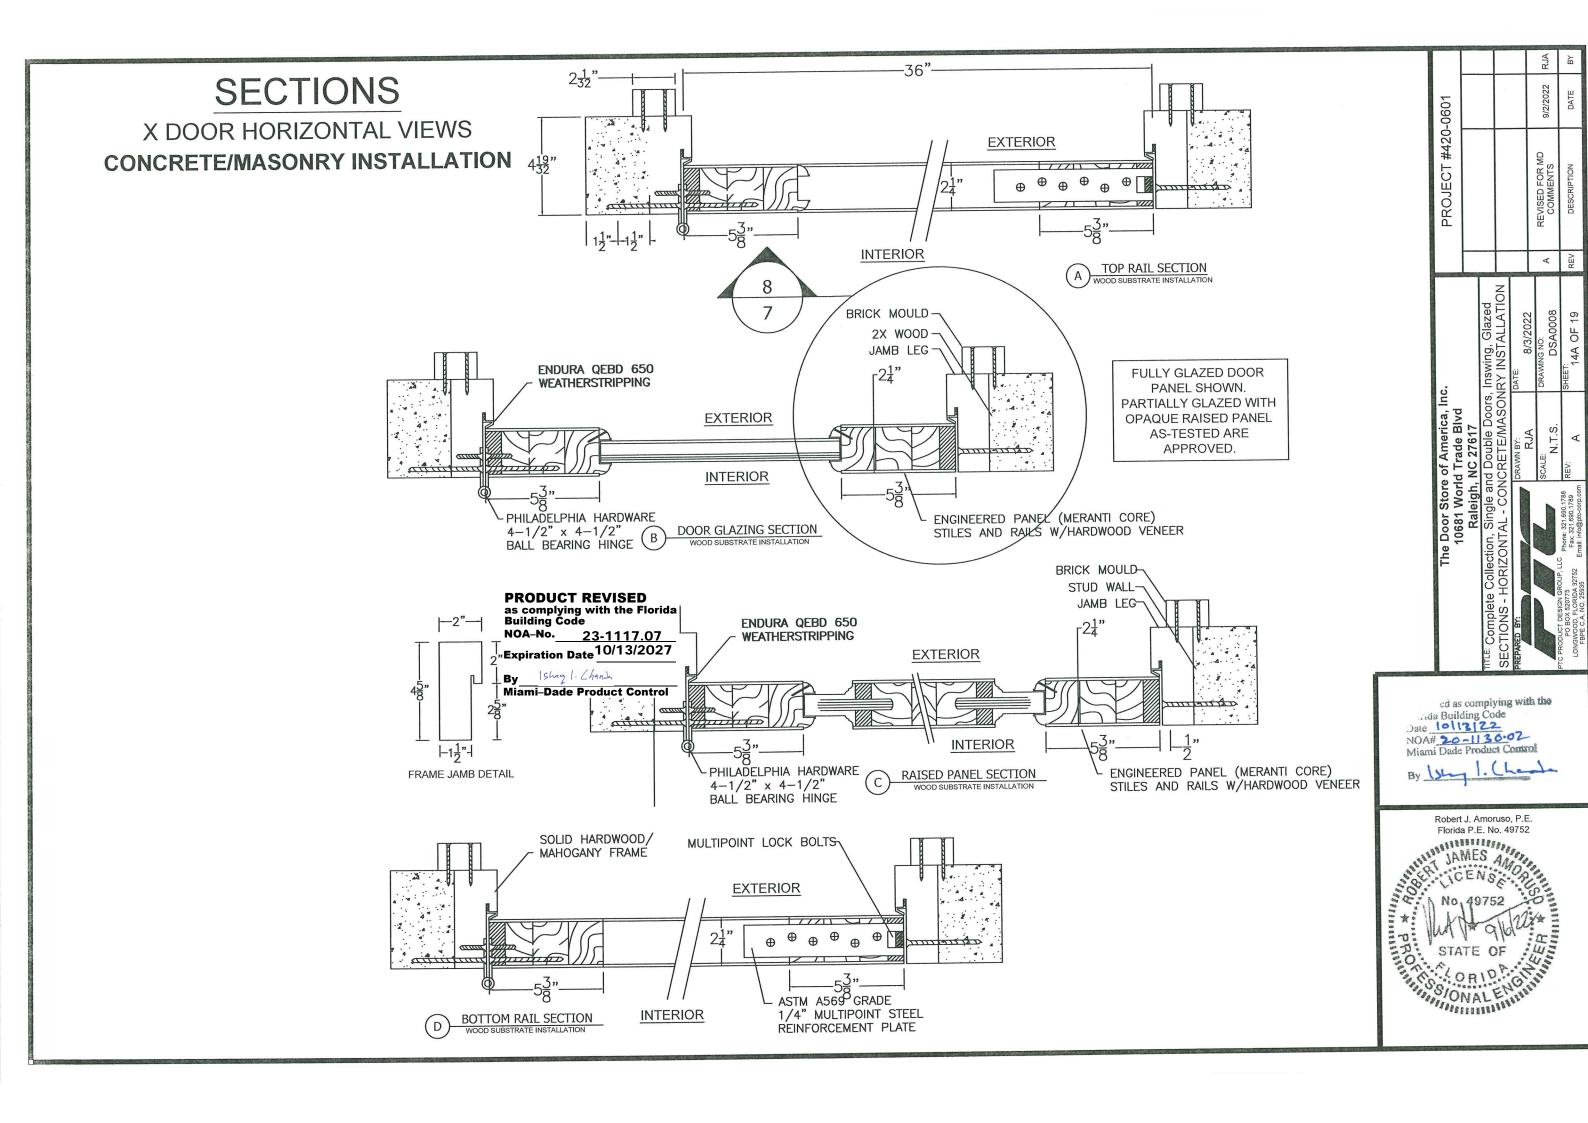

XX PANEL DETAILS


MULTIPOINT LOCK LAYOUT RECTANGULAR PANELS SHOWN ARCH TOP PANELS SAME (SEE SHEETS 15A, 15B & 15C FOR ADDITIONAL DETAILS)

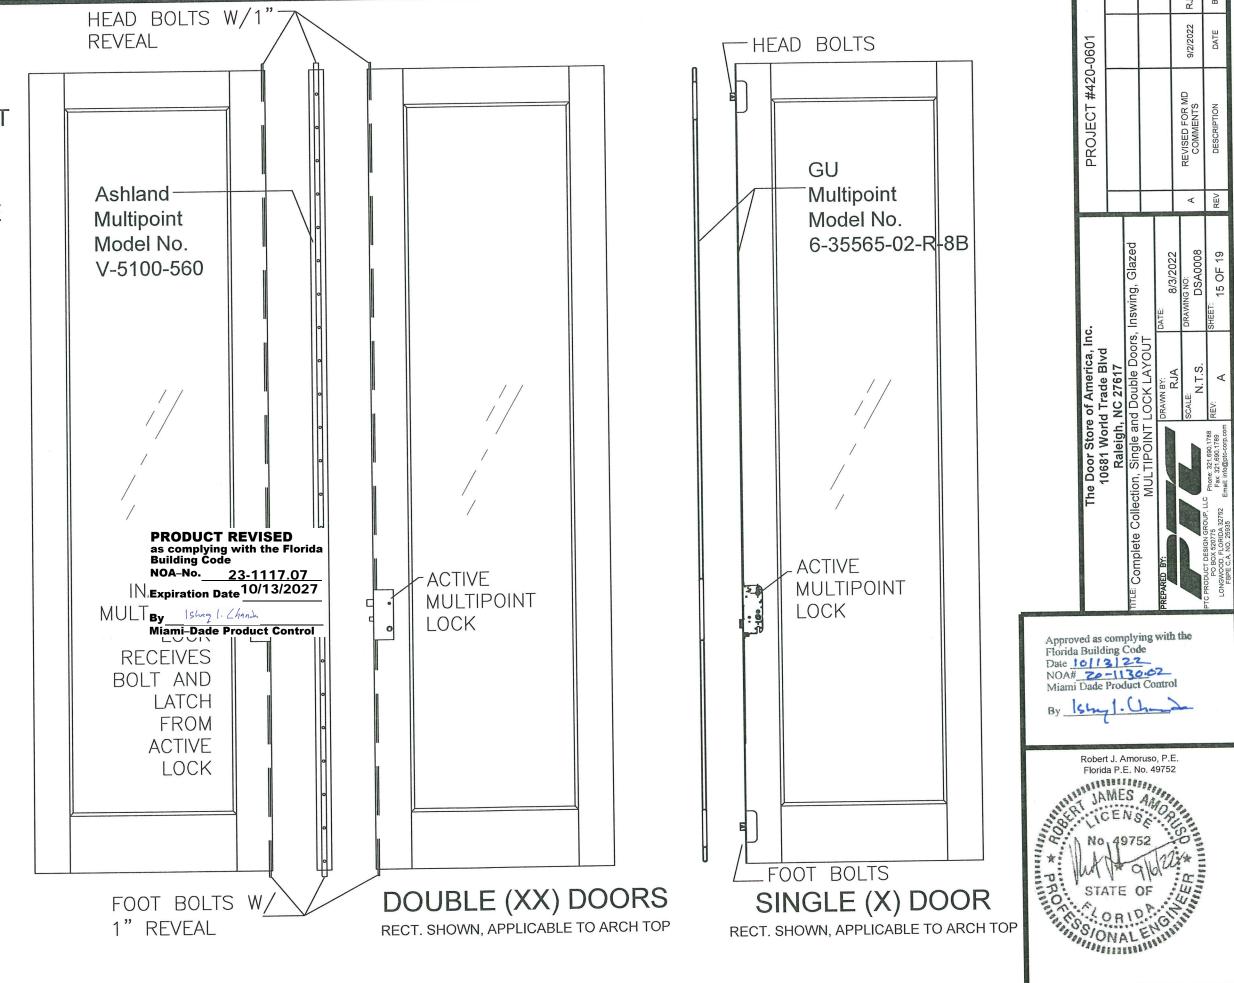

XX PANEL RECT. & ARCH TOP DETAILS


ASHLAND MULTIPOINT LOCK LAYOUT


Ashland Multipoint Model No. V-5100-560

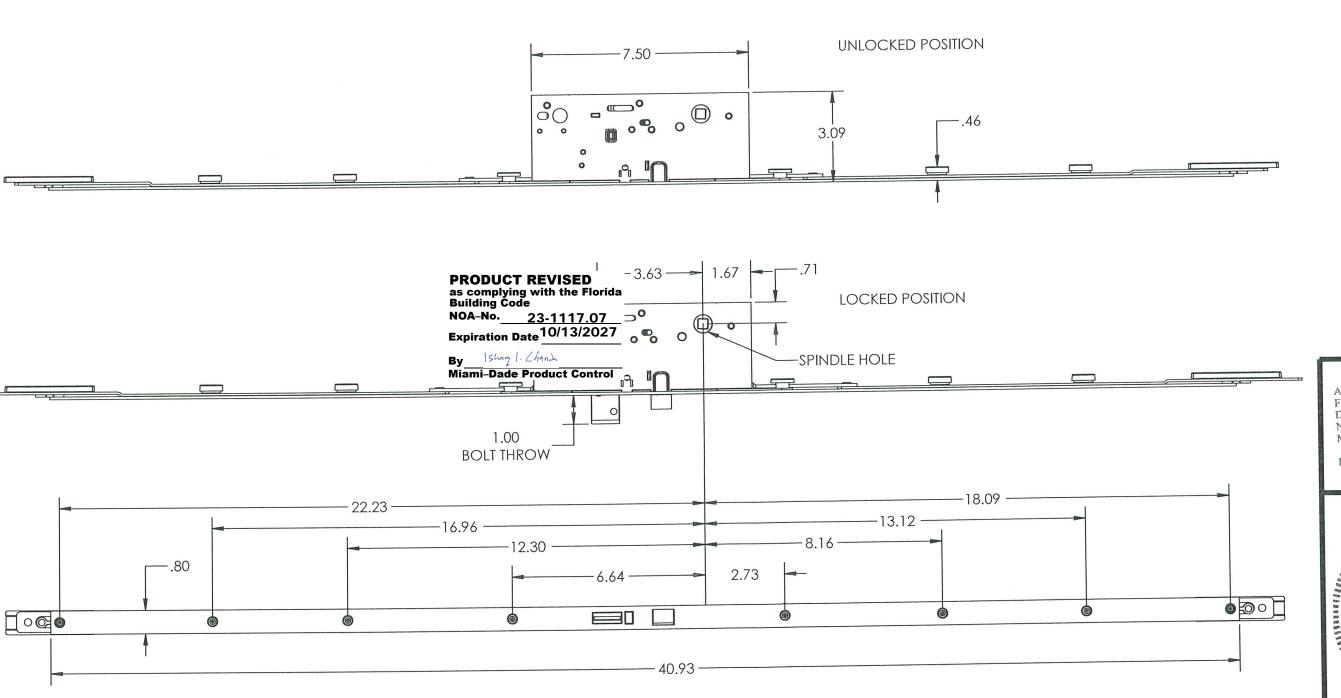




Approved as complying with the Florida Building Code
Date 1013122 NOA# 20-1130:02



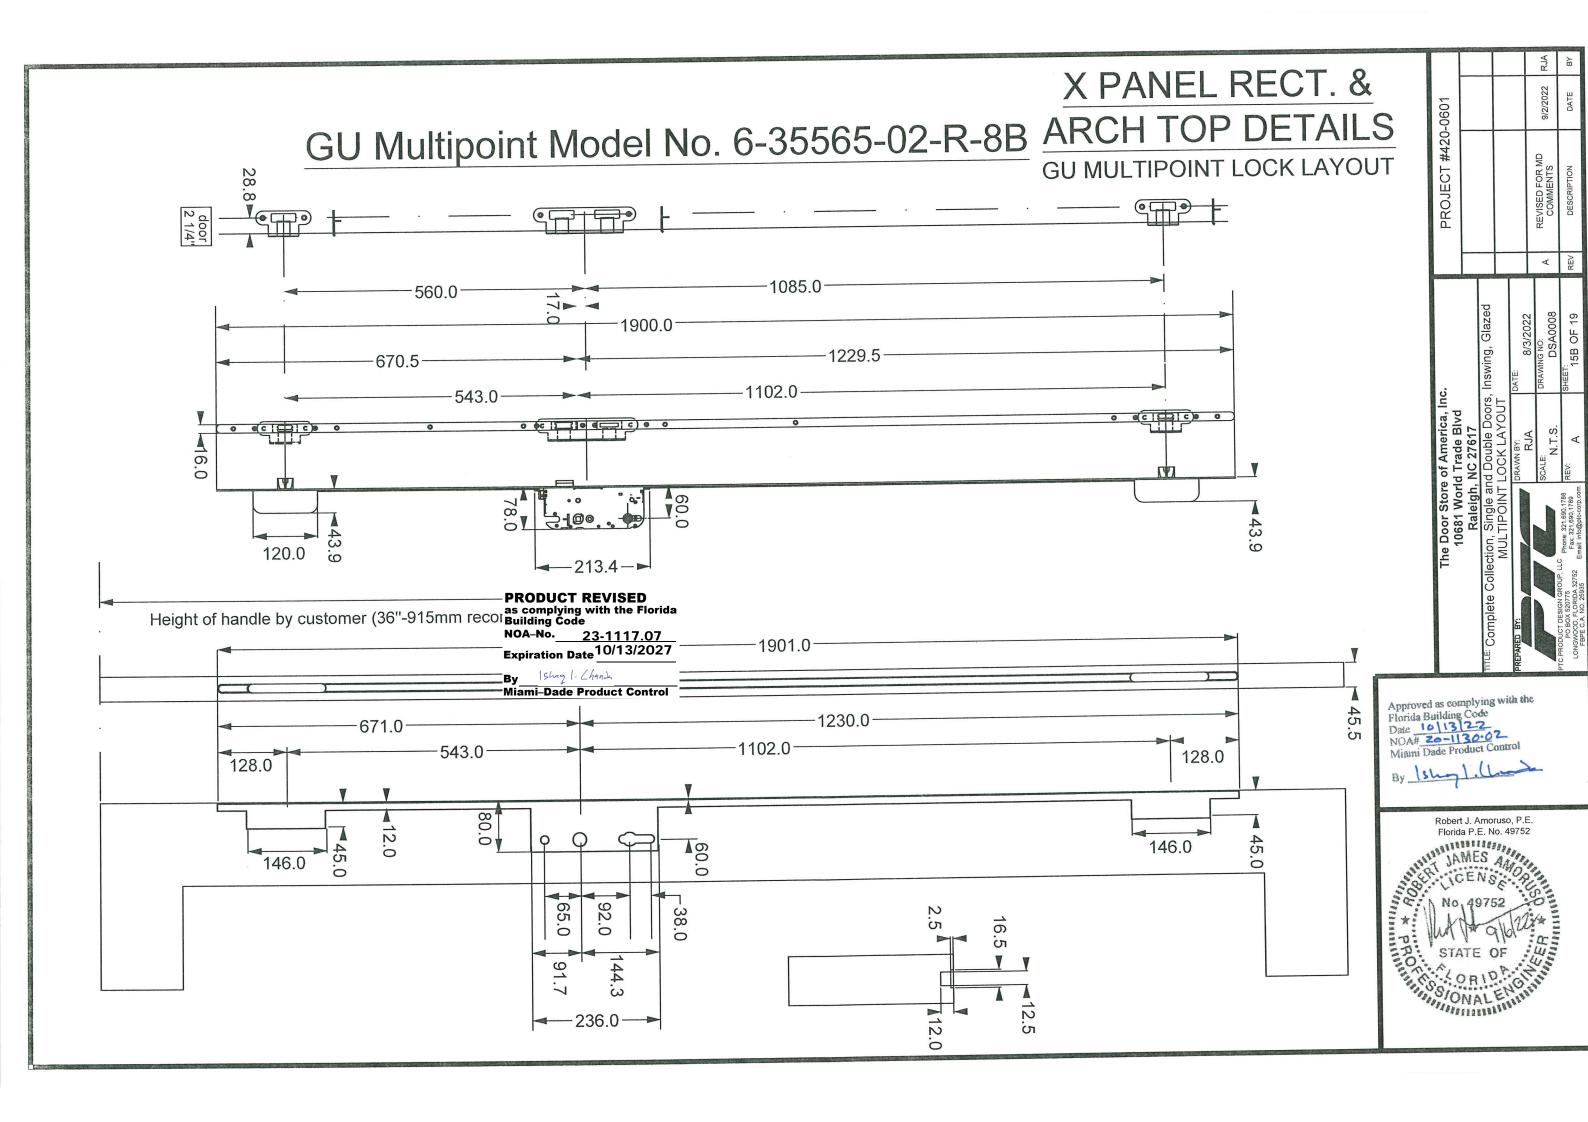


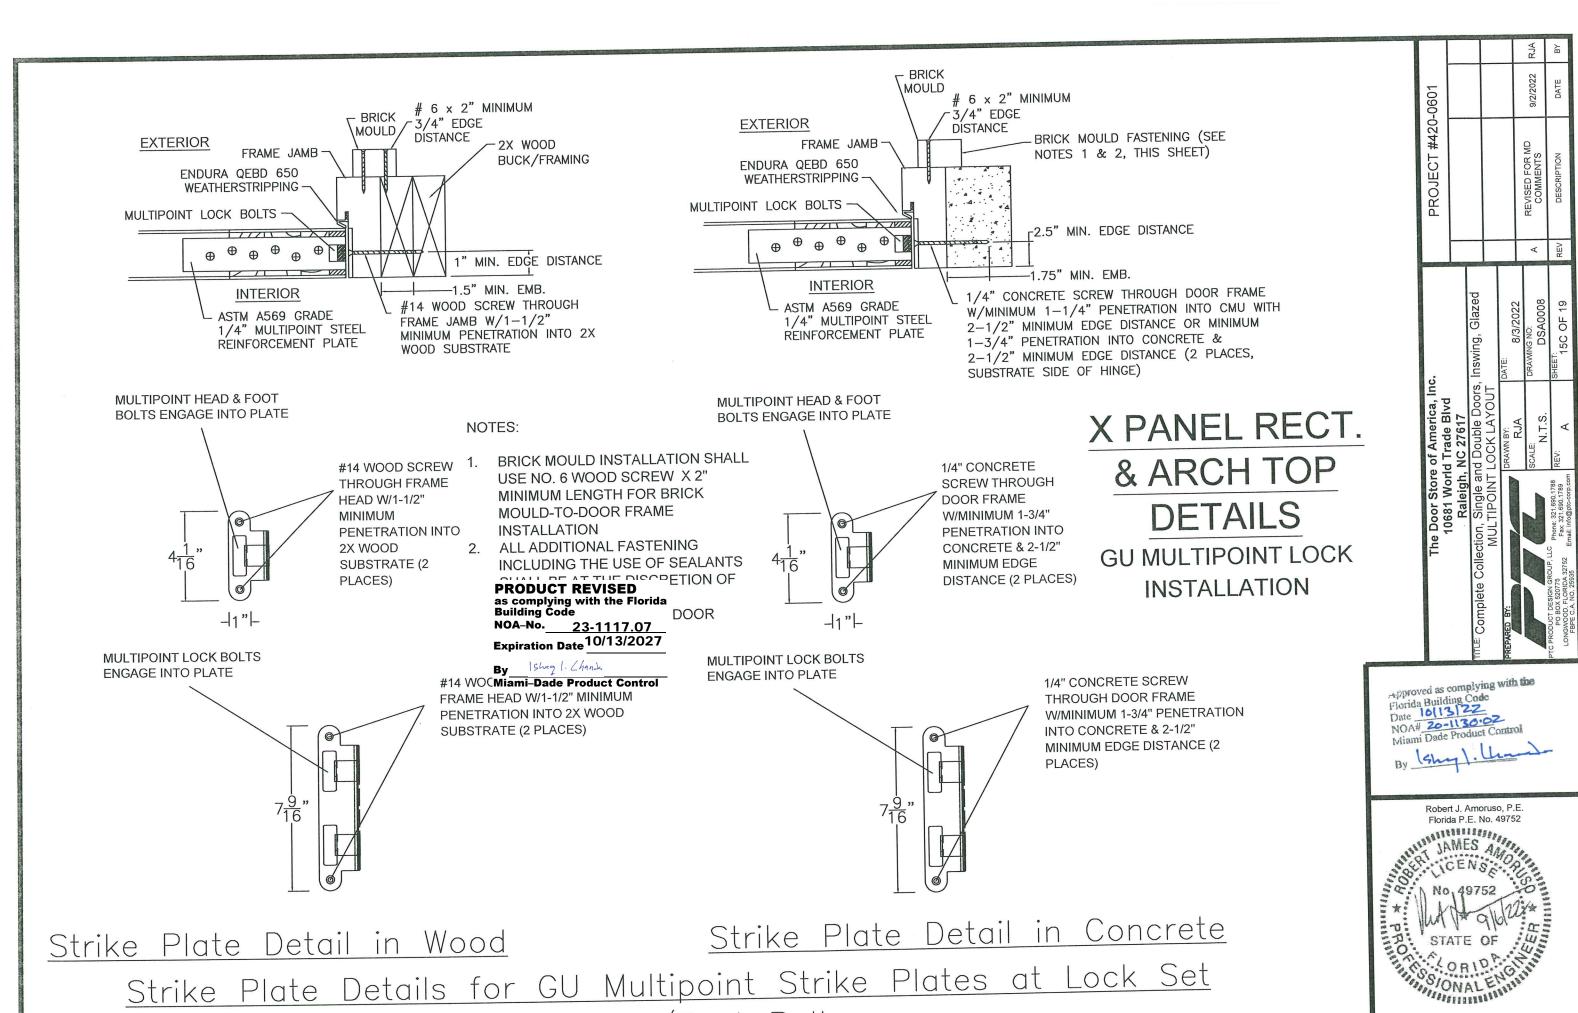

and Head/Foot Bolts

PANEL CONSTRUCTION DETAIL (X & XX)

XX & X RECTANGULAR PANEL CONSTRUCTION (XX ARCH TOP PANEL SIMILAR) - DOWEL LOCATION

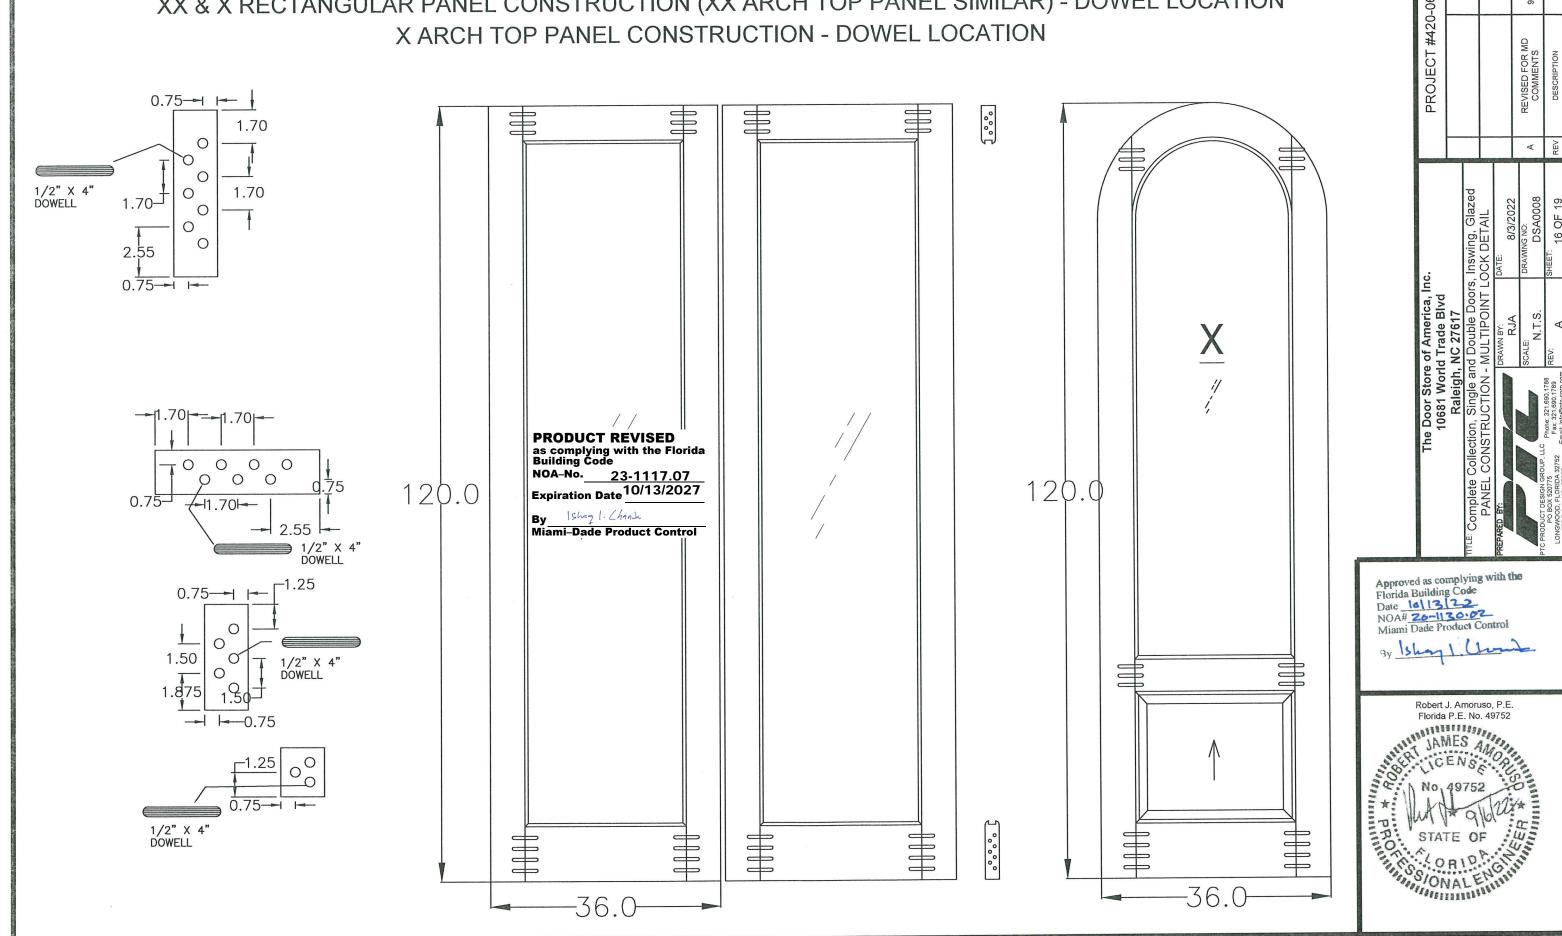

APPROVED CONFIGURATIONS

MAXIMUM FRAME, DOOR PANEL AND DLO SIZES SHOWN ON SHEETS 2, 2A, 2B, 2C AND 2D MUST BE MET.




















PARTIAL OPAQUE NOT TO EXCEED TESTED SIZE (TYP. ALL PLACES)









V_{SURFACE} APPLIED FALSE MUNTINS TYPICAL ALL PLACES

























PARTIAL OPAQUE NOT TO EXCEED TESTED SIZE (TYP. ALL PLACES)
















V_{SURFACE} APPLIED FALSE MUNTINS TYPICAL ALL PLACES










PARTIAL OPAQUE NOT TO EXCEED TESTED SIZE (TYP. ALL PLACES)

V_{SURFACE} APPLIED FALSE MUNTIN PRODUCT REVISED as complying with the Florida Building Code

NOA-No. 23-1117.07 Expiration Date 10/13/2027


111 111 777





-SURFACE APPLIED FALSE MUNTINS TYPICAL ALL

Keowee



onee




Brentwood


Approved as complying with the Florida Building Code
Date 10113122
NOA# 20-1130-02 Miami Dade Product Control

The Door Store of America,
10681 World Trade Blvd
Raleigh, NC 27617
collection, Single and Double Doors, Inswing, Glazed
collection, Single and Double Doors, Inswing, Glazed

PROJECT #420-0601

REVISED FOR MD COMMENTS









APPROVED CONFIGURATIONS

MAXIMUM FRAME, DOOR PANEL AND DLO SIZES SHOWN ON SHEETS 2, 2A, 2B, 2C AND 2D MUST BE MET.









V-SURFACE APPLIED FALSE MUNTINS TYPICAL ALL PLACES












PARTIAL OPAQUE NOT TO EXCEED TESTED SIZE (TYP. ALL PLACES)











































SURFACE APPLIED FALSE MUNTINS TYPICAL ALL PLACES





Approved as complying with the Florida Building Code
Date /9//3/2-2
NOA# 20-//30-02
Miami Dade Product Control

#420-0601

PROJECT

Inswing, Glazed

The Door Store of America, Inc.
10681 World Trade Blvd
Raleigh, NC 27617
Illection, Single and Double Doors, Ins
APPROVED CONFIGURATIONS

REVISED FOR MD COMMENTS

⋖

DSA0008


N.T.S.

Robert J. Amoruso, P.E. Florida P.E. No. 49752 AMES AND JAMES AND No. 49752

* ORIDA
ONALEMANN
ONALEMA

APPROVED CONFIGURATIONS

MAXIMUM FRAME, DOOR PANEL AND DLO SIZES SHOWN ON SHEETS 2, 2A, 2B, 2C AND 2D MUST BE MET.

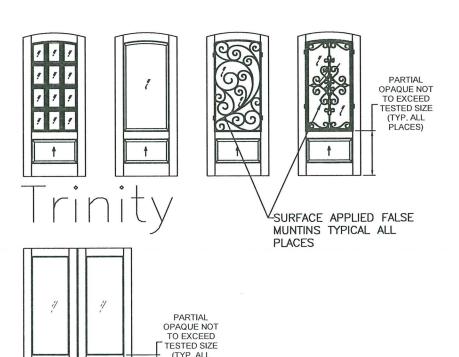

PLACES)

















PARTIAL OPAQUE NOT TO EXCEED TESTED SIZE (TYP. ALL PLACES)

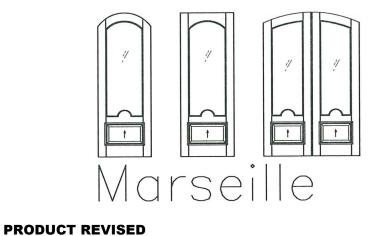









as complying with the Florida Building Code NOA-No. 23-1117.07 Expiration Date 10/13/2027 Ishag 1. Chands

Miami-Dade Product Control

Madison Seville

-SURFACE APPLIED FALSE MUNTINS TYPICAL ALL PLACES

Complete Collection, APPR Approved as complying with the Florida Building Code Date 10 13 22 NOA# 20-1130-02 Miami Dade Product Control By Shy 1. Chambe

oor Store of America, Inc.
381 World Trade Blvd
Raleigh, NC 27617
Single and Double Doors, Inswing, Glazed

PROJECT #420-0601

REVISED FOR MD COMMENTS

 \triangleleft

Robert J. Amoruso, P.E. Florida P.E. No. 49752 JAMES JAMES STATE STATE