

Eurotech Industries, Inc. 4201 NE 12th Terrace Ft. Lauderdale, FL 33334

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "1072" Aluminum Single Hung Window – S.M.I.

APPROVAL DOCUMENT: Drawing No. **W03-95**, titled "Series 1072 Alum. Single Hung Window (S.M.I.)", sheets 1 through 8 of 8, dated 10/20/03, with revision N dated 06/16/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami–Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA No. 23-0717.12** and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.



12/12/24

NOA No. 24-1125.07 Expiration Date: February 27, 2026 Approval Date: December 19, 2024 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. *(Submitted under NOA No. 03-1201.04)*
- Drawing No. W03-95, titled "Series 1072 Alum Single Hung Window (S.M.I.)", sheets 1 through 8 of 8, dated 10/20/03, with revision N dated 06/16/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 23-0717.12)

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Small Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by American Test Lab of South Florida, Test Report No. ATLSF-0422.02-03, dated 07/24/03, signed and sealed by Henry Hattern, P.E. (Submitted under NOA No. 03-1201.04)

C. CALCULATIONS

- Anchor verification calculations and structural analysis, complying with FBC-2007, dated 10/20/08, revised and updated on 07/30/14 to comply with FBC 5th Edition (2014), and revised and updated on 03/06/18 to comply with FBC 6th Edition (2017), all prepared by Al-Farooq Corporation and signed and sealed by Javad Ahmad, P.E. (Submitted under NOA's No. 08-1210.02, 14-0903.04 and 20-0129.10 respectively)
- 2. Glazing complies with **ASTM E1300-09**
- D. QUALITY ASSURANCE
 - 1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 23-0713.18 issued to Eastman Chemical Company (MA) for their "Saflex[®] PVB Clear and Colored Interlayers for Laminated Glass" dated 08/17/23, expiring on 05/21/26.
- 2. Notice of Acceptance No. 23-0717.28 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 08/24/23, expiring on 07/08/24.

Manuel Perez, P.E.

Product Control Examiner NOA No. 24-1125.07 Expiration Date: February 27, 2026 Approval Date: December 19, 2024

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

F. STATEMENTS

- Statement letter of conformance, complying with FBC 7th Edition (2020), with FBC 8th Edition (2023) and of no financial interest, dated June 20, 2023, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 23-0717.12)
- 2. Bill of Sale for Impact Window Company Acquisition, LLC to Eurotech Industries Inc. (Submitted under NOA No. 23-0717.12)
- **3.** Documents for "**Innovative Window Concepts**, **LLC** Purchase of Assets in Replevin".
 - (Submitted under NOA No. 20-0129.10)
- Laboratory compliance letter for Test Report No. ATLSF-0422.02-03, issued by American Test Lab of South Florida, dated 07/24/03, signed and sealed by William R. Mehner, P.E. and Henry Hattem, P.E. (Submitted under NOA No. 03-1201.04)

G. OTHERS

1. Notice of Acceptance No. 20-1216.21, issued to Impact Window Company Acquisition, LLC, for their Series "1072" Aluminum Single Hung Window – S.M.I., approved on 03/11/21 and expiring on 02/19/25.

Man

Manuel Perez, P.E. Product Control Examiner NOA No. 24-1125.07 Expiration Date: February 27, 2026 Approval Date: December 19, 2024

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 23-0713.18 issued to Eastman Chemical Company (MA) for their "Saflex[®] PVB Clear and Colored Interlayers for Laminated Glass" dated 08/17/23, expiring on 05/21/26.
- 2. Notice of Acceptance No. 24-0205.08 issued to Kuraray America, Inc. for their "Trosifol[®] Ultraclear, Clear and Color PVB Glass Interlayers" dated 03/21/24, expiring on 07/08/29.

F. STATEMENTS


- 1. Statement letter of conformance, complying with **FBC 8th Edition (2023)** and of no financial interest, dated November 19, 2024, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
- 2. Letter from consultant requesting a 1-year extension to allow time to perform verification test, dated 11/19/24 issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
- **3.** Testing agreement letter dated 11/21/24 between American Test Lab of South Florida (ATL) and Eurotech Industries, Inc., issued by ATL and signed by Tony Porcello, President, American Test Lab of South Florida.

G. OTHERS


- 1. Notice of Acceptance No. 23-0717.12, issued to Eurotech Industries, Inc., for their Series "1072" Aluminum Single Hung Window S.M.I., approved on 11/23/23and expiring on 02/27/25.
- 2. This is a one-year approval, subjected to successful verification test, the final approval will be issued for a total of 5 years.

Manuel Perez, P.E

Product Control Examiner NOA No. 24-1125.07 Expiration Date: February 27, 2026 Approval Date: December 19, 2024

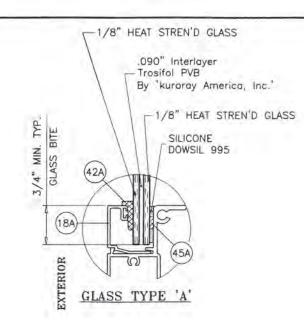

-1/8" HEAT STREN'D GLASS .090" Interlayer Saflex Clear And Color Glass By 'Eastman Chemical Co.' -1/4" TEMP. GLASS TYP. TYP BITE BITE SILICONE MIN. MIN. GLASS DOWSIL 1199 GLASS 3/4" 3/4" (42) (18) (18) (45) EXTERIOR 105 EXTERIOR GLASS TYPE 'B'

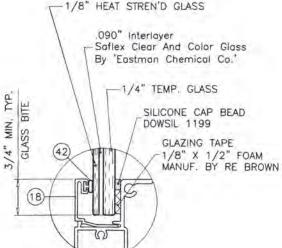

TYP.

MIN.

3/4"

BITE

ASS

0

(18)

GLAZING OPTIONS

GLASS TYPE 'B'

WINDOWS RATED FOR SMALL MISSILE IMPACT.

PRODUCT RENEWED

as complying with the Florida Building Code 24-1125.07 NOA-No. Expiration Date: 02/27/2026 By: Manuel Peres

PRODUCT REVISED

Bv

as complying with the Florida Building Code 23-0717.12 NOA-No.



Expiration Date 02/27/2025

00 Miami-Dade Product Control

Miami-Dade Product Control

SERIES 1072 ALUMINUM SINGLE HUNG WINDOW

DESIGN LOAD RATINGS FOR THESE WINDOWS TO BE AS PER CHARTS SHOWN ON SHEETS 2 & 3.

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE COMBINATIONS OF S.H./S.H. OR SINGLE HUNG WITH OTHER WINDOW TYPES IN MODULES OF TWO OR MORE WINDOWS USING MIAMI-DADE COUNTY APPROVED MULLIONS IN BETWEEN.

LOWER DESIGN PRESSURE FROM WINDOWS OR MULLION APPROVAL WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2020 (7TH EDITION)/2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.


ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2020/2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC.

CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.

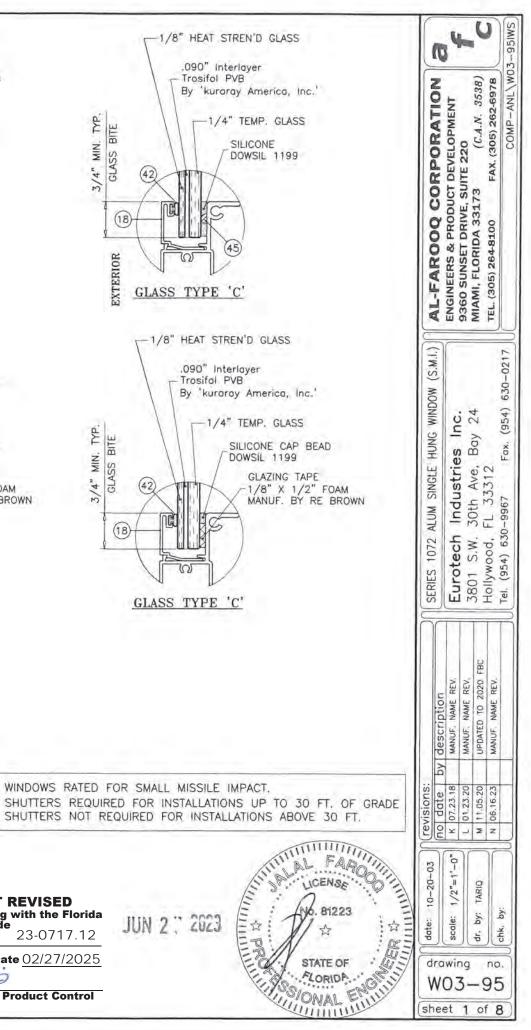

	UNEQU	JAL LIT	ES WIN	DOWS		UNEQ	UAL LIT	TES WIN	DOWS
	DESIG	GN LOAD C	CAPACITY	- PSF		DES	IGN LOAD	CAPACITY	- PSF
STD. ANCE			IOR SPACING		1	- 10	EXTRA JAM	B ANCHORS	
FLANGE DIMS.		GLASS TYPE 'A'		GLASS TYPES 'B' & 'C'		FLANGE DIMS.		GLASS TYPES 'B' & 'C'	
WIDTH	HEIGHT	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	WIDTH	HEIGHT	EXT.(+)	1NT.(-)
19-1/8"	1	80.0	90.0	90.0	160.0	19-1/8"	50-5/8" (6)	90.0	160.0
24"	(c). ¹⁵	80.0	90.0	90.0	160.0	24"		90.0	160.0
26-1/2"		80.0	90.0	90.0	160.0	26-1/2"		90.0	160.0
32"	50-5/8"	80.0	90.0	90.0	160.0	32"		90.0	160.0
37"	(4)	80.0	90.0	90.0	138.4	37" 40" 48"		90.0	160.0
40"		80.0	90.0	90.0	128.0			90.0	160.0
48"		80.0	90.0	90.0	106.7			90.0	158.8
53-1/8"		80.0	90.0	90.0	96.4	53-1/8"		90.0	137.0
19-1/8"		80.0	90.0	90.0	160.0	19-1/8" 24" 26-1/2" 32" 37" 40" 48" 53-1/8"	63" (7)	90.0	160.0
24"		80.0	90.0	90.0	160.0			90.0	160.0
26-1/2"		80.0	90.0	90.0	160.0			90.0	160.0
32"	63"	80.0	90.0	90.0	160.0			90.0	160.0
37"	(5)	80.0	90.0	90.0	139.0			90.0	160.0
40"		80.0	90.0	90.0	128.6			90.0	160.0
48"			÷	90.0	107.1			90,0	140.0
53-1/8"		-	-	90.0	96.8			90.0	125.6
19-1/8"		80.0	90.0	90.0	160.0	19-1/8" 24" 26-1/2" 32" 37" 40" 48"	76" (8)	90.0	160.0
24"		80.0	90.0	90.0	160.0			90.0	160.0
26-1/2"		80,0	90.0	90.0	160.0			90.0	160.0
32"	76"	80.0	90.0	90.0	159.9			90.0	140.0
37"	(6)	-	-	90.0	138.3			90.0	140.0
40"		-	-	90.0	127.9			90.0	140.0
48"		- A.	1	90.0	106.6			90.0	140.0
53-1/8"		-	4	90.0	96.3	53-1/8"		90.0	123.8
19-1/8"	-	80.0	90.0	90.0	160.0	* *		RENTHESIS	
24"	84" (7)	80.0	90.0	90.0	160.0		ER JAMB.		
26-1/2"		80.0	90.0	90.0	160.0				
32"		-	-	90.0	140.0				
37"		÷.	-	90.0	140.0				
40"		-	38.5	90.0	135.0				
19-1/8"	96″ (8)	80.0	90.0	90.0	160.0				
24"		80.0	90.0	90.0	160.0				
26-1/2"		-	-	90.0	160.0				
32"		-	-	90.0	140.0				
37"		-	- e	90.0	140.0				

			47 9/16"
			D.L.O. (FIX. LITE)
			A
¢.		-	
	(DX)	(D)-	
	51 7/8" (SLOPED HEAD) 52 3/16" (FLAT HEAD)	LITE)	
-	(FLA	FIX.	
TEIGH	/16" (5	.0.	
1 MO	1 7/	D.I	azabezee#eeee#eee
WINDOW HEIGHT	w	-	
		2	
	19 1/2" MAX. VENT HEIGHT 14 7/16"		
	T HE . 7/1	D.L.O. (VENT) MIN.	
	19 1 VEN		
Y			46 7/8" MAX.
			D.L.O. (VENT)
			50 1/8" MAX.
			VENT WIDTH
			53 1/8" MAX. WINDOW WIDTH

UNEQUAL LITES (ORIEL TYPE)


TYPICAL ELEVATION

* NO. IN PARENTHESIS INDICATE


NO. OF ANCHORS PER JAMB.


NOTE:

GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219

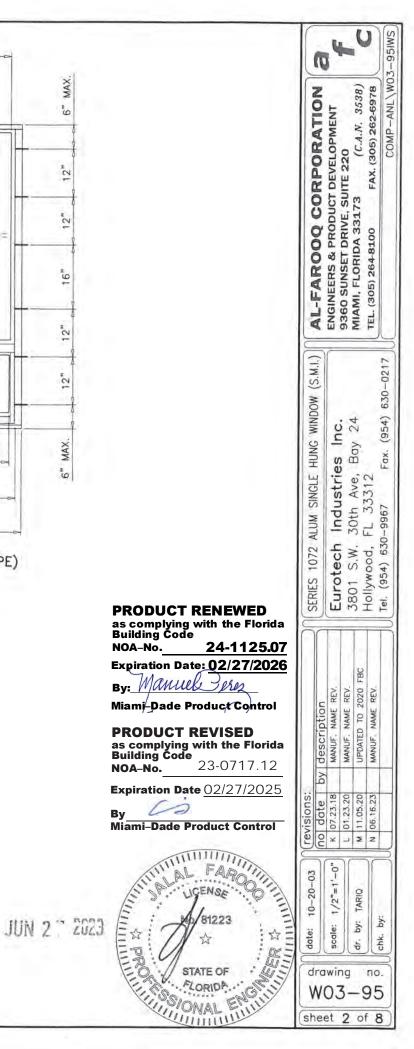



	EQU	AL LITI	ES WIN	DOWS		EQU	UAL I
	DESIG	N LOAD	CAPACITY	- PSF	_	DES	IGN LO
			STD. ANC	HOR SPACIN	G		
FLANGE DIMS.		GLASS TYPE 'A' GLASS TYPES 'B' & 'C'				FLANG	E DIMS
WIDTH	HEIGHT	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	WIDTH	HEIGH
19-1/8"		80.0	90.0	90.0	160.0	19-1/8"	
24"		80.0	90.0	90.0	160.0	24"	
26-1/2"	1000	80.0	90.0	90.0	160.0	26-1/2"	
32"	26" (2)	80.0	90.0	90.0	155.8	32"	26"
37"	(2)	80.0	90.0	90.0	134.7	37"	(3)
40"		80.0	90.0	90.0	124.6	40"	
48"		80.0	90.0	90.0	103.8	48"	
53-1/8"		80.0	90.0	90.0	93.8	53-1/8"	
19-1/8"	25.21	80.0	90.0	90.0	160.0	19-1/8"	
24"		80.0	90.0	90.0	160.0	24"	
26-1/2"	38-3/8"	80.0	90.0	90.0	160.0	26-1/2"	
32"		80.0	90.0	90.0	158.3	32"	38-3/
37"	(3)	80.0	90.0	90.0	136.9	37"	(5)
40"		80.0	90.0	90.0	126.6	40"	
48"		80.0	90.0	90.0	105.5	48"	
53-1/8"		80.0	90.0	90.0	95.4	53-1/8"	
19-1/8"	-	80.0	90.0	90.0	160.0	19-1/8"	
24"	50 5 /0"	80.0	90.0	90.0	160.0	24"	
26-1/2"		80.0	90.0	90.0	160.0	26-1/2"	
32"	50-5/8"	80.0	90.0	90.0	160.0	32"	50-5/
37"	(4)	80.0	90.0	90.0	138.4	37"	(6)
40*	1.11	80.0	90.0	90.0	128.0	40"	1.56
48"		80.0	90.0	90.0	106.7	48"	
53-1/8"	1	80.0	90.0	90.0	96.4	53-1/8"	
19-1/8"		80.0	90.0	90.0	160.0	19-1/8"	
24"	63" (5)	80.0	90.0	90.0	160.0	24"	
26-1/2"		80.0	90.0	90.0	160.0	26-1/2"	
32"		80.0	90.0	90.0	160.0	32"	63"
37"		80.0	90.0	90.0	139.0	37"	(7)
40"		80.0	90.0	90.0	128.6	40"	
48"		80.0	90.0	90.0	107.1	48"	
53-1/8"	· · · · · · · · ·	80.0	90.0	90.0	96.8	53-1/8"	
19-1/8"	(i	80.0	90.0	90.0	160.0	19-1/8"	-
24"		80.0	90.0	90.0	160.0	24"	
26-1/2"	1.000	80.0	90.0	90.0	160.0	26-1/2"	
32"	76"	80.0	90.0	90.0	159.9	32"	76"
37"	(6)	80.0	90.0	90.0	138.3	37"	(8)
40"		80.0	90.0	90.0	127.9	40"	
48"		80.0	90.0	90.0	106.6	48"	
53-1/8"	l	80.0	90.0	90.0	96.3	53-1/8"	
19-1/8"	Pr	80.0	90.0	90.0	160.0	19-1/8"	
24"		80.0	90.0	90.0	160.0	24"	
26-1/2"		80.0	90.0	90.0	160.0	26-1/2"	1.
32"	84"	80.0	90.0	90.0	160.0	32"	84"
37"	(7)	80.0	90.0	90.0	145.9	37"	(8)
40"	1 - Sec. (80.0	90.0	90.0	135.0	40"	
48"		80.0	90.0	90.0	112.5	48"	-
19-1/8"		80.0	90.0	90.0	160.0	19-1/8"	
24"		80.0	90.0	90.0	160.0	24"	
26-1/2"	96"	80.0	90.0	90.0	160.0	26-1/2"	
32"		80.0	90.0	90.0	160.0	32"	96"
37"	(8)	80.0	90.0	90.0	145.9	37"	(9)
40"		80.0	90.0	90.0	135.0	40"	1.2.2.3

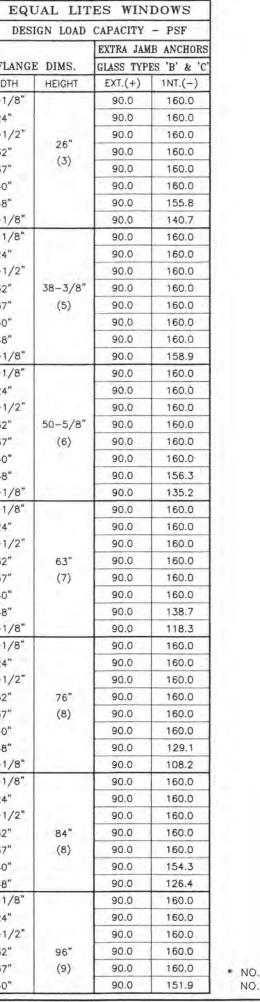

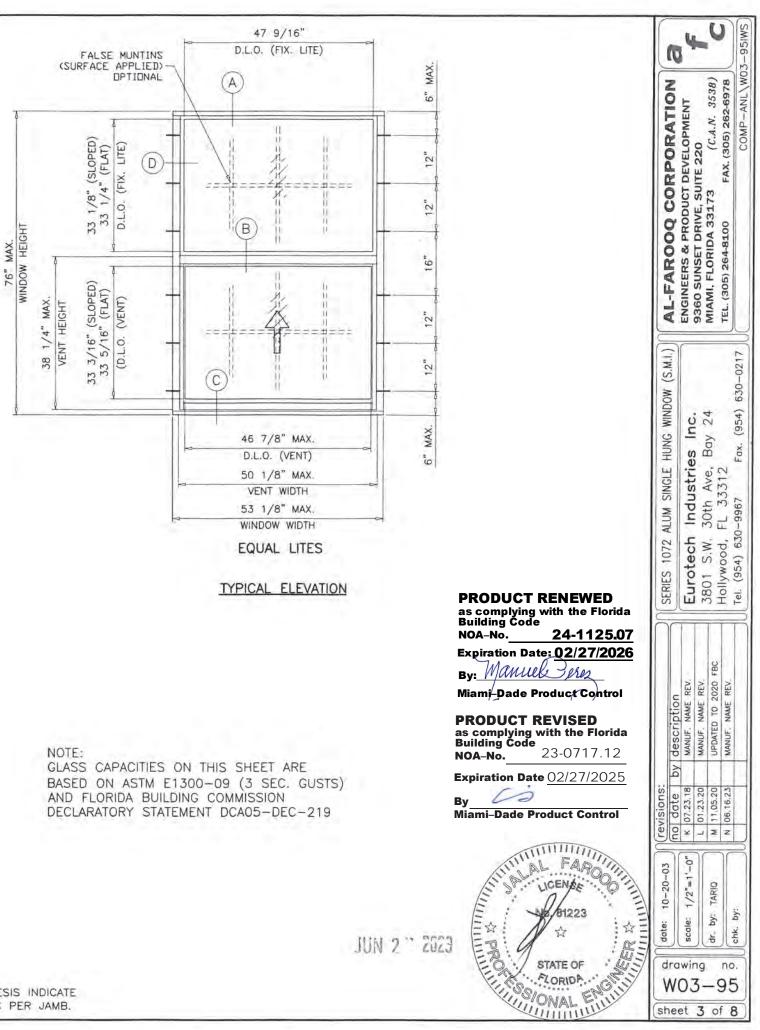



* NO. IN PARENTHESIS INDICATE NO. OF ANCHORS PER JAMB.

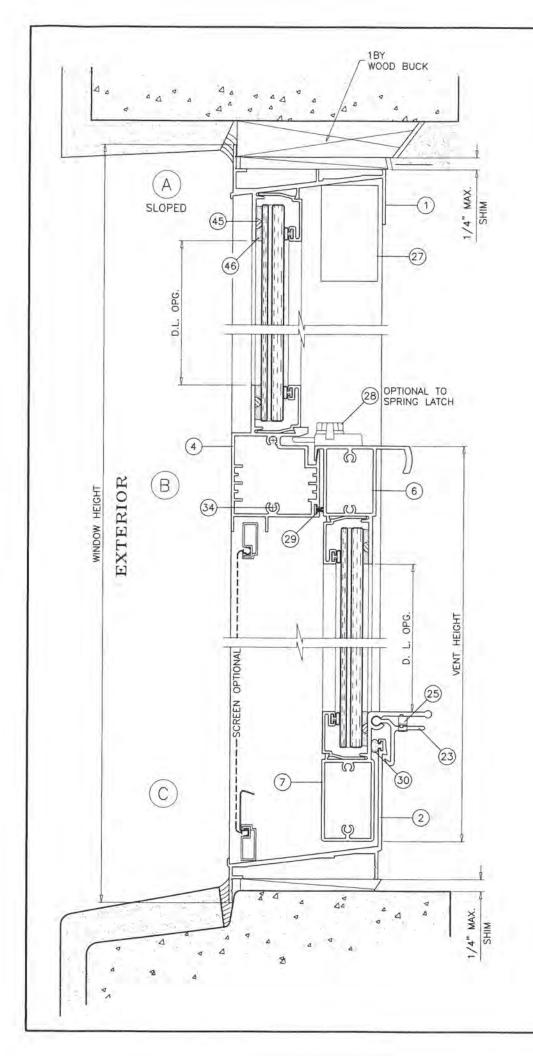


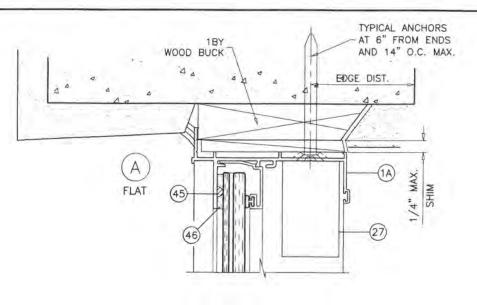


SEALANT:

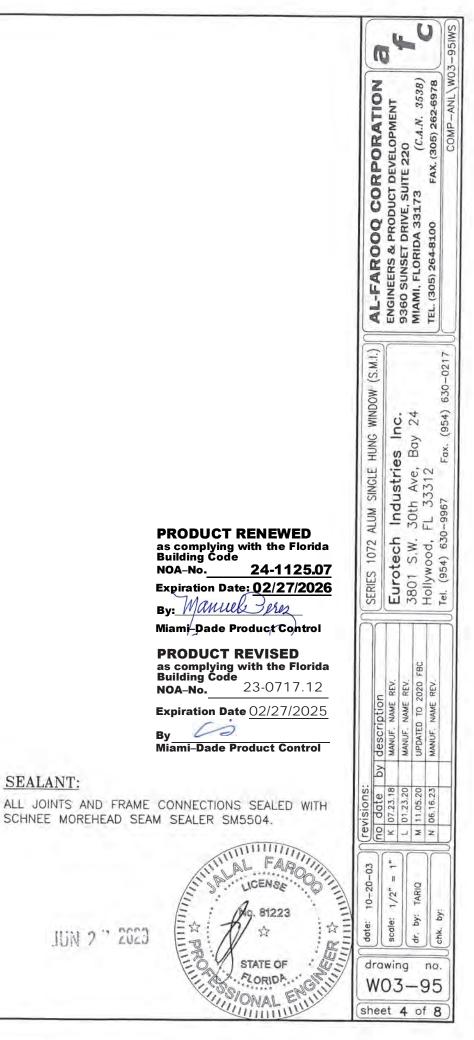


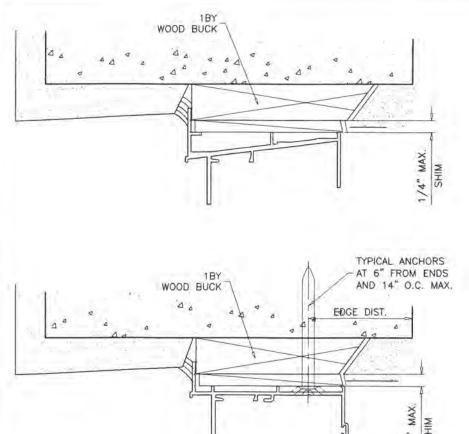

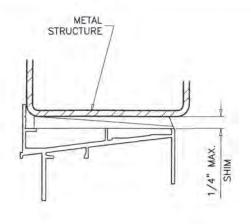



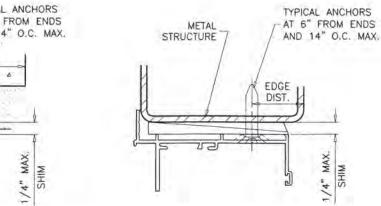

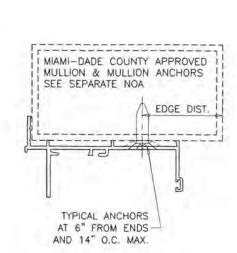

TYPICAL ANCHORS: SEE ELEV. FOR SPACING

1/4" DIA. ULTRACON+ BY 'DEWALT' (Fu=164 KSI, Fy=148 KSI) INTO 2BY WOOD BUCKS OR WOOD STRUCTURES 1-1/2" MIN. PENETRATION INTO WOOD (HEAD/JAMBS)

THRU 1BY BUCKS INTO CONC. OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

DIRECTLY INTO CONCRETE OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

#14 SMS OR SELF-DRILLING SCREWS (GRADE 2 CRS)

INTO METAL STRUCTURES (HEAD/JAMBS) (3) THREADS MIN. TO EXTEND BEYOND METAL THICKNESS ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.) (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

#12 SMS OR SELF-DRILLING SCREWS (GRADE 2 CRS)

INTO MIAMI-DADE COUNTY APPROVED MULLIONS (3) THREADS MIN. TO EXTEND BEYOND METAL THICKNESS ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) (NO SHIMS) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.) (NO SHIMS) (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

CRITICAL EDGE DISTANCE


INTO CONCRETE AND BLOCKS = 2-1/2" MIN. INTO WOOD STRUCTURE = 1" MIN. INTO METAL STRUCTURE = 3/4" MIN.


WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN. CONCRETE AT HEAD, SILL OR JAMBS I'C = 3000 PSI MIN. C-90 HOLLOW/FILLED BLOCK AT JAMBS I'm = 2000 PSI MIN.

WOOD BUCKS AND METAL STRUCTURE NOT BY 'EUROTECH' MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

MAX.

1/4"

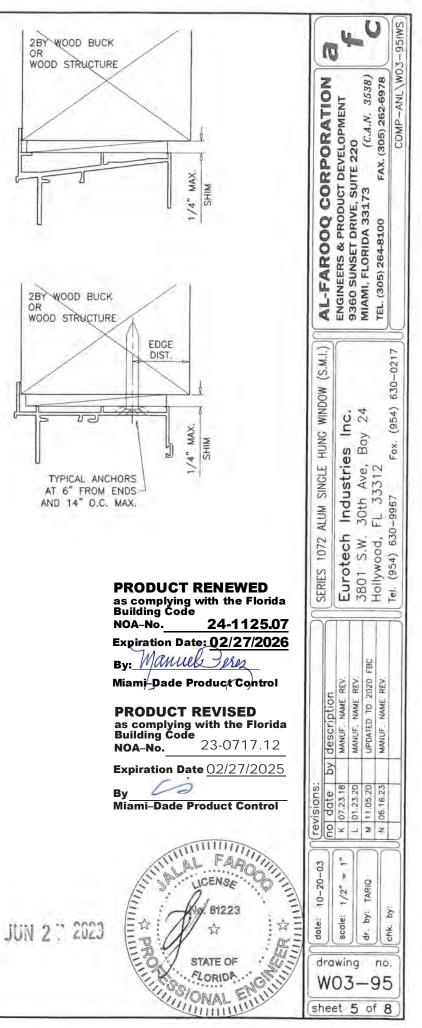

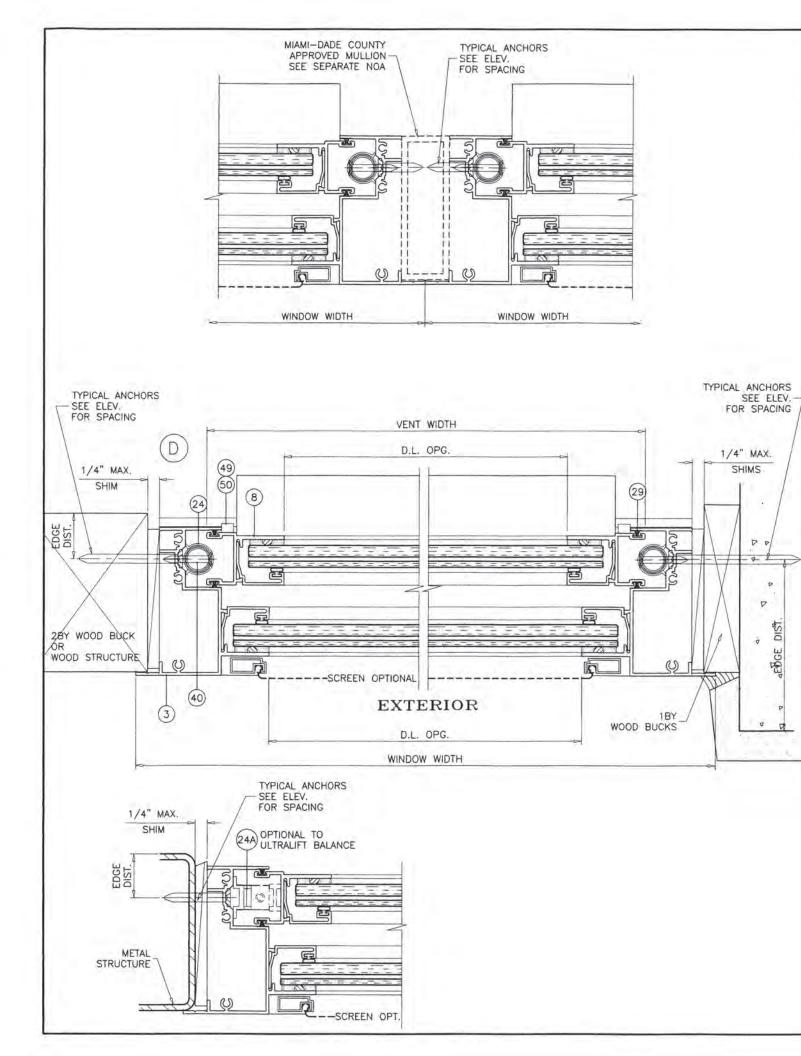

ITEM NO.	PART NO.	QUANTITY	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS	ar o	
1	021-029	1	FRAME HEAD (SLOPED)	6063-T5	ARCH ALUM.	""	
1A	021-006	1	FRAME HEAD (FLAT)	6063-T5	ARCH ALUM.		
2	021-002	1	FRAME SILL	6063-T5	ARCH ALUM.	RPORATION DEVELOPMENT TTE 220 (C.A.N. 3538) (C.A.N. 3538) FAX. (305) 262-6978	
3	021-005	2	FRAME JAMB	6063-T6	ARCH ALUM.	ORATIO ELOPMENT 220 (C.A.N. 353 (305) 262-69	
4	022-007	1	MTG. RAIL	6063-T5	ARCH ALUM.	AT AT	
6	022-004	1	VENT TOP RAIL	6063-T5	ARCH ALUM.	C (C.)	
7	022-001	1	VENT BOTTTOM RAIL	6063-T5	ARCH ALUM.	X. (3 222	
8	021-003	2	VENT SIDE RAIL	6063-T5	ARCH ALUM.	RP DEVI DEVI DEVI	
18	021-011	4/ LITE	GLAZING BEAD (7/16" GLASS)	6063-T5	ARCH ALUM.	AL-FAROOQ CORPORATIC ENGINEERS & PRODUCT DEVELOPMENT 9360 SUNSET DRIVE, SUITE 220 MIAMI, FLORIDA 33173 (C.A.N. 35 TEL. (305) 264-8100 FAX. (305) 262-61	
18A	021-105	4/ LITE	GLAZING BEAD (5/16" GLASS)	6063-T5	ARCH ALUM.	S 331	
23	021-008	2/ VENT	SNAP LATCH (2 @ 3" LG)	6063-T5	ARCH ALUM.	ROOQ RS & PRO VSET DRI ORIDA 3: 264-8100	
24	025-000	2	ULTRA LIFT BALANCE		CALDWELL MFG	RIC 8	
24A	024-000	2	BLOCK & TACKLE BALANCE		BSI	AR ERS UNSI FLOI	
25	006-001	2	SPRING	ST/ST	IND. SPRING	MI, FL	
26	004-005	_	UEK BRACKET	STEEL	CALDWELL MFG	AL- ENGI 9360 MIAN MIAN	
27	010-001	-	SASH STOP	RIGID VINYL	MASTER TOOL	W WOZF	
28	004-002	- 2	SWEEP LOCK @ 7" FROM ENDS	METAL	SULLIVAN & ASSOC.		
29	016-001	AS REQD.	FIN SEAL	WOOL PILE	ULTRA FAB	(.I.W.)	
30	023-001	AS REQU.	FILLED BULB VINYL	WOOL FILE		(S)	
31	015-009		CHIMNEY PLUG		AMESBURY FRANK LOWE RUBBR	MOC	
33	008-014	1.1.1.1.1.1.1			FRANK LUWE RUBBR	WING C. C.	
	100 X120	AS REQD.	#8X1 PH PH SMS	ST/ST		HUNG WINDOW es Inc. Bay 24	
34	008-031	2/ END	#10X1 PH PH SMS	ST/ST		HUNG WING SS Inc. Bay 24	
37	012-001	-	SEAM SEALER SM5504	ACRYLIC	SCHNEE MOREHEAD	irie e,	
39	008-010	-	#8X1/2 UCFHPH SMS	ST/ST		single single single single	
40	008-017		#8X1 1/4 FHPH SMS	ST/ST		M S Dth	
42	015-001	AS REQD.	BULB GASKET	VINYL	MASTER TOOL	72 ALUM SINGLE HUN ch Industries W. 30th Ave, Ba d, FL 33312 630-9967 Fax	
42A	015-007	AS REQD.	WEDGE GASKET	VINYL	-	1072 1072 S.W. S.W.	
45	015-006	-	0.150 SPACER	VINYL	FRANK LOWE RUBBR	RIES 1072 urotech 301 S.W. ollywood,	
45A	015-012		.4 X .4 X .1 SPACER	VINYL	FRANK LOWE RUBBR	RIES Urot 301 301 011yw	
46	012-004	-	DOW 1199	SILICONE	DOWSIL	SERIES 1072 Eurotech 3801 S.W. Hollywood, Tel. (954) 630	
49	010-010	-	SASH GUIDE TOP	RIGID PVB	M & M PLASTICS	Contraction of the second seco	
50	010-011	-	SASH GUIDE BOT	RIGID PVB	M & M PLASTICS		
51	008-002		#6X1/2 FHPH SMS	ST/ST			
55	003-001	AS REQD.	ROLL FORM SCREEN FRAME	ALUMINUM	FLORIDA SCREEN	FBC	
			PRODUCT RENEWED as complying with the Flor Building Code NOA-No. 24-1125 Expiration Date: 02/27/20 By: Manuel June	ida as con Buildir .07 NOA-N	DUCT REVISED polying with the Florida to. 23-0717.12 tion Date 02/27/2025	ns: e by description 18 MaNUF. NAME REV. 20 UPDATED TO 2020 23 MANUF. NAME REV. 23 MANUF. NAME REV.	
			Miami-Dade Product Contro		Dade Product Control	3 (revisions: k 07.23.18 N 11.05.20 N 06.16.23	
			JUN 2 7 20	223	ON STATE OF	$\begin{array}{c c} \text{date: } 10-20-03\\ \text{scale: } 1/2" = 1\\ \text{dr. by: } TARIO\\ \text{chk. by:} \end{array}$	
				1-	CORIDA ST	W03-95	

