

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION NOTICE OF ACCEPTANCE (NOA)

E.S. Windows, LLC 3550 NW 49th Street Miami, FL 33142

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "ES-H340 Thermal" Aluminum Single Hung Window – S.M.I.

APPROVAL DOCUMENT: Drawing No. **W15-01** titled "ES-H340 Thermal Alum Single Hung Wdw. (S.M.I.)", sheets 1 through 9 of 9, dated 01/09/15, with revision **D** dated 09/08/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, **Barranquilla**, **Colombia**, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA No. 23-0928.20** and consists of this page 1 and evidence pages E-1, E-2, and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

MIAMI-DADE COUNTY APPROVED

6/26/25

NOA No. 25-0613.04 Expiration Date: June 25, 2026 Approval Date: July 03, 2025 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. *(Submitted under NOA No. 15-0129.11)*
- Drawing No. W15-01, titled "ES-H340 Thermal Alum Single Hung Wdw. (S.M.I.)", sheets 1 through 9 of 9, dated 01/09/15, with revision D dated 09/08/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 23-0928.20)

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Small Missile Impact Test per FBC, TAS 201-94
 - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 7) Forced Entry Test, per FBC 2411.3.2.1 (b) and TAS 202-94

along with marked-up drawings and installation diagram of model ES-H340 aluminum single hung windows, prepared by Fenestration Testing Laboratory, Inc. Test Report No. **FTL-7607**, dated 06/12/14, signed and sealed by Idalmis Ortega, P.E. *(Submitted under NOA No. 15-0129.11)*

C. CALCULATIONS

- Anchor verification calculations and structural analysis, complying with FBC 5th Edition (2014), dated 11/11/14 and updated on 11/17/20 to comply with FBC 6th Edition (2017) and with FBC 7th Edition (2020), prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 21-0510.03)
- 2. Glazing complies with ASTM E1300-09

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 20-0915.22 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 11/19/20, expiring on 07/08/24.

Manu

Manuel Perez, P.E. Product Control Examiner NOA No. 25-0613.04 Expiration Date: June 25, 2026 Approval Date: July 03, 2025

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

E. MATERIAL CERTIFICATIONS (CONTINUED)

- 2. Aluminum Low Profile Insulated Glass spacer Helima AH 800 N, 0.3125" (Length) by 0.26 (Height) by 0.0059" (Thickness) (8.0x6.6x0.15mm), (P/N.: USA K 001 000 000 R7) with Aluminum Alloy AW-3000 (Ft_u=17 ksi and Ft_y=12ksi) by Helmut Lingemann GmbH & Co., KG. (HELIMA).
- 3. Test report No. ATI-60520.02-106-18, prepared by Architectural Testing, Inc., dated 11/09/06, with revision date 11/29/06, issued to Ensinger, Inc., for their <u>Tecatherm®</u> 66GF insulbar material comprised of Polyamide 66 with 25% glass fibers, per ASTM G 155-00ae1, "Standard Practice for Operating Xenon Arc Light Apparatus for Exposure of /Non-Metallic Materials", per ASTM D638-03 "Standard Test Methods for Tensile Properties of Plastics", for exposed & unexposed sample per Xenon Arc after 4500 Hours, ASTM D635-98 "Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position", ASTM D1929-96 (2000)e01 "Standard Test Method for Determining Ignition Properties of Plastics" and ASTM D2843-99 "Standard Test Method for Density of Smoke from the Burning or Decomposition of Plastics" and ASTM D2843-99
 "Standard Test Method for Density of Smoke from the Burning or Decomposition of Plastics", signed and sealed by Joseph A. Reed, P.E.
- **4.** Standard Material Values Data Sheet from **Ensinger for** "*Tecatherm 66 GF* Polymide 66 with 25% glass fibers, black– Mechanical Properties and Thermal Properties.

F. STATEMENTS

- Statement letter of conformance, complying with FBC 7th Edition (2020), with FBC 8th Edition (2023) and of no financial interest, dated September 16, 2023, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 23-0928.20)
- Testing proposal issued by the Product Control Section, dated 04/15/13, signed by Jaime Gascon, P.E., Product Control Supervisor. (Submitted under NOA No. 15-0129.11)

G. OTHERS

1. Notice of Acceptance No. **21-0510.03**, issued to E.S. Windows, LLC, for their Series "ES-H340 Thermal" Aluminum Single Hung Window – S.M.I., approved on 06/03/21 and expiring on 06/25/25.

Manu

Manuel Perez, P.E. Product Control Examiner NOA No. 25-0613.04 Expiration Date: June 25, 2026 Approval Date: July 03, 2025

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. 24-0205.08 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 03/21/24, expiring on 07/08/29.

F. STATEMENTS


- 1. Statement letter of conformance, complying with **FBC 8th Edition (2023)** and of no financial interest, dated June 09, 2025, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
- 2. Letter from consultant requesting a 1-year extension to allow time to perform verification test, dated June 09, 2025, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
- **3.** Testing agreement letter, dated June 11, 2025, between Blackwater Technical Services, Inc. and E.S. Windows, LLC, issued by Blackwater and signed by Michael D. Caldwell, President.

G. OTHERS

- 1. Notice of Acceptance No. 23-0928.20, issued to E.S. Windows, LLC, for their Series "ES-H340 Thermal" Aluminum Single Hung Window – S.M.I., approved on 11/09/23 and expiring on 06/25/25.
- 2. This is a one-year approval, subjected to successful verification test, the final approval will be issued for a total of 5 years.

Manu


Manuel Perez, P.E. Product Control Examiner NOA No. 25-0613.04 Expiration Date: June 25, 2026 Approval Date: July 03, 2025

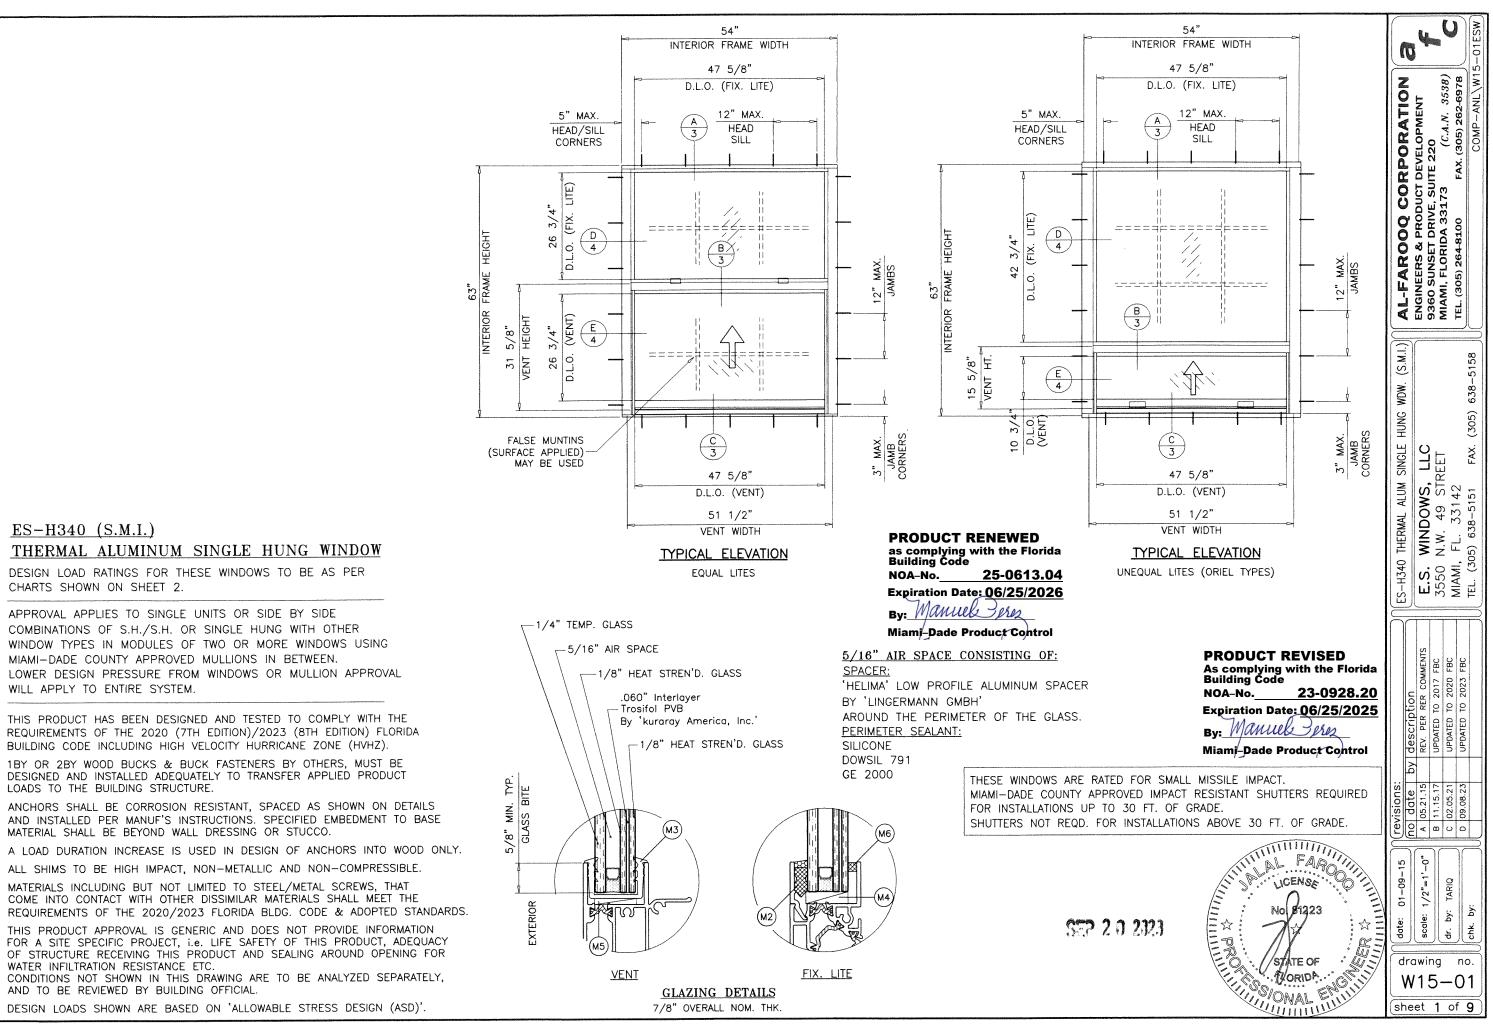


DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'

INTER	LOAD CAP	r				PACITY -		
INTERIOR FRAME DIMS.		INSUL. LAM. GLASS		1	INTERIOR FRAME DIMS.		INSUL. LAM. GLASS	
WIDTH	HEIGHT	EXT.(+)	1NT.(-)	WIDTH	HEIGHT	EXT.(+)	1NT.(-	
18-1/8"		80.0	90.0	18-1/8"		80.0	90.0	
25-1/2"		80.0	90.0	25-1/2"		80.0	90.0	
31"		80.0	90.0	31"	73-1/4"	80.0	90.0	
36"	25"	80.0	90.0	36"	(7)	80.0	90.0	
39"	(3)	80.0	90.0	39"		80.0	90.0	
43"		80.0	90.0	43"		80.0	90.0	
47"		80.0	90.0	18-1/8"		80.0	90.0	
52-1/8"		80.0	90.0	25-1/2"		80.0	90.0	
54"		80.0	90.0	31"	75"	80.0	90.0	
18-1/8"		80.0	90.0	36"	(7)	80.0	90.0	
25-1/2"		80.0	90.0	39"		80.0	90.0	
31"		80.0	90.0	43"		80.0	90.0	
36"	37-3/8"	80.0	90.0	18-1/8"		80.0	90.0	
39"	(4)	80.0	90.0	25-1/2"	81"	80.0	90.0	
43"		80.0	90.0	31"	(8)	80.0	90.0	
47"		80.0	90.0	36"		80.0	90.0	
52-1/8"		80.0	90.0	39"	l	80.0	90.0	
54"		80.0	90.0	* NUMBER	IN PAREN	ITHESIS I	NDICA	
18-1/8"		80.0	90.0	MIN. NO	. OF ANCH	HORS PE	r jam	
25-1/2"		80.0	90.0					
31"		80.0	90.0					
36"	49-5/8"	80.0	90.0					
39"	(5)	80.0	90.0					
43"		80.0	90.0					
47"		80.0	90.0					
52-1/8"		80.0	90.0					
54"		80.0	90.0					
18-1/8"		80.0	90.0					
25-1/2"		80.0	90.0			ka		
31"		80.0	90.0					
36"	55"	80.0	90.0			Ű		
39"	(5)	80.0	90.0			<u> </u>		
43"		80.0	90.0				100 100 100	
47"		80.0	90.0					
52-1/8"		80.0	90.0			U		
54"		80.0	90.0					
18-1/8"		80.0	90.0					
25-1/2"		80.0	90.0			>		
31"		80.0	90.0			F		
36"	62"	80.0	90.0					
39"	(6)	80.0	90.0			1287.25°		
43"		80.0	90.0			Ę	3	
47"		80.0	90.0		-	1	Ē	
52-1/8"		80.0	90.0					
54"		80.0	88.9					
18-1/8"		80.0	90.0					
25-1/2"		80.0	90.0					
31"	69"	80.0	90.0					
36"	(7)	80.0	90.0			NOTE:		
39"	\./	80.0	90.0			GLASS		
43"		80.0	90.0			BASED		
47"		80.0	90.0			AND F		

۵	
т Į	
	۲

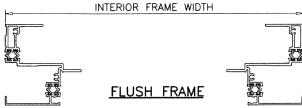

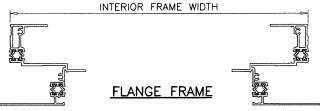



NOTE: GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219


UNEQUAL DESIGN	LITES (ORI LOAD CAF	EL TYPE PACITY -) WDWS PSF
	RIOR DIMS.	INSUL GL4	LAM.
WIDTH	HEIGHT	EXT.(+)	1NT.(-
18-1/8"		80.0	90.0
25-1/2"		80.0	90.0
31"		80.0	90.0
36"	49-5/8"	80.0	90.0
39"	(5)	80.0	90.0
43"		80.0	90.0
47"		80.0	90.0
52-1/8"		80.0	90.0
54"		80.0	90.0
18-1/8"		80.0	90.0
25-1/2"		80.0	90.0
31"		80.0	90.0
36"	55"	80.0	90.0
39"	(5)	80.0	90.0
43"		80.0	90.0
47"		80.0	90.0
52-1/8"		80.0	90.0
54"		80.0	90.0
18-1/8"		80.0	90.0
25-1/2"		80.0	90.0
31"		80.0	90.0
36"	62"	80.0	90.0
39"	(6)	80.0	90.0
43"		80.0	90.0
47"		80.0	90.0
52-1/8"		80.0	90.0
54"		80.0	88.9
18-1/8"		80.0	90.0
25-1/2"		80.0	90.0
31"		80.0	90.0
36"	69"	80.0	90.0
39"	(7)	80.0	90.0
43"		80.0	90.0
47"		80.0	90.0
18-1/8"		80.0	90.0
25-1/2"		80.0	90.0
31"	73-1/4"	80.0	90.0
36"	(7)	80.0	90.0
39"		80.0	90.0
43"		80.0	90.0
18-1/8"		80.0	90.0
25-1/2"		80.0	90.0
31"	75"	80.0	90.0
36"	(7)	80.0	90.0
39"		80.0	90.0
43"		80.0	90.0
18-1/8"		80.0	90.0
25-1/2"	C 4 ¹¹	80.0	90.0
31"	81"	80.0	90.0
36"	(8)	80.0	90.0
39"		80.0	90.0

* NUMBER IN PARENTHESIS INDICATE MIN. NO. OF ANCHORS PER JAMB.

Т

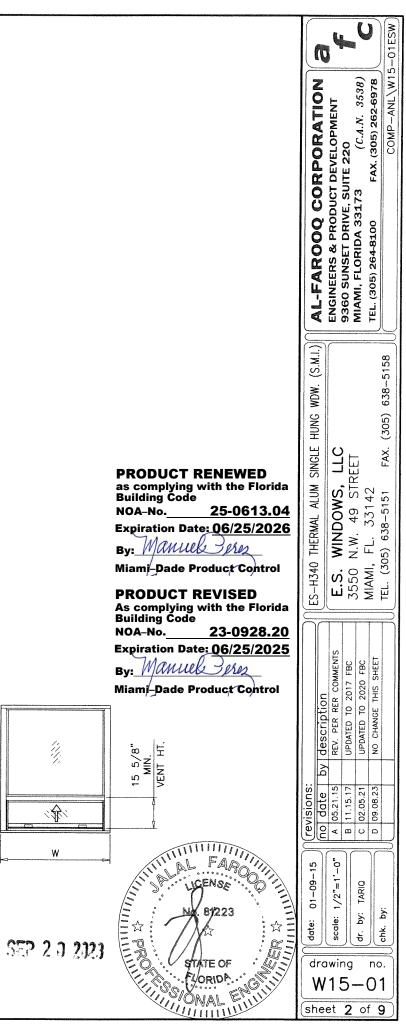


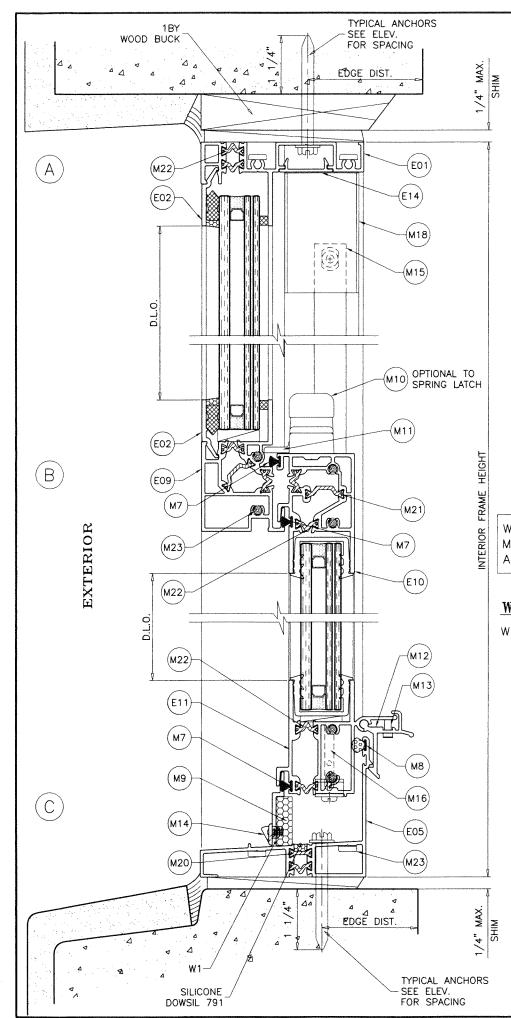

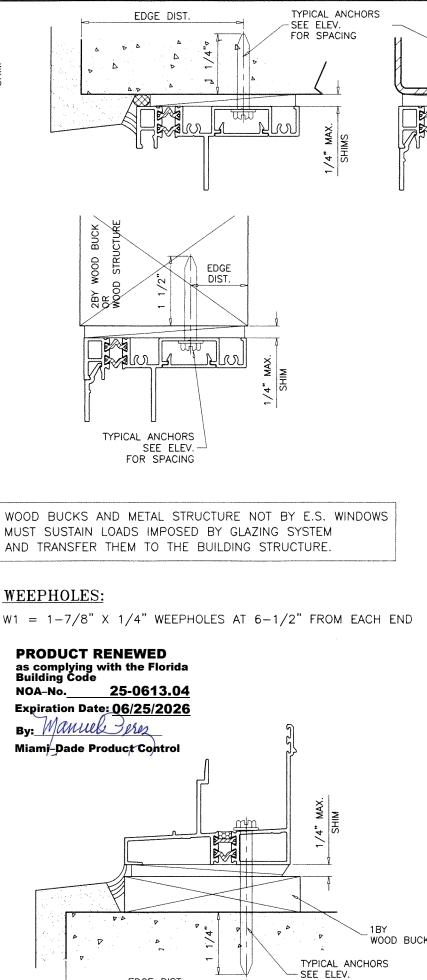

EDGE DIST

FOR SPACING

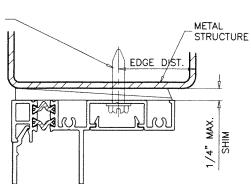

TYPICAL ANCHORS: SEE ELEV. FOR SPACING #14 DIA, CRETE-FLEX SS4 BY 'DEWALT' (Fu=190 KSI, Fy=127 KSI) 1/4" DIA. AGGRE-GATOR 300 BY 'DEWALT' (Fu=96 KSI, Fy=57 KSI) 1/4" DIA. ULTRACON+ BY 'DEWALT' (Fu=164 KSI, Fy=148 KSI) INTO 2BY WOOD BUCKS OR WOOD STRUCTURES

THRU 1BY BUCKS INTO CONC. OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

DIRECTLY INTO CONCRETE OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

1/4" DIA. ULTRACON SS4 410 BY 'DEWALT' (Fu=190 KSI, Fy=164 KSI) INTO 2BY WOOD BUCKS OR WOOD STRUCTURES 1-1/2" MIN. PENETRATION INTO WOOD (HEAD/SILL/JAMBS)

THRU 1BY BUCKS INTO CONC. OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO GROUT-FILLED BLOCKS (JAMBS)

DIRECTLY INTO CONCRETE OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO GROUT-FILLED BLOCKS (JAMBS)

1/4" DIA, BI-FLEX 300 SELF DRILLING SCREWS BY 'DEWALT'

INTO MIAMI-DADE COUNTY APPROVED MULLIONS AND INTO METAL STRUCTURES (HEAD/SILL/JAMBS) (3) THREADS MIN. TO EXTEND BEYOND METAL THICKNESS ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.) (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

ANCHOR EDGE DISTANCES


INTO CONCRETE AND BLOCKS = 2-1/2" MIN. INTO WOOD STRUCTURE = 1" MIN. INTO METAL STRUCTURE = 3/4" MIN.


WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN. CONCRETE AT HEAD, SILL OR JAMBS f'c = 3000 PSI MIN. C-90 HOLLOW/FILLED BLOCK AT JAMBS f'm = 2000 PSI MIN.


PRODUCT REVISED

As complying with the Florida Building Code 23-0928.20 2 2 7 2 12 NOA-No. Expiration Date: 06/25/2025 Manuel Jeres By: Miami-Dade Product Control



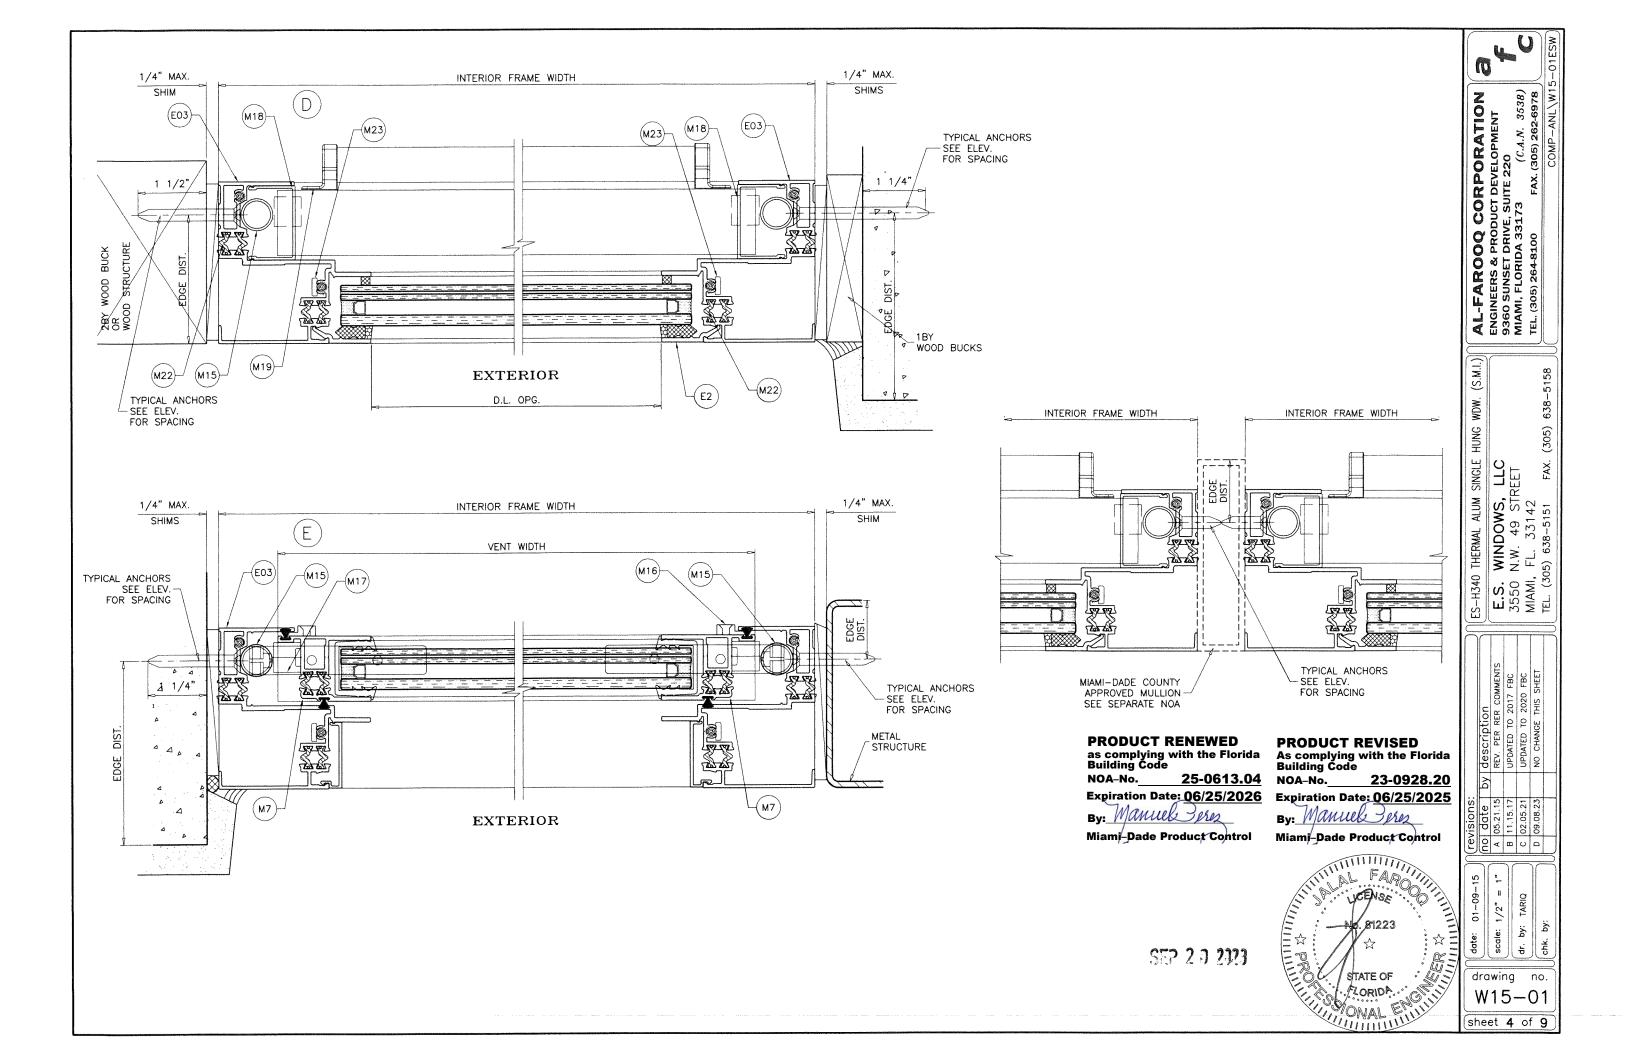

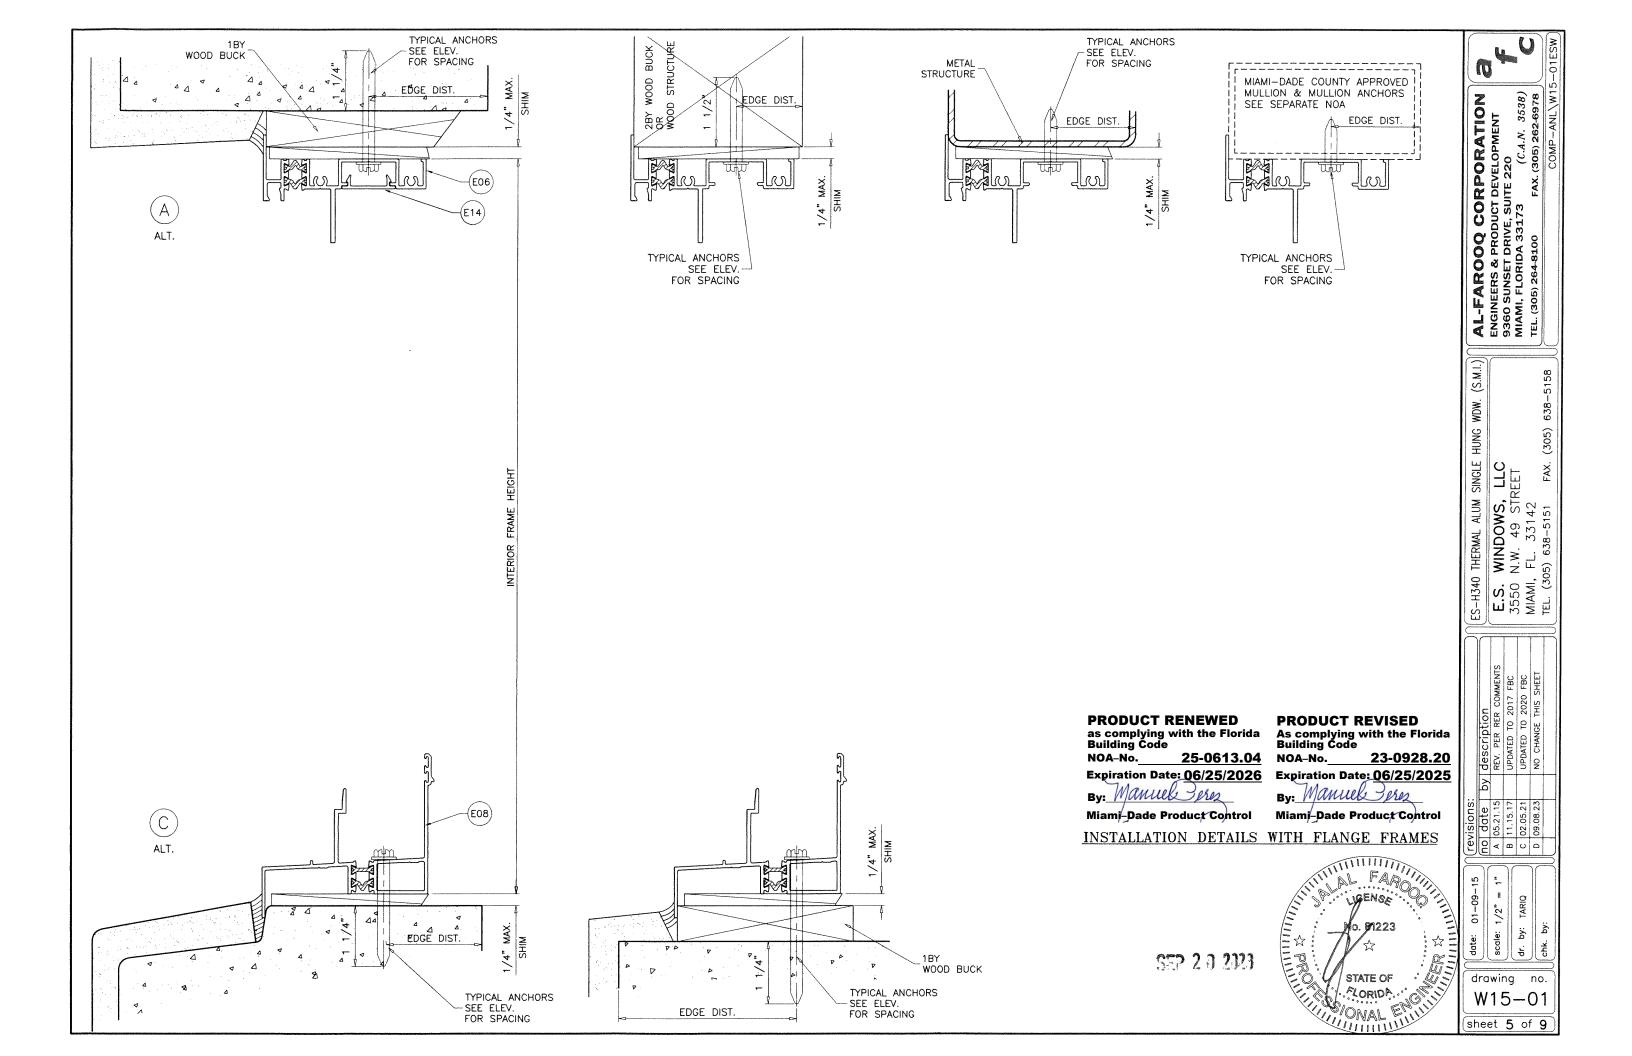


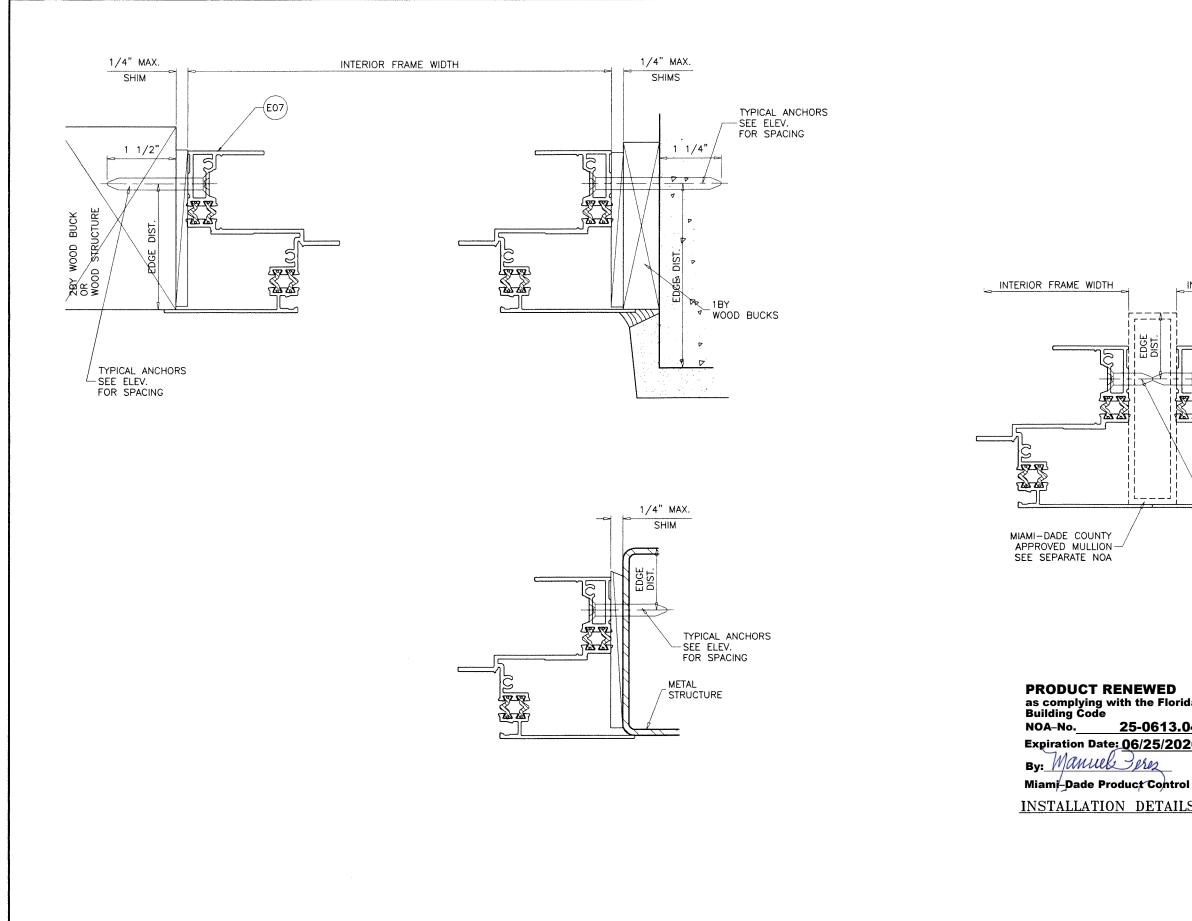

SEP 2 0 2023

ਙ


12 15

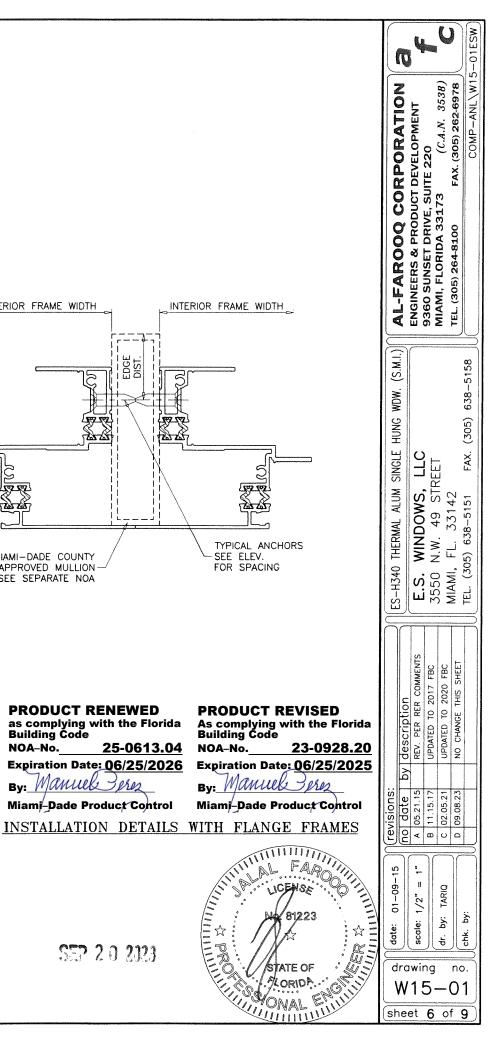


ІТЕМ #	PART #	REQD.	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS
E01	ES-H340-501	1	FLUSH FRAME HEAD	6063-T6	-
E02	ES-H340-003	4/ LITE	GLASS STOP	6063-T6	
E03	ES-H340-505	2	FLUSH FRAME JAMB	6063-T6	-
E04	ES-H340-007	AS REQD.	SCREEN ADAPTER/COVER	6063-T5	
E05	ES-H340-503	1	FLUSH FRAME SILL	6063-T6	_
E06	ES-H340-502	1	FLANGE FRAME HEAD	6063-T6	-
E07	ES-H340-506	2	FLANGE FRAME JAMB	6063-T6	_
E08	ES-H340-504	1	FLANGE FRAME SILL	6063-T6	-
E09	ES-H340-507	1	FIXED INTERLOCK	6063-T6	
E10	ES-H340-508	1	VENT INTERLOCK	6063-T6	-
E11	ES-H340-509	1	BOTTOM RAIL	6063-T6	_
E12	ES-H340-510	2	JAMB STILE	6063-T6	-
E13	ES-H340-021	-	JAMB TRIM	6063-T5	_
E14	ES-9502	AS REQD.	HEAD FRAME COVER	6063-T5	
M2	ES-H340-G02	AS REQD.	EXTERIOR GLAZING WEDGE (FIX. LITE)	EPDM	DUROMETER 60±5 SHORE A
М3	ES-H340-G01	AS REQD.	GLAZING GASKET (VENT)	EPDM	DUROMETER 60±5 SHORE A
M4	ES-21-B04A	AS REQD.	SETTING BLOCK (FIX. LITE)	EPDM	DUROMETER 80±5 SHORE A
М5	ES-7530-B01A	AS REQD.	SETTING BLOCK (VENT)	EPDM	DUROMETER 80±5 SHORE A
М6	-	AS REQD.	INTERIOR GLAZING TAPE	POLYURETHANE	THERMALBOND
М7	W23241NK	AS REQD.	PILE W'STRIPPING	-	-
м8	Q300T190	AS REQD.	Q-LONG W'STRIPPING	-	_
М9	WPSA	1/ WEEP	FOAM PAD, 2" X 1" X 5/8"	FOAM	OPEN CELL
м10	3032	2/ VENT	SWEEP LOCK	DIE CAST ALUM.	-
M11	ES1050-PL1		SWEEP LOCK FLAT BOLT	ST. STEEL	-
M12	SK08-4000.000		VENT LATCH INTERLOCK	DIE CAST ALUM	-
M13	ES-1012		LATCH SPRING LS 4050	ST. STEEL	-
M14	WA2L		WEEP HOLE COVER	RIGID PVC	-
M15	30-31	2/ VENT	ULTRA LIFT BALANCE	STEEL ROD	-
M16	-	2/ VENT	BALANCE GUIDE	NYLON	FASTENED W/ (1) #8 X 1/2" FH SMS
M17	21803		NON TILT	ST. STEEL	_
M18	ES-H340-P01		SASH STOP	RIGID PVC	-
M19	ES-1000-P1		NOTCH CAP	NYLON	-
M20	2310	-	INSULBAR 10MM FLAT	POLYAMIDE	ENSINGER
M21	1673	-	INSULBAR 20MM OFFSET	POLYAMIDE	ENSINGER
M22			INSULBAR 12MM OFFSET	POLYAMIDE	ENSINGER
M23	#10 X 1-1/4"	AS REQD.	ASSEMBLY FASTENERS	ST. STEEL	PH SMS
M24	#8 X 1/2"		NON TILT SCREWS	ST. STEEL	PH SMS
M25	#6 X 1/2"		BALANCE GUIDE SCREWS	ST. STEEL	FH SMS


SEALANTS:


FRAME AND VENT CORNERS AND INSTALLATION SCREWS AT SILL SEALED WITH WHITE/ALUMINUM COLORED GENERAL PURPOSE SILICONE SEALANT BY MACKLANBURG-DUNCAN.

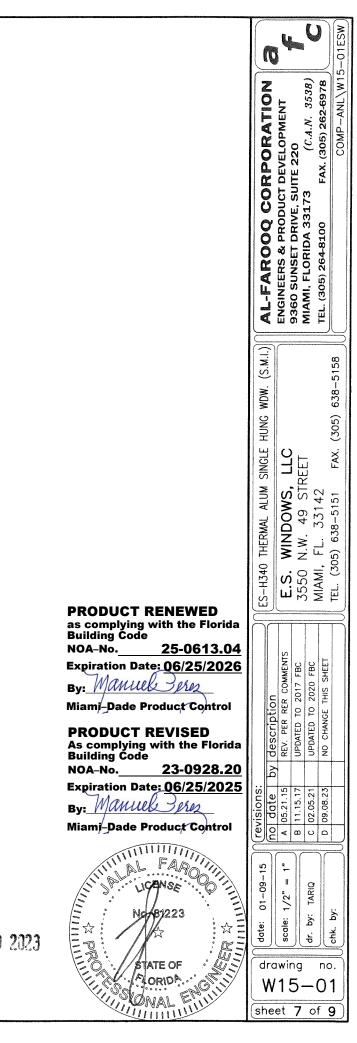


SEP 2 0 2023

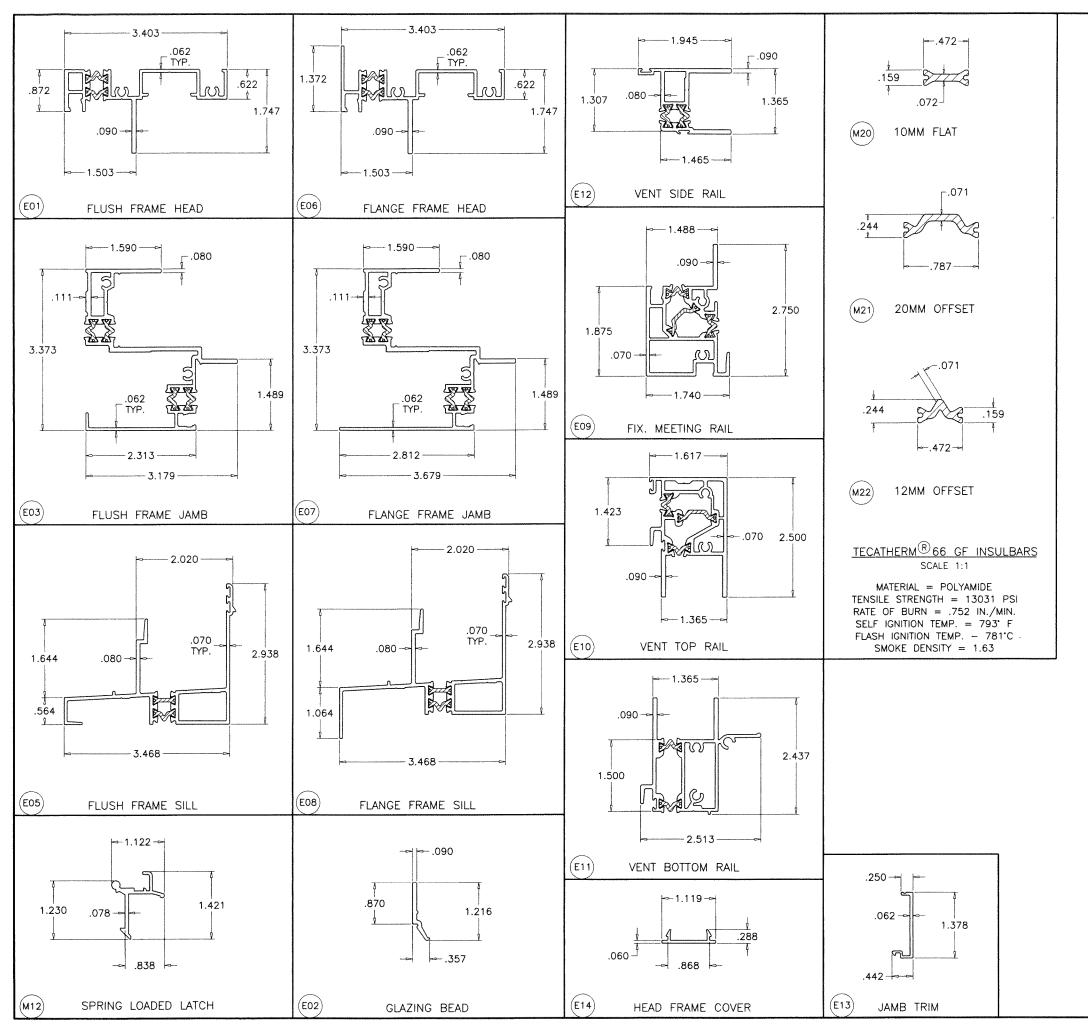

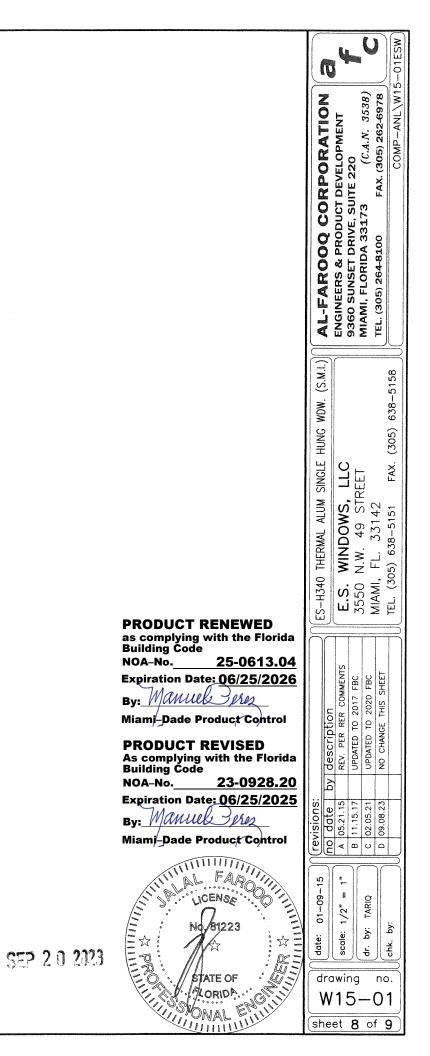

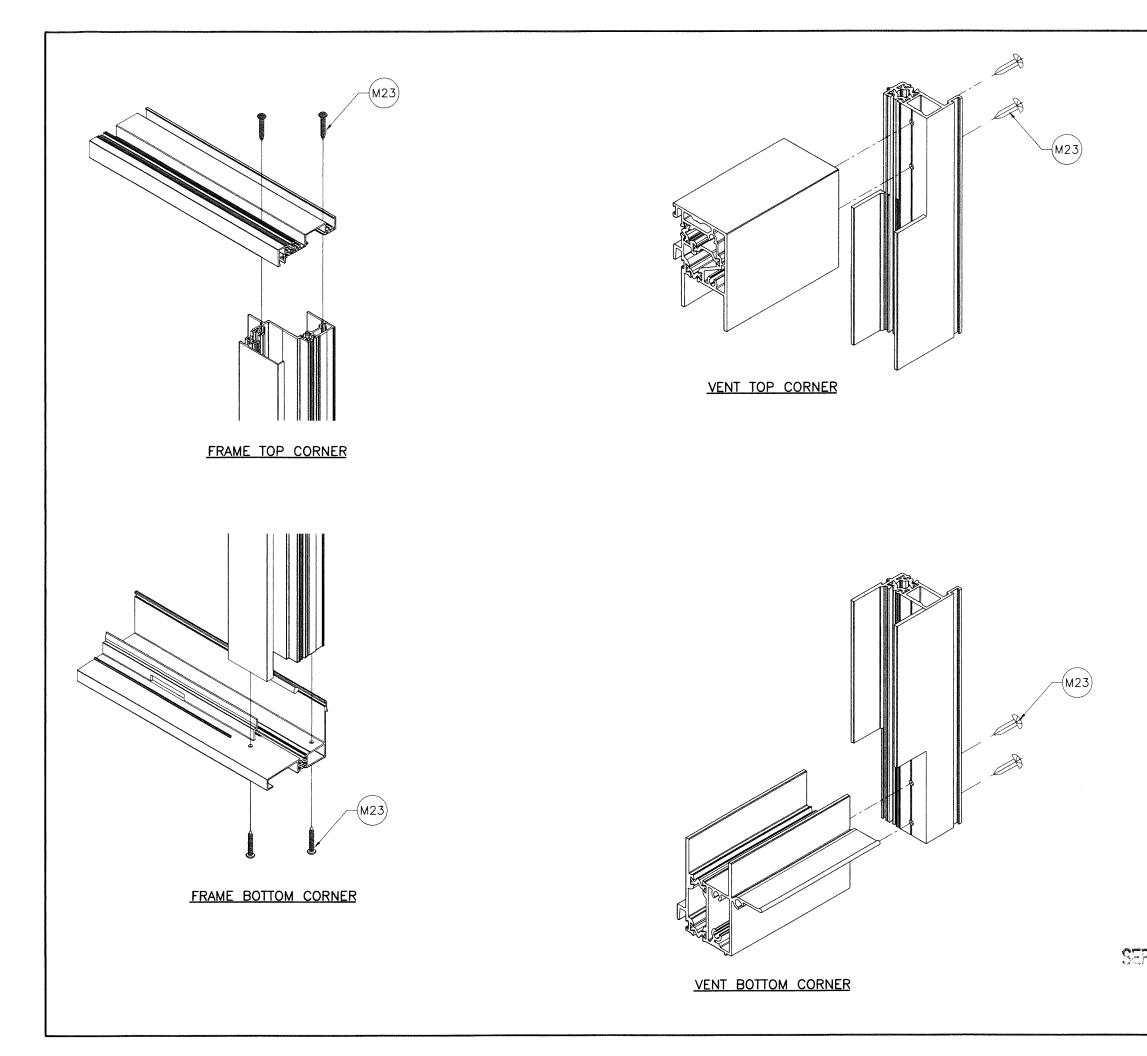

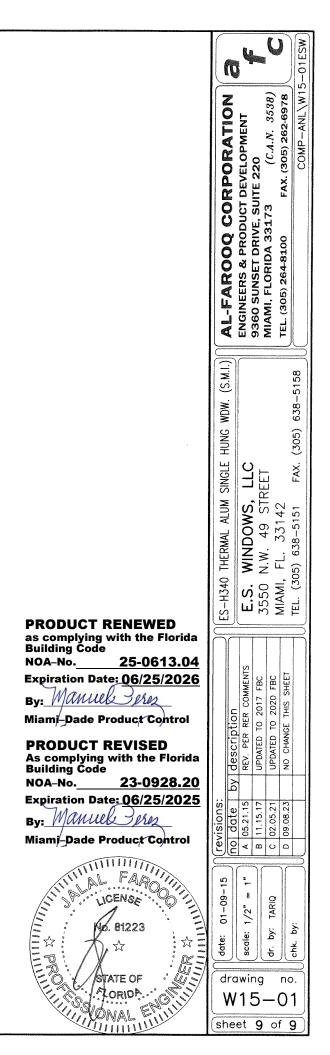

SEP 2 0 2023