



MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING

**BUILDING CODE COMPLIANCE OFFICE**  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908

**PRODUCT CONTROL NOTICE OF ACCEPTANCE**

**G S Roofing Products Company, Inc.**  
**5525 MacArthur Blvd., Suite #900**  
**Irving TX 75015**

**CONTRACTOR LICENSING SECTION**  
(305) 375-2527 FAX (305) 375-2558

**CONTRACTOR ENFORCEMENT SECTION**  
(305) 375-2966 FAX (305) 375-2908

**PRODUCT CONTROL DIVISION**  
(305) 375-2902 FAX (305) 372-6339

Your application for Product Approval of:

***Conventional BUR Roofing Systems Over Steel Decks.***

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This approval shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at anytime from a jobsite or manufacturer's plant for quality control testing.

If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

**Acceptance No.: 99-1213.08**

**Expires: 06/19/2003**

Raul Rodriguez  
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL CONDITIONS**

**BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.  
Director

Miami-Dade County  
Building Code Compliance Office

**Approved: 05/12/2000**

1 of 16



**ROOFING ASSEMBLY APPROVAL**

Applicant:  
**GS Roofing Products Company, Inc. d/b/a CertainTeed**  
 P.O. Box 860  
 Valley Forge, PA 19482

Product Control No.: 99-1213.08

Approval Date: May 12, 2000

Expiration Date: June 19, 2003

Category: Roofing  
Sub-Category: BUR,  
Deck Type: Steel  
Maximum Design Pressure: -52.5 psf.  
Fire Classification: See General Limitation #1

**TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
All Weather/Empire Base Sheet	36" x 72'; Roll weight: 86 lbs. (2 squares)	ASTM D 2626 UL Type 15	Asphalt coated, organic base sheet.
Flintglas® Mineral Surfaced Cap Sheet	36" X 36'; Roll Weight: 78 lbs. (1 square)	ASTM D 3909	Asphalt impregnated and coated inorganic glass fiber surfaced with mineral granules used as the top ply in conventional built-up roof membranes.
Flintglas® Ply Sheet Type IV or VI	36" x 180'; Roll weight: 40/55 lbs. (5 squares)	ASTM D 2178 Type IV or VI UL Type G1	Fiberglass, asphalt impregnated ply sheet.
Flex-I-Glas or Flex-I-Glas FR Base Sheet	36" x 108'; Roll weight: 90 lbs. (3 squares)	ASTM D 5147	SBS Modified, fiberglass reinforced base sheet.
GlasBase™ Base Sheet	36" x 108'; Roll weight: 69 lbs. (3 squares)	ASTM D 4601 UL Type G2	Asphalt coated, fiberglass base sheet.
No. 15 Perforated Felt	36" x 144', Roll weight: 90 lbs. (4 square)	ASTM D 226	Organic asphalt saturated felt.
Yosemite® Mineral Surfaced Cap Sheet	36" x 36'; Roll weight: 90 lbs. (1 square)	ASTM D 249 UL Type 30	Mineral Surfaced organic cap and buffer sheet.




Frank Zuloaga, RRC  
 Product Control Examiner

**TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS:**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>	<u>Manufacturer</u>
ACFoam II	various	PA 110	Polyisocyanurate foam insulation	Atlas Energy Products (with current NOA)
E'NRG'Y-2 or PSI-25	various	PA 110	Polyisocyanurate foam insulation	NRG Barriers, Inc. (with current NOA)
ISORoc	various	PA 110	Polyisocyanurate foam and rockwool composite insulation	NRG Barriers, Inc. (with current NOA)
E'NRG'Y-2 Plus	various	PA 110	Polyisocyanurate foam / wood fiberboard composite insulation	NRG Barriers, Inc. (with current NOA)
Multi-Max	various	PA 110	Polyisocyanurate foam insulation.	RMAX (with current NOA)
Hy-Therm AP	various	PA 110	Polyisocyanurate foam insulation	Celotex Corp. (with current NOA)
UltraGard Gold	various	PA 110	Polyisocyanurate foam insulation	Johns Manville (with current NOA)
Pyrox	various	PA 110	Polyisocyanurate foam insulation	Apache (with current NOA)
ISO 95+	various	PA 110	Polyisocyanurate foam insulation	Firestone (with current NOA)
High Density Fiberboard	various	PA 100	Wood fiber insulation	Celotex Corp. (with current NOA)
High Density Wood Fiberboard	various	PA 110	Wood fiber insulation board	with current NOA
Fiberglas	various	PA 110	Fiber glass roof insulation	Johns Manville (with current NOA)
Paroc Cap Board	various	PA 110	Rockwool insulation	Partek, Inc. (with current NOA)
Perlite Insulation	various	PA 110	Perlite insulation board	generic
Dens Deck	various	PA 110	Gypsum core / fiberglass faced coverboard	Georgia Pacific (with current NOA)
N.T.B. Magnum		PA 114	Glass reinforced nylon fastener for use in gypsum and cementitious wood fiber decks.	Olympic (with current NOA)
N.T.B. Spin Weld Plate	2" round	PA 114	2" round amorphorus nylon locking plate for use with N.T.B. fasteners with 1" head	Olympic (with current NOA)
N.T.B. Plastic Plate	3" round	PA 114	3" round polypropylene stress plate for use with N.T.B. fasteners	Olympic (with current NOA)
N.T.B. Plate		PA 114	3" round galvalume AZ55 plate for use with N.T.B. fasteners	Olympic (with current NOA)
Lite-Deck Fastener and Plate		PA 114	Fastener and plate for insulation attachment to cementitious wood fiber or gypsum.	Olympic (with current NOA)
Rawlite		PA 114	Insulation fastener for cementitious and gypsum decks	The Rawlplug Company Inc. (with current NOA)

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>	<u>Manufacturer</u>
Rawlite 3" Plate	3" round	PA 114	3" round galvalume AZ55 steel plate for use with Rawlite fasteners	The Rawlplug Company Inc. (with current NOA)
Polymer Gyptec		PA 114	Nylon fastener for insulation attachment to cementitious wood fiber decks.	ITW Buildex (with current NOA)
TPR		PA 114	Rivet fastener for cementitious wood fiber decks.	SFS Stadler (with current NOA)
Asphalt Emulsion		PA 121	Asphalt emulsion	Gardner (with current NOA)
Gardner Cold Process Roof Cement Asphalt	1, 5, 55 gallons	ASTM D 3019 Type III ASTM D 312	Fibered asphaltic general purpose lap and ply cement. Type III or IV hot asphalt bitumen adhesive	Gardner (with current NOA) generic
Asphalt Primer		ASTM D 41	Asphalt Primer	generic
Chopped fiberglass emulsion		ASTM D 1227	Roof Coating	generic
Fiberglas Flashing Cement		PA 110 ASTM D 4586 or ASTM D 2822	Fiber glass roof insulation A trowel-grade, cutback bitumen cement mixture including inorganic fibers and mineral stabilizers.	with current NOA generic
Modified Cold Process Cement		ASTM D 3019 Type III	Adhesive	generic
Modified Plastic Roof Cement		ASTM D4586 Type I	Flashing Cement	generic
Non Fibered Aluminum Coating		ASTM D 2824	Roof Coating	generic
Static Asphalt Fibered Emulsion		ASTM D 1227	Roof Coating	generic
al MB aluminum roof coating		PA 121	Aluminum roof coating	Grundy Industries (with current NOA)
Karnak 97, 97AF or 169		PA 121	Roof coating	Karnak (with current NOA)
Prograde Fibered Aluminum		PA 121	Fibrated aluminum roof coating.	Monsey Products Co. (with current NOA)
# 2100 - Modified All Weather Flashing Cement	1, 5, 55 gallons, or 10.5 ounce tubes.	ASTM D 3019 (Type III) and D 3409	Rubberized all-weather flashing cement, trowel grade, modified adhesive.	Tropical Asphalt Products Corporation (with current NOA)
Aluma-Brite No. 120		PA 121	Fibrated aluminum roof coating.	Tropical Asphalt Products Corp. (with current NOA)
APOC 212		PA 121	Aluminum roof coating.	APOC, Subsidiary of Gardner (with current NOA)
Sunbright 400		PA 121	Roof coating	APOC, Subsidiary of Gardner (with current NOA)
MBA		ASTM 3019 Type III	Asphalt based cold applied adhesive.	APOC, Subsidiary of Gardner (with current NOA)

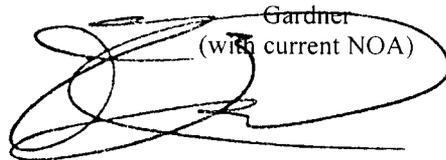

Frank Zuloaga, RRC  
Product Control Examiner

**EVIDENCE SUBMITTED**

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Applied Research Laboratories	Physical Properties	28013	06/02/87
Factory Mutual Research Corporation	Current Insulation Fastening Requirements	FMRC 1996	01/01/96
Factory Mutual Research Corporation	PA 114 (FMRC 4470)	J.I. #3Y8A1.AM	03/23/96
Underwriters Laboratories, Inc.	Fire Classification Compliance	R11656	07/13/87
United States Testing Company, Inc.	ASTM D 5147	97457-4	06/03/88
United States Testing Company	ASTM D 5147	97-457-2R	12/02/87



Frank Zuloaga, RRC  
Product Control Examiner

**APPROVED ASSEMBLIES:**

- Membrane Type:** BUR
- Deck Type 2I:** Steel, Insulated, New Construction
- Deck Description:** 18-22 ga. steel
- System Type B:** Base layer of insulation mechanically fastened, optional top layer adhered with approved asphalt.

All General Limitations shall apply.

<u>Insulation Base Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u>	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
------------------------------	----------------------	-----------------------------	----------------------------	-------------------------

(see PA 117)

one or more layers of any of the following insulations under those listed as Top Layer:

Approved Type(s): **AC-Foam II**

Minimum: 1.3" x 4' x 4'	DekFast S/P	[3]	4	1:4 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Anchorbond S/P	[3]	4	1:4 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Insulfixx S/P	[3]	4	1:4 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	HD Insulfixx S/P	[3]	4	1:4 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Gripdek S/P	[3]	4	1:4 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Olympic S	[3]	4	1:4 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Rawl S	[3]	4	1:4 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Olympic /G2 Plate	[3]	4	1:4 ft <sup>2</sup>

Approved Type(s): **E'NRG'Y 2**

Minimum: 1.4" x 3' x 4'	DekFast S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Anchorbond S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Roofgrip S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Hextra S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Gripdek S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Tru-Fast S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Olympic S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Rawl S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Olympic /G2 Plate	[2]	4	1:3 ft <sup>2</sup>

Approved Type(s): **ISORoc**


Minimum: 1.4" x 4' x 4'	DekFast S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Anchorbond S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Roofgrip S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Hextra S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Gripdek S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Tru-Fast S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Olympic S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Rawl S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.4" x 4' x 4'	Olympic /G2 Plate	[3]	6	1:2.67 ft <sup>2</sup>

Approved Type(s): **E'NRG'Y 2 Plus**

Minimum: 1.5" x 3' x 4'	DekFast S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Anchorbond S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Roofgrip S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Hextra S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Insulfixx S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	HD Insulfixx S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Gripdek S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Rawlplug S	[2]	3	1:4 ft <sup>2</sup>



<u>Insulation Base Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
Minimum: 1.5" x 3' x 4'	DekFast P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Anchorbond P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Olympic S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Olympic/G2	[2]	3	1:4 ft <sup>2</sup>
Approved Type(s): <b>Apache Pyrox, Hy-Therm AP</b>				
Minimum: 1.3" x 4' x 4'	DekFast S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Roofgrip S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Hextra S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Insulfixx S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Gripdek S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Tru-Fast S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Olympic S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Olympic/G2	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Anchorbond S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	HD Insulfixx S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Glasfast S/P	[3]	6	1:2.67 ft <sup>2</sup>
Approved Type(s): <b>UltraGard Gold</b>				
Minimum: 1.3" x 4' x 4'	DekFast S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Roofgrip S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Hextra S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Insulfixx P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Gripdek S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Tru-Fast S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Olympic S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Olympic/G2	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	Anchorbond S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.3" x 4' x 4'	HD Insulfixx P	[3]	6	1:2.67 ft <sup>2</sup>
Approved Type(s): <b>Iso 95 +</b>				
Minimum: 1.4" x 3' x 4'	DekFast S	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Anchorbond S	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Roofgrip S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Hextra S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Insulfixx S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	HD Insulfixx S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	GlasFast S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Tru-Fast S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Olympic S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Olympic/G2	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Gripdek S/P	[2]	3	1:4 ft <sup>2</sup>
Approved Type(s): <b>Perlite</b>				
Minimum: ¾" x 2' x 4'	DekFast S	[1]	4	1:2 ft <sup>2</sup>
Minimum: ¾" x 2' x 4'	Anchorbond S	[1]	4	1:2 ft <sup>2</sup>
Minimum: ¾" x 2' x 4'	Olympic/G2	[1]	4	1:2 ft <sup>2</sup>
Approved Type(s): <b>High Density Wood Fiberboard</b>				
Minimum: ½" x 4' x 4'	DekFast S	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Tru-Fast S/P	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Roofgrip S/P	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Anchorbond S/P	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Olympic S or G2	[4]	16	1:2 ft <sup>2</sup>
Approved Type(s): <b>Fiberglas</b>				
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	DekFast S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	Anchorbond S/P	[3]	6	1:2.67 ft <sup>2</sup>

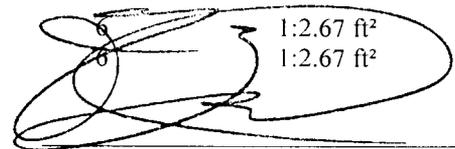

Frank Zuloaga, RRC  
Product Control Examiner

<u>Insulation Base Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
Minimum: 15/16" x 4' x 4'	Roof Grip S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 15/16" x 4' x 4'	Insulfixx S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 15/16" x 4' x 4'	HD Insulfixx S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 15/16" x 4' x 4'	Tru-Fast S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 15/16" x 4' x 4'	Hextra S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 15/16" x 4' x 4'	GlasFast S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 15/16" x 4' x 4'	Olympic S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 15/16" x 4' x 4'	Olympic/G2	[3]	6	1:2.67 ft <sup>2</sup>

**Note:** Base layer shall be mechanically attached with fasteners and density described above. Insulation panels listed are minimum sizes and dimensions; if larger panels are used the number of fasteners per board shall be increased maintaining the same fastener density (See Miami-Dade County Roofing Application Standard RAS 117 for fastening details).

<u>Insulation Optional Top Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
--------------------------------------	----------------------	---	----------------------------	-------------------------

one or more layers of any of the following insulations

Approved Type(s): **Any of the insulations listed for Base Layer, above.**

Minimum: see Base Layer                      N/A                      N/A                      N/A                      N/A

Approved Type(s): **Paroc**

Minimum: 3/4" x 4' x 4'                      N/A                      N/A                      N/A                      N/A

Approved Type(s): **Dens-Deck**

Minimum: 1/4" x 4' x 4'                      N/A                      N/A                      N/A                      N/A

**Note:** Optional top layer of insulation shall be adhered with approved asphalt within the EVT range and at a rate of 20-40 lbs. Please refer to Miami-Dade County Roofing Application Standard RAS 117 for insulation attachment. Composite insulation boards used as a top layer shall be installed with the polyisocyanurate face down.

Base Sheet:                      (Optional) Install one ply of All Weather/Empire, Flex-I-Glas or GlasBase base sheet directly over the top layer of insulation. Adhere with any approved mopping asphalt at an application rate of 25 lbs./sq. ± 15%.

Ply Sheet:                      Two, three, four or five plies of Flintglas Ply Sheet (Type IV) or Flintglas Premium Ply Sheet (Type VI) or #15 Asphalt Perforated Felt ply sheet adhered in a full mopping of approved asphalt at an application rate of 25 lbs./sq. ± 15%.

Cap Sheet:                      (Optional) One ply of FlintGlas Mineral Surface cap sheet adhered in a full mopping of approved asphalt at an application rate of 25 lbs./sq. ± 15%.

Surfacing:                      (Required if no cap sheet is used) Install one of the following:  
 1. A two part coating consisting of a base coat of Static Asphalt Fibered Emulsion at rate of 3 gal./sq. or Monoform compound; surfaced with 1 gal./sq. Sta-Kool non-fibered aluminum coating or fibered APOC No. 212..  
 2. Flood coat of approved Type III asphalt with an application rate of 60 lbs./sq.; plus gravel or slag at an application rate of 400 lbs./sq. or 300 lbs./sq. respectively.

Maximum Design Pressure:                      -52.5 psf See General Limitation #9

Maximum Fire Classification:                      See General Limitation # 1.



Frank Zuloaga, RRC  
Product Control Examiner

Maximum Slope: See General Limitation # 1.



---

Frank Zuloaga, RRC  
Product Control Examiner


**Membrane Type:** BUR  
**Deck Type 2I:** Steel, Insulated, New Construction  
**Deck Description:** 18-22 ga. steel  
**System Type C:** All layers of insulation simultaneously fastened.

All General Limitations shall apply.

<u>Insulation (Optional) Base Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
one or more layers of any of the following insulations under those listed as Top Layer:				
Approved Type(s): <b>AC-Foam II, E'NRG'Y 2, E'NRG'Y 2 Plus</b>				
Minimum: 1" x 3' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>ISORoc</b>				
Minimum: 1" x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Multi-Max</b>				
Minimum: 1" x 4' x 8'	N/A	N/A	N/A	N/A
Approved Type(s): <b>High Density Wood Fiber</b>				
Minimum: 1/2" x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Paroc</b>				
Minimum: 3/4" x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Perlite</b>				
Minimum: 3/4" x 2' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Fiberglas</b>				
Minimum: 1 5/16" x 4' x 4'	N/A	N/A	N/A	N/A

Note: All layers shall be simultaneously fastened; see top layer below for fasteners and density.

<u>Insulation Top Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
one or more layers of any of the following insulations				
Approved Type(s): <b>AC-Foam II</b>				
Minimum: 1.3" x 3' x 4'	DekFast S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.3" x 3' x 4'	Olympic S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.3" x 3' x 4'	Gripdek S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.3" x 3' x 4'	Roofgrip S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.3" x 3' x 4'	Anchorbond S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.3" x 3' x 4'	Olympic/G2	[2]	4	1:3 ft <sup>2</sup>
Approved Type(s): <b>E'NRG'Y 2</b>				
Minimum: 1.4" x 3' x 4'	DekFast S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Tru-Fast S	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Olympic S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Gripdek S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Roofgrip S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Anchorbond S	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.4" x 3' x 4'	Olympic/G2	[2]	4	1:3 ft <sup>2</sup>
Approved Type(s): <b>ISORoc</b>				
Minimum: 1.5" x 4' x 4'	DekFast S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.5" x 4' x 4'	Tru-Fast S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.5" x 4' x 4'	Olympic S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.5" x 4' x 4'	Gripdek S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.5" x 4' x 4'	Roofgrip S/P	[3]	6	1:2.67 ft <sup>2</sup>

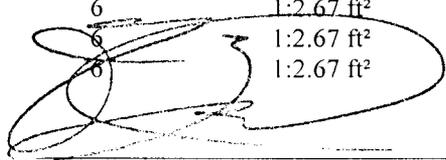  
 Frank Zuloaga, RRC  
 Product Control Examiner

<u>Insulation Top Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
Minimum: 1.5" x 4' x 4'	Anchorbond S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1.5" x 4' x 4'	Olympic/G2	[3]	6	1:2.67 ft <sup>2</sup>
Approved Type(s): <b>E'NRG'Y 2 Plus</b>				
Minimum: 1.5" x 3' x 4'	DekFast S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Tru-Fast S	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Insulfixx S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Hextra S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Anchorbond S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	HD Insulfixx S/P	[2]	3	1:4 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Olympic/G2	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Gripdek S/P	[2]	4	1:3 ft <sup>2</sup>
Minimum: 1.5" x 3' x 4'	Roofgrip S/P	[2]	4	1:3 ft <sup>2</sup>
Approved Type(s): <b>Multi-Max</b>				
Minimum: 1.5" x 4' x 8'	DekFast S	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	Tru-Fast S	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	Insulfixx S/P	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	Olympic S	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	Roofgrip S/P	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	Anchorbond S	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	HD Insulfixx S/P	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	Hextra S/P	[4]	11	1:2.9 ft <sup>2</sup>
Minimum: 1.5" x 4' x 8'	Olympic/G2	[4]	11	1:2.9 ft <sup>2</sup>
Approved Type(s): <b>Perlite</b>				
Minimum: ¾" x 2' x 4'	DekFast S	[1]	4	1:2 ft <sup>2</sup>
Minimum: ¾" x 2' x 4'	Tru-Fast S	[1]	4	1:2 ft <sup>2</sup>
Minimum: ¾" x 2' x 4'	Insulfixx S	[1]	4	1:2 ft <sup>2</sup>
Minimum: ¾" x 2' x 4'	Roofgrip S	[1]	4	1:2 ft <sup>2</sup>
Minimum: ¾" x 2' x 4'	Anchorbond S	[1]	4	1:2 ft <sup>2</sup>
Minimum: ¾" x 2' x 4'	Olympic S or G2	[1]	4	1:2 ft <sup>2</sup>
Approved Type(s): <b>High Density Wood Fiberboard</b>				
Minimum: ½" x 4' x 4'	DekFast S	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Tru-Fast S/P	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Roofgrip S/P	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Anchorbond S/P	[4]	16	1:2 ft <sup>2</sup>
Minimum: ½" x 4' x 4'	Olympic S or G2	[4]	16	1:2 ft <sup>2</sup>
Approved Type(s): <b>Fiberglas</b>				
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	DekFast S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	Insulfixx S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	Roofgrip S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	TruFast S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	Anchorbond S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	HD Insulfixx S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	Hextra S	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	Olympic S/P	[3]	6	1:2.67 ft <sup>2</sup>
Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	Glasfast S/P	[3]	6	1:2.67 ft <sup>2</sup>

**Note:** All layers of insulation shall be mechanically attached using the fastener density listed above. The insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. Refer to Metro-Dade County Roofing Application Standard PA 117 for insulation attachment.



Frank Zuloaga, RRC  
Product Control Examiner

- Base Sheet: (Optional) Install one ply of All Weather/Empire, Flex-I-Glas, Flex-I-Glas FR or GlasBase base sheet directly over the top layer of insulation. Adhere with any approved mopping asphalt at an application rate of 25 lbs./sq.  $\pm$  15%.
- Ply Sheet: Two, three, four or five plies of Flintglas Ply Sheet (Type IV) or Flintglas Premium Ply Sheet (Type VI) or #15 Asphalt Perforated Felt ply sheet adhered in a full mopping of approved asphalt at an application rate of 25 lbs./sq.  $\pm$  15%.
- Cap Sheet: (Optional) One ply of FlintGlas Mineral Surface cap sheet adhered in a full mopping of approved asphalt at an application rate of 25 lbs./sq.  $\pm$  15%.
- Surfacing: (Required if no cap sheet is used) Install one of the following:
1. A two part coating consisting of a base coat of Static Asphalt Fibered Emulsion at rate of 3 gal./sq. or Monoform compound; surfaced with 1 gal./sq. Sta-Kool non-fibered aluminum coating or fibered APOC No. 212..
  2. Flood coat of approved Type III asphalt with an application rate of 60 lbs./sq.; plus gravel or slag at an application rate of 400 lbs./sq. or 300 lbs./sq. respectively.
- Maximum Design Pressure: -52.5 psf See General Limitation #9
- Maximum Fire Classification: See General Limitation # 1.
- Maximum Slope: See General Limitation # 1.



---

Frank Zuloaga, RRC  
Product Control Examiner

**Membrane Type:** BUR  
**Deck Type 2I:** Steel, Insulated, New Construction  
**Deck Description:** 18-22 ga. steel  
**System Type D:** All layers of insulation and base sheet simultaneously attached.

All General and System Limitations apply.

<u>Insulation Base Layer (Optional)</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
one or more layers of any of the following insulations:				
Approved Type(s): <b>HyTherm</b> Minimum: 1.3" x 3' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>ACFoam-II, UltraGard Gold, UltraGard Premier, Isotherm R</b> Minimum: 1½" x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Apache Pyrox</b> Minimum: 1.3" x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>E'NRG'Y-1, E'NRG'Y-2, PSI-25</b> Minimum: 1½" x 3' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Fiberglas</b> Minimum: 1 <sup>5</sup> / <sub>16</sub> " x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Perlite</b> Minimum: ¾" x 2' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>High Density Wood Fiber</b> Minimum: ½" x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Dens-Deck</b> Minimum: ¼" x 4' x 4'	N/A	N/A	N/A	N/A

<u>Insulation Top Layer</u>	<u>Fastener Type</u>	<u>Fastening Detail No.</u> (see PA 117)	<u>Fasteners Per Board</u>	<u>Fastener Density</u>
Approved Type(s): <b>Perlite</b> Minimum: ¾" x 2' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>High Density Wood Fiberboard</b> Minimum: ½" x 4' x 4'	N/A	N/A	N/A	N/A
Approved Type(s): <b>Dens-Deck</b> Minimum: ¼" x 4' x 4'	N/A	N/A	N/A	N/A

**Note: Top insulation layer shall have preliminary attachment, prior to base sheet installation, at a rate of two fasteners per board for boards having no dimension greater than 4 ft., and four fasteners per board for boards having any dimension greater than 4 ft. All layers of insulation and base sheet shall be simultaneously fastened. See base sheet below for fasteners and density.**

**Base Sheet:** One ply of All Weather/Empire, Flex-I-Glas, Flex-I-Glas FR or GlasBase mechanically attached as detailed below.

**Fastening #1:** Olympic #12 or #14 Screws and metal plates, Dekfast #12, #14 or #15, or Insulfixx #12 or #14 and metal plates at a 4" side lap 12" o.c. and two rows staggered in the center of the sheet, 24" o.c.



- Fastening #2: Olympic #12 or #14 Screws and metal plates, Dekfast #12, #14 or #15, or Insulfixx #12 or #14 and metal plates at a 4" side lap 12" o.c. and one row in the center of the sheet, 18" o.c.
- Ply Sheet: Two, three, four or five plies of Flintglas Ply Sheet (Type IV) or Flintglas Premium Ply Sheet (Type VI) or #15 Asphalt Perforated Felt ply sheet adhered in a full mopping of approved asphalt at an application rate of 25 lbs./sq. ± 15%.
- Cap Sheet: (Optional) One ply of FlintGlas Mineral Surface cap sheet adhered in a full mopping of approved asphalt at an application rate of 25 lbs./sq. ± 15%.
- Surfacing: (Required if no cap sheet is used) Install one of the following:
1. A two part coating consisting of a base coat of Static Asphalt Fibered Emulsion at rate of 3 gal./sq. or Monoform compound; surfaced with 1 gal./sq. Sta-Kool non-fibered aluminum coating or fibered APOC No. 212..
  2. Flood coat of approved Type III asphalt with an application rate of 60 lbs./sq.; plus gravel or slag at an application rate of 400 lbs./sq. or 300 lbs./sq. respectively.
- Maximum Design Pressure: -45 psf See General Limitation #9
- Maximum Fire Classification See General Limitation #1.
- Maximum Slope: See General Limitation #1.



Frank Zuloaga, RRC  
Product Control Examiner

**STEEL DECK SYSTEM LIMITATIONS:**

- 1 If mechanical attachment to the structural deck through the lightweight insulating concrete is proposed, a field withdrawal resistance testing shall be performed to determine fastener patterns and density. All testing and fastening design shall be in compliance with Miami-Dade County Testing Application Standard TAS 105 and Miami-Dade County Roofing Application Standard RAS 117.

**GENERAL LIMITATIONS:**

- 1 Fire classification is not part of this acceptance, refer to a current Approved Roofing Materials Directory for fire ratings of this product.
- 2 Insulation may be installed in multiple layers. The first layer shall be attached in compliance with Product Control Approval guidelines. All other layers shall be adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq., or mechanically attached using the fastening pattern of the top layer
- 3 All standard panel sizes are acceptable for mechanical attachment. When applied in approved asphalt, panel size shall be 4' x 4' maximum.
- 4 An overlay and/or recovery board insulation panel is required on all applications over closed cell foam insulations when the base sheet is fully mopped. If no recovery board is used the base sheet shall be applied using spot mopping with approved asphalt, 12" diameter circles, 24" o.c.; or strip mopped 8" ribbons in three rows, one at each sidelap and one down the center of the sheet allowing a continuous area of ventilation. Encircling of the strips is not acceptable. A 6" break shall be placed every 12' in each ribbon to allow cross ventilation. Asphalt application of either system shall be at a minimum rate of 12 lbs./sq. **Note: Spot attached systems shall be limited to a maximum design pressure of -45 psf.**
- 5 Fastener spacing for insulation attachment is based on a Minimum Characteristic Force (F') value of 275 lbf., as tested in compliance with Testing Application Standard TAS 105. If the fastener value, as field-tested, are below 275 lbf. insulation attachment shall not be acceptable.
- 6 Fastener spacing for mechanical attachment of anchor/base sheet or membrane attachment is based on a minimum fastener resistance value in conjunction with the maximum design value listed within a specific system. Should the fastener resistance be less than that required, as determined by the Building Official, a revised fastener spacing, prepared, signed and sealed by a Florida Registered Engineer or Architect may be submitted. Said revised fastener spacing shall utilize the withdrawal resistance value taken from Miami-Dade County Testing Application Standards TAS 105 and calculations in compliance with Miami-Dade Roofing Application Standard RAS 117.
- 7 Perimeter and corner areas shall comply with the enhanced uplift pressure of these areas, as calculated in compliance with Chapter 23 of the South Florida Building Code. Fastener densities shall be increased for both insulation and base sheet as calculated in compliance with Miami-Dade County Roofing Application Standard RAS 117. **(When this limitation is specifically referred within this NOA, General Limitation #9 will not be applicable.)**
- 8 All attachment and sizing of perimeter nailers, metal profile, and/or flashing termination designs shall conform with Miami-Dade County Roofing Application Standard RAS 111 and the wind load requirements of Chapter 23 of the South Florida Building Code.
- 9 The maximum designed pressure limitation listed shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners). **(When this limitation is specifically referred within this NOA, General Limitation #7 will not be applicable.)**



Frank Zuloaga, RRC  
Product Control Examiner


GS Roofing Products Co., Inc. d/b/a CertainTeed  
P.O. Box 860  
Valley Forge 19482

ACCEPTANCE NO: 99-1213.08  
APPROVED: May 12, 2000  
EXPIRES: June 19, 2003

**NOTICE OF ACCEPTANCE STANDARD CONDITIONS**

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
  - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
  - b) The product is no longer the same product (identical) as the one originally approved;
  - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
  - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
  - a) Unsatisfactory performance of this product or process;
  - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 1 through 16

**END OF THIS ACCEPTANCE**

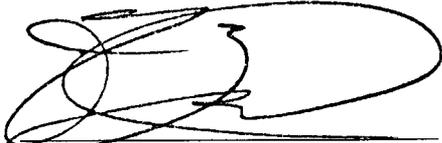

Frank Zuloaga, RRC  
Product Control Examiner