



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908**

NOTICE OF ACCEPTANCE (NOA)

**Lomanco, Inc.
2101 W. Main Street
Jacksonville, AR 72076**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: OR-20 Omni Roll Ridge Vent

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA # 00-1127.03 consists of pages 1 through 4.
The submitted documentation was reviewed by Jorge L. Acebo



**NOA No.: 05-0823.07
Expiration Date: 12/22/10
Approval Date: 12/22/05
Page 1 of 4**

ROOFING COMPONENT APPROVAL

Category: Roofing
Sub-Category: 07720 Ventilation
Type: Static
Materials: Plastic
Deck: Wood

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
OR-20 Omni Roll Ridge Vent	1" x 14-1/2" x 20' 0.05" thick	TAS 100(A)	Ridge ventilation system

TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>	<u>Manufacturer</u>
Asphalt Roof Cement		ASTM D 4586	Asbestos-free, asphalt based roof cement.	generic
Roofing Nails	Minimum #12 x 2"	TAS 114	Corrosion resistant annular ring shank nails	generic

EVIDENCE SUBMITTED

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Description</u>	<u>Date</u>
Celotex Corporation Testing Service	MTS 520172	ASTM D1929	07/21/99
		ASTM D635	
		ASTM D638	10/22/99
PRI Asphalt Technologies, Inc.	MTS 520656 LOM-01-02-01	ASTM D638	07/14/00
		TAS 100(A)	08/17/00




APPROVED ASSEMBLY:

- System Type A:** Mechanical attachment of ridge vent over composite shingles
- Cutout:** Truss Construction: Cut shall be 1-1/2" wide and 6" shorter at from each end wall plane than the total length of the ridge vent to be installed.
- Ridge Pole Construction: Cut shall be 3-1/8" wide and 6" shorter at from each end wall plane than the total length of the ridge vent to be installed.
- Installation** Mark proper alignment and end line for vents with chalk; outer edge of vent shall be 7" from apex of roof.
- Center the length of vent along the ridge. Starts nailing the vent at end then proceed down the vent using the nail holes at approximately every foot. Cut lines are provide if more than one vent is being used (See manufactures installation manual). Additional pieces shall run in the same direction as they unroll out of the carton.
- Install cap shingles on top of ridge vent and nail through the vent as recommended by shingle manufacturer.
- Net Free Area:** Refer to manufacturers published literature.
- Slope:** Minimum 2" on 12"

LIMITATIONS:

1. Refer to applicable building codes for required ventilation.
2. Omni Roll Ridge Vent shall not be installed on roof mean heights greater than 33 feet.



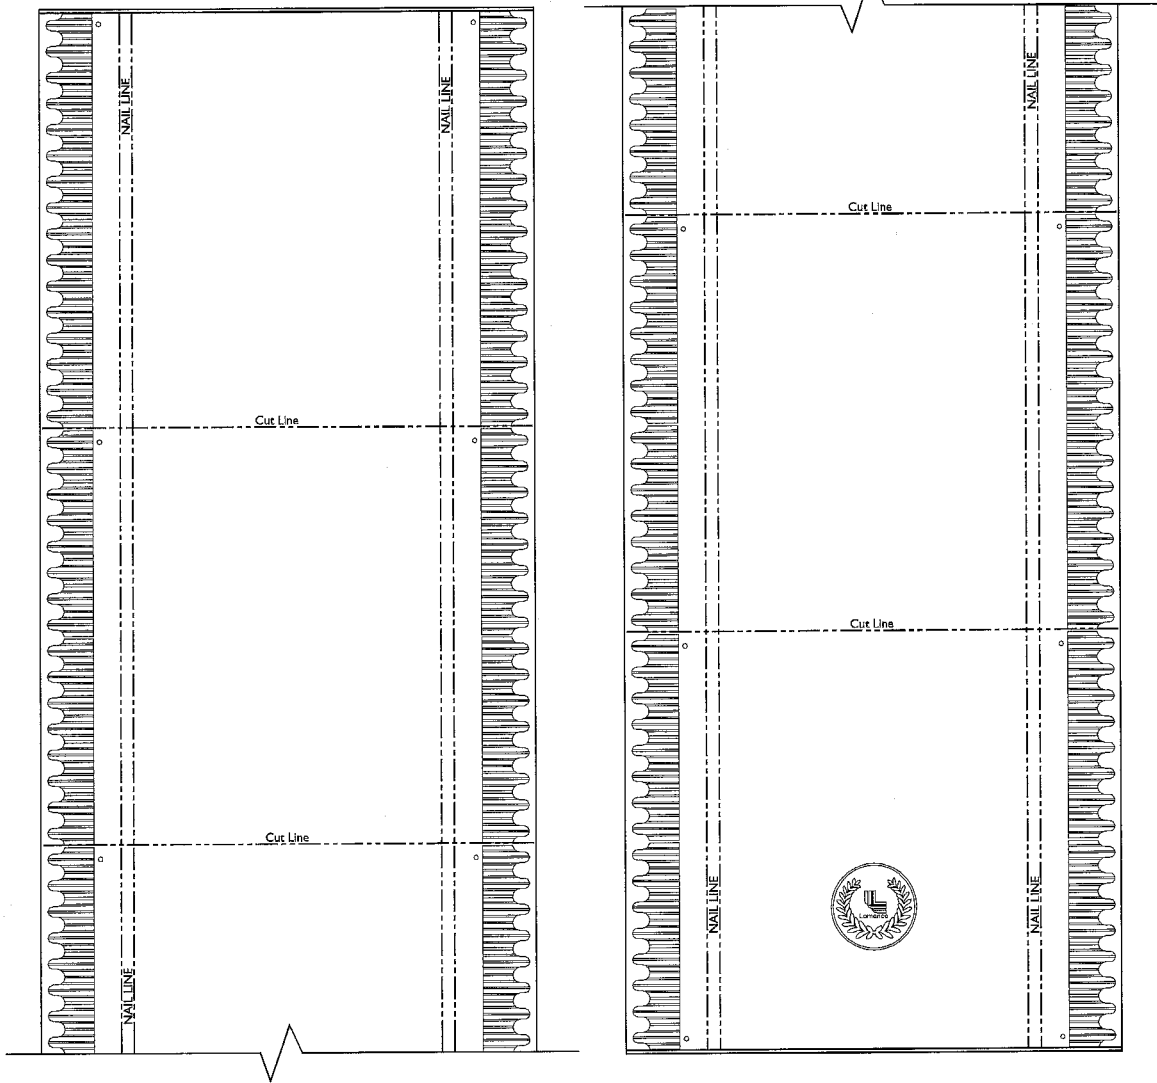

DETAIL DRAWINGS

End OF THIS ACCEPTANCE



NOA No.: 05-0823.07
 Expiration Date: 12/22/10
 Approval Date: 12/22/05
 Page 4 of 4