


## **PLAN VIEW**

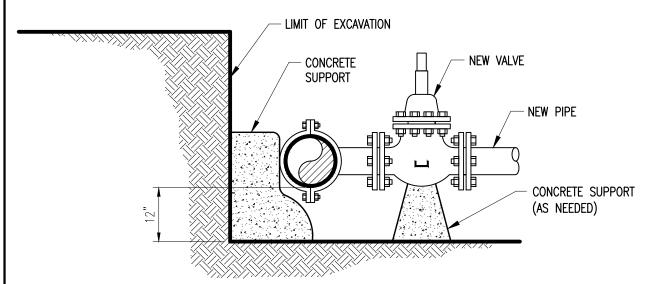

## **SECTION**

## **PROCEDURE:**

- 1. CONTRACTOR TO INSTALL AND PRESSURE TEST TAPPING SLEEVE AND VALVE, WITNESSED BY M-D.WASD INSPECTOR.
- 2. ALL TAPS LARGER THAN 20 INCHES SMALL BE DONE BY A TAPPING SPECIALIST WITH CREDENTIALS ACCEPTABLE TO THE DEPARTMENT.
- 3. CONTRACTOR TO SUPPLY EQUIPMENT TO HANDLE TAPPING MACHINE & DEWATERING EQUIPMENT.
- 4. 18" CLEARANCE FROM FITTINGS AND BELLS.
  5. TAPPING VALVE AND SLEEVE SHALL BE PRESSURE TESTED AT 150 psi PRIOR

5. IAPPING VALVE AND SLEEVE SHALL BE PRESSURE TESTED AT 150 PSI PRIOR						
TO BEING TAPPED.						
				ITEM	CROSS REF.	SPEC. REF.
MIAMI-DADE	<u>ISSUE DATE</u>	<u>APPROVED BY</u>	STANDARD DETAIL TAPPING SLEEVE AND VALVE INSTALLATION (PROPOSED)		GS 1.8 SHEET 1 OF 1	
	01/22/2009	V.F.C.				
	07/20/2016	D.V.				
Delivering Excellence Every Day						
WATER & SEWER DEPARTMENT						I UF I