

#### DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION NOTICE OF ACCEPTANCE (NOA)

#### South Florida Rolling Doors, Inc. 3590 NW 34 Street Miami, FL 33142

**SCOPE:** This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ). This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

#### DESCRIPTION: Series 1675 Steel Roll-up Door up to 16'-9 1/2" Wide

**APPROVAL DOCUMENT:** Drawing No. **AD14-11**, titled "Series 1675 Rolling Door (LMI & SMI)", sheets 1 through 4 of 4, dated 09/24/2014, with revision 1 dated 02/18, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

# MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

**LABELING:** A permanent label with the manufacturer's name or logo, manufacturing address, model number, the positive and negative design pressure rating, indicate impact rated if applicable, installation instruction drawing reference number, approval number (NOA), the applicable test standards, and the statement reading 'Miami-Dade County Product Control Approved' is to be located on the door's side track, bottom angle, or inner surface of a panel.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 18-0828.10** and consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.



From

NOA No. 20-0312.02 Expiration Date: April 16, 2025 Approval Date: April 16, 2020 Page 1

# **NOTICE OF ACCEPTANCE:** EVIDENCE SUBMITTED

#### 1. Evidence submitted under NOA # 14-1001.05

#### A. DRAWINGS

1. Drawing No. AD14-11, titled "Series 1675 Rolling Door (LMI & SMI)", sheets 1 through 4 of 4, dated 09/24/2014, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E.

#### **B. TESTS**

- 1. Test reports on 1) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
  - 2) Large Missile Impact Test per FBC, TAS 201-94
    - 3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
    - 4) Forced Entry Test, per FBC, TAS 202-94
    - 5) Tensile Test per ASTM E8,

Along with marked-up drawings and installation diagram of Series 1675 Rolling Doors, prepared by Fenestration Testing Laboratory, Inc., Test Report No. **FTL-7811**, dated 08/20/2014, signed and sealed by Idalmis Ortega, P.E.

#### C. CALCULATIONS

1. Calculations of Series 1675 Rolling Door, prepared by MCY Engineering, Inc., dated 09/23/2014, signed and sealed by Yiping Wang, P.E.

#### D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

#### E. MATERIAL CERTIFICATIONS

- 1. Notice of acceptance No. **11-0926.07** issued to Dyplast Products LLC for their Expanded Polystyrene Block Type Insulation, approved on 11/10/2011 and expiring on 01/11/2017.
- 2. Mill certificate issued by Century Metals & Supplies, Inc., dated 10/22/2014.

#### F. STATEMENTS

1. Statement letter of code conformance to the 2010 and the 5<sup>th</sup> edition (2014) FBC and of no financial interest, prepared by MCY Engineering, Inc., dated 09/29/2014, signed and sealed by Yiping Wang, P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 20-0312.02 Expiration Date: April 16, 2025 Approval Date: April 16, 2020

# **NOTICE OF ACCEPTANCE:** EVIDENCE SUBMITTED

#### 2. Evidence submitted under NOA # 18-0828.10

#### A. DRAWINGS

1. Drawing No. AD14-11, titled "Series 1675 Rolling Door (LMI & SMI)", sheets 1 through 4 of 4, dated 09/24/2014, with revision 1 dated 02/18, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E.

#### **B. TESTS**

- 1. None.
- C. CALCULATIONS
  - 1. None.

#### D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)


# E. MATERIAL CERTIFICATIONS


1. Notice of acceptance No. 17-1207.04 issued to Dyplast Products LLC for their E and R Expanded Polystyrene Rigid Foam Insulations, approved on 02/01/2018 and expiring on 01/11/2022.

#### F. STATEMENTS


1. Statement letter of code conformance to the 6<sup>th</sup> edition (2017) FBC issued by MCY Engineering, Inc., dated 03/12/2020, signed and sealed by Yiping Wang, P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 20-0312.02 Expiration Date: April 16, 2025 Approval Date: April 16, 2020

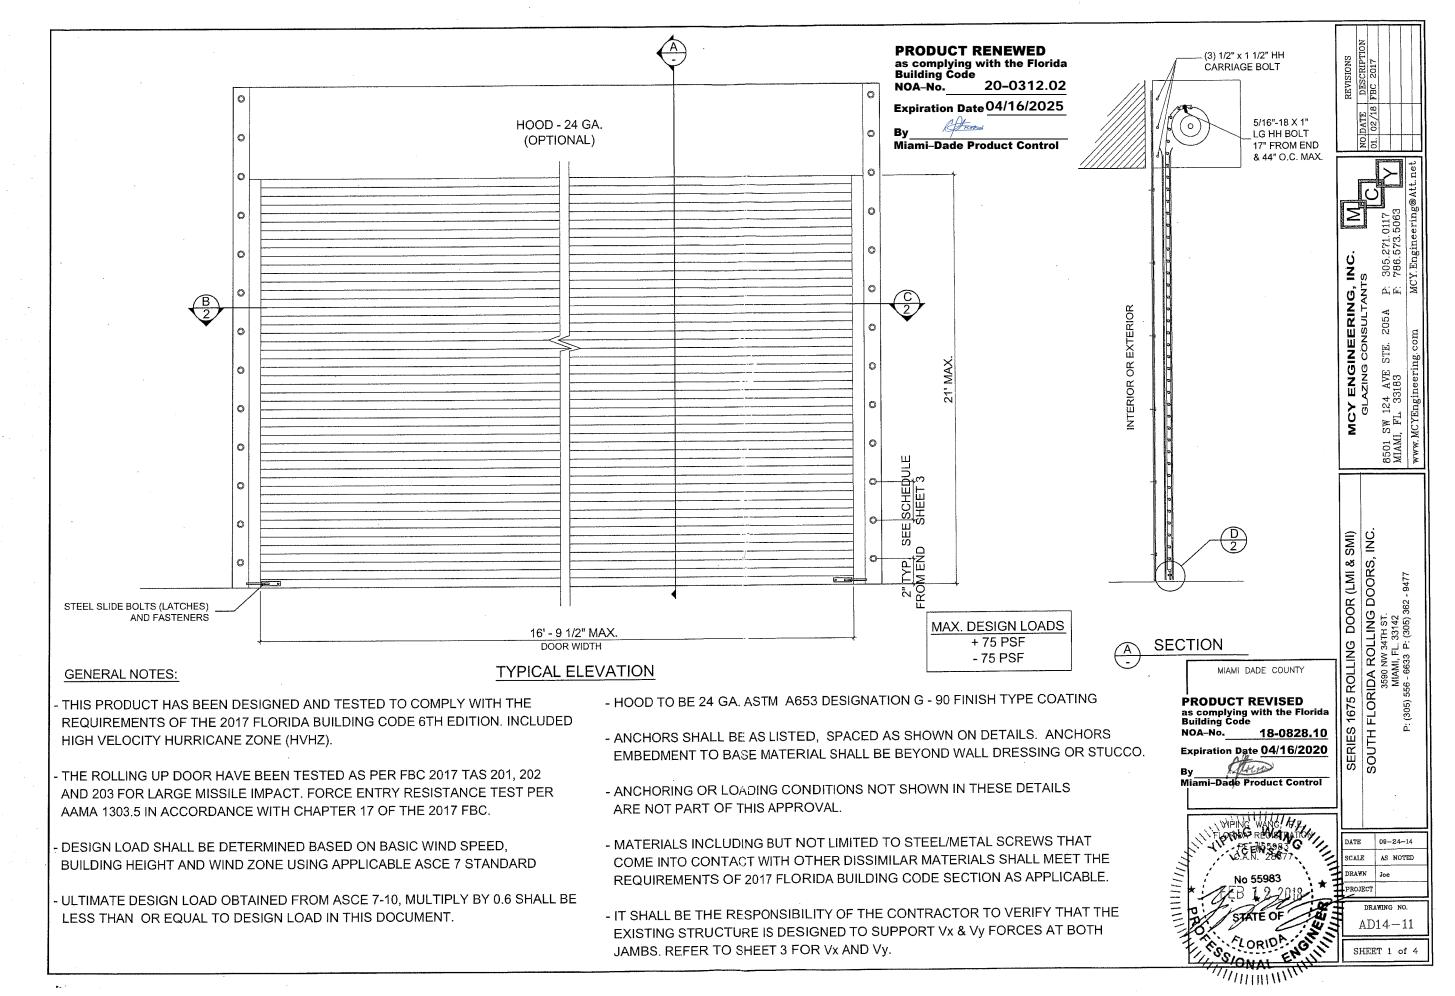

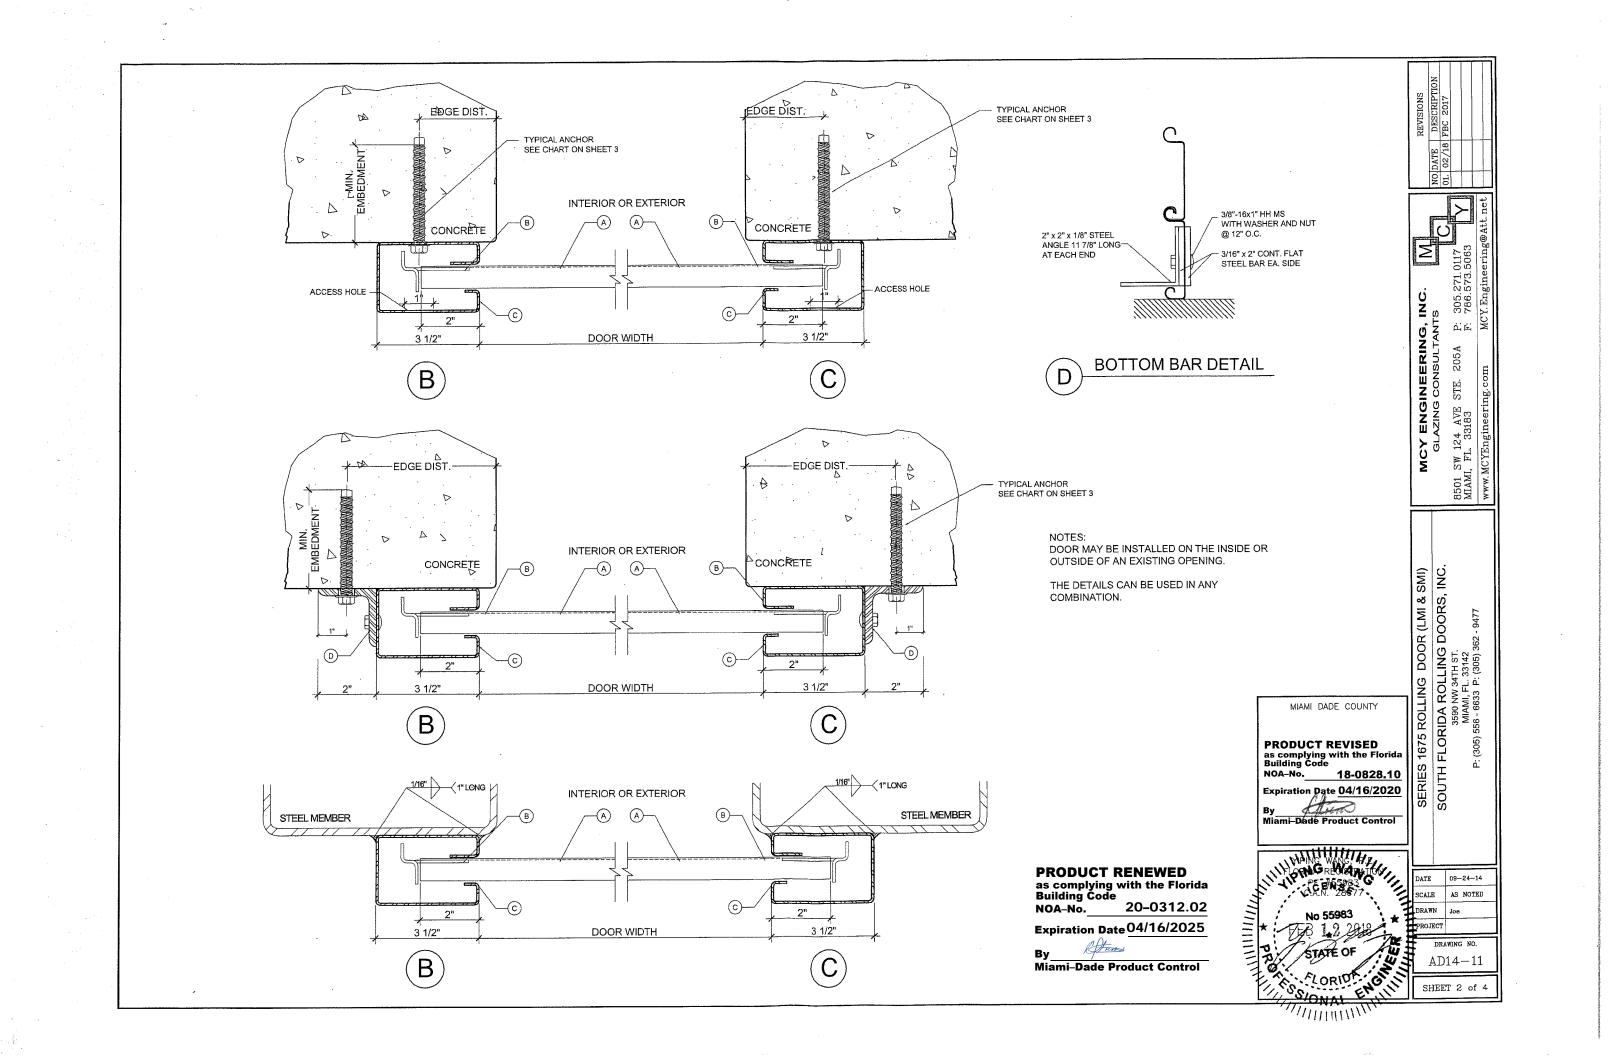


						· · · · · · · · · · · · · · · · · · ·						·
					MAX. LOADS AT EACH SIDE OFJAMB		ANCHOR SPACING (INCHES)					
	MAXIMUM DESIGN LOAD (PSF)	DOOR WIDTH (IN)	DESIGN SLIP (IN)	Vx (LB/FT)	Vy (LB/FT)	MOUNTING A1	MOUNTING A2			MOUNTING A3		
						TYPE D	TYPE A	TYPE B	TYPE C	TYPE A	TYPE B	Т
						STEEL	fc' = 4000 (PSI) MIN.					
	±75 -	≤ 201.5	3/4	2265	652	7 1/2"	-	6 5/8"	7 3/4"	5"	7 1/4"	
		180	1/2	2261	584	7 3/4"		6 5/8"	7 3/4"	5"	7 1/4"	
		156	3/8	2022	509	8 3/4"	5"	7 3/8"	8"	5 5/8"	8 1/8"	
		132	1/4	1794	434	10"	5 5/8"	8"	8"	6 3/8"	8 1/4"	

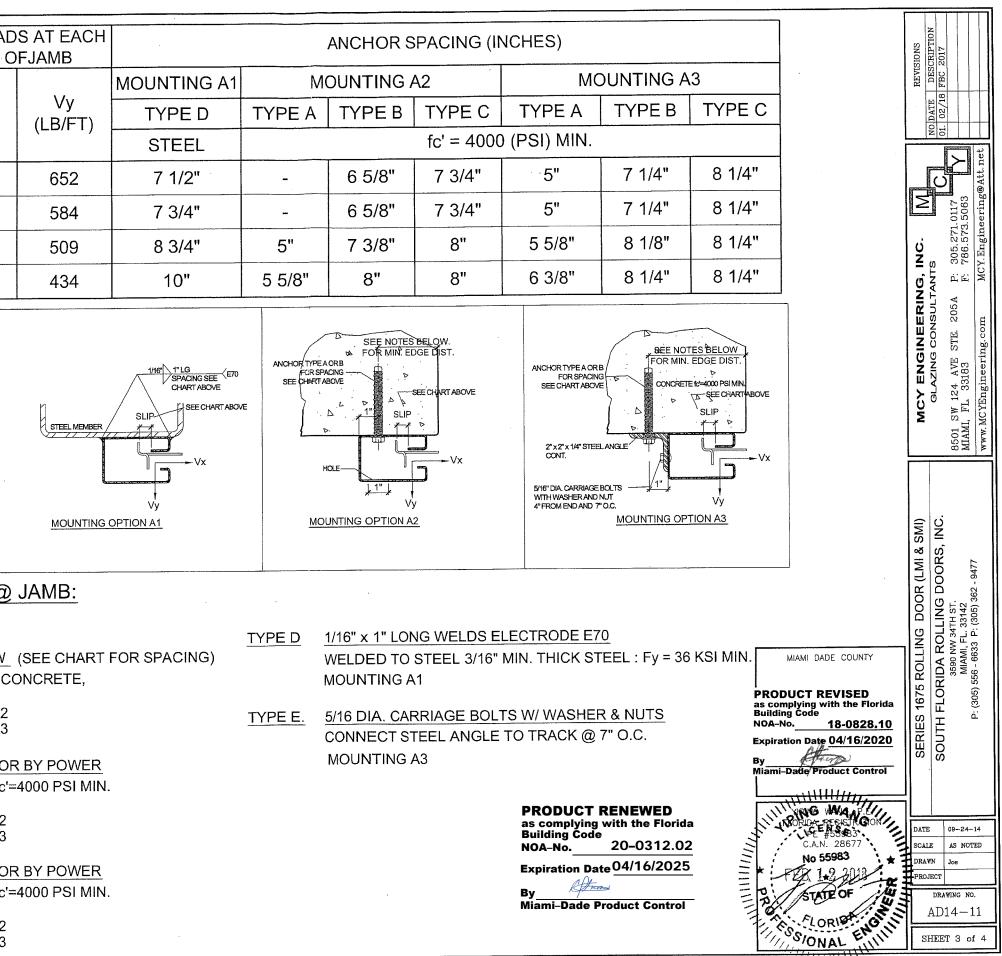


# TYPICAL ANCHORS @ JAMB:


(SEE CHART FOR SPACING)

- TYPE A. 1/2" DIA. LDT ANCHOR BY ITW (SEE CHART FOR SPACING) DIRECTLY INTO fc'=4000 PSI CONCRETE, 4 1/2" MIN. EMBED. MIN EDGE 4" @ MOUNTING A2 MIN EDGE 4" @ MOUNTING A3
- TYPE B. 3/8" DIA. WEDGE BOLT ANCHOR BY POWER DIRECTLY INTO CONCRETE fc'=4000 PSI MIN. 3 1/2" MIN. EMBED MIN EDGE 4" @ MOUNTING A2 MIN EDGE 4" @ MOUNTING A3
- TYPE C. 1/2" DIA. WEDGE BOLT ANCHOR BY POWER DIRECTLY INTO CONCRETE fc'=4000 PSI MIN. 4" MIN. EMBED MIN EDGE 5" @ MOUNTING A2 MIN EDGE 5" @ MOUNTING A3

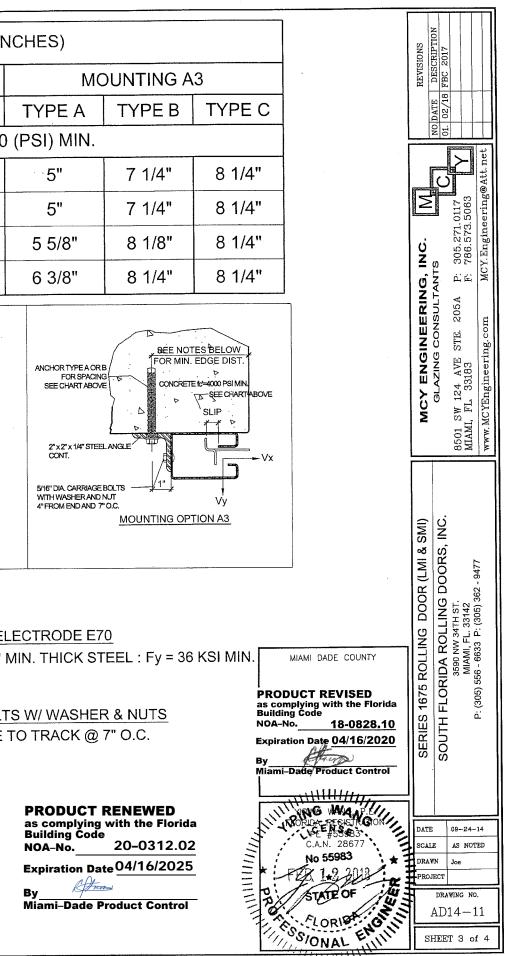

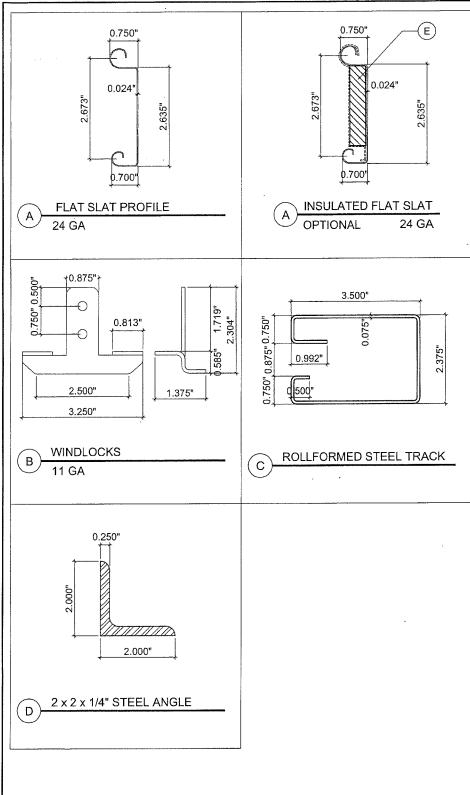

		BILL OF MATERIALS					
ITEM #	QTY.	DESCRIPTION	MATERIAL	MANUF			
A	AS REQD	24GA (0.024") FLAT SLAT	GALVANIZED STEEL OR STAINLESS STEEL	ASTM A653 Fy Fy = 57KSI . S			
Β.	EVERY OTHER SLAT	11 GA WINDLOCKS	PLATED STEEL	ASTM A36 MIN.			
С	2 PER FRAME	ROLLFORMED STEEL TRACK	GALVANIZED STEEL				
D	AS REQD.	2 x 2 x 1/4" STEEL ANGLE	GALVANIZED STEEL				
E	AS REQD.	EXPANDED POLYSTYRENE BLOCK TYPE INSULATION	POLYSTYRENE	DYPLAS			

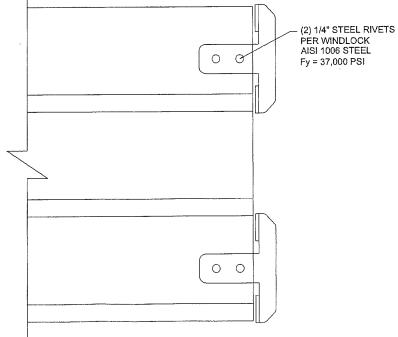

# INTERLOCKING SLATS W/ WINDLOCKS @ EVERY OTHER SLAT

