

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

Ruskin Company 3900 Dr. Greaves Road Grandview, MO 64030

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Model EME3625MD Aluminum Louver

APPROVAL DOCUMENT: Drawing No. **60-022572-00B**, titled "EME3625MD / Wind-Driven Rain Resistant Louver", sheets 1 through 9 of 9, dated 10/30/2020, with revision A dated 03/19/2021, prepared by Ruskin Company, signed and sealed by Vahe M. Astourian, R.A., bearing the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, Geneva, AL or Juarez, Chihuahua C. P., Mexico, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA consists of this page 1 and evidence page E-1 as well as approval document mentioned above. The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**

MIAMI-DADE COUNTY
APPROVED

Hum

NOA No. 20-1201.02 Expiration Date: May 13, 2026 Approval Date: May 13, 2021 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **60-022572-00B**, titled "EME3625MD / Wind-Driven Rain Resistant Louver", sheets 1 through 10 of 10, dated 10/30/2020, with revision A dated 03/19/2021, prepared by Ruskin Company, signed and sealed by Vahe M. Astourian, R.A.

B. TESTS

- 1. Test reports on 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 2) Large Missile Impact Test per FBC, TAS 201-94
 - 3) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of HZ700MD Aluminum Fixed Louvers", prepared by National Certified Testing Laboratories, Test Report No.

NCTL-210-4189-01, dated 09/09/2020, signed and sealed by Douglas J. McDougall, P.E.

2. Test report on Wind Driven Rain Resistance per TAS 100(A)-95 and on High Wind Driven Rain Resistant Louvers per AMCA 550 09-15 of a EME3625MD Vertical Aluminum Louver, prepared by Intertek, Test Report No. **K3092.01-801-44 R0**, dated 02/14/2020, signed and sealed by Tyler Westerling, P.E.

C. CALCULATIONS

Wind load review prepared by Ruskin Company, dated 04/01/2021, signed and sealed by Vahe M. Astourian, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

- 1. Statement letter of code conformance to the 7th edition (2020) of the FBC, issued by Ted Ruskin Company, dated 04/01/2020, signed and sealed by Vahe M. Astourian, P.E.
- 2. Statement letter of no financial interest issued by Ruskin Company, dated 04/01/2021, signed and sealed by Vahe M. Astourian, P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 20-1201.02 Expiration Date: May 13, 2026

Approval Date: May 13, 2021

ABBREVIATIONS:

- BLANK OFF B.O. - CHANNEL FRAME

CONT. - CONTINUOUS - CENTER TO CENTER

C-C DIM - DIMENSION

FLG - FLANGE FF - FLANGED FRAME

HDG - HOT DIP GALVANIZED

- HIDDEN VERTICAL BLADE SUPPORT H.H.B.S. - HIDDEN HORIZONTAL BLADE SUPPORT

- HEX WASHER HEAD **HWH**

L.D. - LOUVER DIMENSION

MAX. - MAXIMUM MIN. - MINIMUM NOM. - NOMINAL

N.T.E. - NOT TO EXCEED N.T.S. - NOT TO SCALE O/C - ON CENTER OPP. - OPPOSITE N.I.C. - NOT IN CONTRACT

R.O. - ROUGH OPENING **REF** - REFERENCE


SHT - SHEET S.S. - SHIP SECTION

S.S.D. - SHIP SECTION DIMENSION

S.D.S. - SELF DRILLING SCREW

SIM - SIMILAR STL - STEEL TYP. - TYPICAL


- UNLESS NOTED OTHERWISE U.N.O.

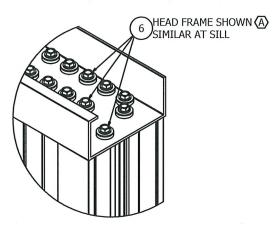

DETAIL 1 LOUVER CONSTRUCTION

NOTES:

- 1. THE EME3625MD HAS BEEN TESTED IN ACCORDANCE WITH & QUALIFIED TO FLORIDA PROTOCOLS TAS-201, 202, & 203 FOR LARGE MISSILE IMPACT, UNIFORM PRESSURE, CYCLIC WIND PRESSURE; (A) LEVEL D (BASIC PROTECTION) MISSILE IMPACT; & AMCA 550 FOR HIGH, VELOCITY WIND DRIVEN RAIN.
- 2. QUALIFICATIONS TO AMCA 550 ALLOWS THIS LOUVER TO BE INSTALLED IN A LOCATION WHERE THE ROOM BEHIND THE LOUVER IS NOT DESIGNED TO DRAIN WATER PENETRATING INTO THE ROOM & THE ROOM DOES NOT HOUSE WATER RESISTANT/PROOF EQUIPMENT, COMPONENTS, OR SUPPLIES.
- 3. THIS LOUVER SYSTEM IS APPROVED FOR APPLICATIONS WITH **DESIGN PRESSURES OF +/- 120 PSF** OR LESS, THIS LOUVER SYSTEM IS NON-BEARING AND IS NOT DESIGNED TO WITHSTAND BUILDING
- 4. SECTIONS OR ASSEMBLIES MAY BE STACKED VERTICALLY PROVIDING A SUITABLE STRUCTURAL MEMBER, DESIGNED & INSTALLED BY OTHERS, IS BETWEEN EACH STACKED LOUVER TO CARRY THE FULL LOAD OF THE UPPER LOUVER, SO THAT NO LOUVER TAKES THE LOAD OF THE OTHER.
- 5. THIS LOUVER ATTACHES ONLY AT THE HEAD & SILL TO THE SUBSTRATE. NO ATTACHMENT AT JAMBS. SEE SHEETS -07 & -08 FOR INSTALLATION PARTS & DETAILS. REQUIREMENTS GIVEN IN "SUBSTRATE FASTENER TABLE" ARE AS NEEDED FOR ANCHORAGE ONLY AND (N.I.C.).
- 6. MAXIMUM SINGLE SECTION SIZE FOR RECTANGLES ARE 60" WIDE X 96" HIGH. UNLIMITED WIDTH CAN BE ACCOMPLISHED BY PLACING SINGLE SECTIONS SIDE-BY-SIDE.
- 7. ALL WELDED ATTACHMENTS REQUIRE A MINIMUM FILLER OF 4043 ALUMINUM ALLOY WITH A MINIMUM TENSILE STRENGTH OF 24KSI.
- 8. EXTRUDED ALUMINUM H.H.B.S. CHANNEL IS FACTORY CUT TO FIT BETWEEN EACH BLADE. THE H.H.B.S.CHANNEL IS SCREWED TO EVERY 3RD BLADE AND AT BOTH JAMB FRAMES. THE H.H.B.S. CHANNEL IS REQUIRED FOR ANY LOUVER ASSEMBLY EXCEEDING 48" HIGH & EQUALLY SPACED BETWEEN HEAD & SILL FRAMES.
- 9. **SQUARE BALLOONS** INDICATE **SHIP LOOSE PARTS**.

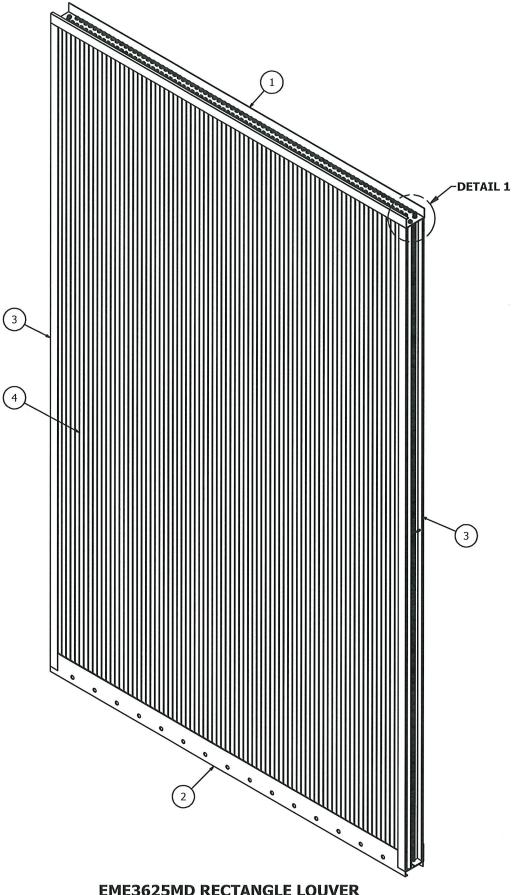

EME3625MD RECTANGLE LOUVER

(CF) 60"W X 96"H SHOWN

TARIS LIST / CHANNEL HAN-IL							
ITEM	DESCRIPTION	MATERIAL					
1	HEAD FRAME	EXT ALUM 6063-T6					
2	SILL FRAME	EXT ALUM 6063-T6					
3	JAMB FRAME	EXT ALUM 6063-T6					
4	LOUVER BLADE	EXT ALUM 6063-T6					
5	H.H.B.S.	EXT ALUM 6063-T6					
6	SCR 8-18 X .75 HWH SW A/B	410 SS/ZC					
	PARTS LIST / FLANGED	FRAME					
ITEM	DESCRIPTION	MATERIAL					
7	FLANGED HEAD FRAME	EXT ALUM 6063-T6					
8	FLANGED SILL FRAME	EXT ALUM 6063-T6					
9	FLANGED JAMB FRAME	EXT ALUM 6063-T6					
	INSTALLATION PAI	RTS					
ITEM	DESCRIPTION	MATERIAL					
10	CONT. RETAINING ANGLE 2" X 2" X 1/4"	EXT ALUM 6063-T6					
11	SUBSTRATE FASTENER	-					
12	SCR 1/4"-20 X 1" HWH TEK3	300S					
13	UNIVERSAL SLEEVE - MIN 1/8" THK PLT	FORMED ALUM 5005-H34					
14	SPL PLT LVR ALUM 2 X 4 X .125	ALUM 3003-H14					
15	CONT. RETAINING ZEE - 1/4" THK PLT	FORMED ALUM 5005-H34					
16	CONT. RETAINING ANGLE - 1/4" X 2"	FORMED ALUM 3003-H14					
17	CONT. RETAINING ANGLE - 1/4" X 3" X 5"	FORMED ALUM 3003-H14					
18	CONT. STIFFENER PLT - 1/8" X 5"	ALUM 5005-H34					
19	CONT. STIFFENER PLT - 1/8" X 4"	ALUM 5005-H34					

PARTS LIST / CHANNEL FRAME

DRAWING SHEET INDEX:

SHEET 01 - STANDARD LOUVER SPECIFICATIONS

SHEET 02 - MULTI-SECTION (CF) ASSEMBLY FRONT VIEW

SHEET 03 - MULTI-SECTION (CF) ASSEMBLY BACK VIEW


SHEET 04 - MULTI-SECTION (FF) ASSEMBLY FRONT VIEW

SHEET 05 - MULTI-SECTION (FF) ASSEMBLY BACK VIEW

SHEET 06 - UNIVERSAL SLEEVE ASSEMBLY & INSTALLATION **SHEET 07** - LOUVER INSTALL / RETAINING SINGLE ANGLE

SHEET 08 - LOUVER INSTALL / RETAINING ZEE & DOUBLE ANGLE

SHEET 09 - LOUVER FRAMING & INSTALL PART PROFILES

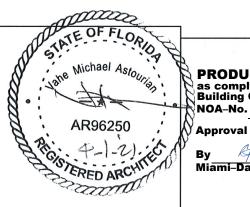

PRODUCT APPROVED as complying with the Florida Building Code

20-1201.02

Approval Date 05/13/2021


Miami-Dade Product Control


VAHE MICHAEL ASTOURIAN AR-96250


Use WIQ-007, WIQ-0


	A PARTS LIST			DLD I	ASTERIERS TO	E-R	JDS	VMA		3/19/21	
	AUTHOR	DKF	9/25/2020	1	DI 16			3900 Do			ı
	CHECKED	E-R	10/28/2020		RUS		IV	Grandy PROP	iew, MO RIETARY		ı
	APPROVE	TCB	10/29/2020	,	AUTHORITY IN	AIR CON	TROL	COI	NFIDENT	TAL	
ise	APPROVE	MMM	10/30/2020	PRODUC	T EME3625MD /	WIND-D	RIVEN	RAIN RES	SISTANT	LOUVER	ı
ise 08 1/16	EXTRU	JDED ALU		TITLE	STANDA	RD LOUVI	ER SPE	CIFICATIO	ONS		l
0.020				SIZE B	C	OWG NO	60-02	2572-00)B	REV A	
± 2.	ECN			SCALE	NONE	INVENTO	, T	user 1	y∈ 9		ı


REVISED NOTE 1 ADDED FASTENERS TO

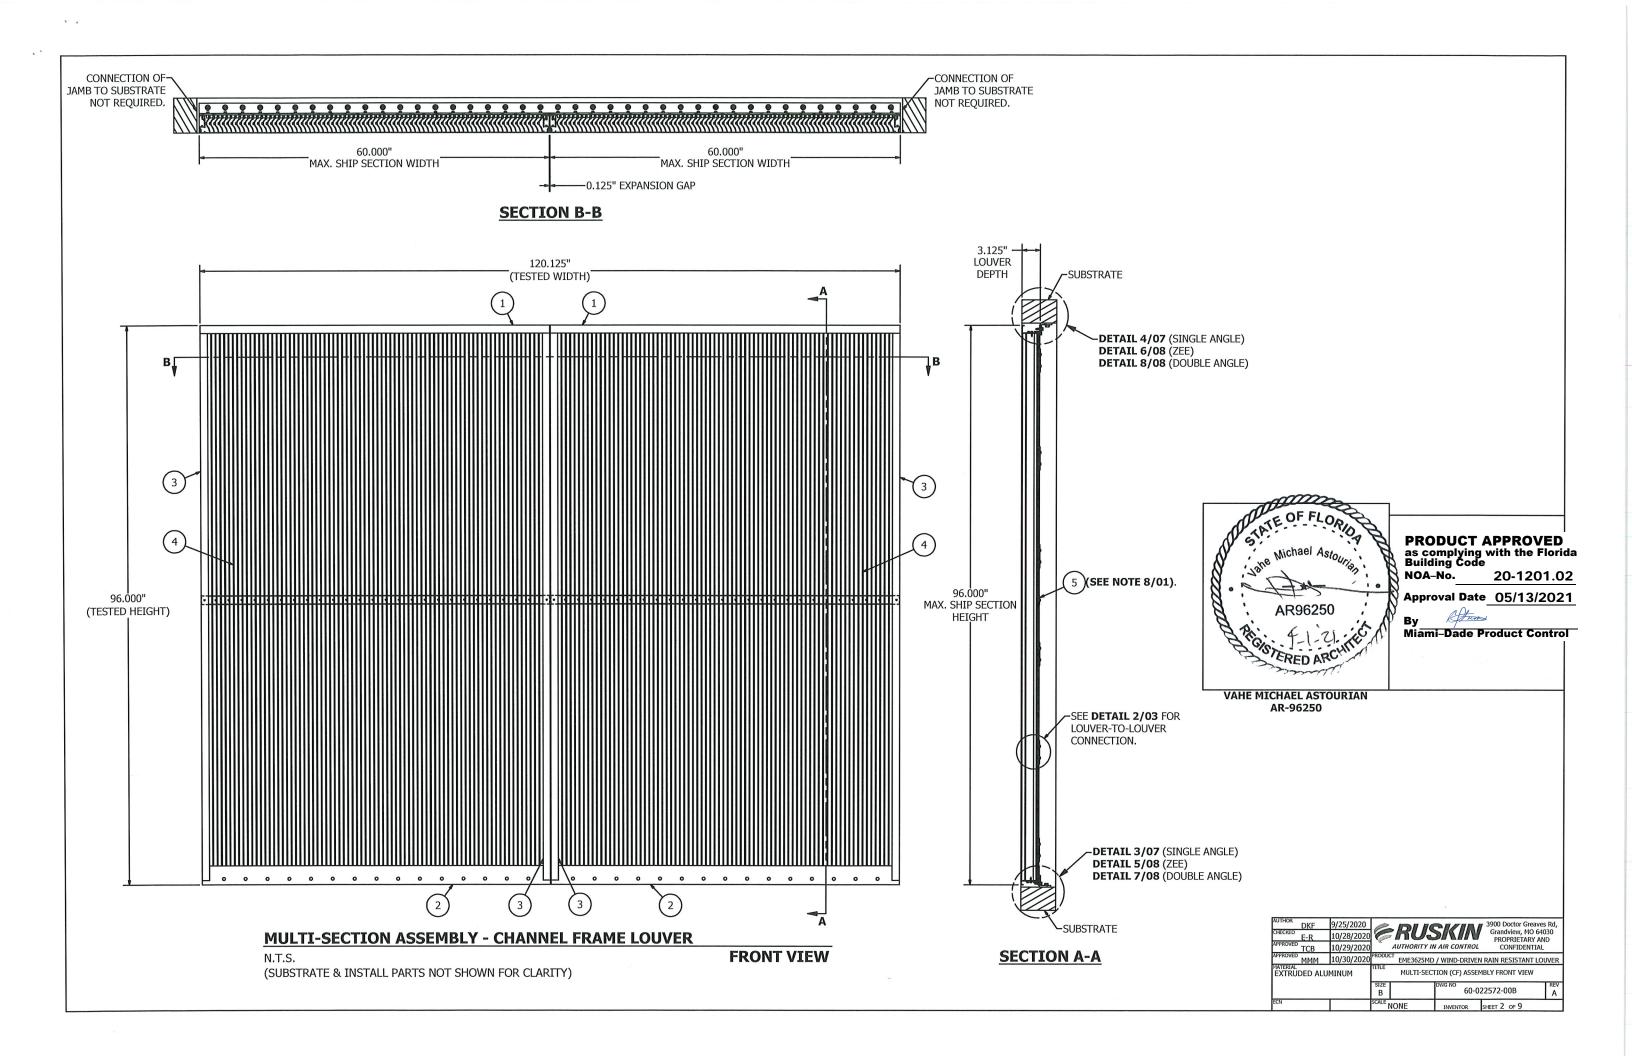


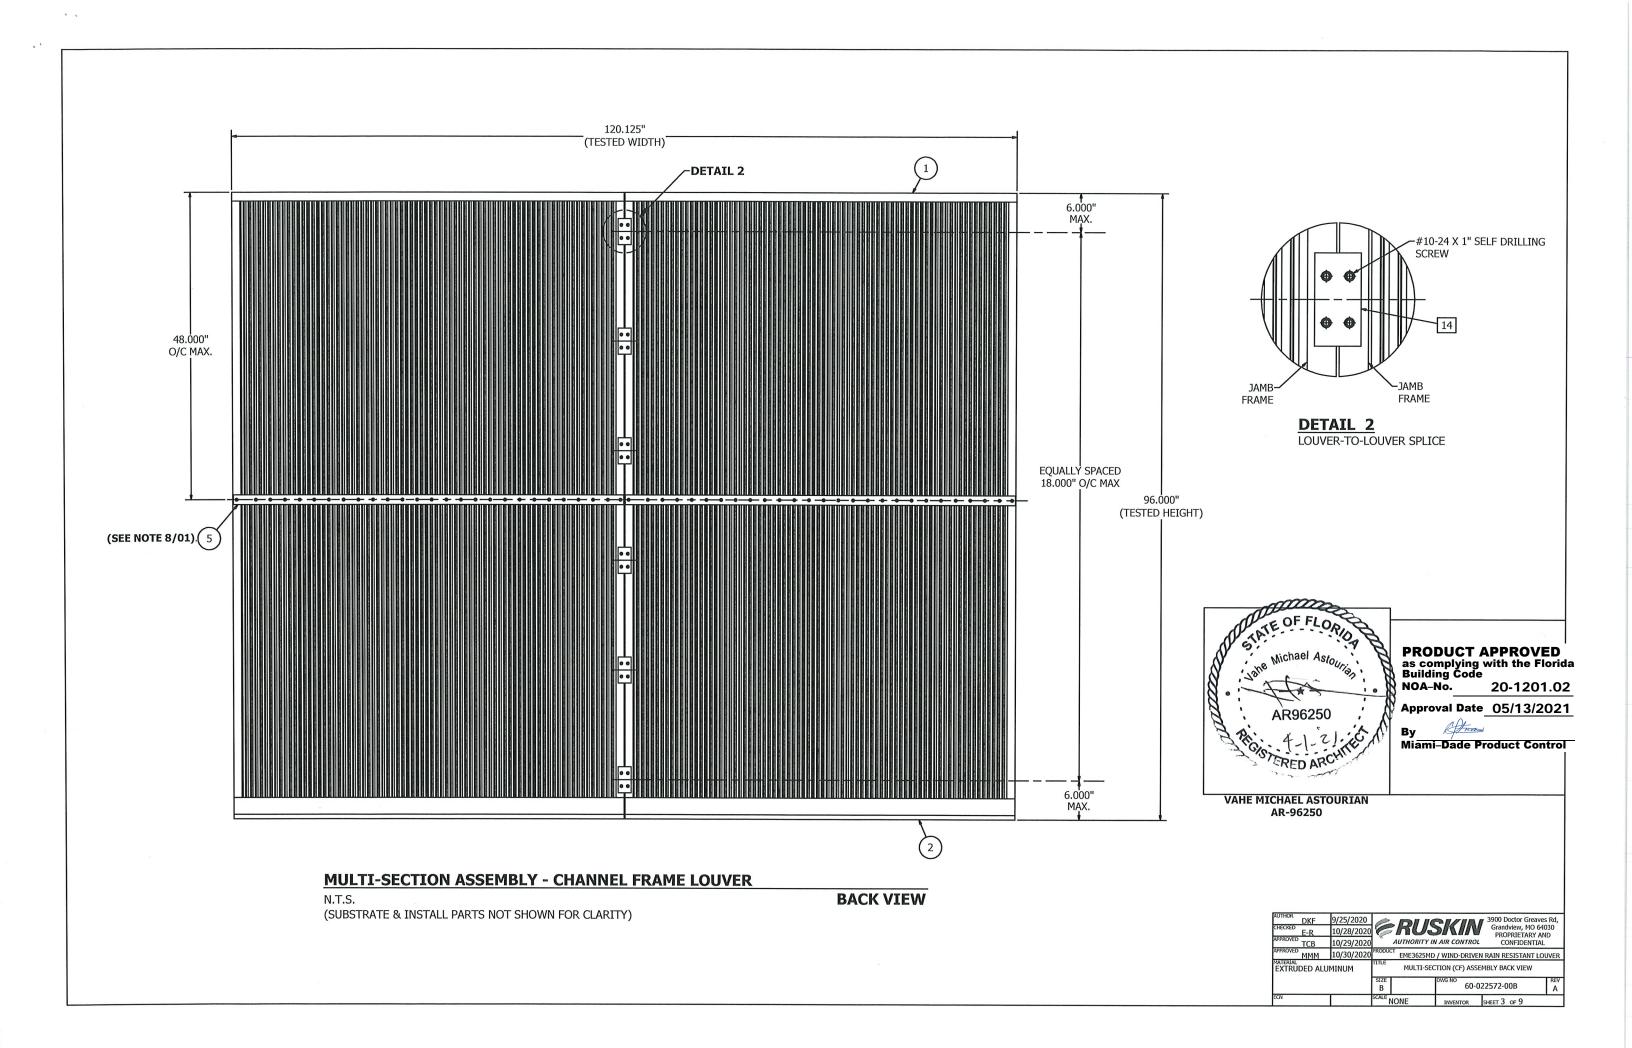


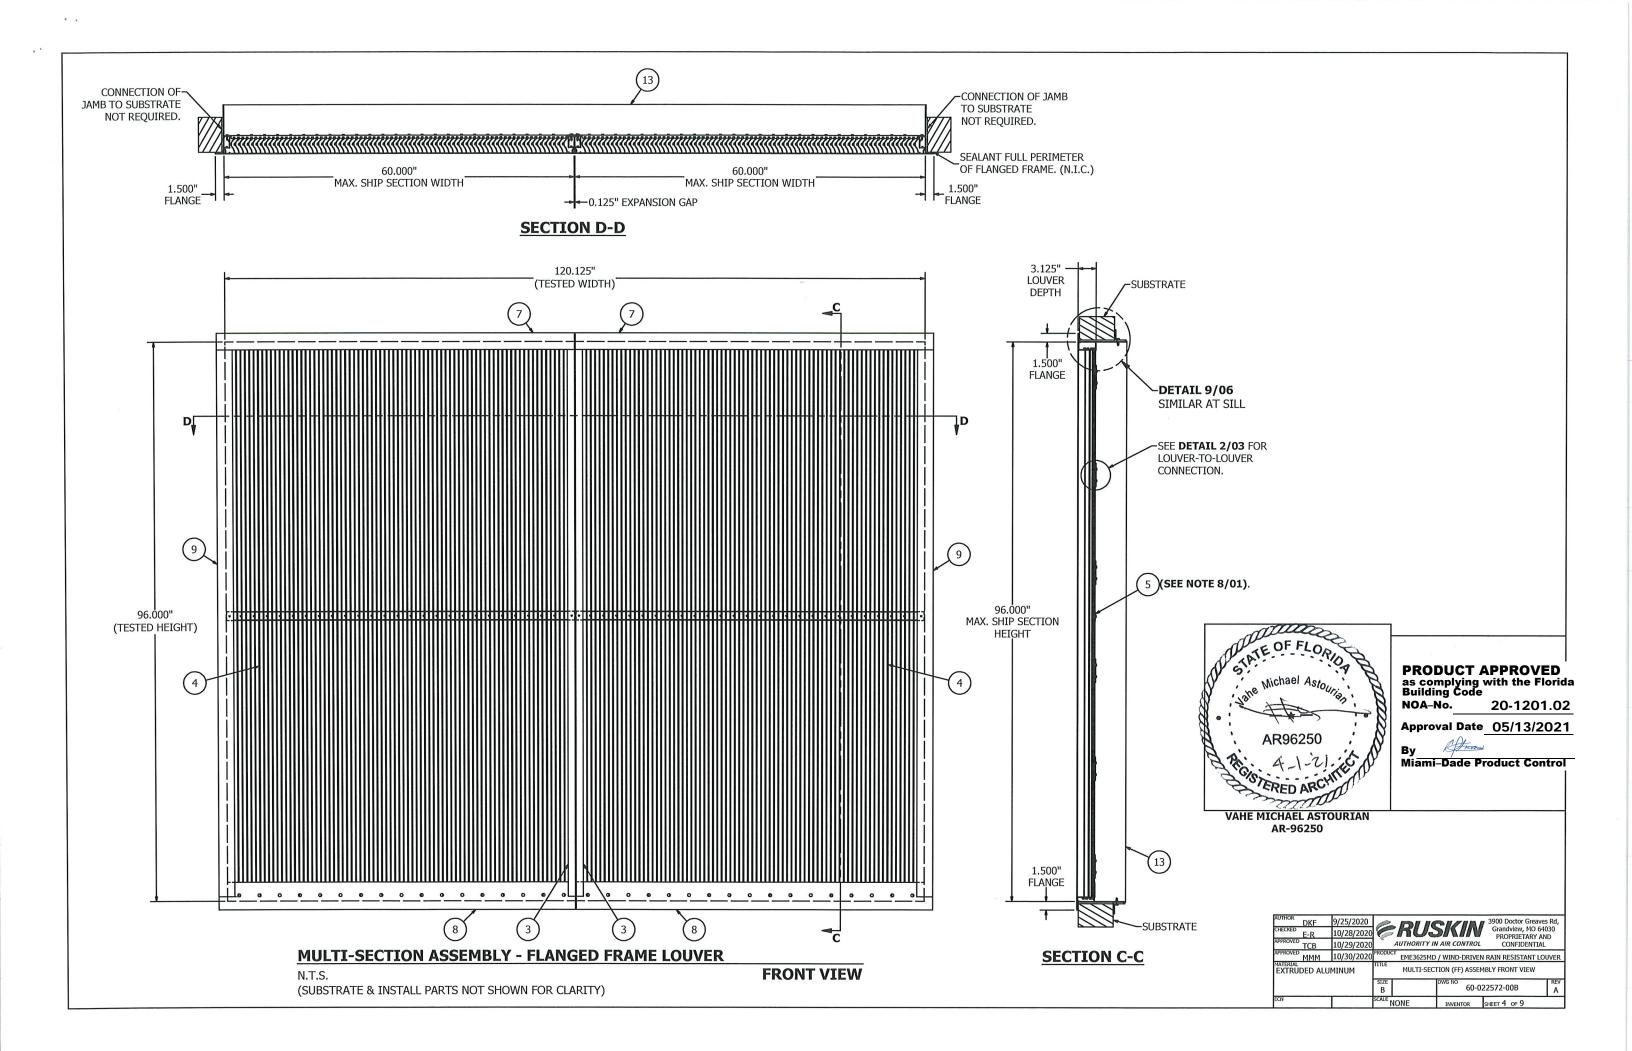

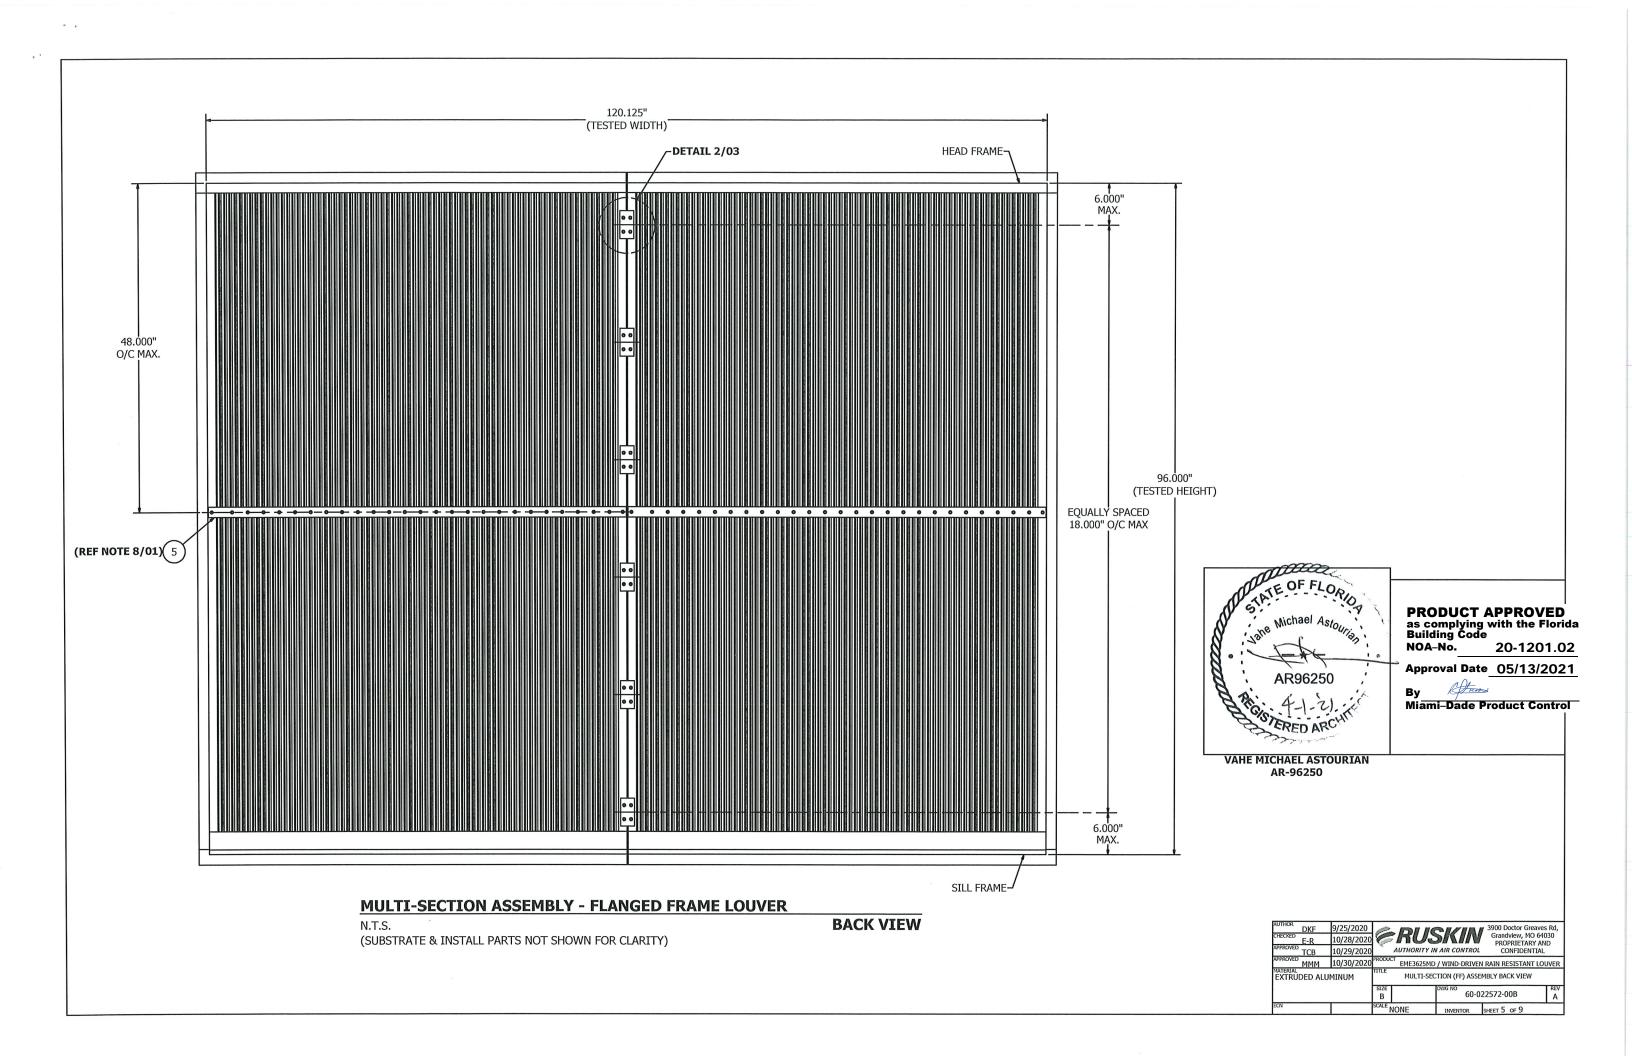


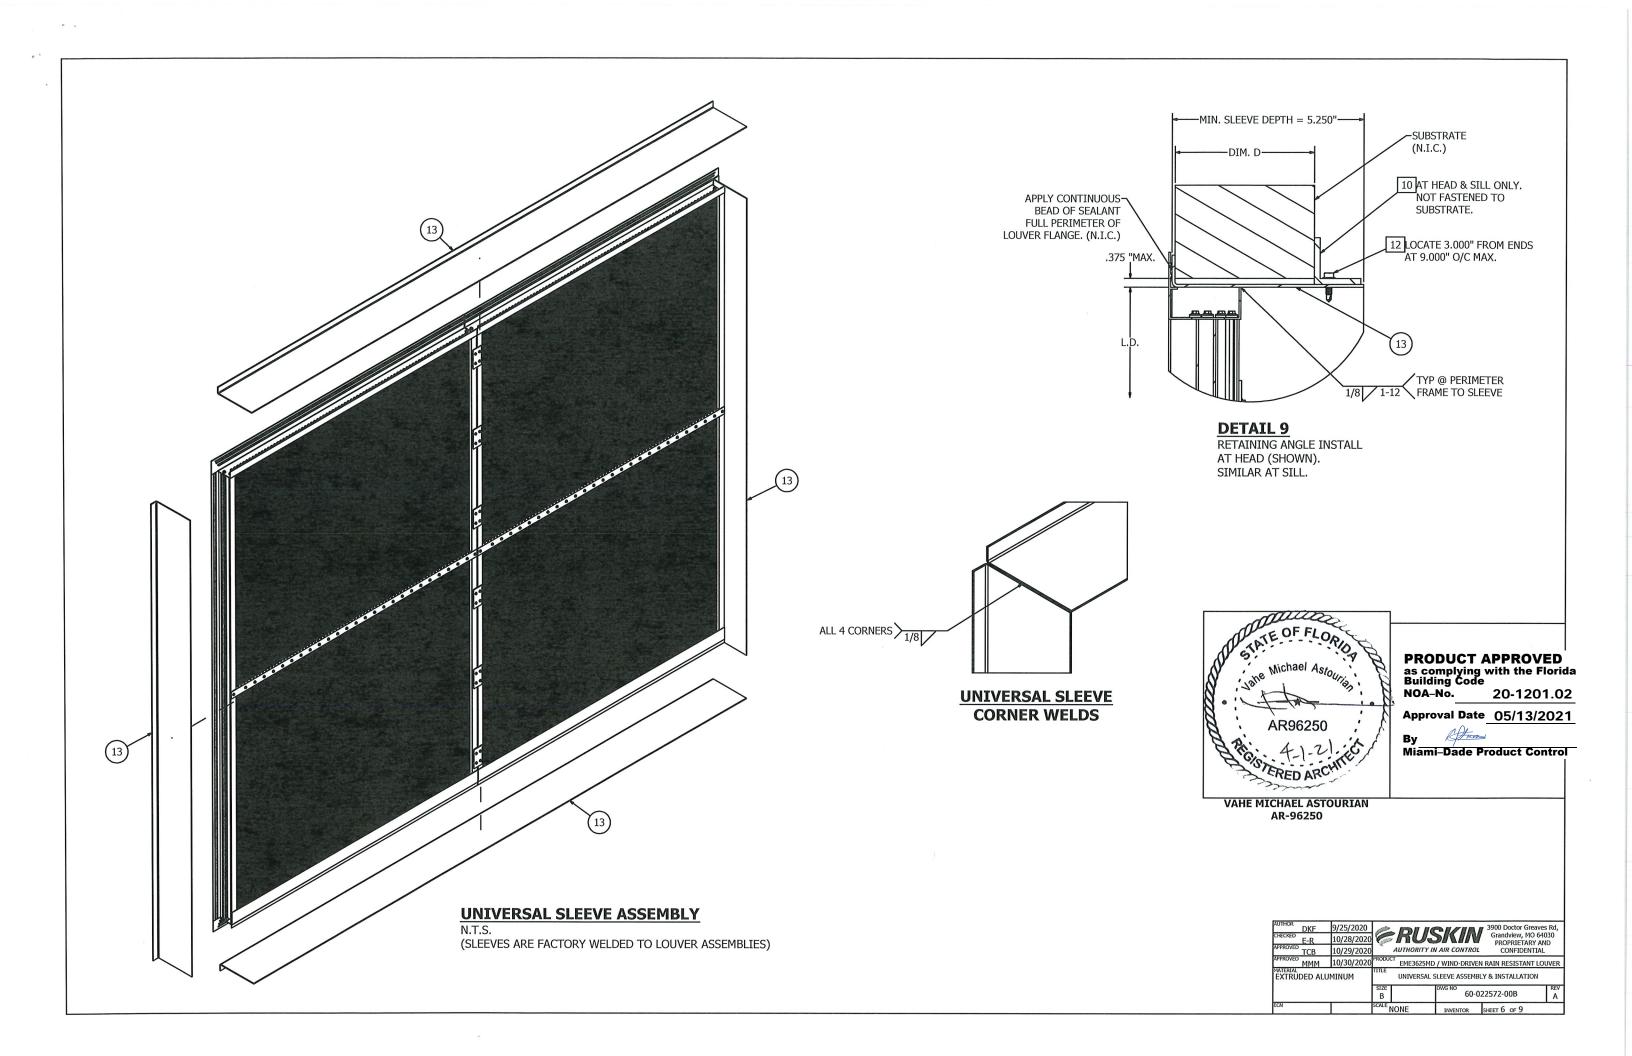


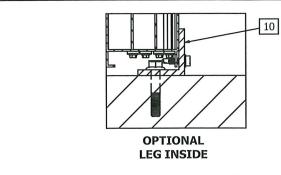

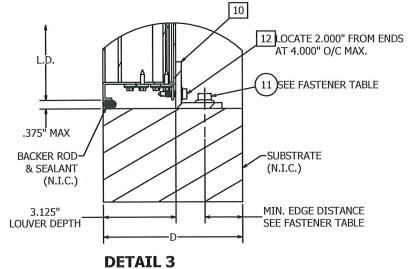


RETAINING ANGLE INSTALL AT SILL



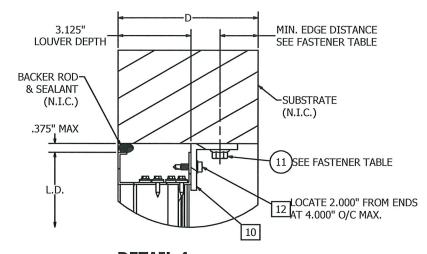

DETAIL 4RETAINING ANGLE INSTALL AT HEAD

SI	JBSTRATE FASTENER TAE	BLE (N.I.C.) / EME3625MD 120 PSF /	SINGLE AND	GLE INSTALL	
SUBSTRATE TYPE	MIN. SUBSTRATE REQUIREMENTS	FASTENER TYPE	MAX. C/C SPACING AT HEAD / SILL	MIN. EMBEDMENT	MIN. EDGE DISTANCE
MOOD	3" THICK, 0.42 SPECIFIC GRAVITY	3/8-16 BOLT W/NUT, MIN A307 GRADE A	8"	3 THREADS BEYOND NUT	1-1/2"
WOOD	5 THION, 0.42 SPECIFIC GNAVITT	3/8" DIA. LAG SCREW 2 1/2" LONG MIN. A307 GRADE A	8"	2-1/4"	1-1/2"
STEEL	18 GA, 45 KSI TENSILE STRENGTH, 33KSI YIELD STRENGTH	MIN A307 GRADE A 8" BEYOND NUT		3 THREADS BEYOND NUT	1/2"
STEEL	12 GA, 45 KSI TENSILE STRENGTH, 33KSI YIELD STRENGTH	1/4-20 SELF-DRILLING SCREW W/ WASHER CARBON STEEL	MAX. C/C SPACING AT HEAD / SILL 8" 8" 8" 8" 8" 4" 3 THF SUBS 8" 8" 8" 3 THF SUBS	3 THREADS BEYOND SUBSTR. THICKNESS	1/2"
ALUMINUM	0.125" THICK, 20 KSI TENSILE STRENGTH, 15 KSI YIELD STRENGTH	1/4-20 BOLT W/NUT & WASHER MIN A307 GRADE A	8"	3 THREADS BEYOND NUT	1/2"
ALOMINOM	0.1875" THICK, 20 KSI TENSILE STRENGTH, 15 KSI YIELD STRENGTH	1/4-20 SELF-DRILLING SCREW W/ WASHER CARBON STEEL	4"	SUBSTR. THICKNESS 3 THREADS	1/2"
		3/8" DIA. SIMPSON STRONG-TIE TITEN HD SCREW ANCHOR CARBON STEEL	8"	SUBSTR. THICKNESS 3-1/4"	2"
	2500 PSI COMPRESSIVE STRENGTH	3/8" DIA. DEWALT SCREW BOLT + SCREW ANCHOR CARBON STEEL	8"	3-1/4"	4"
CONCRETE		3/8" DIA. HILTI KWIK HUS-EZ SCREW ANCHOR CARBON STEEL	8"	3 1/4"	2"
	·	1/4" DIA. ELCO AGGRE-GATOR W/ WASHER 300 SERIES SS	4"	1-3/8"	1-1/2"
	ASTM C-90 BLOCK, 1500 PSI GROUT COMPRESSIVE STRENGTH	3/8" DIA. SIMPSON STRONG-TIE TITEN HD SCREW ANCHOR CARBON STEEL	4"	2 -3/4"	4"
		3/8" DIA. DEWALT SCREW BOLT + SCREW ANCHOR CARBON STEEL	8"	3 1/4"	2"
GROUT FILLED CMU		3/8" DIA. HILTI KWIK HUS-EZ SCREW ANCHOR CARBON STEEL	8"	3-1/4"	4"
		1/4" DIA. ELCO AGGRE-GATOR W/ WASHER 300 SERIES SS	4"	2"	2"




PRODUCT APPROVED as complying with the Florida Building Code
NOA-No. 20-1201.02


Approval Date 05/13/2021

By Miami-Dade Product Control

VAHE MICHAEL ASTOURIAN AR-96250


						1	
AUTHOR	DKF	9/25/2020	1	DI 16		3900 Doctor Greave	
CHECKED	E-R	10/28/2020		MUS	SKIN	Grandview, MO 64 PROPRIETARY A	
APPROVED	TCB	10/29/2020	,		AIR CONTROL	CONFIDENTIA	
APPROVED	MMM	10/30/2020	PRODUC	T EME3625MD	/ WIND-DRIVEN	RAIN RESISTANT LO	OUVER
EXTRUI	MATERIAL EXTRUDED ALUMINUM				STALL / RETAINI	NG SINGLE ANGLE	
			SIZE B		60-02	22572-00B	REV A
ECN			SCALE 1	ONE	INVENTOR	SHEET 7 OF 9	

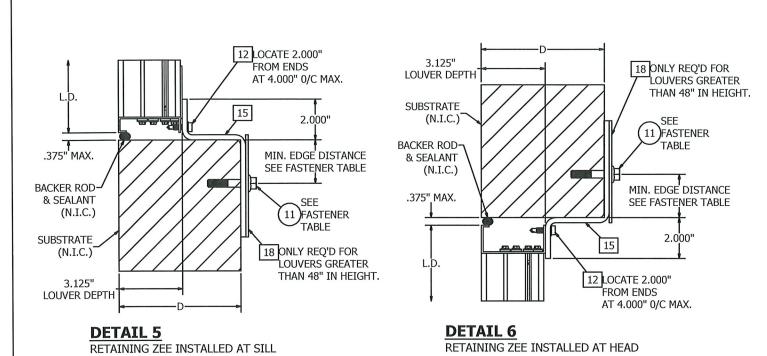

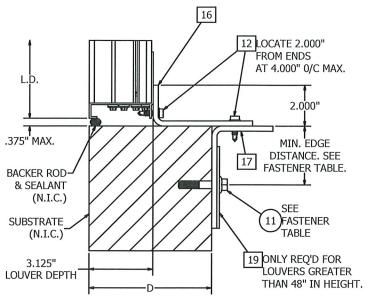

DETAIL 7

DOUBLE ANGLE INSTALLED AT SILL

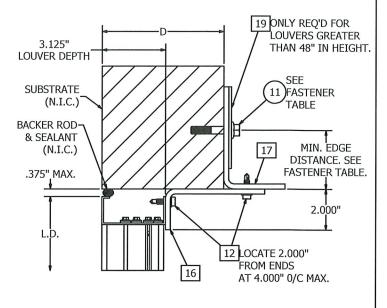

DETAIL 8DOUBLE ANGLE INSTALLED AT HEAD

SUBSTRATE FASTENER TABLE (N.I.C.) / EME3625MD 120 PSF / RETAINING ZEE & DOUBLE ANGLE INSTALL

SUBSTRATE TYPE	MIN. SUBSTRATE REQUIREMENTS	FASTENER TYPE	MAX. C/C SPACING AT HEAD / SILL	MIN. EMBEDMENT	MIN. EDGE DISTANCE
WOOD	3" THICK, 0.42 SPECIFIC GRAVITY	3/8-16 BOLT W/ NUT, MIN A307 GRADE A	(A) 8"	3 THREADS BEYOND NUT	1-1/2"
VVOOD	o Trilon, 0.42 of Loil to Civiviti	3/8" DIA. LAG SCREW, 2 1/2" LONG, MIN. A307 GRADE A	(A) 8"	2-1/4"	1-1/2"
STEEL	18 GA, 45 KSI TENSILE STRENGTH, 33KSI YIELD STRENGTH	1/4-20 BOLT W/ NUT & WASHER, MIN A307 GRADE A	(A) 8"	3 THREADS BEYOND NUT	1/2"
STEEL	12 GA, 45 KSI TENSILE STRENGTH, 33KSI YIELD STRENGTH	1/4-14 SELF-DRILLING SCREW W/ WASHER CARBON STEEL	6"	3 THREADS BEYOND SUBSTR. THICKNESS	1/2"
ALUMINUM	0.125" THICK, 20 KSI TENSILE STRENGTH, 15 KSI YIELD STRENGTH	1/4-20 BOLT W/ NUT & WASHER, MIN A307 GRADE A	♠ 8"	3 THREADS BEYOND NUT	1/2"
ALOMINOM	0.1875" THICK, 20 KSI TENSILE STRENGTH, 15 KSI YIELD STRENGTH	1/4-14 SELF-DRILLING SCREW W/ WASHER CARBON STEEL	6"	3 THREADS BEYOND SUBSTR. THICKNESS	1/2"
		3/8" DIA. SIMPSON STRONG-TIE TITAN HD SCREW ANCHOR CARBON STEEL	♠ 8"	3-1/4"	2"
		3/8" DIA. DEWALT SCREW BOLT + SCREW ANCHOR CARBON STEEL	(A) 8"	3-1/4"	4"
CONCRETE	2500 PSI COMPRESSIVE STRENGTH	3/8" DIA. HILTI KWIK HUS-EZ SCREW ANCHOR CARBON STEEL	(A) 8"	3 1/4"	2"
		1/4" DIA. ELCO AGGRE-GATOR W/ WASHER 300 SERIES SS	6"	1-3/8"	1-1/2"
		3/8" DIA. SIMPSON STRONG-TIE TITAN HD SCREW ANCHOR CARBON STEEL	♠ 8"	2 -3/4"	4"
	ASTM C-90 BLOCK, 1500 PSI GROUT	3/8" DIA. DEWALT SCREW BOLT + SCREW ANCHOR CARBON STEEL	(A) 8"	3 1/4"	2"
GROUT FILLED CMU	COMPRESSIVE STRENGTH	3/8" DIA. HILTI KWIK HUS-EZ SCREW ANCHOR CARBON STEEL	(A) 8"	3-1/4"	4"
		1/4" DIA. ELCO AGGRE-GATOR W/ WASHER 300 SERIES SS	6"	2"	2"



AR-96250

PRODUCT APPROVED as complying with the Florida Building Code

NOA-No.

A-No. 20-1201.02

Approval Date <u>05/13/2021</u>

By Miami-Dade Product Control

INVENTOR SHEET 8 OF 9

ARO.

Α	REVISED	SUBSTRATE	FASTENER TABLE	E-R	JDS	VMA		3/19/21
AUTHOR	DKF	9/25/2020	@ DI 16	HAL	IA II	3900 Do		
CHECKED	E-R	10/28/2020	CRUS		IV		iew, MO RIETARY	
APPROVE	D	40/20/2020	AUTHORITY IN	ID CON	TROI		ICTOCALT	

CHECKED E-R 10/28/2020

APPROVED TCB 10/29/2020

AUTHORITY IN AIR CONTROL

CONFIDENTIAL

MATERIAL

EXTRUDED ALUMINUM

SIZE

B

OWS NO

60-022572-00B

APPROVED TCB

10/29/2020

AUTHORITY IN AIR CONTROL

CONFIDENTIAL

CONFIDENTI

SCALE NONE

