

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Briscoe Shutters, Inc. DBA BSI 2841 Shoreview Drive Naples, Florida 34112

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER- Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Aluminum Bahama Shutter

APPROVAL DOCUMENT: Drawing No. 26-0282, titled "Bahama Shutter System and Bahama over Colonial Shutter System", sheets 1 through 10 of 10, prepared by Michael Trapasso, P.E., dated December 02, 2020, signed and sealed by Michael Trapasso, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, the following statement: "Miami-Dade County Product Control Approved", and NOA number, per TAS-201, TAS-202, and TAS-203, unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA #17-0823.11 and consists of this page 1, evidence submitted pages E-1, E-2, E-3 & E-4 as well as approval document mentioned above.

The submitted documentation was reviewed by Helmy A. Makar, P.E., M.S.

MIAMI-DADE COUNTY
APPROVED

Hely A. Melor 01/21/2021

NOA No. 20-1215.07 Expiration Date: 11/28/2022 Approval Date: 01/21/2021

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 02-0722.05

A. DRAWINGS

1. Drawing No. 26-0282 titled "Bahama Shutter Master Plan", sheets 1 through 10 of 10, dated May 10, 2002, prepared by Arthur C. Quinnell, P.E, signed and sealed by Arthur C. Quinnell, P.E.

B. TESTS

- 1. Test report on Large Missile Impact Test, Cyclic Wind Pressure Test and Uniform Static Air Pressure Test of Double Bahama shutters, prepared by Hurricane Test laboratory, Report No. 0288-1218.01, specimen #1, dated December 10-11, 2001, signed and sealed by Vinu J. Abraham, P.E.
- 2. Test report on Large Missile Impact Test, Cyclic Wind Pressure Test and Uniform Static Air Pressure Test of Double Bahama over Colonial Shutters w/ four leaf assembly, prepared by Hurricane Test laboratory, Report No. 0288-1218.01, specimen #2, dated December 13-14, 2001, signed and sealed by Vinu J. Abraham, P.E.

C. CALCULATIONS

1. Anchor analysis prepared by Briscoe shutter, Inc., signed and sealed by Arthur C. Ouinnell, P.E.

D. MATERIAL CERTIFICATIONS

1. Mill Certified Inspection Report with chemical composition and mechanical properties for aluminum alloy 6063-T52.

2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #07-0713.06

A. DRAWINGS

- 1. None.
- B. TEST
 - 1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Building Code Compliance Office.

E. MATERIAL CERTIFICATION

1. None.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor NOA No. 20-1215.07

Expiration Date: 11/28/2022

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 09-0122.07

A. DRAWINGS

1. Drawing No. 26-0282, titled "Bahama Shutter System and Bahama over Colonial Shutter System", sheets 1 through 11 of 11, prepared by Michael Trapasso, P.E., dated August 17, 2009, signed and sealed by Michael Trapasso, P.E.

B. TESTS

- 1. Test report on Uniform Static Air Pressure Test of Bahama shutter System and Bahama over Colonial Shutter System, prepared by Hurricane Test laboratory, LLC Report No. 0288-0611-07, specimen #1, dated May 05, 2008, signed and sealed by Vinu J. Abraham, P.E.
- 2. Test report on Large Missile Impact Test and Cyclic Wind Pressure Test of Bahama shutter System and Bahama over Colonial Shutter System, prepared by Hurricane Test laboratory, Report No. 0288-0611-07, specimen #1A, dated May 05, 2008, signed and sealed by Vinu J. Abraham, P.E.
- 3. Test report on Large Missile Impact Test, Cyclic Wind Pressure Test, and Uniform Static Air Pressure Test of Bahama shutter System and Bahama over Colonial Shutter System, prepared by Hurricane Test laboratory, Report No. 0288-0314-08, specimen #2, dated May 05, 2008, signed and sealed by Vinu J. Abraham, P.E.
- 4. Test report on Large Missile Impact Test, Cyclic Wind Pressure Test, and Uniform Static Air Pressure Test of Bahama shutter System and Bahama over Colonial Shutter System, prepared by Hurricane Test laboratory, Report No. 0288-0314-08, specimen #3, dated May 05, 2008, signed and sealed by Vinu J. Abraham, P.E.

C. CALCULATIONS

1. Anchor analysis prepared by Briscoe shutter, Inc., signed and sealed by Michael Trapasso, P.E.

D. QUALITY ASSURANCE

1. By Miami-Dade County Building Code Compliance Office.

E. MATERIAL CERTIFICATION

1. Mill Certified Inspection Report with chemical composition and mechanical properties for aluminum alloy 6063-T52.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 20-1215.07 Expiration Date: 11/28/2022

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

4. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 12-0906.05

A. DRAWINGS

1. Drawing No. 26-0282, titled "Bahama Shutter System and Bahama over Colonial Shutter System", sheets 1 through 10 of 10, prepared by Michael Trapasso, P.E., dated September 01, 2012, signed and sealed by Michael Trapasso, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. Revision analysis prepared by Briscoe shutter, Inc., dated September 05, 2012, signed and sealed by Michael Trapasso, P.E.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATION

1. None.

5. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 16-0201.20

A. DRAWINGS

1. Drawing No. 26-0282, titled "Bahama Shutter System and Bahama over Colonial Shutter System", sheets 1 through 10 of 10, prepared by Michael Trapasso, P.E., dated January 18, 2016, signed and sealed by Michael Trapasso, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATION

1. None.

F. STATEMENTS

1. Florida Building Code, 2014 Edition compliance letter, issued by Michael Trapasso, P.E., dated January 19, 2016, signed and sealed by Michael Trapasso, P.E.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 20-1215.07 Expiration Date: 11/28/2022

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

6. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 17-0823.11

A. DRAWINGS

1. Drawing No. 26-0282, titled "Bahama Shutter System and Bahama over Colonial Shutter System", sheets 1 through 10 of 10, prepared by Michael Trapasso, P.E., dated August 10, 2017, signed and sealed by Michael Trapasso, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATION

1. None.

F. STATEMENTS

1. Florida Building Code, 2014 and 2017 Editions compliance letter, issued by Michael Trapasso, P.E., dated August 10, 2017, signed and sealed by Michael Trapasso, P.E.

7. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. 26-0282, titled "Bahama Shutter System and Bahama over Colonial Shutter System", sheets 1 through 10 of 10, prepared by Michael Trapasso, P.E., dated December 02, 2020, signed and sealed by Michael Trapasso, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATION

1. None.

F. STATEMENTS

1. FBC, 2020 Edition compliance letter, issued by Michael Trapasso, P.E., dated 12/02/2020, signed and sealed by Michael Trapasso, P.E.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 20-1215.07 Expiration Date: 11/28/2022

BAHAMA SHUTTER SYSTEM and BAHAMA over COLONIAL SHUTTER SYSTEM

Maximum Design Pressures
Bahama & Colonial Shutters
+ 84.7 psf & - 113.3 psf
Bahama Over Colonial Shutter
+ 77 psf & -77 psf

Glass Separation Sheet 9

Patent No: US 6,996,934 B2 US 7,131,480 B2



BRISCOE SHLITTERS INC 2841 Shoreview Drive

Naples Fl 34||2 www.bsishutters.com bsishutters@juno.com Office: 239-774-2025




PRODUCT REVISED as complying with the Florida Building Code

Acceptance No Zo . 1715.07
Expiration Date 11/78/2072


By Held M. Miami Dede Product Control

DRAWING NO. SHEET NO. 26-0282 | 1 of 10 | DATE: 12/02/20

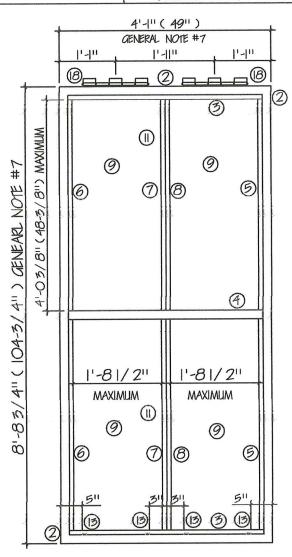


TEST SHLITTER #1 - DESIGN PRESSLIKE + 79.2 psf & -90.2 psf BUILD OUT FRAME; 8' 6-1/2" (w) x 9' 0-3/4" (h) ONE BAHAMA & ONE COLONIAL SHLITTER LEAFS; EACH LEAF @ 4'-0" (w) x 8' 8-3/4" (h)

TEST SHUTTER #IA & #IB - DESIGN PRESSURE + 79.2 psf & -90.2 psf BUILD OUT FRAME; 8' 6-1/2" (w) x 9' 0-3/4" (h) EACH BUILD OUT FRAME AT 4' 4/1/16"(w) x 9' 0-3/4"(h) BAHAMA SHUTTER LEAF IA & COLONIAL SHUTTER LEAF IB EACH LEAF @ 4'-1" (w) x 8' 8-3/4" (h)




TEST SHLITTER #2 - DESIGN PRESSURE + 84.7 psf & -113.3 psf BUILD OUT FRAME; 2'-4" (w) x 2' 3-5/8" (h) BAHAMA LEAF; 2'-O" (w) x 1' 11-5/8" (h)


TEST SHUTTER #3 - DESIGN PRESSURE + 82.5 psf & -108.9 psf BUILD OUT FRAME; 2' 8-1/2" (w) x 5' 4-11/16" (h) BAHAMA LEAF; 2'-6" (w) x 5' 0-11/16" (h)

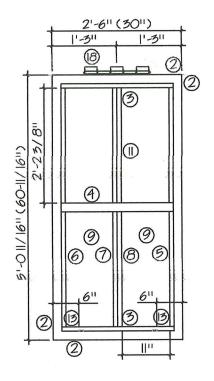

GENERAL NOTES SHEET 10: TEST STANDARDS, WIND SPEED CONVERSIONS, WIND LOADS - COMPONENTS & CLADDING, ADJUSTMENT FACTOR FOR BUILDINGS HEIGHT & EXPOSURE, SHUTTER LEAF SIZES, FASTENER CALCULATIONS & LOCATIONS

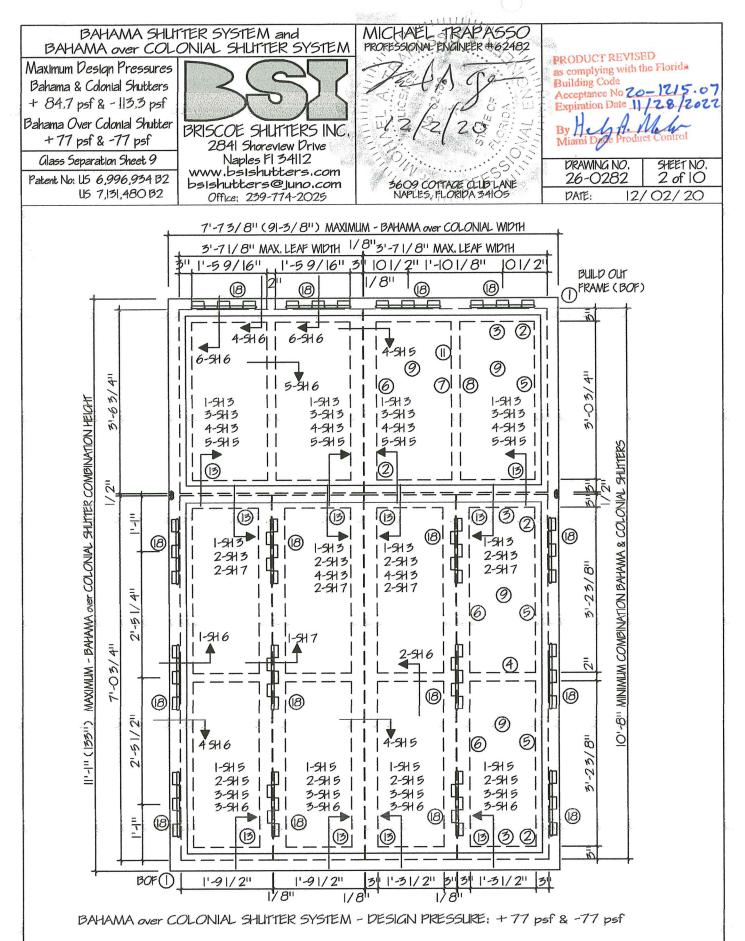

GENERAL NOTES SHEET 10: TEST STANDARDS, WIND SPEED CONVERSIONS, WIND LOADS - COMPONENTS & CLADDING, ADJUSTMENT
FACTOR FOR BUILDINGS HEIGHT & EXPOSURE, SHUTTER LEAF SIZES, FASTENER CALCULATIONS & LOCATIONS

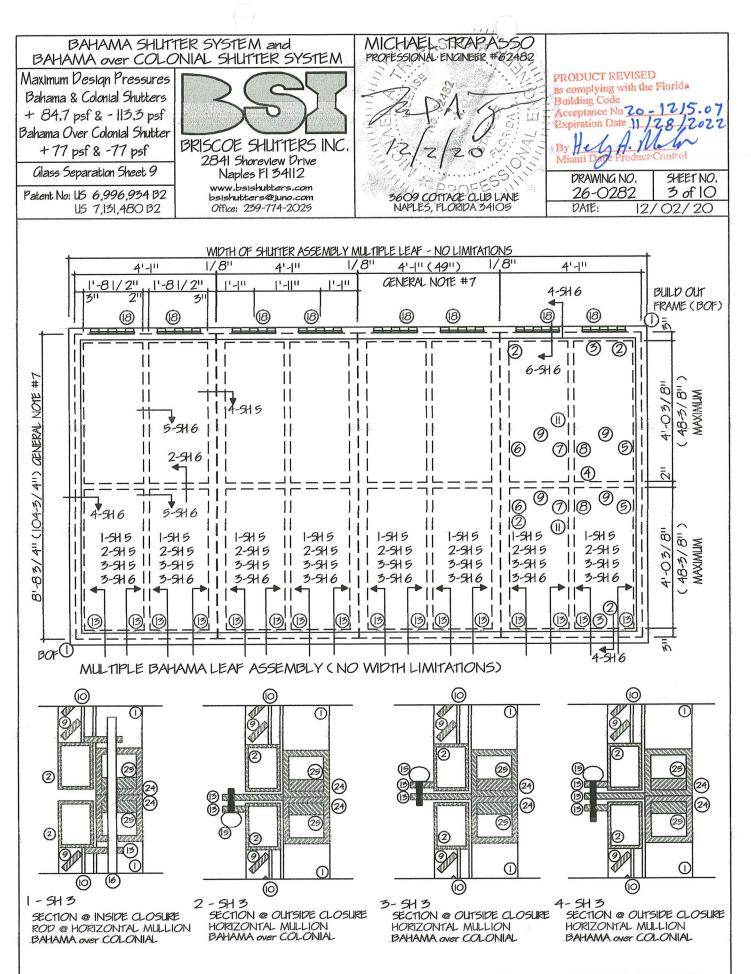

GENERAL NOTES SHEET 10: TEST STANDARDS, WIND SPEED CONVERSIONS, WIND LOADS - COMPONENTS & CLADDING, ADJUSTMENT FACTOR
FOR BUILDINGS HEIGHT & EXPOSURE, SHLITTER LEAF SIZES, FASTENER CALCULATIONS & LOCATIONS



Maximum Design Pressures Bahama & Colonial Shutters + 84.7 psf & - 113.3 psf Bahama Over Colonial Shutter +77 psf & -77 psf

Glass Separation Sheet 9

Patent No: US 6,996,934 B2 US 7,131,480 B2



BRISCOE SHUTTERS INC 2841 Shoreview Drive

Naples Fl 34112 www.bsishutters.com bsishutters@juno.com Office: 239-774-2025




MICHAEL TRAPASSO

PRODUCT REVISED as complying with the Florids **Building Code** Acceptance No Zo 1215.07 Expiration Date 11 28/2022

Miami Dag

SHEET NO. DRAWING NO. 26-0282 4 of 10 DATE:

3609 COTTAGE CLUB LANE NAPLES, FLORIDA 34105 12/02/20

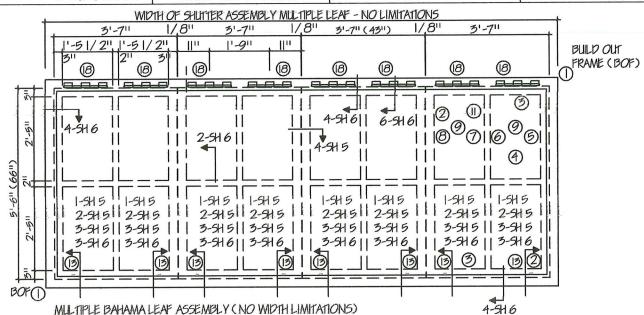

HINGE ASSEMBLY HINGE SPECIFICATIONS; REFER TO PAGE 10 GENERAL NOTE 10, 10a, & 10b

BAHAMA SHLITTER, 4'-1" (49") (w) HINGES - 2 SETS OF 5 LEAF HINGES AT THE TOP PER SHUTTER, (3 LEAFS AT THE BUILD OUT FRAWE & 2 LEAFS AT THE SHUTTER. WITH 3 SCREWS PER LEAF)

2 BAHAMA SHUTTER, 3'-7" (43") (w) HINGES - I SET, 7 LEAF HINGE AT THE TOP PER SHLITTER, (4 LEAFS AT THE BUILD OUT FRAME & 3 LEAFS AT THE SHLITTER, WITH 3 SCREWS PER LEAF)

3 BAHAMA SHIFTER 2'-6" (30") (w) HINGES - I SET OF 5 LEAF HINGES AT THE TOP PER SHUTTER, (3 LEAFS AT THE BUILD OUT FRAME & 2 LEAFS AT THE SHUTTER, WITH 3 SCREWS PER LEAF) HOLD CLOSE TABS

- I BAHAMA SHUTTER, 4'-1" (w) x8' 8-3/4" (h) 4 TABS, 2 @ 5" IN FROM OUTSIDE EDGE JAMBS & 2 @ 3" EACH SIDE OF CENTER LINE
- 2 BAHAMA SHLITTER, 3'-7" (w) x 6'-0" (h) 2 TABS, 5" TO 6" IN FROM OUTSIDE EDGE JAMBS

SHUTTER LEAF TOLERANCES: ANY COMBINATION OF WIDTH X HEIGHT NOT TO EXCEED 35.64 SQ FT PER LEAF IS ALLOWED WITHIN THE DESIGN PRESSURE

BAHAMA SHLITTER SYSTEM ASSEMBLY:

BAHAMA LEAF: WIDTH 4'-1" (49"), HEIGHT 8' 8-3/4" (103-3/4"), GENERAL NOTE #7

BAHAMA over COLONIAL SHUTTER SYSTEM ASSEMBLY:

COMBINED BAHAMA & COLONIAL; BOF WIDTH 7' 7-3/8" (91-3/8"), HEIGHT II'-I'' (133") GENERAL NOTE #7

MAXIMUM BAHAMA LEAF; WIDTH 3" 7-1/8" (43-1/8"), MAXIMUM COMBINED HEIGHT - BAHAMA HEIGHT PLUS COLONIAL HEIGHT NOT TO EXCEED 10'-8" (128"), GENERAL NOTE #7

MAXIMUM COLONIAL LEAF; WIDTH 1' 9-1/2" (21-1/2"), MAXIMUM COMBINED HEIGHT - BAHAMA HEIGHT PLUS COLONIAL HEIGHT NOT TO EXCEED 10'-8" (128"), GENERAL NOTE #7

COLONIAL SHLITTER SYSTEM ASSEMBLY:

COLONIAL LEAF; WIDTH 2'-2" (26"), HEIGHT 10'-8" (128"), GENERAL NOTE #7 COLONIAL LEAF; WIDTH 4'-1" (49"), HEIGHT 8' 8-3/4" (103-3/4"), GENERAL NOTE #7

GENERAL NOTES SHEET 10: TEST STANDARDS, WIND SPEED CONVERSIONS, WIND LOADS - COMPONENTS & CLADDING, ADJUSTMENT FACTOR FOR BUILDINGS HEIGHT & EXPOSURE, SHLITTER LEAF SIZES, FASTENER CALCULATIONS & LOCATIONS


MICHAEL TRAPASSO BAHAMA SHLITTER SYSTEM and PROFESSIONAL ENGINEER #62482 BAHAMA over COLONIAL SHLITTER SYSTEM PRODUCT REVISED Maximum Desian Pressures as complying with the Florida **Building Code** Bahama & Colonial Shutters Acceptance No Zo - 1215.07 + 84.7 psf & - 113.3 psf Expiration Date 11/28/2022 Bahama Over Colonial Shutter BRISCOE SHUTTERS INC +77 psf & -77 psf 2841 Shoreview Drive Naples Fl 34112 Glass Separation Sheet 9 DRAWING NO. SHEET NO. www.bsishutters.com 5 of 10 26-0282 Patent No: US 6,996,934 B2 bsishutters@juno.com DATE: 12/02/20 US 7,131,480 B2 Office: 239-774-2025 1-1/2" WINDOW or DOOR OPENING WINDOW or DOOR OPENING 19 (B) (2)WALL WALL WALL (7) 1/4 16 (3) Ո 1-SH 5 SECTION: INSIDE CLOSURE 2-SH 5 SECTION: SILL OF HEAD OUTSIDE CLOSURE - VERTICAL THUMBSCREW SECTION: SILL OF HEAD 3-5H 5 OUTSIDE CLOSURE HORIZONTAL - THUMBSCREW (<u>ō</u> (\overline{o}) ω **@** 4-SH 5 SECTION: VERTICAL MULLION 2 ONE LEAF HOLD OPEN TAB 1-3/4" 18" (B) HOLD CLOSE TAB (2) GENERAL NOTE: ADD 2-1/2" TO LENGTH FOR EACH ADDITIONAL SHUTTER LEAF / SIDE HOLD OPEN TAB SIDE VIEW 15 (10 HOLD OPEN TAB FRONT VIEW SECTION: INSIDE CLOSURE 5-SH 5 THUMBSCREWS @ HORIZONTAL MULLION NOTES:

* DEPTH OF BUILD OUT FRAME (1) = REFER TO SHEET 9 "MINIMUM GLASS SEPARATION"


B ** DIMENSION VARIES: SLAT SPACING TO ACCOMMODATE FULL SLAT (1/4" x 1" FLAT BAR @ 45 DEGREE) IN SLAT WELD GLIDES (5) & (6)

C*** WIDTH VARIES MINIMUM 3"

GENERAL NOTES SHEET 10: TEST STANDARDS, WIND LOADS CONVERSIONS, WIND LOADS - COMPONENTS & CLADDING, ADJUSTMENT FACTOR FOR BUILDINGS HEIGHT & EXPOSURE, SHUTTER LEAF SIZES, FASTENER CALCULATIONS & LOCATIONS

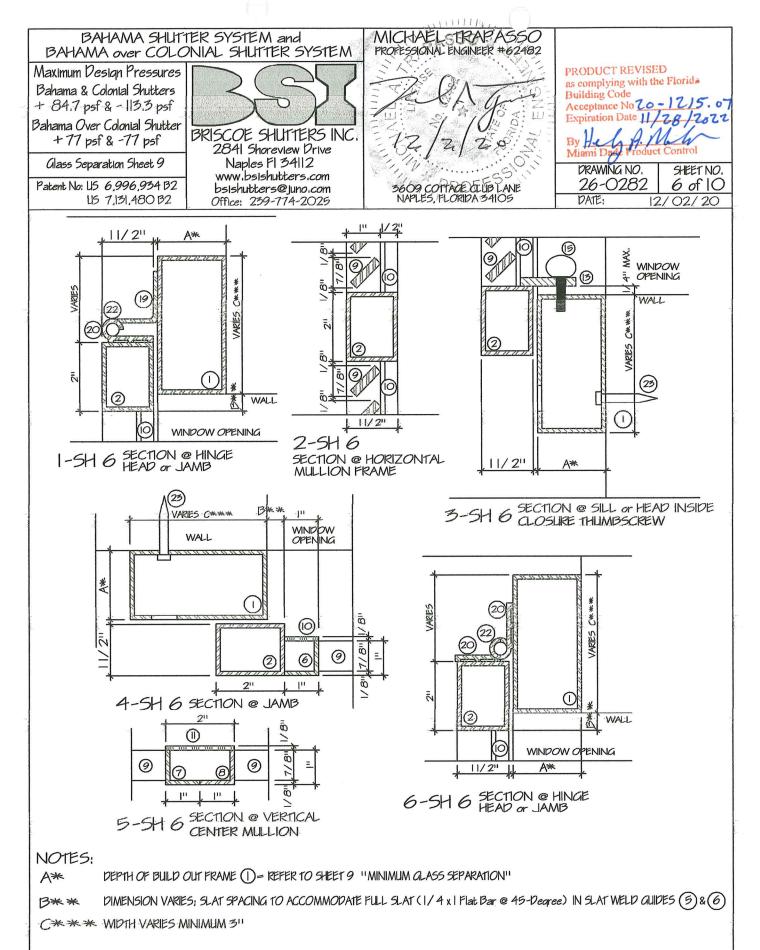

GENERAL NOTES SHEET 10: TEST STANDARDS, WIND SPEED CONVERSIONS, WIND LOADS - COMPONENTS & CLADDING, ADJUSTMENT FACTOR FOR BUILDINGS HEIGHT & EXPOSURE. SHLITTER LEAF SIZES. FASTENER SCHEDULES & LOCATIONS

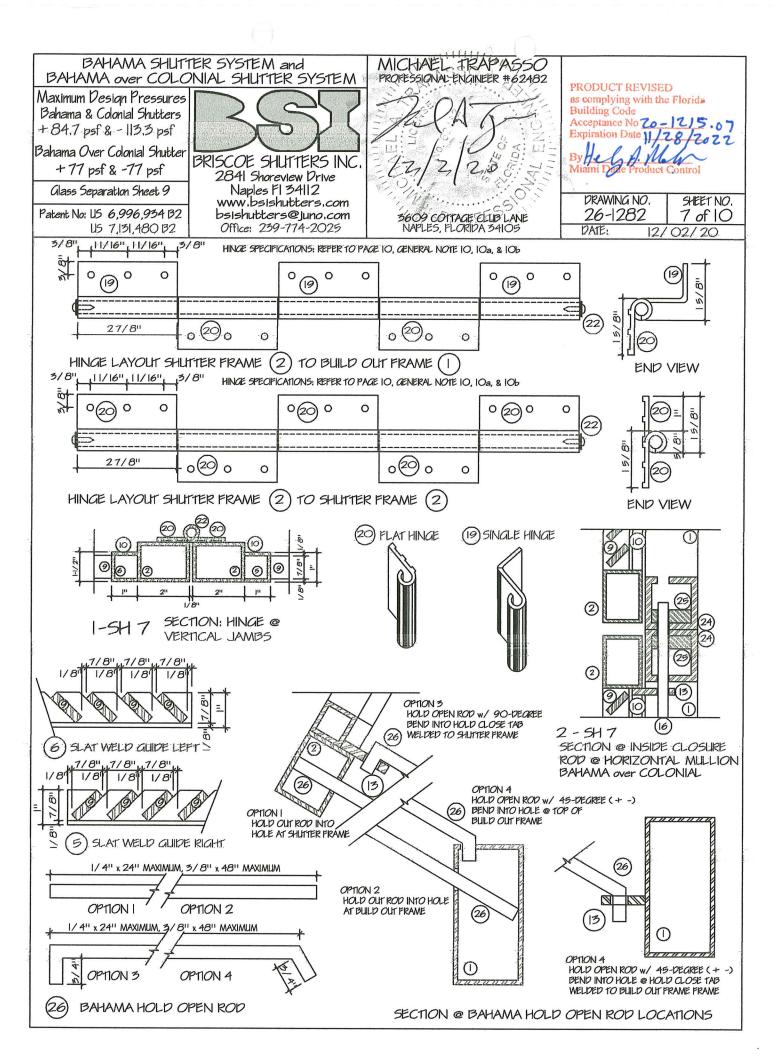

BAHAMA SHUTTER SYSTEM and BAHAMA over COLONIAL SHUTTER SYSTEM

Maximum Design Pressures Bahama & Colonial Shutters + 84.7 psf & - 113.3 psf Bahama Over Colonial Shutter +77 psf & -77 psf

Glass Separation Sheet 9

Patent No: US 6,996,934 B2 US 7,131,480 B2



2841 Shoreview Drive

Naples Fl 34112 www.bsishutters.com bsishutters@juno.com Office: 239-774-2025

MICHAELA TRAPASSO PROFESSIONAL ENGINEER #62482

NAPLES, FLORIDA 34109

PRODUCT REVISED as complying with the Florida **Building Code**

Acceptance No 70-1215.07 Expiration Date 11/28/2022

DRAWING NO. SHEET NO. 26-0282 8 of 10 DATE: 12/02/20

DESCRIPTION OF MATERIAL

| Item# | DESCRIPTION OF MATERIAL | | | SIZE | | TYPE | YPE MATERIAL GRADE | | | |
|---|------------------------------------|------------|----------------|----------------------|----------------------------|--------------------------|--------------------|--------------------|----------------|--|
| 1 | BUILD OUT FRAME | | | A* × C*** × 1/8" | | TUBE | ALUMINUM 6063-T52 | | | |
| 2 | SHUTTER FRAME | | | 1 1/2" × 2" × 1/8" | | TUBE | ALUMINUM 6063-T52 | | | |
| 3 | SPACER | | | | 1" x 1" x 1/8" | | TUBE | ALUMINUM 6063-T52 | | |
| 4 | HORIZONTAL MULLION | | | | 1 1/2" × 2" × 1/8" | | TUBE | ALUMINUM 6063-T52 | | |
| 5 | SLAT WELD GUIDE RIGHT | | | | 1" × 1" × 1/8" | | ANGLE | ALUMINUM 6063-T52 | | |
| 6 | SLAT WELD GUIDE LEFT | | | 1" × 1" × 1/8" | | | ANGLE | ALUMINUM 6063-T52 | | |
| 7 | VERTICAL MULLION RIGHT | | | 1" × 1" × 1/8" | | ANGLE | ALUMINUM 6063-T52 | | | |
| 8 | VERTICAL MULLION LEFT | | | 1" × 1" × 1/8" | | ANGLE | ALUMINUM 6063-T52 | | | |
| 9 | SLATS | | | 1/4" × 1" | | FLATBAR | ALUMINUM 6063-T52 | | | |
| 10 | JAMB WELD GUIDE COVER | | | 1" : | 1" × 1/8" FLAT BAR | | FLATBAR | ALUMINUM 6063-T52 | | |
| 11 | VERTICAL MULLION BACK COVER | | | 1/8 | 1/8" x 2" FLAT BAI | | FLATBAR | ALUMINUM 6063-T52 | | |
| 12 | | | | | | | | | | |
| 13 | HOLD CLOSE TAB | | | 1/4" × 1" × Varies | | FLATBAR | ALUMINUM 6063-T52 | | | |
| 14 | HOLD OPEN TAB | | | 1/4" × 1" × Varies | | FLATBAR | AL | UMINUM 6063-T52 | | |
| 15-15* | SHUTTER CLOSURE THUMBSCREW | | | 1/4" × 1" or *1 1/2" | | THUMBSCREW STAINLESS STE | | STAINLESS STEEL | | |
| 16 | INSIDE CLOSURE ROD 3/8" × VARIE | | | S PER SHUTTER | | | ROD | ALUMINUM 6063-T52 | | |
| 17 | | | | | | | · | | | |
| 18 | HINGE ASSEMBLY | | | | | | | | | |
| 19 | SINGLE HINGE | | | | 3/16" × 2-7/8" × 1-5/8" | | | AL | UMINUM 6061-T6 | |
| 20 | FLAT HINGE | | | | 3/16" × 2-7/8" × 1-5/8" | | | ALUMINUM 6061-T6 | | |
| 21 | HINGE SCREWS | | | | 0 x 1" 3 AT E | NGE LEAF | HE | X SELF-DRILLING | | |
| 22 | HINGE PIN | | | | B" DIAMETER | ROD ALUMINUM 6063-T52 | | UMINUM 6063-T52 | | |
| 23 | BUILD OUT | FRAME FAST | ENERS | | | | | | | |
| CONCRETE BLOCK HOLLOW 1/4 × MIN EMB | | | | | ED 1 1/4" 5.5. CO | | NC. SCREW | ELCO IND. or EQUAL | | |
| CONCRETE BLOCK; CONC. FILL 1/4 × MIN EMBI | | | | | | NC. SCREW | ELCO IND. or EQUAL | | | |
| | | | | | LAG BOLT or SS CONC. SCREW | | | ELCO IND. or EQUAL | | |
| WOOD FRAMING 5/16" x MIN. EMBED 1 1/4" | | | | | | | NC. SCREW | ZINC, SS or EQUAL | | |
| METAL FRAMING 12-24 × MIN. EA | | | WBED 1" | | | TEK SCREW | TEK SELF-DRILLING | | | |
| 24 | HORIZONTAL | _ | 2" × 2" × 1/4" | | | TUBE | ALUMINUM 6061-T6 | | | |
| 25 | HORIZONTAL MULLION STIFFENER | | | 1/2" × 1-1/2" | | | FLATBAR | ALUMINUM 6061-T6 | | |
| 26 | HOLD OUT ROD 1/4 x 24" MAXIMUM, 3/ | | | | 48" MAXIM | ROD | ALUMINUM 6063-T52 | | | |

ASSEMBLY METHOD:

SHUTTER FRAME

- SHUTTER FRAME CORNER CONSTRUCTION, AT EACH PANEL CORNER, THE ADJOINING STILE / RAIL ENDS ARE MITER CUT, BUTTED AND WELDED TOGETHER USING TWO (2) 1/4" x 2-13/16" FILET WELDS -ONE PER FACE, EACH FACE WELD IS GROUND DOWN SMOOTH
- 1B INTERMEDIATE RAIL END CONSTRUCTION, AT EACH INTERMEDIATE RAIL END, THE RAIL IS SQUARE CUT, BUTTED AND WELDED TO THE ADJACENT PANEL FRAME MEMBER USING TWO (2) 1/4"x 2" FILET WELDS - ONE PER FACE, EACH FACE WELD IS GROUND SMOOTH
- 1C SLAT WELD GUIDES WELDED TO THE SHUTTER FRAME JAMBS ON THE INSIDE AT 6" O/C, TOP AND BOTTOM
- VERTICAL MULLION WELD GUIDE; ONE RIGHT WELD GUIDE AND ONE LEFT WELD GUIDE WELDED TOGETHER ON THE INSIDE AT 6" O/C, THIS MEMBER IS WELDED TO THE HEAD, MULLIONS, AND SILL
- SLANTED SLAT CONSTRUCTION, ALL SLATS ARE SQUARE CUT AND WELDED AT EACH END TO THE ADJACENT PANEL STILE MEMBER USING ONE (1) 1/4" x 1" FILET WELD

BUILD OUT FRAME

2A BUILD OUT FRAME CONSTRUCTION, AT EACH CORNER THE ADJOINING STILE / RAIL ENDS ARE MITER CUT. BUTTED AND WELDED TOGETHER USING TWO (2) $1/4" \times 4-1/4"$ (1 × 3) OR TWO (2) $1/4" \times 5$ 11/16" (1 × 4) FILER WELDS - ONE PER FACE. EACH FACE WELD IS GROUND DOWN SMOOTH

BAHAMA SHLITTER SYSTEM and BAHAMA over COLONIAL SHLITTER SYSTEM

Maximum Design Pressures Bahama & Colonial Shutters +84.7 psf & -113.3 psf

Bahama Over Colonial Shutter +77 psf & -77 psf

Glass Separation Sheet 9

Patent No: US 6,996,934 B2 US 7,131,480 B2



BRISCOE SHUTTERS INC. 2841 Shoreview Drive Naples Fl 34112

www.bsishutters.com bsishutters@juno.com Office: 239-774-2025 MICHAEL TRAPASSO PROFESSIONAL ENGINEER #62482

> 3609 COTTAGE CLUB LANE NAPLES, FLORIDA 34105

PRODUCT REVISED
as complying with the Florids
Building Code
Acceptance No 20-1215

Acceptance No 20-1215.07 Expiration Date 11/28/2022

By H. M. Mieuri Dole Product Control

DRAWING NO. SHEET NO. 26-0282 9 of 10 DATE: 12/02/20



A 41.6 sq., ft, shutter has a negative 101.75 psf design pressure.

41.6 sq. ft., x 101.75 psf = 4,232.8 lb. design load.

BSI HURRICANE SHUTTER SYSTEMS HAS A BUILD OUT FRAME (BOF) ①
THAT ATTACHES TO THE BUILDING (INSIDE CLEAR OPENING IS 1/4"
LARGER THEN BUILDING OPENING), DEPTH OF BOF IS GOVERNED
BY THE GLASS SEPARATION, SHUTTERS ARE FACTORY ASSEMBLED
TO THE BOF THEN DISASSEMBLED FOR SHIPPING & INSTALLATION

BUILD OUT FRAME DEPTH IS GOVERNED BY THE GLASS SEPARATION FURTHEST OUTWARD GLASS SURFACE TO BACK OF SHUTTER SLATS

DISTANCE FROM FACE OF BUILDING TO FURTHEST OUTWARD GLASS SURFACE, MINUS (-) MINIMUM GLASS SEPARATION = DEPTH OF BUILD OUT FRAME (MINIMUM DEPTH I'')


MINIMUM GLASS SEPARATION BACK OF SLATS TO GLASS SHUTTER SIZE MAX. SQ. FT. TYPE OF SHUTTER SEPARATION 3.94 sqft 24" x 23.625" BAHAMA 2-1/4" COLONIAL 30" x 60.6875" 12.64 sqft 30.01" x 60.7 BAHAMA 12.65 saft 2-3/411 to 49" x 104.75" to 35.64 saft COLONIAL & 26" x | 28" & 21.11 saft BAHAMA over 3-1/411 ALL SIZES 84.4 saft COLONIAL

ANY COMBINATION OF WIDTH x HEIGHT NOT TO EXCEED 35.64 sq ft PER LEAF IS ALLOWABLE WITHIN THE DESIGN PRESSURE, GENERAL NOTE #7, SHEET IO


EXAMPLE

A 45.4 sq. ft, shutter has a negative 85.2 psf design pressure.

45.4 sq. ft., x 85.2 psf =3,868.08 lb. design load.

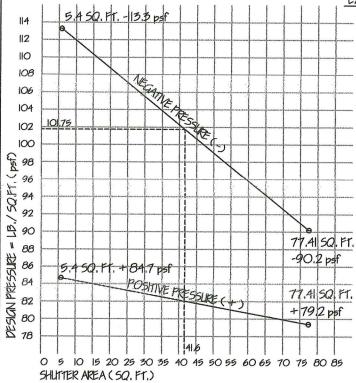

DESIGN PRESSURE CHART FOR FASTENER LOAD
CALCULATIONS BAHAMA & COLONIAL SHUTTER SYSTEMS

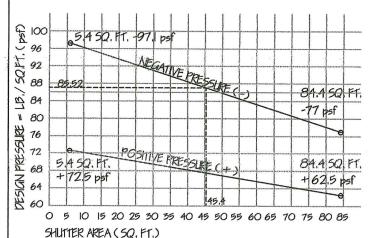

DESIGN PRESSURE CHART FOR FASTENER LOAD
CALCULATIONS BAHAMA over COLONIAL SHUTTER SYSTEM

GENERAL NOTES SHEET IO: TEST STANDARDS, WIND SPEED CONVERSIONS, WIND LOADS - COMPONENTS & CLADDING, ADJUSTMENT FACTOR FOR BUILDINGS HEIGHT & EXPOSURE, SHUTTER LEAF SIZES, FASTENER CALCULATIONS & LOCATIONS

BAHAMA SHUTTER SYSTEM and BAHAMA over COLONIAL SHUTTER SYSTEM

Maximum Design Pressures Bahama & Colonial Shutters + 84.7 psf & -113.3 psf

Bahama Over Colonial Shutter +77 psf & -77 psf

Glass Separation Sheet 9

Patent No: US 6,996,934 B2 US 7,131,480 B2



BRISCOE SHUTTERS INC 2841 Shoreview Drive Naples F1 34112 www.bsishutters.com bsishutters@juno.com

Office: 239-774-2025

MICHAEL TRAPASO PROFESSIONAL ENGINEER #62482

PRODUCT REVISED as complying with the Florida Building Code
Acceptance No Zo - 12.15.07
Expiration Date 11.128.120.27

By He Land Product Control

DRAWING NO. SHEET NO. 10 of 10 DATE: 12/02/20

GENERAL NOTES:

- 1 THIS PRODUCT IS DESIGNED & TESTED IN ACCORDANCE WITH THE 2020 FLORIDA BUILDING CODE (FBS) 7th EDITION BUILDING & RESIDENTIAL; FOR USE WITHIN AND OUTSIDE THE HIGH VELOCITY HURRICANE ZONE, TEST STANDARDS; TAS 201, 202, 203
- 2 THIS PRODUCT IS DESIGNED & TESTED IN ACCORDANCE WITH THE 2020 FLORIDA BUILDING CODE (FBC) 7th EDITION BUILDING CHAPTER 16 STRUCTURAL DESIGN & CHAPTER 24 GLASS & GLAZING
- 3 1HIS PRODUCT IS DESIGNED & TESTED IN ACCORDANCE WITH THE 2020 FLORIDA BUILDING CODE (FBC) 7th EDITION BUILDING SECTION 2413 HIGH-VELOCITY HURRICANE ZONES-STORM SHLITTERS/EXTERIOR PROTECTIVE DEVISES
- 4 ASCE 7-10, CHAPTER 30 (pq. 346) WIND LOADS COMPONENTS AND CLADDING METHOD I, NET DESIGN WIND PRESSURES, Pnet 30 (psf) (Exposure B at h = 30 ft.) NOTE: FOR EFFECTIVE AREAS BETWEEN THE THOSE GIVEN ABOVE THE LOAD MAY BE INTERPOLATED, OTHERWISE USE THE LOAD ASSOCIATED WITH THE LOWEST EFFECTIVE AREA
- 5 ASCE 7-10, CHAPTER 30 (pg. 347), MINIMUM DESIGN LOADS COMPONENTS IN CLADDING METHOD I, ADJUSTMENT FACTOR FOR BUILDING HEIGHT AND EXPOSURE B. C. & D
- 6 FASTENER CALCULATIONS & LOCATIONS:
 - WIDTH X HEIGHT X DESIGN PRESSURE (6a) / FASTENER STRENGTH (6b) = TOTAL NUMBER OF FASTENERS REQUIRED PER OPENING (6c)
 - 6a DESIGN PRESSURE REQUIRED BUILDING DATA; WIND VELOCITY (MPH), IMPORTANCE FACTOR, EXPOSURE CATEGORY, INTERNAL PRESSURE COEFFICIENT + -, MEAN ROOF HEIGHT, BUILDING WIDTH, BUILDING LENGTH, & ROOF SLOPE (x:12)
 - 66 FASTENER STRENGTH, ALLOWABLE LOADS EQUAL TO 25% OF THE AVERAGE LILTIMATE LABORATORY TEST VALUES, ELCO CONSTRUCTION PRODUCTS
 AGGRE-GATOR FASTENERS 300 SERIES STAINLESS STEEL (HEX HEAD 1/4 x 4 MAX.), CRETE-FLEX 554 MASONRY SCREWS (HEX HEAD 1/4 x 4 MAX.),
 ELCO ULTRACON CONCRETE 8 MASONRY ANCHORS (HEX HEAD 1/4 x 6 MAX, OR HEX HEAD 5/16 x 6 MAX.) OR
 FLORIDA FASTENERS DIRECT, LLC BLUE TAP SCREW ANCHORS 1/4 DIAMETER HEX HEAD x 1-1/4" to 6" LONG OR EQUAL
 - 6c FASTENER SPACING AND LOCATIONS: MAJORITY OF FASTENERS AT PRESSURE POINTS (HINGES, HOLD CLOSE TABS OR BRACKETS) BALANCE ON SIDES (BAHAMA). OR TOP & BOTTOM (COLONIAL). OF THE BUILD OUT FRAME, IN ACCORDANCE WITH MANUFACTURES HURRICANE SHUTTER SHOP DRAWINGS FOR EACH SIZE AND / OR OPENING

ANCHOR INSTALLATION SHALL BE MADE IN ACCORDANCE WITH ANCHOR MANUFACTURES PUBLISHED INSTALLATION INSTRUCTIONS AND THEIR APPROVED NOA

- 7 ANY COMBINATION OF WIDTH X HEIGHT NOT TO EXCEED 35,64 SQUARE FEET PER SHLITTER LEAF IS ALLOWABLE WITHIN THE DESIGN PRESSURE
- 8 .BSI.HURRICANE SHUTTER SYSTEMS HAS A BUILD OUT FRAME (BOF) (DITHAT ATTACHES TO THE BUILDING (INSIDE CLEAR OPENING IS 1/4" LARGER THEN BUILDING OPENING), DEPTH OF THE BOF IS GOVERNED BY THE GLASS SEPARATION, SHUTTERS ARE FACTORY ASSEMBLED TO THE BOF THEN DISASSEMBLED FOR SHIPPING & INSTALLATION
- 9 FOR THE PURPOSE OF THE TESTING REQUIRED IN TAS 202 SECTION 5.2, DESIGN PRESSURE CALCULATED IN ACCORDANCE WITH ASCE 7-10 ARE PERMITTED TO BE MULTIPLIED BY 0.6
- 10 HINGE SPECIFICATIONS:
 - 10a DESIGN PRESSURES, WIND VELOCITY, AND REQUIREMENTS BY THE BUILDING DEPARTMENT GOVERNING YOUR AREA DETERMINE THE TYPE OF HINGE ASSEMBLY
 - 106 NUMBER OF HINGE LEAFS (3, 5, 7, 9, & 11-Leaf Assembles) IS DETERMINED BY THE DESIGN PRESSURE & FASTENER CALCULATIONS REFER TO GENERAL NOTES: 6, 6a, 6b, & 6c