



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)  
BOARD AND CODE ADMINISTRATION DIVISION  
**NOTICE OF ACCEPTANCE (NOA)**

**PGT Industries, Inc.**  
**1070 Technology Drive**  
**North Venice, FL 34275**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

**DESCRIPTION: Series "FD-101" Outswing Aluminum French Door w/wo Sidelites – Non-Impact**

**APPROVAL DOCUMENT:** Drawing No. **11005-2 Rev G**, titled "Alum French Door & Sidelites, NI", sheets 1 through 15 of 15, prepared by manufacturer, dated 04/04/12 and last revised on 04/20/20, signed and sealed by Lynn Miller, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

**MISSILE IMPACT RATING: None: Approved Hurricane Protection devices, complying w/ FBC, as applicable are required.**

Limitations:

1. Use of Tables 1 or 2 (sheet 2) requires full length reinforcements (item # 22) for OX, XO, XXO, OXX, OXO and OXXO configurations. The lower design pressure from table 1 or table 2 shall control.
2. Standalone X, XX and O configuration unit do not require, reinforcement (item #22).
3. Applicable Egress operable doors must comply with min clear width & height per FBC, to be reviewed by AHJ.
4. 1x or 2x buck to be properly secured to sustain imposed load and to be reviewed by AHJ.

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and series and following statement: "Miami-Dade County Product Control Approved", noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA #20-0427.02** and consists of this page 1 and evidence pages E-1, E-2, E-3 & E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by **Ishaq I. Chanda, P.E.**



*Ishaq I. Chanda*

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**A. DRAWINGS**

1. Manufacturer's die drawings and sections (Submitted under files # listed below)
2. Drawing No. **11005-2 Rev F**, titled "Alum French Door & Sidelites, NP", sheets 1 through 15 of 15, prepared by manufacturer, dated 04/04/12 and last revised on 07/27/17, prepared by PGT Industries, signed and sealed by Anthony Lynn Miller, P.E.

**B. TESTS**

1. Reference Test report on
  - 1) Air Infiltration Test, per FBC, TAS 202-94
  - 2) Uniform Static Air Pressure Test, per FBC, TAS 202-94
  - 3) Water Resistance Test, per FBC, TAS 202-94.
  - 4) Forced Entry Test, per FBC 2411 3.2.1 (b) and TAS 202-94.
  - 5) Large Missile Impact Test per FBC, TAS 201-94 (N/A)
  - 6) Cyclic Wind Pressure Loading per FBC, TAS 203-94 (N/A)

Along with marked-up drawings and installation diagram of aluminum double French door, prepared by Fenestration Testing Laboratory, Inc., Test Report No(s). **FTL-2612**, dated SEP 07, 2000, signed and sealed by Marlin D. Brinson, P.E

Along with marked-up drawings and installation diagram of aluminum fixed door, prepared by Fenestration Testing Laboratory, Inc., Test Report No(s). **FTL-6864**, dated April 09, 2012, signed and sealed by Aldo P. Gonzalez, P.E.

2. Reference Test report on
  - 1) Uniform Static Air Pressure Test, per FBC, TAS 202-94
  - 2) Large Missile Impact Test per FBC, TAS 201-94(N/A)
  - 3) Cyclic Wind Pressure Loading per FBC, TAS 203-94(N/A)

Along with marked-up drawings and installation diagram of Aluminum Sliding Glass Doors (w/ PS, Super, Cardinal & Duraseal Spacers), prepared by Fenestration Testing Laboratory, Inc., Test Reports No(s) **FTL-8717**, **FTL-8970** and **FTL-8968**, dated 02/15/16, 06/07/16 and 06/20/16, all signed & sealed by Idalmis Ortega, P.E. (Submitted under files #**16-0629.18**/**#15-0528.25**)

3. Test report on
  - 1) Air Infiltration Test, per FBC, TAS 202-94
  - 2) Uniform Static Air Pressure Test, per FBC, TAS 202-94
  - 3) Water Resistance Test, per FBC, TAS 202-94.
  - 4) Forced Entry Test, per FBC 2411 3.2.1 (b) and TAS 202-94

Along with marked-up drawings and installation diagram of aluminum out swinging French door w/ sidelites, prepared by Fenestration Testing Laboratory, Inc., Test Report No(s). **FTL-4964**, dated September 09, 2006, signed and sealed by Edmundo Largaespada, P.E. (Submitted under files #**15-0528.25**/**12-0516.03**/**#11-1013.21**)

**C. CALCULATIONS**

1. Anchor verification calculations and structural analysis dated 04/28/17 and last revised on 07/17/17, complying with FBC-217 (6<sup>th</sup> Edition), prepared by PGT, signed and sealed by Lynn Miller, P.E.
2. Glazing complies w/ ASTM E-1300-02, 04 & -09.

**D. QUALITY ASSURANCE**

1. Miami Dade Department of Regulatory and Economic Resources (RER).

*Ishaq I. Chanda*

**Ishaq I. Chanda, P.E.**  
**Product Control Unit Supervisor**  
**NOA No. 22-0608.04**  
**Expiration Date: August 02, 2027**  
**Approval Date: July 07, 2022**

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

**E. MATERIAL CERTIFICATIONS**

1. None.

**F. STATEMENTS**

1. Statement letter of conformance to FBC 2017(6<sup>th</sup> edition) and letter of no financial interest, prepared by PGT, dated 07/17/17, signed and sealed by Lynn Miller, P.E.
2. Statement letter of conformance to FBC 2014(5<sup>th</sup> edition) and letter of no financial interest, prepared by PGT, dated 05/22/15, signed and sealed by Lynn Miller, P.E. (Submitted under files #15-0528.25)
3. Lab compliance as part of the above referenced test report.

**G. OTHER**

1. This NOA **revises & renews** NOA # 16-0629.18, expiring 08/02/22.
2. Test proposal # 16-0152 dated 03/09/16 approved by RER.
3. Test proposal dated Jan. 17, 2007 approved by BCCO.
4. RER e-mail correspondence dated 07-26-17.

**2. Evidence submitted under previous approval**

**A. DRAWINGS**

1. Drawing No. **11005-2 Rev G**, titled "Alum French Door & Sidelites, NI", sheets 1 through 15 of 15, prepared by manufacturer, dated 04/04/12 and last revised on 04/20/20, prepared by PGT Industries, signed and sealed by Anthony Lynn Miller, P.E.

**B. TESTS**

1. Test report on
  - 1) Air Infiltration Test, per FBC, TAS 202-94
  - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
  - 3) Water Resistance Test, per FBC, TAS 202-94
  - 4) Forced Entry Test, per ASTM F588 and TAS 202-94

along with marked-up drawings and installation diagram of all PGT Industries, Inc. representative units listed below and tested to qualify **Dowsil 791** and **Dowsil 983** silicones, prepared by Fenestration Testing Laboratory, Inc., Test Reports No.:

**FTL-7897**, PGT PW5520 PVC Fixed Window (unit 6 in proposal), dated 09/03/14

**FTL-20-2107.1**, PGT SGD780 Aluminum Sliding Glass Door (unit 7 in proposal) **FTL-20-**

**2107.2**, PGT CA740 Alum. Outswing Casement Window (unit 8 in proposal) **FTL-20-2107.3**,

PGT PW7620A Aluminum Fixed Window (unit 9 in proposal) and **FTL-20-2107.4**, PGT

PW7620A Aluminum Fixed Window (unit 10 in proposal) dated 07/13/20, all signed and sealed by Idalmis Ortega, P.E

**C. CALCULATIONS**

1. Anchor verification calculations and structural analysis dated 04/20/20, complying with FBC-2020 (7<sup>th</sup> Edition), prepared by PGT, signed and sealed by Lynn Miller, P.E.
2. Glazing complies w/ ASTM E-1300-02, -04 -09 & -16.

*Ishaq I. Chanda*

---

Ishaq I. Chanda, P.E.  
Product Control Unit Supervisor  
NOA No. 22-0608.04  
Expiration Date: August 02, 2027  
Approval Date: July 07, 2022

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**D. QUALITY ASSURANCE**

1. Miami Dade Department of Regulatory and Economic Resources (RER).

**E. MATERIAL CERTIFICATIONS**

1. None.

**F. STATEMENTS**

1. Statement letter of conformance to FBC 2020 (7<sup>th</sup> edition), and letter of no financial interest, prepared by PGT, dated 04/20/20, signed and sealed by Lynn Miller, P.E.

**G. OTHER**

1. This NOA **revises** NOA #**20-0427.02** and updates to **FBC 2020 (7<sup>th</sup> Edition)** expiring 08/02/22.
2. RER Test proposals #**19-1155** dated 01/10/20 approved by Ishaq I. Chanda, P.E.

*Ishaq I. Chanda*

---

**Ishaq I. Chanda, P.E.**  
**Product Control Unit Supervisor**  
**NOA No. 22-0608.04**  
**Expiration Date: August 02, 2027**  
**Approval Date: July 07, 2022**

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**3. New Evidence submitted**

**A. DRAWINGS**

1. Drawing No. **11005-2 Rev G**, titled “Alum French Door & Sidelites, NI”, sheets 1 through 15 of 15, prepared by manufacturer, dated 04/04/12 and last revised on 04/20/20, prepared by PGT Industries, signed and sealed by Anthony Lynn Miller, P.E.

**B. TESTS**

1. None.

**C. CALCULATIONS (submitted under previous approval)**

1. Anchor verification calculations and structural analysis dated 04/20/20, complying with FBC-2020 (7<sup>th</sup> Edition), prepared by PGT, signed and sealed by Lynn Miller, P.E.
2. Glazing complies w/ ASTME-1300-02, -04 -09 & -16.

**D. QUALITY ASSURANCE**

1. Miami Dade Department of Regulatory and Economic Resources (RER).

**E. MATERIAL CERTIFICATIONS**

1. None.

**F. STATEMENTS**

1. Statement letter of conformance to FBC 2020 (7<sup>th</sup> edition), and letter of no financial interest, prepared by PGT, dated 05/26/22, signed and sealed by Lynn Miller, P.E.
2. Statement e-letter dated 05/26/22 issued by PGT Industries, Inc, requesting renewal with no change, signed and sealed by Lynn Miller, P.E.

**G. OTHER**

1. This NOA **renews** NOA #**20-0427.02**, expiring 08/02/27.

*Ishaq I. Chanda*

---

**Ishaq I. Chanda, P.E.**  
**Product Control Unit Supervisor**  
**NOA No. 22-0608.04**  
**Expiration Date: August 02, 2027**  
**Approval Date: July 07, 2022**

# SERIES 101 OUTSWING, NON-IMPACT RESISTANT FRENCH DOOR AND SIDE LITE

DESIGN PRESSURE RATING	IMPACT RATING
SEE TABLES 1 - 4 ON SHEET 2	NOT RATED FOR IMPACT RESISTANCE

- 1) GLAZING OPTIONS: SEE BELOW.
- 2) DESIGN PRESSURES: (SEE TABLES 1-4 ON SHEET 2).
  - A. NEGATIVE DESIGN LOADS BASED ON TESTED PRESSURE AND GLASS TABLES ASTM E 1300.
  - B. POSITIVE DESIGN LOADS BASED ON WATER TEST PRESSURE AND GLASS TABLES ASTM E 1300.
  - C. DESIGN LOADS ARE BASED ON ALLOWABLE STRESS DESIGN, ASD.
- 3) CONFIGURATIONS: X, O, XX, XO, OX, XXO, OXX, OXO, AND OXXO.
- 4) ANCHORAGE: THE 33 1/3% STRESS INCREASE HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT. FOR ANCHORAGE REQUIREMENTS SEE SHEETS 8-11. MATERIALS, INCLUDING BUT NOT LIMITED TO STEEL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FBC, CURRENT EDITION.
- 5) SHUTTERS ARE REQUIRED WHERE IMPACT RESISTANCE IS REQUIRED. SHUTTERS MUST BE MIAMI-DADE COUNTY APPROVED FOR INSTALLATION IN MIAMI-DADE COUNTY.
- 6) SEALANTS: INSTALLATION SCREWS, FRAME AND PANEL CORNERS SEALED WITH CLEAR COLORED SEALANT.
- 7) REFERENCES: TEST REPORT FTL-2612, 4964 & 6864; ELCO ULTRACON NOA, DEWALT ULTRACON+ NOA, ELCO/DEWALT CRETEFLEX NOA, ANSI/AF&PA NDS FOR WOOD CONSTRUCTION, ALUMINUM DESIGN MANUAL
- 8) THIS PRODUCT HAS BEEN DESIGNED & TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
- 9) DOOR SIZES MUST BE VERIFIED FOR COMPLIANCE WITH EGRESS REQUIREMENTS PER CURRENT FLORIDA BUILDING CODE. APPLICABLE EGRESS REQUIREMENTS TO BE REVIEWED BY AUTHORITY HAVING JURISDICTION (AHJ).

TABLE A:

Anchor Group	Anchor Type	Frame Member	Substrate	Min. Edge Distance	Min. Embedment or Metal Thickness
1	1/4" Elco UltraCon®	All	Concrete (min. 2.85 ksi)	1-3/4"	1-3/8"
		Jamb	Hollow Block (ASTM C90)	1-3/4"	1-1/4"
	1/4" DeWalt UltraCon+®	All	Concrete (min. 3 ksi)	1-3/4"	1-3/8"
		Jamb	Hollow Block (ASTM C90)	1-3/4"	1-1/4"
2	1/4" 410 SS Elco/DeWalt CreteFlex®	All	Concrete (min. 3.35 ksi)	1-3/4"	1-3/4"
		Jamb	Hollow Block (ASTM C90)	1-3/4"	1-1/4"
		All	Southern Pine (SG = 0.55)	1"	1-3/8"
3	#12 SMS (steel, 18-8 S.S. or 410 S.S.)	All	Southern Pine (SG = 0.55)	9/16"	1-3/8"
		All	6063-T5 Aluminum	3/8"	1/8"
		All	Steel, A36	3/8"	0.060"
		All	Steel Stud, A1003 Gr. 33	3/8"	0.0451" (18 Ga.)

- 1) ALL ANCHOR HEAD TYPES ARE APPLICABLE.
- 2) MIN. OF 3 THREADS BEYOND METAL SUBSTRATE.
- 3) METAL SUBSTRATE TO MEET MIN. STRENGTH AND THICKNESS REQUIREMENTS PER CURRENT FLORIDA BUILDING CODE AND TO BE REVIEWED BY THE AUTHORITY HAVING JURISDICTION.
- 4) SEE ANCHOR/SUBSTRATE MATERIAL PROPERTIES ON SHEET 5 FOR Fy & Fu.


**CODES / STANDARDS USED:**

- 2020 FLORIDA BUILDING CODE (FBC), 7TH EDITION
- 2017 FLORIDA BUILDING CODE (FBC), 6TH EDITION
- ASTM E1300-09
- ANSI/AF&PA NDS-2018 FOR WOOD CONSTRUCTION
- ALUMINUM DESIGN MANUAL, ADM-2015
- AISI S100-16
- AISC 360-16

GENERAL NOTES.....	1
GLAZING DETAILS.....	1
DESIGN PRESSURES.....	2
VERT. SECTIONS.....	3
HORIZ. SECTIONS.....	4
PARTS LIST.....	5
EXTRUSIONS.....	6
ANCHOR QUANTITY.....	7-13
INSTALLATION.....	14-15

**INSTRUCTIONS:**

- 1) DETERMINE THE DESIGN PRESSURE, DP REQUIREMENT (LBS/FT<sup>2</sup>) FOR THE OPENING USING THE **ASCE-7 STANDARD**.
- 2) ON SHEET 2, TABLES 1 & 2 REFER TO PRODUCTS THAT ARE REINFORCED. TABLES 3 & 4 REFER TO PRODUCTS THAT ARE UNREINFORCED. DETERMINE THE DESIGN PRESSURE OF YOUR PRODUCT USING THE APPROPRIATE SET OF TABLES. EXAMPLES ARE GIVEN ON SHEET 2. THIS DESIGN PRESSURE NEEDS TO BE HIGHER THAN THE OPENING'S REQUIRED DESIGN PRESSURE FROM STEP 1.
- 3) DETERMINE YOUR ANCHOR GROUP FROM TABLE A, THIS SHEET AND YOUR GLASS TYPES, A OR B, FROM THE GLAZING DETAILS ON THIS SHEET.
- 4) FROM SHEETS 7-13, FIND THE SHEET THAT PERTAINS TO YOUR PRODUCT'S CONFIGURATION AND DETERMINE THE ANCHOR QUANTITIES REQUIRED.
- 5) ANCHORS ARE TO BE INSTALLED USING THE LOCATION GUIDELINES GIVEN IN THE NOTES ON SHEETS 7-13. SHEET 14 & 15 SHOW INSTALLATION CROSS-SECTIONAL DETAILS.

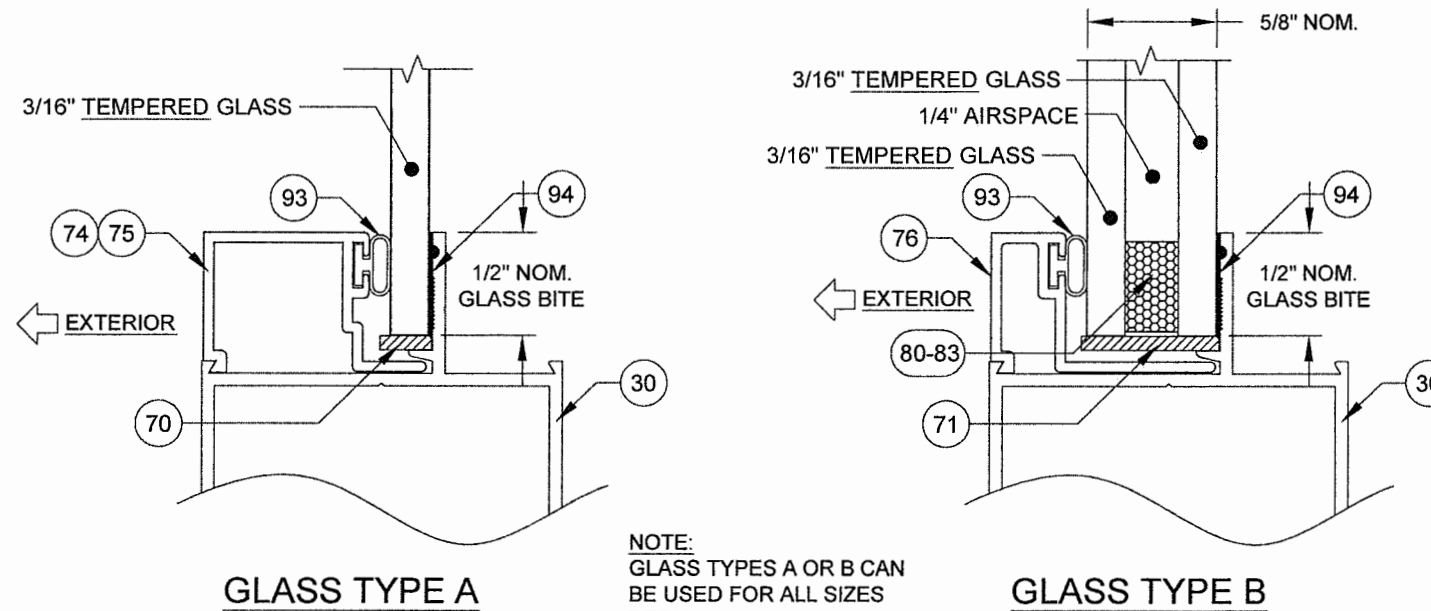

**NOTE:**  
GLASS TYPES A OR B CAN  
BE USED FOR ALL SIZES  
DEPICTED IN TABLES 1-4.

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chande  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By: Ishag I. Chande  
Miami-Dade Product Control

Revision: G) UPDATED TO FBC 2020,  
REVISED ANCHOR TYPE TABLE.  
AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	JENS ROSOWSKI	11005-2	Rev	G
	Drawn By	JENS ROSOWSKI			No.	11005-2
ALUM. FRENCH DOOR & SIDE LITES, NI NOTES AND GLZ. DETAILS REGISTRATION #29296	Sheet	1 OF 15	Scale	FD-101 NI	Title	Series
	NTS	1 OF 15	Scale	FD-101 NI	Title	Series
	NTS	1 OF 15	Scale	FD-101 NI	Title	Series

ANTHONY LYNN MILLER  
 LICENSE  
 No. 58705  
 STATE OF  
 FLORIDA  
 PROFESSIONAL ENGINEER  
 A. LYNN MILLER, P.E.  
 P.E.# 58705

TABLE 1:

DESIGN PRESSURES FOR DOORS, ALL GLASS TYPES											
REINFORCED (ITEM #22) DOOR TO SIDE LITE OR UNREINFORCED STAND-ALONE DOOR											
CONFIG.	DOOR FRAME WIDTH	DOOR FRAME HEIGHT									
		6 <sup>8</sup> - 79 3/4"		7 <sup>0</sup> - 83 3/4"		87 3/4"		91 3/4"		8 <sup>0</sup> - 95 3/4"	
X	2 <sup>0</sup> 25 1/2"	+75.0	-112.1	+75.0	-105.8	+75.0	-100.2	+75.0	-95.2	+75.0	-90.7
X	27 1/2"	+75.0	-105.0	+75.0	-99.0	+75.0	-93.7	+75.0	-89.0	+75.0	-84.7
X	29 1/2"	+75.0	-98.9	+75.0	-93.2	+75.0	-88.2	+75.0	-83.7	+75.0	-79.6
X	2 <sup>6</sup> 31 1/2"	+75.0	-93.7	+75.0	-88.3	+75.0	-83.4	+75.0	-79.1	+75.0	-75.2
X	2 <sup>8</sup> 33 1/2"	+75.0	-82.3	+75.0	-82.3	+75.0	-79.3	+75.0	-75.1	+71.3	-71.3
X	35 1/2"	+72.9	-72.9	+72.9	-72.9	+72.9	-72.9	+71.6	-71.6	+68.0	-68.0
X	3 <sup>0</sup> 37 1/2"	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0
XX	4 <sup>0</sup> 47 3/4"	+75.0	-112.1	+75.0	-105.8	+75.0	-100.2	+75.0	-95.2	+75.0	-90.7
XX	51 3/4"	+75.0	-105.0	+75.0	-99.0	+75.0	-93.7	+75.0	-89.0	+75.0	-84.7
XX	55 3/4"	+75.0	-98.9	+75.0	-93.2	+75.0	-88.2	+75.0	-83.7	+75.0	-79.6
XX	5 <sup>0</sup> 59 3/4"	+75.0	-93.7	+75.0	-88.3	+75.0	-83.4	+75.0	-79.1	+75.0	-75.2
XX	5 <sup>4</sup> 63 3/4"	+75.0	-82.3	+75.0	-82.3	+75.0	-79.3	+75.0	-75.1	+71.3	-71.3
XX	67 3/4"	+72.9	-72.9	+72.9	-72.9	+72.9	-72.9	+71.6	-71.6	+68.0	-68.0
XX	6 <sup>0</sup> 71 3/4"	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0

TABLE 2:

DESIGN PRESSURES FOR SIDE LITES, ALL GLASS TYPES											
REINFORCED (ITEM #22) DOOR TO SIDE LITE OR UNREINFORCED STAND-ALONE SIDE LITE											
SIDE LITE FRAME WIDTH	SIDE LITE FRAME HEIGHT										
	6 <sup>8</sup> - 79 3/4"		7 <sup>0</sup> - 83 3/4"		87 3/4"		91 3/4"		8 <sup>0</sup> - 95 3/4"		
10 3/4"	+75.0	-150.0	+75.0	-150.0	+75.0	-150.0	+75.0	-150.0	+75.0	-150.0	
12 3/4"	+75.0	-150.0	+75.0	-150.0	+75.0	-150.0	+75.0	-150.0	+75.0	-150.0	
19"	+75.0	-138.5	+75.0	-131.0	+75.0	-124.3	+75.0	-118.3	+75.0	-112.8	
21 3/4"	+75.0	-123.4	+75.0	-116.6	+75.0	-110.5	+75.0	-105.1	+75.0	-100.1	
27 3/4"	+75.0	-101.1	+75.0	-95.3	+75.0	-90.2	+75.0	-85.5	+75.0	-81.3	
36 1/8"	+67.3	-67.3	+67.3	-67.3	+67.3	-67.3	+67.3	-67.3	+65.9	-65.9	
36 3/4"	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0	+65.0	-65.0	

FOR MAX. SIZES OF COMBINED UNITS, SEE SHEETS 10-13.

EXAMPLE 1, (USING TABLE 1): X UNIT WITH GLASS TYPE A, 32" WIDE X 90" HIGH SINGLE DOOR (SEE NOTE 9)

DOOR DESIGN PRESSURE = +75 / -75.1 PSF

EXAMPLE 2, USING TABLES 3 & 4): XO UNIT WITH GLASS TYPE B, UNREINFORCED, 36" WIDE X 84" HIGH SINGLE DOOR WITH 12" X 84" SIDE LITE (SEE NOTE 9)

DOOR DESIGN PRESSURE = +35 / -35 PSF  
SIDE LITE DESIGN PRESSURE = +60 / -95.9 PSF  
OVERALL DESIGN PRESSURE = +35 / -35 PSF

DOOR SIZES MUST BE VERIFIED FOR COMPLIANCE WITH EGRESS REQUIREMENTS PER CURRENT FLORIDA BUILDING CODE. APPLICABLE EGRESS REQUIREMENTS TO BE REVIEWED BY AUTHORITY HAVING JURISDICTION (AHJ).

TABLE 3:

DESIGN PRESSURES FOR DOORS, ALL GLASS TYPES											
UNREINFORCED DOOR TO SIDE LITE											
CONFIG.	DOOR FRAME WIDTH	DOOR FRAME HEIGHT									
		6 <sup>8</sup> - 79 3/4"		7 <sup>0</sup> - 83 3/4"		87 3/4"		91 3/4"		8 <sup>0</sup> - 95 3/4"	
X	2 <sup>0</sup> 25 1/2"	+60.0	-60.3	+57.0	-57.0	+54.0	-54.0	+51.3	-51.3	+48.8	-48.8
X	27 1/2"	+56.5	-56.5	+53.3	-53.3	+50.5	-50.5	+47.9	-47.9	+45.6	-45.6
X	29 1/2"	+53.3	-53.3	+50.2	-50.2	+47.5	-47.5	+45.0	-45.0	+42.8	-42.8
X	2 <sup>6</sup> 31 1/2"	+50.5	-50.5	+47.5	-47.5	+44.9	-44.9	+42.6	-42.6	+40.5	-40.5
X	2 <sup>8</sup> 33 1/2"	+44.3	-44.3	+44.3	-44.3	+42.7	-42.7	+40.4	-40.4	+38.4	-38.4
X	35 1/2"	+39.3	-39.3	+39.3	-39.3	+39.3	-39.3	+38.6	-38.6	+36.6	-36.6
X	3 <sup>0</sup> 37 1/2"	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0
XX	4 <sup>0</sup> 47 3/4"	+60.0	-60.3	+57.0	-57.0	+54.0	-54.0	+51.3	-51.3	+48.8	-48.8
XX	51 3/4"	+56.5	-56.5	+53.3	-53.3	+50.5	-50.5	+47.9	-47.9	+45.6	-45.6
XX	55 3/4"	+53.3	-53.3	+50.2	-50.2	+47.5	-47.5	+45.0	-45.0	+42.8	-42.8
XX	5 <sup>0</sup> 59 3/4"	+50.5	-50.5	+47.5	-47.5	+44.9	-44.9	+42.6	-42.6	+40.5	-40.5
XX	5 <sup>4</sup> 63 3/4"	+44.3	-44.3	+44.3	-44.3	+42.7	-42.7	+40.4	-40.4	+38.4	-38.4
XX	67 3/4"	+39.3	-39.3	+39.3	-39.3	+39.3	-39.3	+38.6	-38.6	+36.6	-36.6
XX	6 <sup>0</sup> 71 3/4"	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0

TABLE 4:

DESIGN PRESSURES FOR SIDE LITES, ALL GLASS TYPES											
UNREINFORCED DOOR TO SIDE LITE											
SIDE LITE FRAME WIDTH	SIDE LITE FRAME HEIGHT										
	6 <sup>8</sup> - 79 3/4"		7 <sup>0</sup> - 83 3/4"		87 3/4"		91 3/4"		8 <sup>0</sup> - 95 3/4"		
10 3/4"	+60.0	-120.0	+60.0	-118.1	+60.0	-112.4	+60.0	-107.2	+60.0	-102.4	
12 3/4"	+60.0	-106.4	+60.0	-100.9	+60.0	-95.9	+60.0	-91.4	+60.0	-87.3	
19"	+60.0	-74.6	+60.0	-70.5	+60.0	-66.9	+60.0	-63.7	+60.0	-60.7	
21 3/4"	+60.0	-66.4	+60.0	-62.8	+59.5	-59.5	+56.6	-56.6	+53.9	-53.9	
27 3/4"	+54.4	-54.4	+51.3	-51.3	+48.5	-48.5	+46.1	-46.1	+43.8	-43.8	
36 1/8"	+36.2	-36.2	+36.2	-36.2	+36.2	-36.2	+36.2	-36.2	+35.5	-35.5	
36 3/4"	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0	+35.0	-35.0	

FOR MAX. SIZES OF COMBINED UNITS, SEE SHEETS 10-13.

EXAMPLE 3, (USING TABLE 1): XX UNIT WITH GLASS TYPE A, 63-3/4" WIDE X 91-3/4" HIGH DOUBLE DOOR

DOOR DESIGN PRESSURE = +75 / -75.1 PSF

EXAMPLE 4, (USING TABLES 1 & 2): OXX UNIT WITH GLASS TYPE B, REINFORCED, 60" WIDE X 90" HIGH DOUBLE DOOR WITH 29" X 90" SIDE LITE (SEE NOTE 9)

DOOR DESIGN PRESSURE = +75 / -75.1 PSF  
SIDE LITE DESIGN PRESSURE = +67.3 / -67.3 PSF  
OVERALL DESIGN PRESSURE = +67.3 / -67.3 PSF

EXAMPLE 5, (USING TABLE 2): O UNIT WITH GLASS TYPE A, 24" WIDE X 80" HIGH (SEE NOTE 9)

SIDE LITE DESIGN PRESSURE = +75 / -95.3 PSF

EXAMPLE 6, (USING TABLES 1 & 2): OXXO UNIT WITH GLASS TYPE B, REINFORCED, 71-3/4" WIDE X 95-3/4" HIGH DOUBLE DOOR WITH (2) 36-3/4" X 95-3/4" SIDE LITES

DOOR DESIGN PRESSURE = +65 / -65 PSF  
SIDE LITE DESIGN PRESSURE = +65 / -65 PSF  
OVERALL DESIGN PRESSURE = +65 / -65 PSF

NOTES FOR ALL CONFIGURATIONS:

1) FOR CONFIGURATIONS WHICH CONTAIN A SIDE LITE TO DOOR CONNECTION, (XO, OX, XXO, OXX, OXO, OXXO), THE LOWEST DESIGN PRESSURE SHALL PREVAIL.

2) FULL LENGTH REINFORCEMENT (ITEM 22 SHOWN IN SECTION E-E, SHEET 4), IS REQUIRED AT DOOR TO SIDE LITE CONNECTIONS, WHEN USING TABLES 1 & 2.

3) DOOR AND SIDE LITE COMBINATIONS FROM TABLES 3 AND 4 DO NOT REQUIRE REINFORCEMENT ITEM 22.

4) DESIGN PRESSURES UNDER 40 PSF ARE NOT APPLICABLE IN MIAMI-DADE COUNTY.

5) POSITIVE DESIGN PRESSURE IS LIMITED TO 60 PSF (WATER RESISTANCE 9.0 PSF) FOR NON-REINFORCED DOORS AND SIDE LITES IN TABLES 3 AND 4.

6) FOR DOOR-ONLY CONFIGURATIONS (X, XX), ONLY TABLE 1 IS APPLICABLE. REINFORCEMENT, PART #22, IS NOT REQUIRED.

7) FOR SINGLE, STAND-ALONE SIDE LITES (O), ONLY TABLE 2 IS APPLICABLE. REINFORCEMENT, PART #22, IS NOT REQUIRED


8) CONFIGURATIONS WHERE THE DOOR LOCKSTILE ABUTS A SIDELITE ARE NOT AVAILABLE WITH REINFORCEMENT.


9) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SIZE. (E.G. FOR 32" "X" DOOR WIDTH IN TABLE 1, USE 33-1/2")




**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chande  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By: Ishag I. Chande  
Miami-Dade Product Control

Revision: G) ADDED DESCRIPTION TO TABLE HEADERS.  
- AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	ALUM. FRENCH DOOR & SIDE LITES, NI	Date	04/04/12	JENS ROSOWSKI	G
		Drawn By	JENS ROSOWSKI		
		DWG No.	11005-2		
		Sheet	2 OF 15		
 REGISTRATION #29296 ANTHONY LYNN MILLER LICENSE No. 58705 STATE OF FLORIDA PROFESSIONAL ENGINEER	DESIGN PRESSURE TABLES	Scale	FD-101 NI	NTS	
		Series	FD-101 NI	NTS	
		Title	ALUM. FRENCH DOOR & SIDE LITES, NI	DESIGN PRESSURE TABLES	

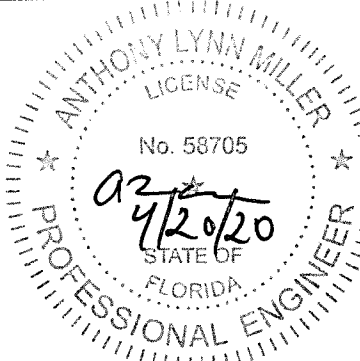  
 A. LYNN MILLER, P.E.  
 P.E.# 58705

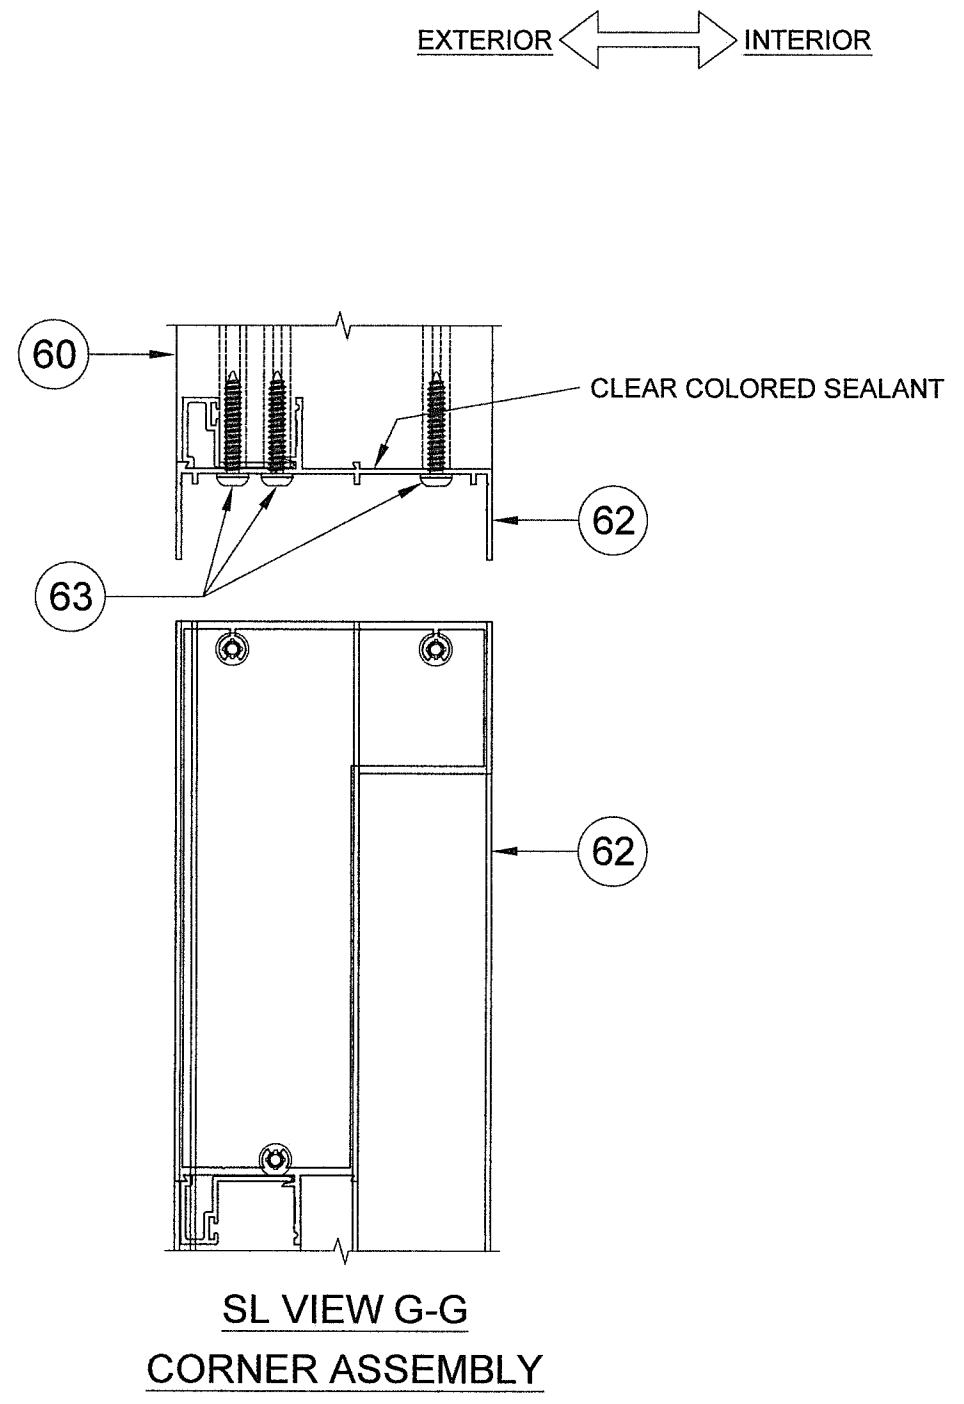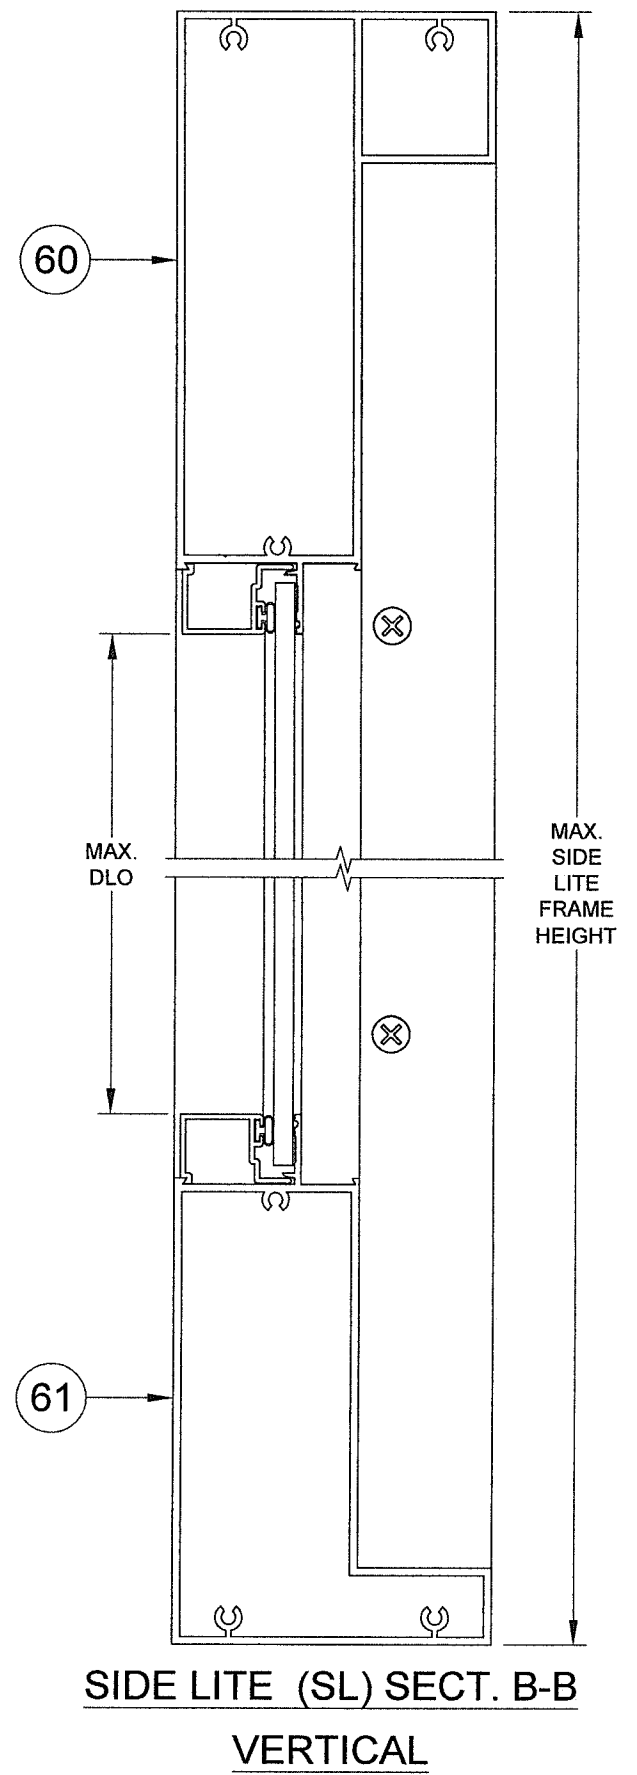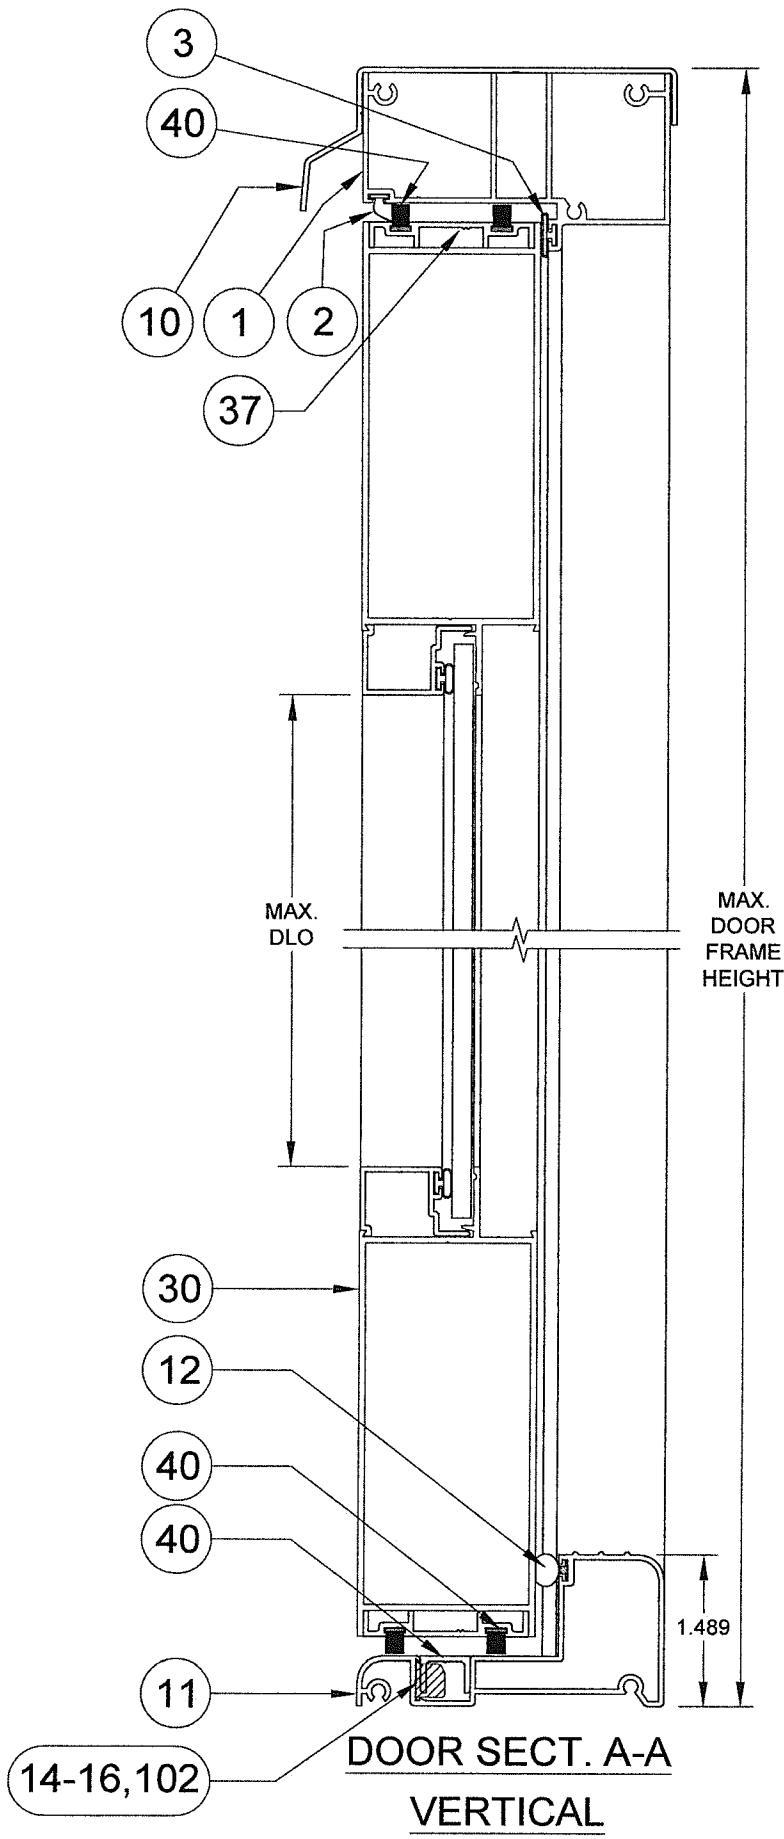

**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chande  
Miami-Dade Product Control





**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By Ishag I. Chande  
Miami-Dade Product Control

Revision  
G) NO CHANGES THIS SHEET. - AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	DWG No.	11005-2
	Scale	FD-101 NI	Sheet	3 OF 15
REGISTRATION #29296	ALUM. FRENCH DOOR & SIDE LITES, NI	VERTICAL SECTIONS		

ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
4/20/20  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705



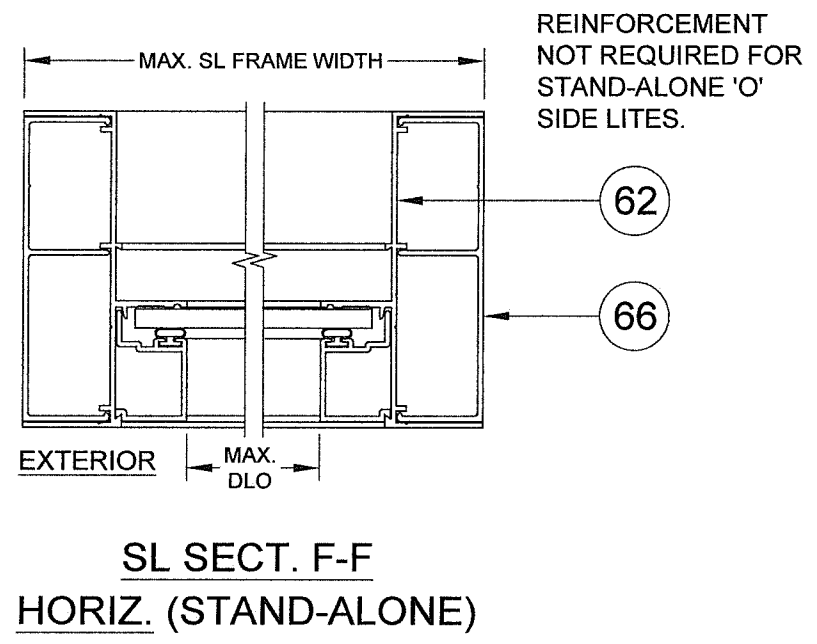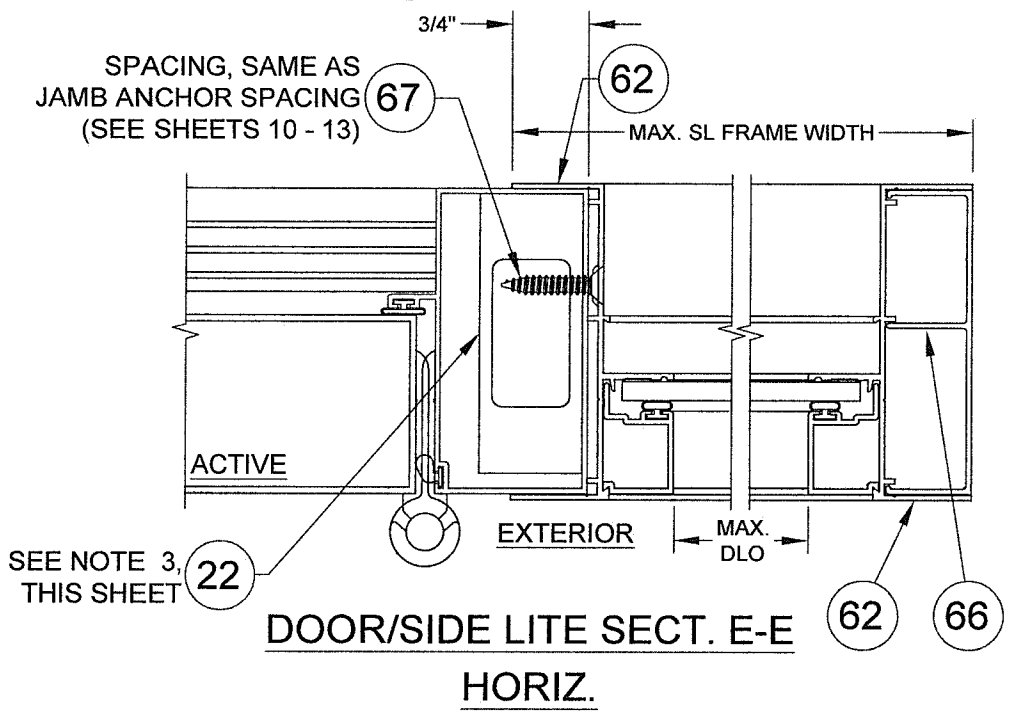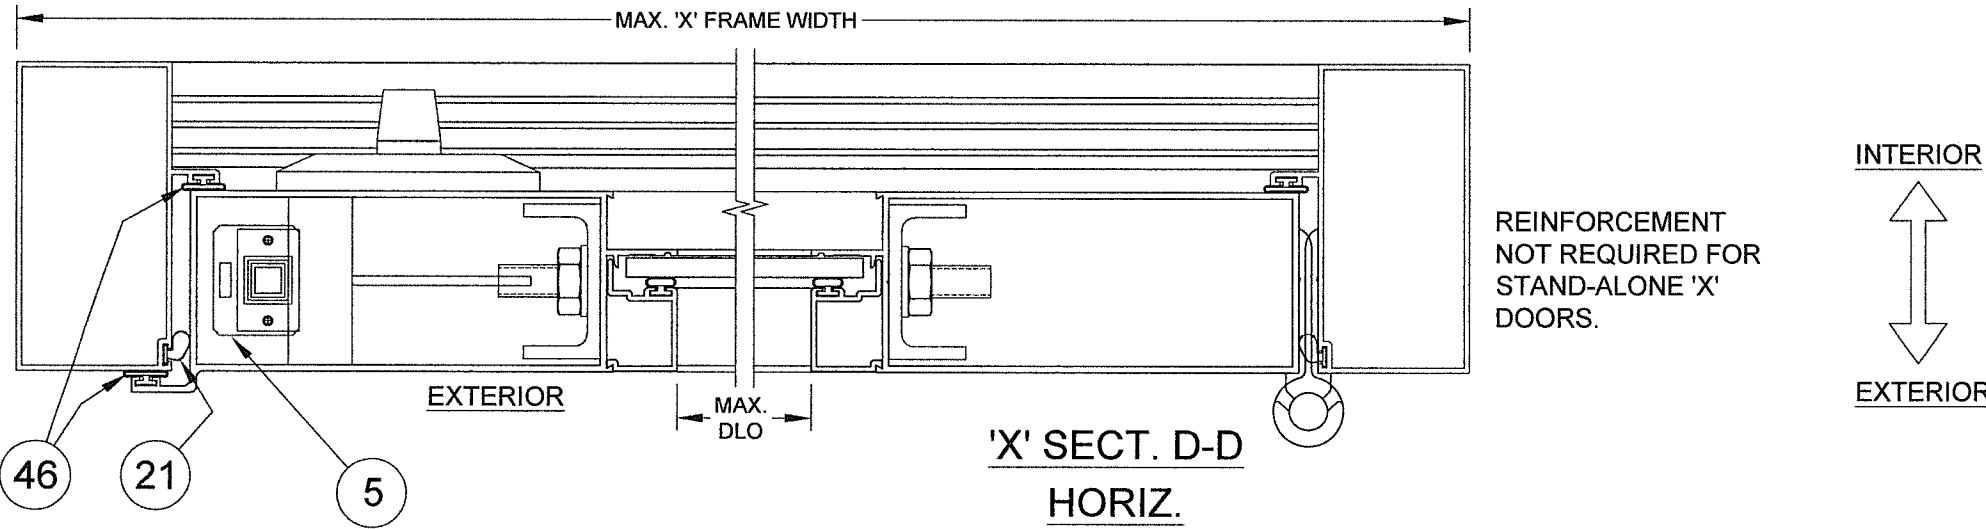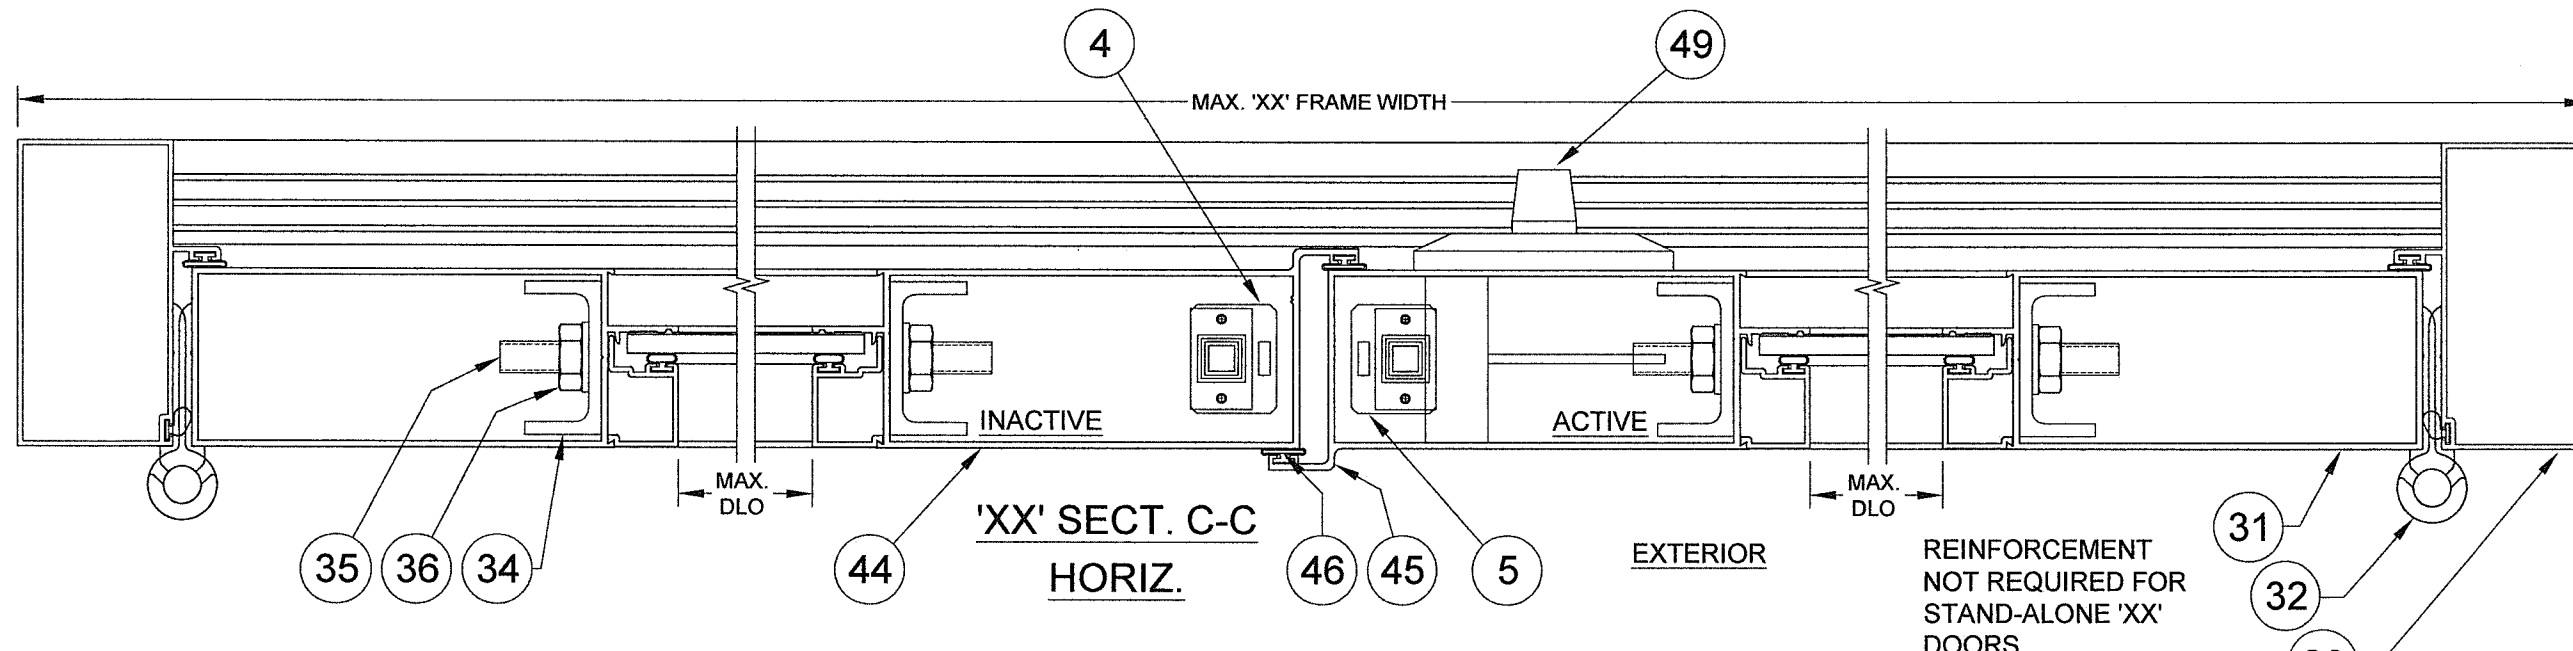

- NOTES:**
- 1) CLEAR OPENING FOR 'X' AND 'XX' DOORS AS FOLLOWS:  
**WIDTH:**  
 'X' DOORS = DOOR FRAME WIDTH - 5.646  
 'XX' DOOR = DOOR FRAME WIDTH / 2 - 4.079  
**HEIGHT:**  
 DOOR FRAME HEIGHT - 3.259"
  - 2) SIDE LITES OVERLAP 'X' AND 'XX' DOORS BY 3/4" WHEN ASSEMBLED TO MAKE 'XO', 'OX', 'OXO', 'XXO', 'OXX' AND 'OXXO' CONFIGURATIONS.
  - 3) FULL LENGTH REINFORCEMENT APPLICABLE TO DOOR AND SIDE LITE COMBINATIONS FROM TABLES 1 AND 2, SHEET 2. ITEM 22 IS NOT REQUIRED WITH COMBINATIONS FROM TABLES 3 AND 4, SHEET 2, OR WITH STAND-ALONE 'O', 'X' & 'XX' CONFIGURATIONS FROM TABLES 1 AND 2.

**PRODUCT RENEWED**  
 as complying with the Florida Building Code  
 NOA-No. 22-0608.04  
 Expiration Date 08/02/2027  
 By *Ishag I. Chande*  
 Miami-Dade Product Control

**PRODUCT REVISED**  
 as complying with the Florida Building Code  
 NOA-No. 20-0427.02  
 Expiration Date: 08/02/2022  
 By *Ishag I. Chande*  
 Miami-Dade Product Control





Revision G) NO CHANGES THIS SHEET. - AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	No.	11005-2
ALUM. FRENCH DOOR & SIDE LITES, NI	Drawn	JENS ROSOWSKI	DWG	4 OF 15
	Series	FD-101 NI	Scale	NTS
HORIZONTAL SECTIONS		Sheet		
REGISTRATION #29296		Title		

ANTHONY LYNN MILLER  
 LICENSE  
 No. 58705  
*Anthony Lynn Miller*  
 4/20/20  
 STATE OF FLORIDA  
 PROFESSIONAL ENGINEER  
 A. LYNN MILLER, P.E.  
 P.E.# 58705

ITEM	DWG #	PGT#	DESCRIPTION
1	943B	60411	FRAME HEAD
2	1010	6Q300	WSTP., Q-LON .190 X.375 HIGH
3	7070	67070K	BULB WEATHERSTRIP .187 X.300 HIGH
4	955	7955X	FLUSHBOLT STRIKEPLATE
5	938	7938X	2 PT. LOCK STRIKEPLATE
6	956	7956A	FRAME HEAD STRIKEPLATE BACKING PLATE
7		7832X12FPXP	#8-32 X .500 PH. FL. MS - S.S. W/SILICONE PATCH
8	995	70995	GASKET (BETWEEN THRESHOLD & FRAME JAMB)
9	996	70996	GASKET (BETWEEN HEAD & FRAME JAMB)
10	952A	6533016	FILLER HEAD ADAPTER
11	11000	611000M	OUTSWING THRESHOLD
12	1670	671670	WSTP., .350 RD FOAM FILL T-SLOT (AMSBURY#32011)
13	11004A	611004M	OUTSWING THRESHOLD CHANNEL COVER
14	11001A	411001A	ACETAL SPACER .065 @ THRESHOLD, OPTIONAL
15	11002A	411002A	ACETAL SPACER .095 @ THRESHOLD, OPTIONAL
16	11003A	411003A	ACETAL SPACER .140 @ THRESHOLD, OPTIONAL
20	915D	60380	FRAME JAMB (OUTSWING)
21	1010	6Q300	WSTP., Q-LON .190 X.375 HIGH
22	6608	66608M	1X2-3/4X650 TUBE MULL 6061-T5
23	1140	78X112PSATS	#8 X 1.500 PH SQ A T/S
24	1048	71048	JAMB SCREW COVER CAP
25	930	41721N	STRIKE PLATE INSERT
26	1118	710X34PFA	#10 X.750 PH. FL. SMS
27	7070	67070K	BULB WEATHERSTRIP .187 X.300 HIGH
30	910D	6910	DOOR PANEL, TOP & BOT. RAIL
31	911E	6911	DOOR PANEL, SIDE RAIL (OUTSWING)
32	917	7FRMO	HINGE ASSY. (917-1D)
33	1178	71058FP W,B	#10 X.625 PH. FL. SMS
34	913A	60378M	TRUSS CLAMP
35	1130	6TRODA	5/16-18 THREADED ROD
36	990	7990NUTA	5/16-18 FLANGED HEX NUT
37	914A	60379M	WEATHERSTRIP CHANNEL
38		7834FPT	#8 X.75 PH. FL. TEK
39	997	70997	GASKET (BETWEEN PANEL HEAD/SILL & PANEL STILES)
40	1023	67924G	WSTP., .187 X.250 HIGH, FINSEAL
41	928	41720	SLIDE BOLT ASSY. (TOP & BOTTOM, INACTIVE PANEL)
42	1145	76X12FPAW	#6 X.500 PH FL SMS TYPE BDS
43	1212	7P30GG	SILL DUST PLUG (INACTIVE PNL)
44	983B	6983	DOOR PANEL ASTRAGAL 1 (OUTSWING)
45	984B	6984	DOOR PANEL ASTRAGAL 2 (OUTSWING)
46	1213	6Q200K	WSTP., Q-LON .190 X.200 HIGH
47	929	74UBLOK	LOCK SUPPORT ASSY. (41707 & 41708)
48	1139	7634F	#6 X.750 PH. FL. SMS
49	982	FD2PTAY	2 PT. LOCK ASSEMBLY
50		6R180FS	RUBBER SLEEVE
51	930	41721	STRIKE PL. INSERT (INACTIVE PANEL)
52	931	7FRSPX	DEADBOLT STRIKE PLATE
53	1118	710X34PFA	#10 X.750 PH FL. SMS
54	957	70957X	HANDLE STRIKE PLATE
55	1118	710X34PFA	#10 X.750 PH FL. SMS
60	920D	6920D	SIDELITE HEADER
61	921D	6921	SIDELITE SILL
62	916B	60381	SIDELITE JAMB
63	1155	781PQA	#8 X 1.000 QUAD PN. SMS
64	998	7998	HEAD GASKETS (STOCKING #70998)
65	999	7999	SILL GASKETS (STOCKING #70999)
66	934A	61641M	SIDELITE JAMB ADAPTER
67			#12 SHEET METAL SCREW
70		712653K	SETTING BLOCK, 3/32" X 1/4" X 1" W/PSA
71		71267K	SETTING BLOCK, 1/16" X 1/2" X 1" W/PSA
74	989	6989	BEAD, 3/16"
75	4046	644842	BEAD, 3/16" (FOR SURFACE-APPLIED GRILL KIT)
76	4057	64057	BEAD, 5/8" IG
92	986	64986	BEAD, SIDE LITE INTERIOR
93	1224	6TP247	BULB, THICK (USED IN ALL EXTRUDED BEAD)
94			GLAZING SILICONE, DOW 899 OR 983 OR 791
100			GLASS, 3/16" TEMPERED
101			GLASS, 5/8" I.G., 3/16" TEMPERED, AIR SPACE, 3/16" TEMPERED
102	11006A	41106A	ACETAL SPACER .295 @ THRESHOLD, OPTIONAL
103			OFF-THE-SHELF DEAD BOLT LOCK, MIN 1" THROW, GR 3 STEEL
104			OFF-THE-SHELF HANDLE/LATCH ASSEMBLY, MIN 7/16" THROW, GR 3 STEEL

ITEMS # 17-19, 28, 29, 56-59, 68, 69, 72, 73, 77-79, 84-91 & 95-99 ARE NOT USED AND ARE NOT PART OF THIS APPROVAL.

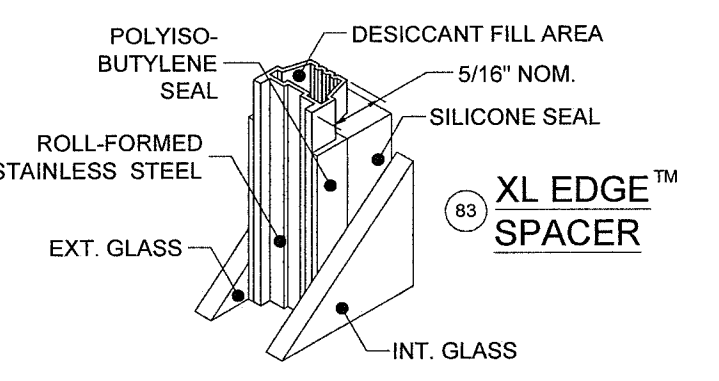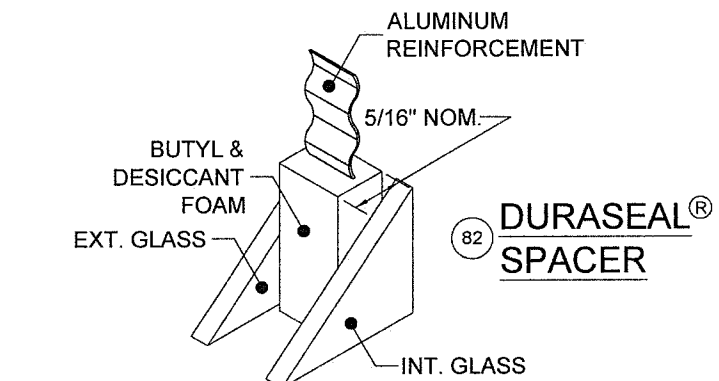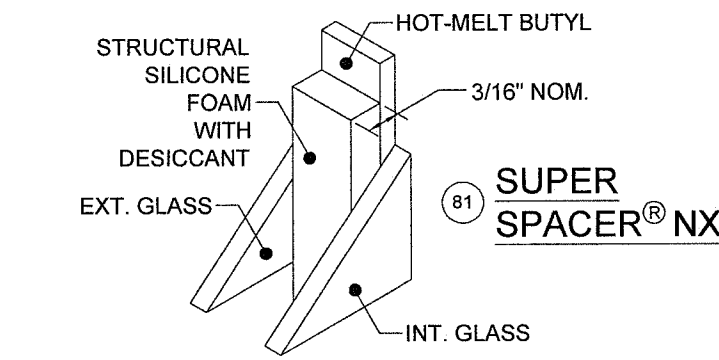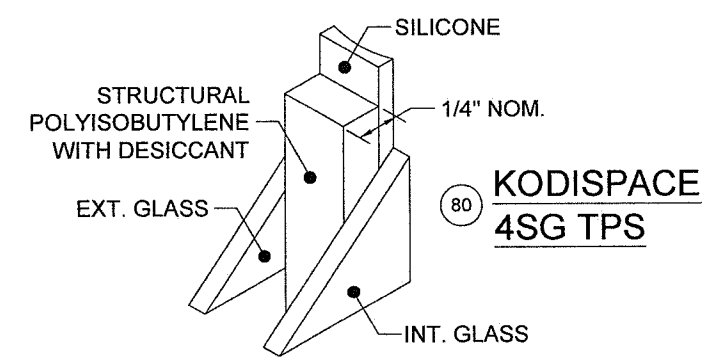


Part #	Description	Material
80	Kommerling 4SG TPS Spacer System	See this Sheet for Materials
81	Quanex Super Spacer nXT with Hot Melt Butyl	
82	Quanex Duraseal Spacer	
83	Cardinal XL Edge Spacer	

REFERENCE TEST REPORTS: FTL-8717, 8968 & 8970

ANCHOR/SUBSTRATE MATERIAL PROPERTIES:


Material	Min. F <sub>y</sub>	Min. F <sub>u</sub>
#12 Steel Screw	92 ksi	120 ksi
#12 18-8 Screw	60 ksi	95 ksi
#12 410 Screw	90 ksi	110 ksi
1/4" Elco UltraCon®	155 ksi	177 ksi
1/4" DeWalt UltraCon®	148 ksi	164 ksi
1/4" 410 SS Elco/Dewalt CreteFlex®	127.4 ksi	189.7 ksi
6063-T5 Aluminum	16 ksi	22 ksi
A36 Steel	36 ksi	58 ksi
Gr. 33 Steel Stud	33 ksi	45 ksi

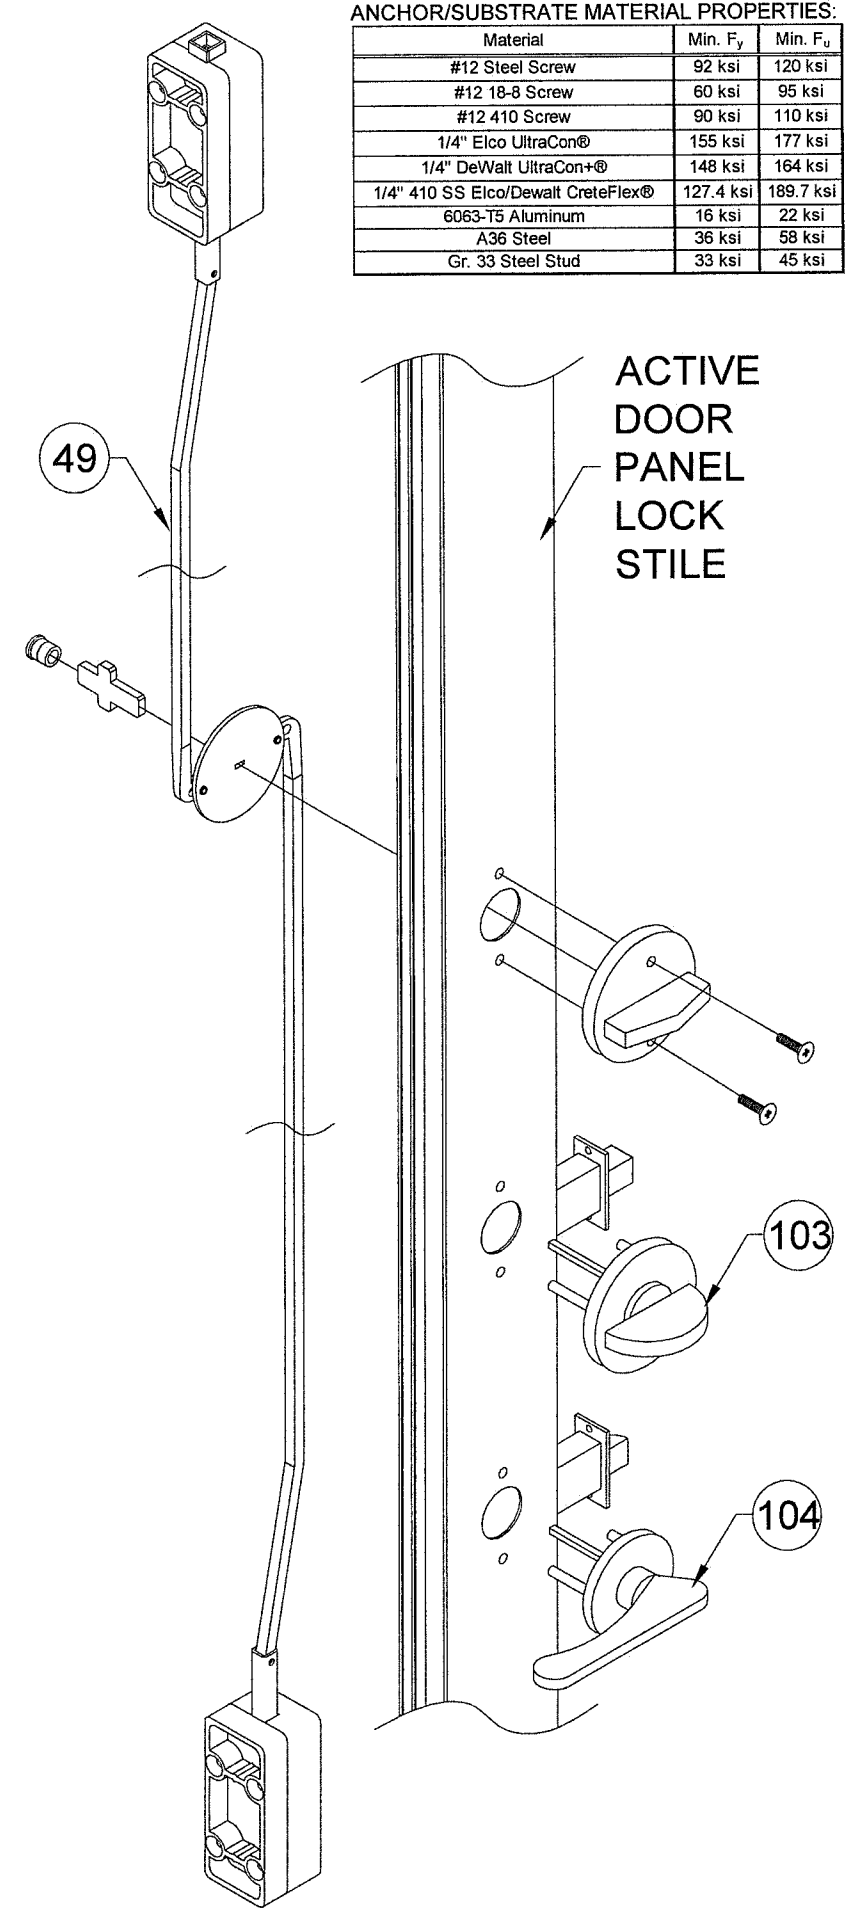


**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chande  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By: Ishag I. Chande  
Miami-Dade Product Control


Revision: G) ADDED BACKBEDDING. - AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	JENS ROSOWSKI	G
	Drawn By			
	No.	11005-2		
	DWC	5 OF 15		
 REGISTRATION #29296 ALUM. FRENCH DOOR & SIDE LITES, NI BOM AND SPACER DETAILS FD-101 NI	Sheet	NTS	Scale	
	Series			
	Desc.			


ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
02/20/20  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705

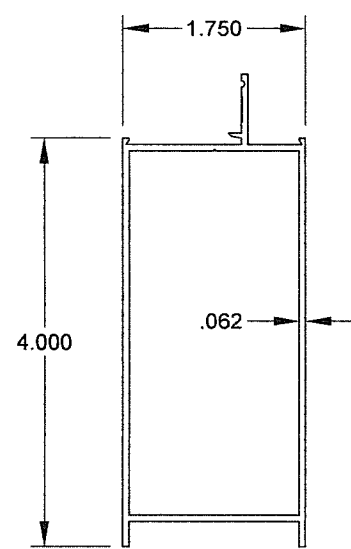


30 DOOR PANEL TOP & BOTTOM RAIL 6063-T5

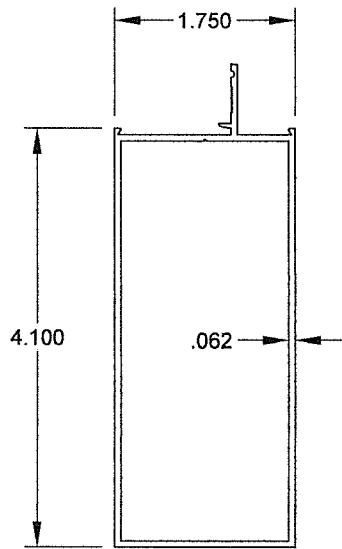


31 DOOR PANEL SIDE RAIL 6063-T5

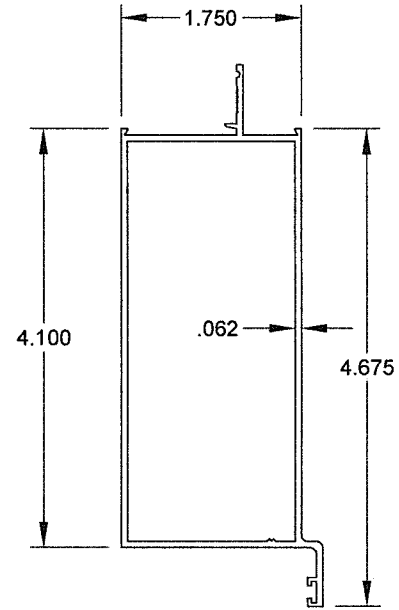

44 DOOR PANEL INTERIOR ASTRAGAL 6063-T5

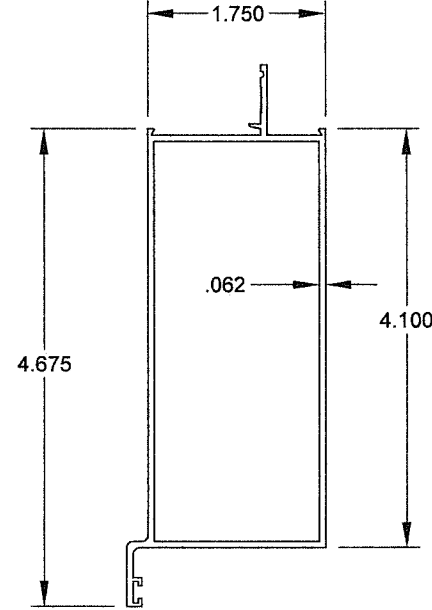


45 DOOR PANEL EXTERIOR ASTRAGAL 6063-T5

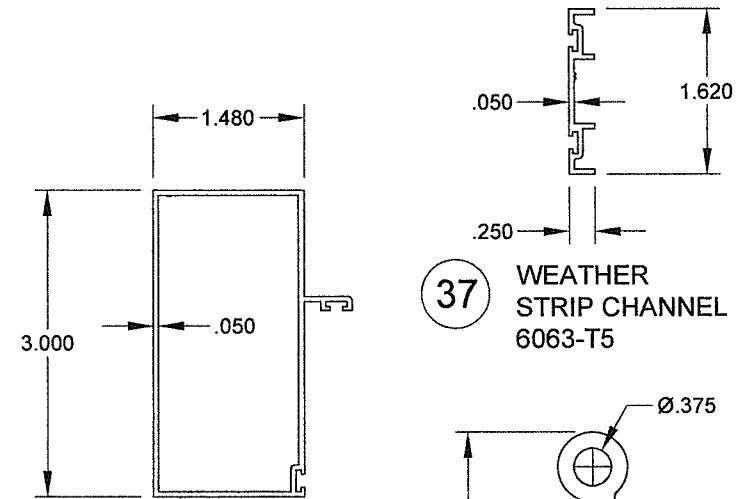


20 DOOR FRAME JAMB 6063-T6


37 WEATHER STRIP CHANNEL 6063-T5




32 HINGE 6063-T5

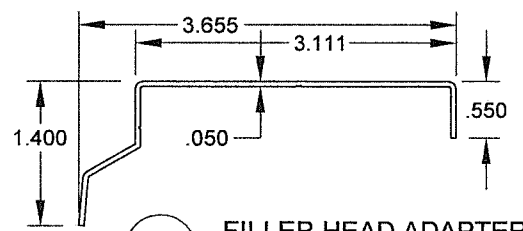


10 FILLER HEAD ADAPTER 6063-T6




34 TRUSS CLAMP 6063-T5




74 3/16" GLAZING BEAD 6063-T5




76 5/8" GLAZING BEAD 6063-T5

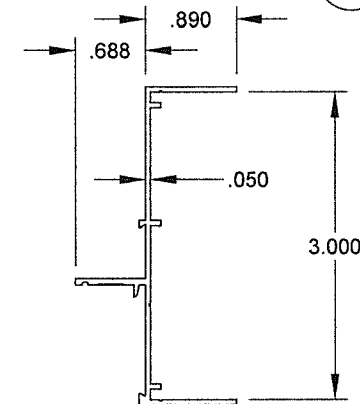


62 SL JAMB 6063-T6

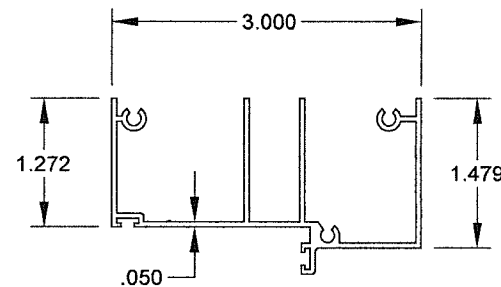


1 FRAME HEAD 6063-T6

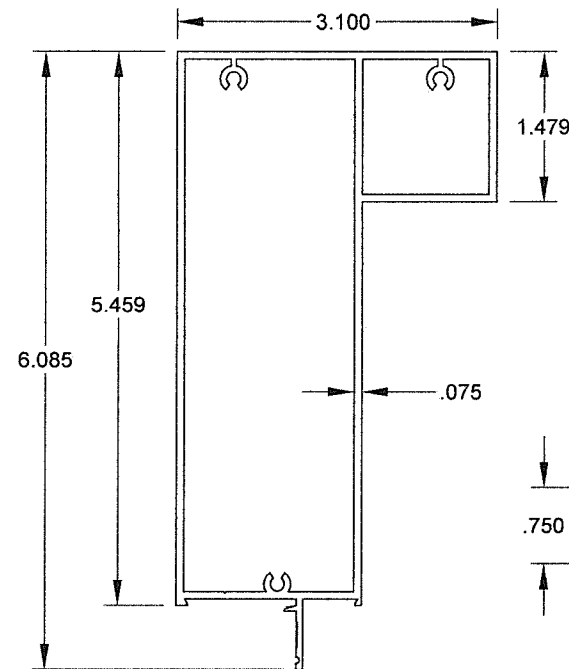


60 SL HEADER 6063-T6

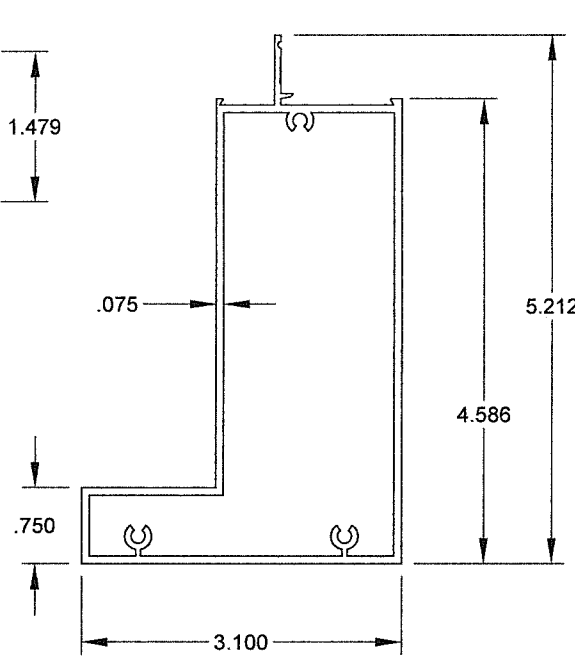


61 SL SILL 6063-T6

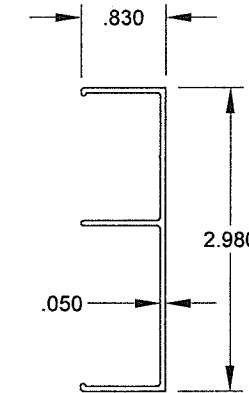


66 SL JAMB ADAPTER 6063-T6

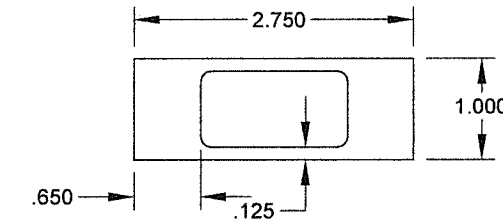

22 REINFORCEMENT 6063-T6

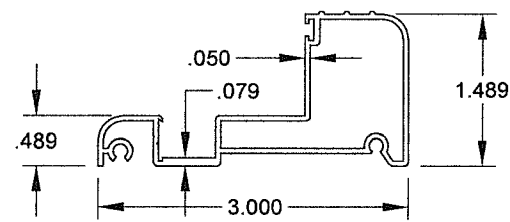

11 OUTSWING THRESHOLD 6063-T6



13 OUTSWING THRESHOLD CHANNEL COVER 6063-T6

**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chande  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By: Ishag I. Chande  
Miami-Dade Product Control

Revision  
G) CORRECTED TUBE MULL TEMPER.  
- AK - 04/15/20


1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	DWG No.	11005-2
	Scale	FD-101 NI	Sheet	6 OF 15
	Series	EXTRUSIONS	NTS	

REGISTRATION #29296  
ALUM. FRENCH DOOR & SIDE LITES, NI  
EXTRUSIONS  
FD-101 NI


ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
4/20/20  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705

TABLE 5:

<b>X DOORS, GLASS TYPES A &amp; B</b>					
ANCHOR TYPE & SUBSTRATE		2,3, WOOD 3 ALUM	1,2, CONCRETE		
MAX DOOR FRAME WIDTH	MAX FRAME HEIGHT	LOAD ZONES			
		X - JAMB "A"	X - HEAD & SILL "C"	X - JAMB "A"	X - HEAD & SILL "C"
25.500	79.750	7	2	4	2
	83.750	7	2	4	2
	87.750	7	2	4	2
	91.750	7	2	4	2
	95.750	7	2	4	2
27.500	79.750	7	2	4	2
	83.750	7	2	4	2
	87.750	7	2	4	2
	91.750	7	2	4	2
	95.750	7	2	4	2
29.500	79.750	7	3	4	3
	83.750	7	3	4	3
	87.750	7	3	4	3
	91.750	7	3	4	3
	95.750	7	3	4	3
31.500	79.750	7	3	4	3
	83.750	7	3	4	3
	87.750	7	3	4	3
	91.750	7	3	4	3
	95.750	7	3	4	3
33.500	79.750	6	3	4	3
	83.750	6	3	4	3
	87.750	7	3	4	3
	91.750	7	3	4	3
	95.750	7	3	4	3
35.500	79.750	6	3	4	3
	83.750	6	3	4	3
	87.750	6	3	4	3
	91.750	6	3	4	3
	95.750	6	3	4	3
37.500	79.750	5	3	4	3
	83.750	6	3	4	3
	87.750	6	3	4	3
	91.750	6	3	4	3
	95.750	6	3	4	3

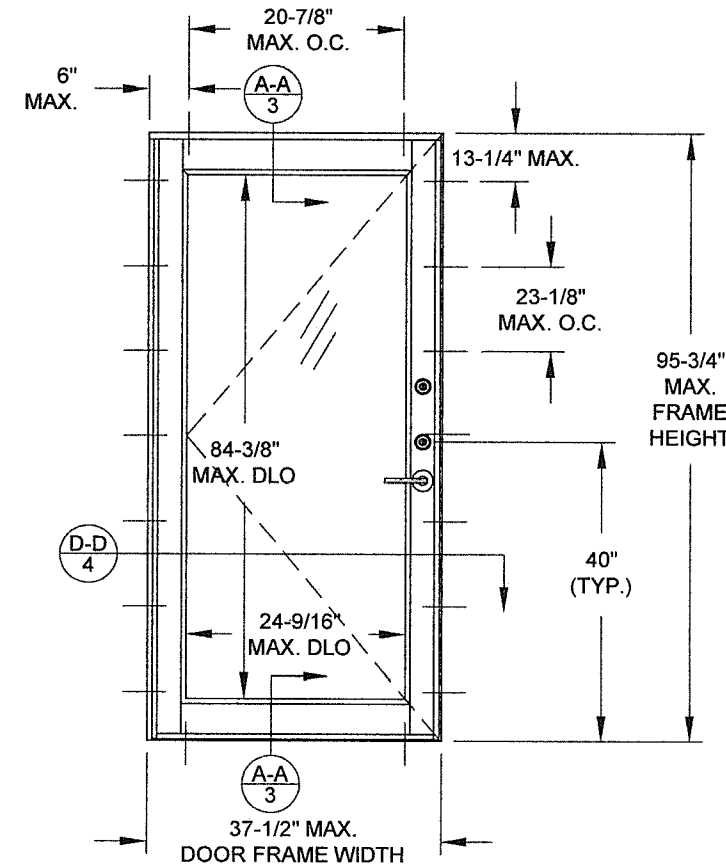

TYP. DIMENSIONS OF SINGLE DOOR, X

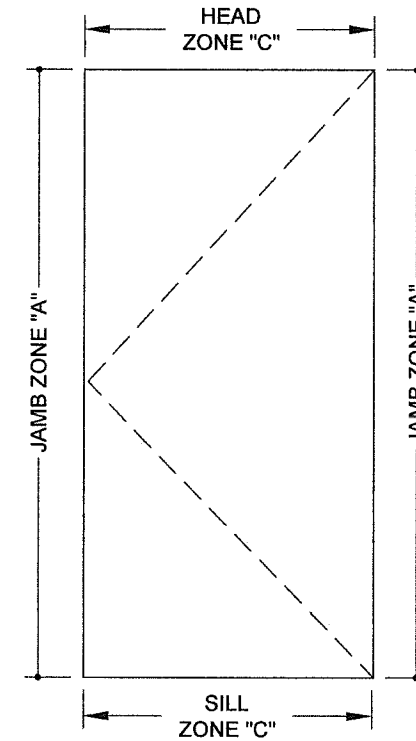

LOAD ZONES FOR SINGLE DOOR, X

**NOTES:**


- 1) SEE SHEET 1 FOR GLASS AND ANCHOR TYPE DESCRIPTIONS.
- 2) DOORS MAY BE LEFT OR RIGHT-HANDED.
- 3) ANCHOR QUANTITIES ARE BASED ON SPACING AS FOLLOWS (4" MIN. O.C. FOR CONCRETE, 4" MIN. O.C. FOR CMU):  
 JAMBS (ALL): 13-1/4" MAX. FROM CORNERS AND 23-1/8" MAX. O.C.  
 HEAD & SILL OF DOORS: 6" MAX. FROM CORNERS, 9" MAX. FROM ASTRAGAL CENTERS AND 20-7/8" MAX. O.C.
- 4) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SIZE.
- 5) FOR ANCHORAGE INSTALLATION DETAILS SEE SHEET 14.

**Design Pressure**  
See Sheet 2, Table 1

**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chande  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By: Ishag I. Chande  
Miami-Dade Product Control

Revision: G) NO CHANGES THIS SHEET. - AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	DWG No.	11005-2
 REGISTRATION #29296 ALUM. FRENCH DOOR & SIDE LITES, NI X DETAILS	Drawn	JENS ROSOWSKI	Sheet	7 OF 15
	Scale	FD-101 NI	Series	NTS



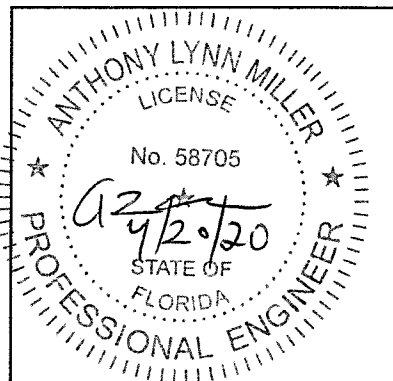
  
 ANTHONY LYNN MILLER  
 LICENSE  
 No. 58705  
 STATE OF FLORIDA  
 PROFESSIONAL ENGINEER  
 A. LYNN MILLER, P.E.  
 P.E.# 58705

TABLE 6:

XX DOORS GLASS TYPES A & B					
ANCHOR TYPE & SUBSTRATE		2,3, WOOD 3 ALUM	1,2, CONCRETE		
MAX DOOR FRAME WIDTH	MAX FRAME HEIGHT	LOAD ZONES			
		XX - JAMB "A"	XX - HEAD & SILL "D"	XX - JAMB "A"	XX - HEAD & SILL "D"
47.750	79.750	6	5	4	3
	83.750	6	4	4	3
	87.750	6	4	4	3
	91.750	6	4	4	3
	95.750	6	4	4	3
51.750	79.750	6	5	4	3
	83.750	6	5	4	3
	87.750	6	4	4	3
	91.750	6	4	4	3
	95.750	6	4	4	3
55.750	79.750	6	5	4	3
	83.750	6	5	4	3
	87.750	6	5	4	3
	91.750	6	5	4	3
	95.750	6	4	4	3
59.750	79.750	6	5	4	3
	83.750	6	5	4	3
	87.750	6	5	4	3
	91.750	6	5	4	3
	95.750	6	5	4	3
63.750	79.750	6	5	4	3
	83.750	6	5	4	3
	87.750	6	5	4	3
	91.750	6	5	4	3
	95.750	6	5	4	3
67.750	79.750	5	5	4	3
	83.750	6	5	4	3
	87.750	6	5	4	3
	91.750	6	5	4	3
	95.750	6	5	4	3
71.750	79.750	5	5	4	3
	83.750	5	5	4	3
	87.750	6	5	4	3
	91.750	6	5	4	3
	95.750	6	5	4	3

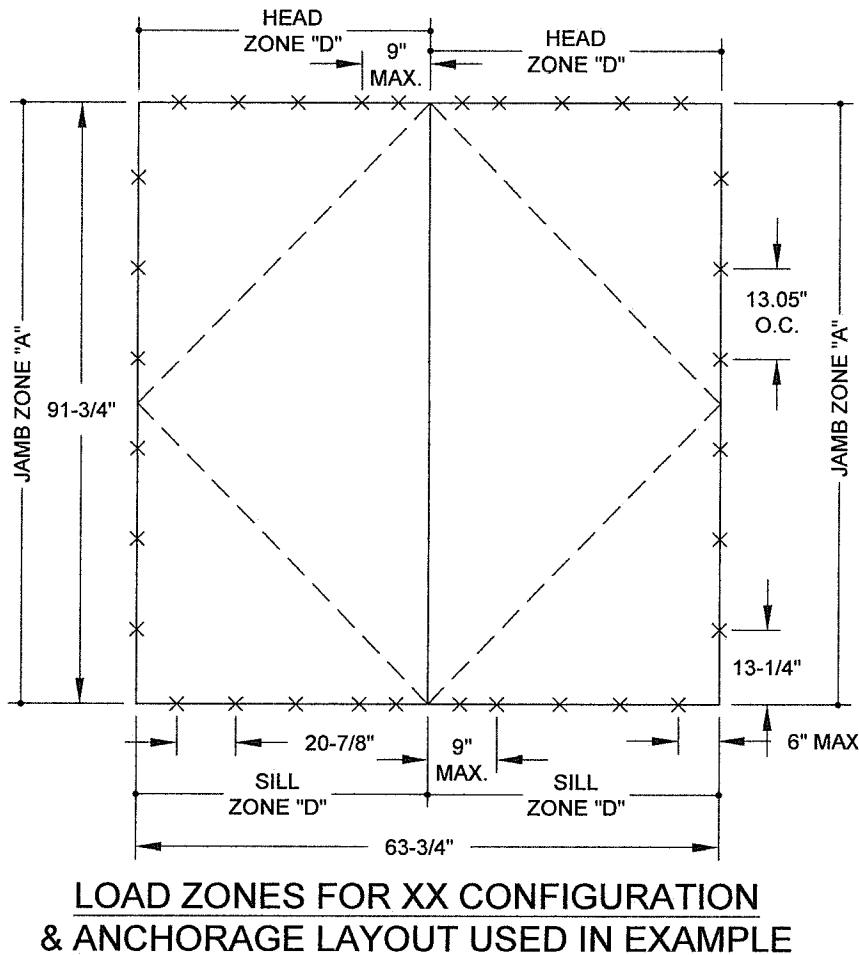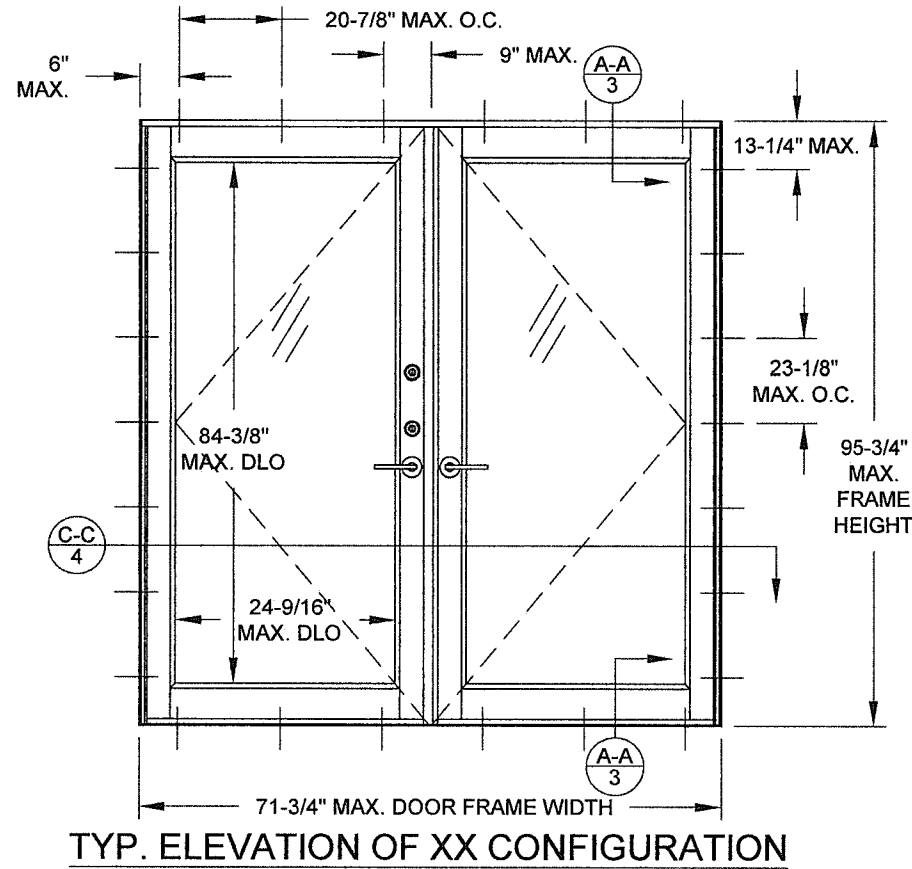

**Design Pressure**  
See Sheet 2, Table 1

**NOTES:**

- 1) SEE SHEET 1 FOR GLASS AND ANCHOR TYPE DESCRIPTIONS.
- 2) DOORS MAY BE LEFT OR RIGHT-HANDED.
- 3) ANCHOR QUANTITIES ARE BASED ON SPACING AS FOLLOWS (4" MIN. O.C. FOR CONCRETE, 4" MIN. O.C. FOR CMU);  
JAMBS (ALL): 13-1/4" MAX. FROM CORNERS AND 23-1/8" MAX. O.C.  
HEAD & SILL OF DOORS: 6" MAX. FROM CORNERS, 9" MAX. FROM ASTRAGAL CENTERS AND 20-7/8" MAX. O.C.
- 4) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SIZE.
- 5) FOR ANCHORAGE DETAILS SEE SHEET 14.

EXAMPLE:  
XX WITH GLASS TYPE A,  
63-3/4" WIDE X 91-3/4" HIGH DOUBLE DOOR,  
ANCHOR TYPE 3 INTO WOOD,  
DOOR DESIGN PRESSURE = +75 / -75.1 PSF,  
SEE EXAMPLE 3, SHEET 2 FOR DP EXAMPLE

DOOR ANCHOR REQUIREMENTS FROM TABLE 6:  
6 ANCHORS @ EACH JAMB  
5 ANCHORS EACH DOOR PANEL @ HEAD  
5 ANCHORS EACH DOOR PANEL @ SILL

○ SEE CIRCLED VALUES ON TABLE 6.

x = DENOTES ANCHOR LOCATION.

**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By *Ishag I. Chande*  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By *Ishag I. Chande*  
Miami-Dade Product Control


Revision  
G) NO CHANGES THIS SHEET. - AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	No.	11005-2
	DWG		Sheet	8 OF 15
	Scale		Series	FD-101 NI
REGISTRATION #29296		XX DETAILS		


ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
02/20/20  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705

TABLE 7:

<b>Q SIDE LITE, GLASS TYPES A &amp; B</b>		2,3, WOOD 3 ALUM		1,2, CONCRETE	
		LOAD ZONES			
		O - JAMB "B"	O - HEAD & SILL "E"	O - JAMB "B"	O - HEAD & SILL "E"
MAX FRAME WIDTH	MAX FRAME HEIGHT				
10.750	79.750	4	2	4	2
	83.750	5	2	4	2
	87.750	5	2	4	2
	91.750	5	2	4	2
	95.750	5	2	4	2
12.750	79.750	5	2	4	2
	83.750	5	2	4	2
	87.750	5	2	4	2
	91.750	6	2	4	2
	95.750	6	2	4	2
19.000	79.750	6	2	4	2
	83.750	6	2	4	2
	87.750	6	2	4	2
	91.750	6	2	4	2
	95.750	6	2 <td 4	2	
21.750	79.750	6	2	4	2
	83.750	6	2	4	2
	87.750	6	2	4	2
	91.750	6	2	4	2
	95.750	6	2	4	2
27.750	79.750	6	2	4	2
	83.750	6	2	4	2
	87.750	6	2	4	2
	91.750	6	2	4	2
	95.750	6	2	4	2
36.125	79.750	5	3	4	3
	83.750	6	3	4	3
	87.750	6	3	4	3
	91.750	6	3	4	3
	95.750	6	3	4	3
36.750	79.750	5	3	4	3
	83.750	5	3	4	3
	87.750	6	3	4	3
	91.750	6	3	4	3
	95.750	6	3	4	3

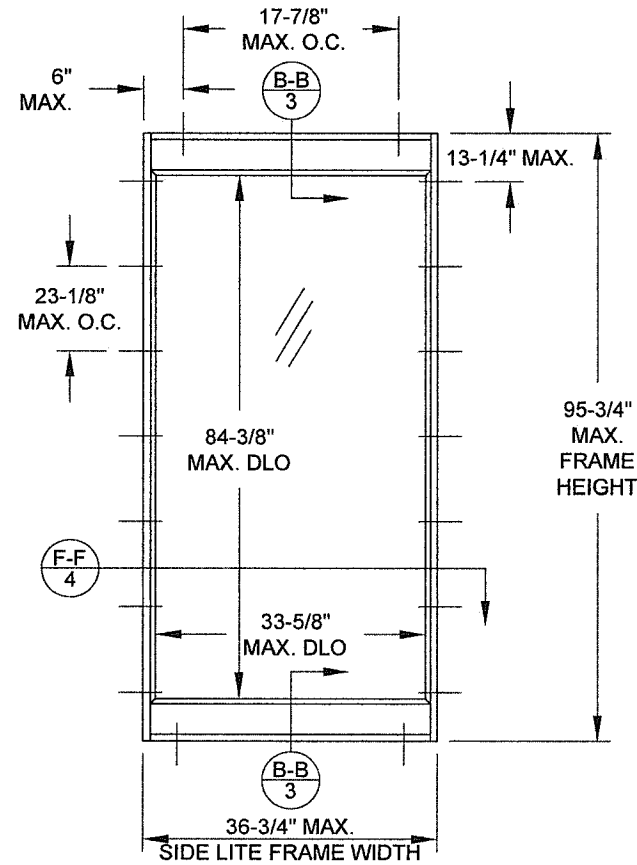

TYP. ELEVATION OF SINGLE SIDELITE, O

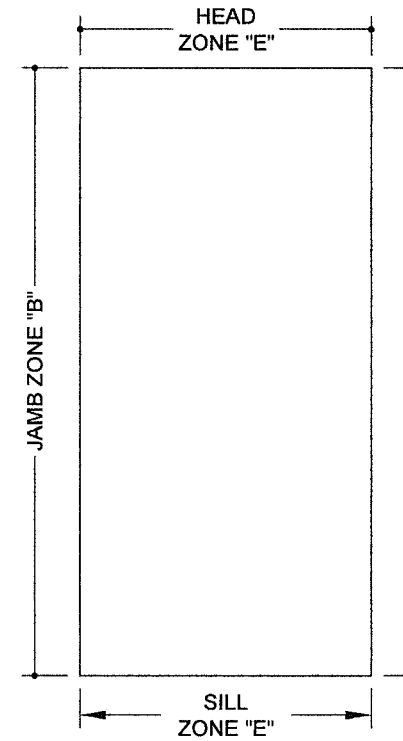

LOAD ZONES FOR SINGLE SIDELITE, O

**NOTES:**


- 1) SEE SHEET 1 FOR GLASS AND ANCHOR TYPE DESCRIPTIONS.
- 2) ANCHOR QUANTITIES ARE BASED ON SPACING AS FOLLOWS (4" MIN. O.C. FOR CONCRETE, 4" MIN. O.C. FOR CMU):  
 JAMBS (ALL): 13-1/4" MAX. FROM CORNERS AND 23-1/8" MAX. O.C.  
 HEAD & SILL OF SIDE LITES: 6" MAX. FROM CORNERS AND 24-3/4" MAX. O.C.
- 3) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SIZE.
- 4) FOR ANCHORAGE INSTALLATION DETAILS SEE SHEET 15.


**Design Pressure**  
See Sheet 2, Table 2

**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By *Ishay I. Chandra*  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By *Ishay I. Chandra*  
Miami-Dade Product Control

Revision: G) NO CHANGES THIS SHEET. - AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	DWG No.	11005-2
 REGISTRATION #29296 ALUM. FRENCH DOOR & SIDE LITES, NI O DETAILS	Scale	9 OF 15	Sheet	NTS
	Series	FD-101 NI	Desc.	

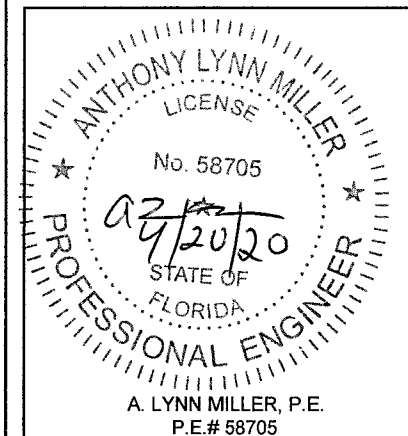


A. LYNN MILLER, P.E.  
P.E.# 58705


TABLE 8:

XO & OX DOORS, GLASS TYPES A & B									
ANCHOR TYPE & SUBSTRATE			2,3, WOOD 3 ALUM				1,2, CONCRETE		
			LOAD ZONES						
MAX SIDE LITE FRAME WIDTH	MAX 'X' DOOR FRAME WIDTH	MAX FRAME HEIGHT	O - JAMB "B"	O - HEAD & SILL "E"	X - HEAD & SILL "D"	X - JAMB "A"	O - JAMB "B"	O - HEAD & SILL "E"	X - HEAD & SILL "D"
			10.750	25.500	79.750	4	3	5	7
		83.750	5	3	4	7	4	2	3
		87.750	5	3	4	7	4	2	3
		91.750	5	3	4	7	4	2	3
		95.750	5	3	4	7	4	2	3
12.750	27.500	79.750	5	3	5	7	4	2	3
		83.750	5	3	5	7	4	2	3
		87.750	5	3	4	7	4	2	3
		91.750	6	3	4	7	4	3	3
		95.750	6	3	4	7	4	3	3
19.000	29.500	79.750	6	3	5	7	4	3	3
		83.750	6	3	5	7	4	3	3
		87.750	6	3	5	7	4	3	3
		91.750	6	3	5	7	4	3	3
		95.750	6	3	4	7	4	3	3
21.750	31.500	79.750	6	3	5	7	4	3	3
		83.750	6	3	5	7	4	3	3
		87.750	6	3	5	7	4	3	3
		91.750	6	3	5	7	4	3	3
		95.750	6	3	5	7	4	3	3
27.750	33.500	79.750	6	3	5	6	4	3	3
		83.750	6	3	5	6	4	3	3
		87.750	6	3	5	7	4	3	3
		91.750	6	3	5	7	4	3	3
		95.750	6	3	5	7	4	3	3
36.125	35.500	79.750	5	3	5	6	4	3	3
		83.750	6	3	5	6	4	3	3
		87.750	6	3	5	6	4	3	3
		91.750	6	3	5	6	4	3	3
		95.750	6	3	5	6	4	3	3
36.750	37.500	79.750	5	3	5	5	4	3	3
		83.750	5	3	5	6	4	3	3
		87.750	6	3	5	6	4	3	3
		91.750	6	3	5	6	4	3	3
		95.750	6	3	5	6	4	3	3

ANCHOR QUANTITIES FOR THE DOOR AND SIDE LITE TO BE DETERMINED INDEPENDENTLY.

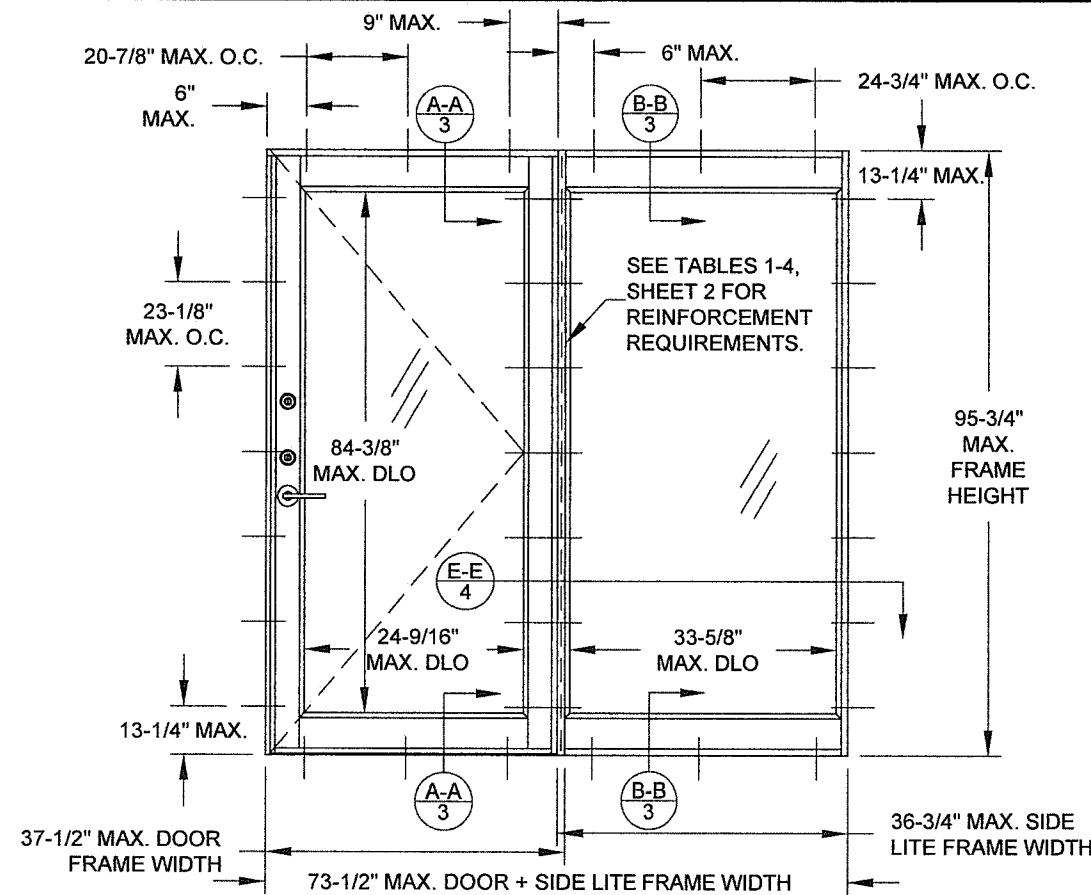

TYP. ELEVATION OF XO CONFIGURATION (OX SIMILAR)

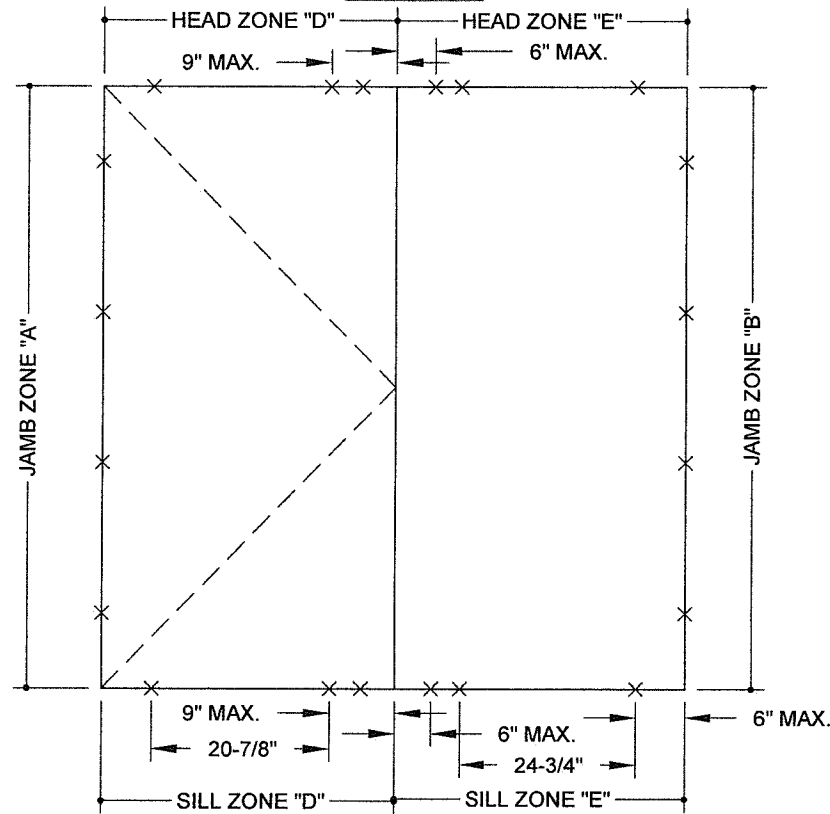

LOAD ZONES FOR XO CONFIGURATION & ANCHORAGE LAYOUT USED IN EXAMPLE (OX SIMILAR)

Design Pressure	
Reinforced:	See Sheet 2, Tables 1 & 2
Unreinforced:	See Sheet 2, Tables 3 & 4

NOTES:

- 1) SEE SHEET 1 FOR GLASS AND ANCHOR TYPE DESCRIPTIONS.
- 2) DOORS MAY BE LEFT OR RIGHT-HANDED.
- 3) ANCHOR QUANTITIES ARE BASED ON SPACING AS FOLLOWS (4\"/>

EXAMPLE:  
XO WITH GLASS TYPE B,  
36\"/>

- DOOR ANCHOR REQUIREMENTS FROM TABLE 8:
- 4 ANCHORS @ DOOR JAMB
  - 4 ANCHORS @ SIDE LITE JAMB
  - 3 ANCHORS @ DOOR PANEL @ HEAD
  - 3 ANCHORS @ DOOR PANEL @ SILL
  - 3 ANCHORS @ SIDE LITE @ HEAD
  - 3 ANCHORS @ SIDE LITE @ SILL

SEE CIRCLED VALUES ON TABLE 8.  
X = DENOTES ANCHOR LOCATION.

**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chanda  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By Ishag I. Chanda  
Miami-Dade Product Control

Revision: G) NO CHANGES THIS SHEET. - AK - 04/15/20


1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	JENS ROSOWSKI	11005-2	G
	By	JENS ROSOWSKI			
	DWG No.	10 OF 15			
	Sheet	NTS			
1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	ALUM. FRENCH DOOR & SIDE LITES, NI		XO & OX DETAILS	FD-101 NI	

REGISTRATION #29296  
ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
4/20/20  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705


TABLE 9:

OXO DOORS, GLASS TYPES A & B			2,3, WOOD 3 ALUM			1,2, CONCRETE		
ANCHOR TYPE & SUBSTRATE			LOAD ZONES					
MAX. SIDE LITE FRAME WIDTH	MAX. 'X' DOOR FRAME WIDTH	MAX. FRAME HEIGHT	O - JAMB "B"	O - HEAD & SILL "E"	X - HEAD & SILL "F"	O - JAMB "B"	O - HEAD & SILL "E"	X - HEAD & SILL "F"
			10.750	25.500	79.750	4	3	10
		83.750	5	3	10	4	2	5
		87.750	5	3	10	4	2	5
		91.750	5	3	9	4	2	5
		95.750	5	3	9	4	2	5
12.750	27.500	79.750	5	3	10	4	2	5
		83.750	5	3	10	4	2	5
		87.750	5	3	10	4	2	5
		91.750	6	3	10	4	3	5
		95.750	6	3	10	4	3	5
19.000	29.500	79.750	6	3	10	4	3	5
		83.750	6	3	10	4	3	5
		87.750	6	3	10	4	3	5
		91.750	6	3	10	4	3	5
		95.750	6	3	10	4	3	5
21.750	31.500	79.750	6	3	10	4	3	5
		83.750	6	3	10	4	3	5
		87.750	6	3	10	4	3	5
		91.750	6	3	10	4	3	5
		95.750	6	3	10	4	3	5
27.750	33.500	79.750	6	3	8	4	3	5
		83.750	6	3	8	4	3	5
		87.750	6	3	10	4	3	5
		91.750	6	3	10	4	3	5
		95.750	6	3	10	4	3	5
36.125	35.500	79.750	5	3	8	4	3	5
		83.750	6	3	8	4	3	5
		87.750	6	3	8	4	3	5
		91.750	6	3	8	4	3	5
		95.750	6	3	8	4	3	5
36.750	37.500	79.750	5	3	8	4	3	3
		83.750	5	3	8	4	3	3
		87.750	6	3	8	4	3	5
		91.750	6	3	8	4	3	5
		95.750	6	3	8	4	3	5

ANCHOR QUANTITIES FOR THE DOOR AND SIDE LITE TO BE DETERMINED INDEPENDENTLY.

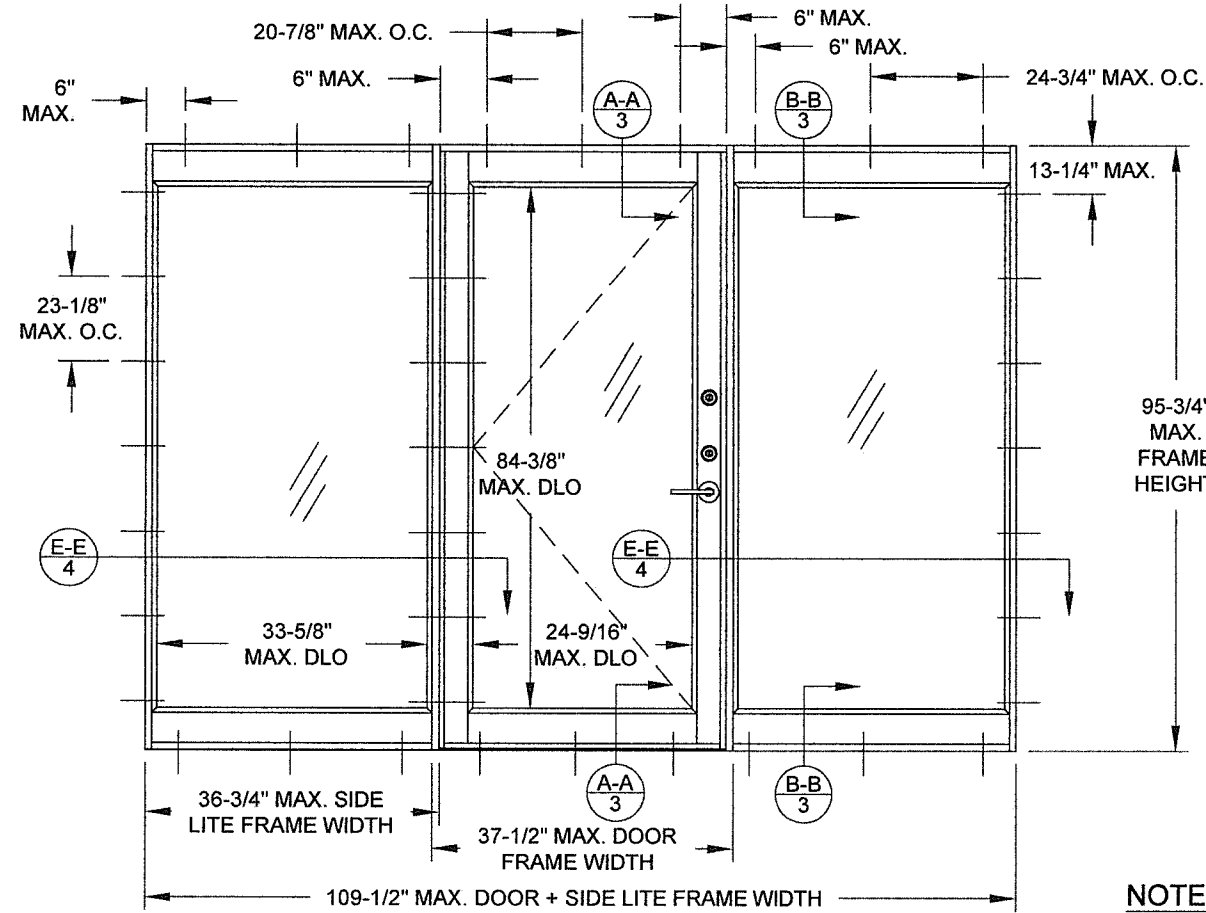

TYP. ELEVATION OF OXO CONFIGURATION  
(NOT AVAILABLE WITH REINFORCEMENT)

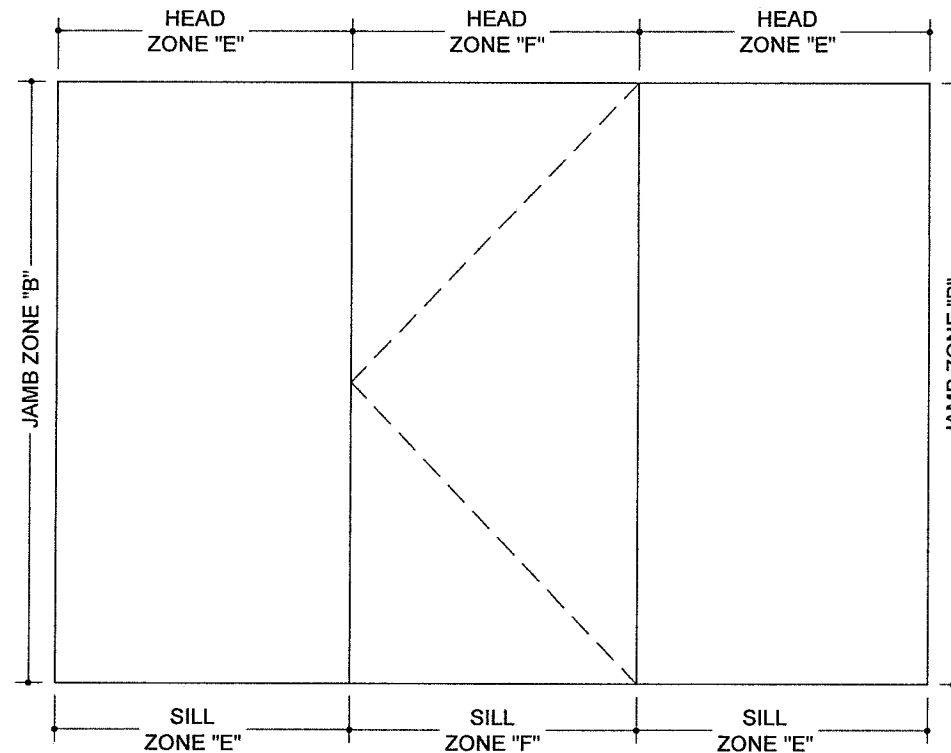

LOAD ZONES FOR OXO CONFIGURATION

Design Pressure	
Reinforced:	N/A
Unreinforced:	See Sheet 2, Tables 3 & 4

NOTES:

- 1) SEE SHEET 1 FOR GLASS AND ANCHOR TYPE DESCRIPTIONS.
- 2) DOORS MAY BE LEFT OR RIGHT-HANDED.
- 3) ANCHOR QUANTITIES ARE BASED ON SPACING AS FOLLOWS (4" MIN. O.C. FOR CONCRETE, 4" MIN. O.C. FOR CMU):  
 JAMBS (ALL): 13-1/4" MAX. FROM CORNERS AND 23-1/8" MAX. O.C.  
 HEAD & SILL OF DOORS: 6" MAX. FROM CORNERS, 9" MAX. FROM ASTRAGAL CENTERS AND 20-7/8" MAX. O.C.  
 HEAD & SILL OF SIDE LITES: 6" MAX. FROM CORNERS AND 24-3/4" MAX. O.C.
- 4) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SIZE.
- 5) FOR ANCHORAGE INSTALLATION DETAILS SEE SHEETS 14 & 15.
- 6) CONFIGURATIONS WHERE THE DOOR LOCKSTILE ABUTS A SIDE LITE ARE NOT AVAILABLE WITH REINFORCEMENT.
- 7) SIDE LITE OVERLAPS DOOR BY 3/4" ONCE ASSEMBLED.

**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By *Ishag I. Chande*  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By *Ishag I. Chande*  
Miami-Dade Product Control

Revision: G) NO CHANGES THIS SHEET. - AK - 04/15/20

1070 TECHNOLOGY DRIVE  
N. VENICE, FL 34275  
(941)-480-1600

REGISTRATION #29296

ALUM. FRENCH DOOR & SIDE LITES, NI

OXO DETAILS

FD-101 NI

DATE: 04/04/12

BY: JENS ROSOWSKI

NO. 11 OF 15

SCALE: NTS

SHEET: 11005-2

REV. G


ANTHONY LYNN MILLER  
LICENSE  
No. 58705  
4/20/20  
STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
A. LYNN MILLER, P.E.  
P.E.# 58705




TABLE 10:

XXO & OXX DOORS, GLASS TYPES A & B				2,3, WOOD 3 ALUM			1,2, CONCRETE																																																																																																																																																																																																																																																																																																																																																																																																																																																															
ANCHOR TYPE & SUBSTRATE			LOAD ZONES																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
MAX SIDE LITE FRAME WIDTH	MAX XX DOOR FRAME WIDTH	MAX FRAME HEIGHT	XX - JAMB "A"	O - JAMB "B"	O - HEAD & SILL "E"	XX - HEAD & SILL "D"	XX - HEAD & SILL "F"	XX - JAMB "A"	O - JAMB "B"	O - HEAD & SILL "E"	XX - HEAD & SILL "D"	XX - HEAD & SILL "F"																																																																																																																																																																																																																																																																																																																																																																																																																																																										
			10.750	47.750	79.750	6	4	3	5	8	4	4	2	3	5			83.750	6	5	3	4	7	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	5	3	4	7	4	4	2	3	5			95.750	6	5	3	4	7	4	4	2	3	5	12.750	51.750	79.750	6	5	3	5	8	4	4	2	3	5			83.750	6	5	3	5	8	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4
		83.750	6	5	3	4	7	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	5	3	4	7	4	4	2	3	5			95.750	6	5	3	4	7	4	4	2	3	5	12.750	51.750	79.750	6	5	3	5	8	4	4	2	3	5			83.750	6	5	3	5	8	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5													
		87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	5	3	4	7	4	4	2	3	5			95.750	6	5	3	4	7	4	4	2	3	5	12.750	51.750	79.750	6	5	3	5	8	4	4	2	3	5			83.750	6	5	3	5	8	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																										
		91.750	6	5	3	4	7	4	4	2	3	5			95.750	6	5	3	4	7	4	4	2	3	5	12.750	51.750	79.750	6	5	3	5	8	4	4	2	3	5			83.750	6	5	3	5	8	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																							
		95.750	6	5	3	4	7	4	4	2	3	5	12.750	51.750	79.750	6	5	3	5	8	4	4	2	3	5			83.750	6	5	3	5	8	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																				
12.750	51.750	79.750	6	5	3	5	8	4	4	2	3	5			83.750	6	5	3	5	8	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																	
		83.750	6	5	3	5	8	4	4	2	3	5			87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																														
		87.750	6	5	3	4	7	4	4	2	3	5			91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																											
		91.750	6	6	3	4	7	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																								
		95.750	6	6	3	4	7	4	4	3	3	5	19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																					
19.000	55.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																		
		83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																															
		87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																												
		91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																									
		95.750	6	6	3	4	7	4	4	3	3	5	21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																						
21.750	59.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																			
		83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																
		87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																													
		91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																										
		95.750	6	6	3	5	8	4	4	3	3	5	27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																							
27.750	63.750	79.750	6	6	3	5	8	4	4	3	3	5			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																				
		83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																	
		87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																														
		91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																											
		95.750	6	6	3	5	8	4	4	3	3	5	36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																								
36.125	67.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																					
		83.750	6	6	3	5	8	4	4	3	3	5			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																		
		87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																															
		91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																																												
		95.750	6	6	3	5	8	4	4	3	3	5	36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																																																									
36.750	71.750	79.750	5	5	3	5	8	4	4	3	3	3			83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																																																																						
		83.750	5	5	3	5	8	4	4	3	3	3			87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																																																																																			
		87.750	6	6	3	5	8	4	4	3	3	5			91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																																																																																																
		91.750	6	6	3	5	8	4	4	3	3	5			95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																																																																																																													
		95.750	6	6	3	5	8	4	4	3	3	5																																																																																																																																																																																																																																																																																																																																																																																																																																																										

ANCHOR QUANTITIES FOR THE DOOR AND SIDE LITE TO BE DETERMINED INDEPENDENTLY.

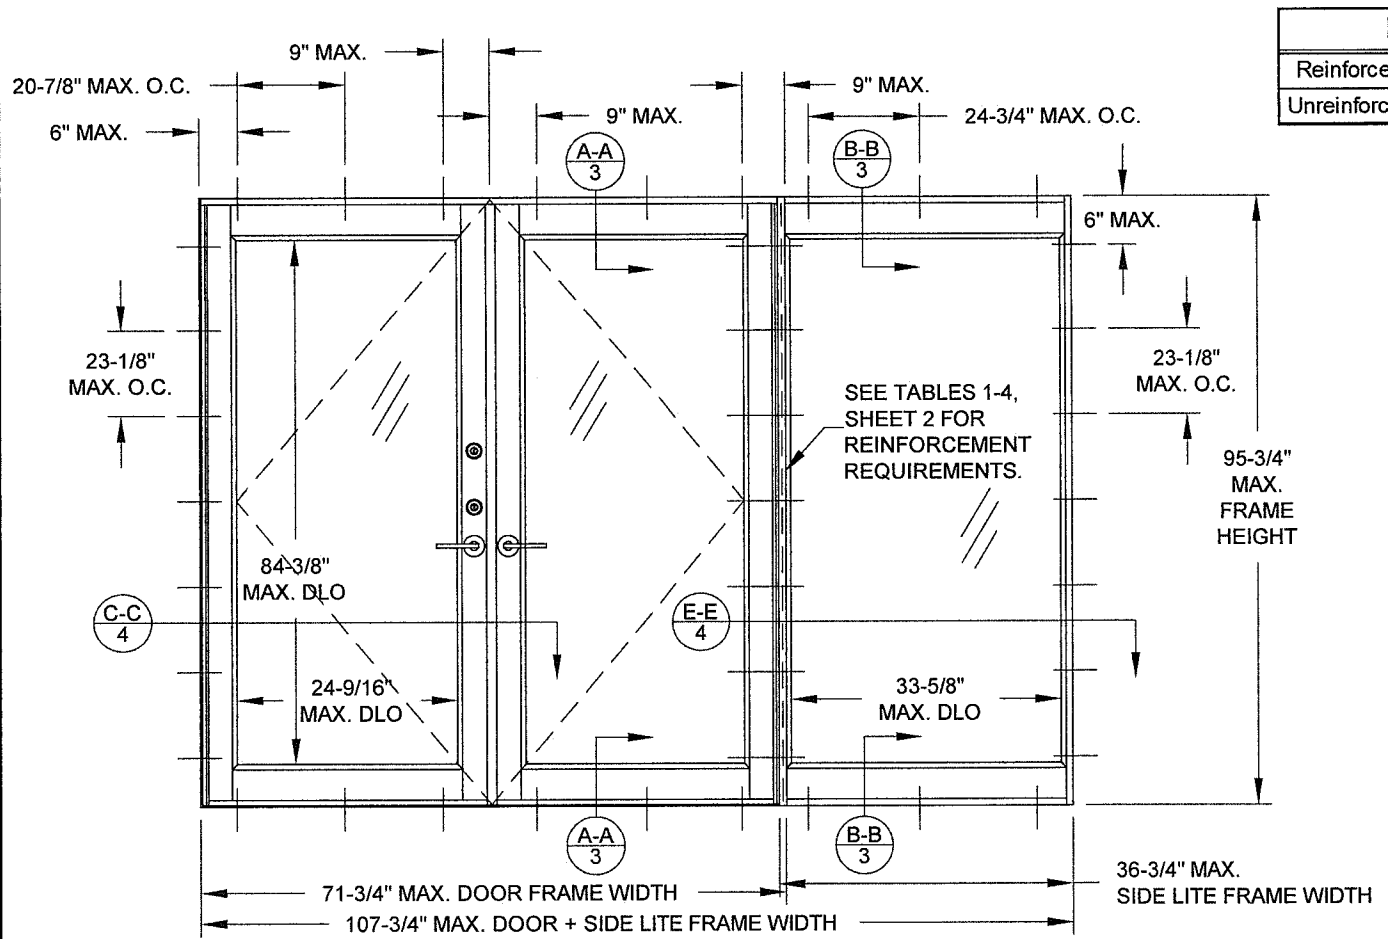

TYP. ELEVATION OF XXO CONFIGURATION (OXX SIMILAR)

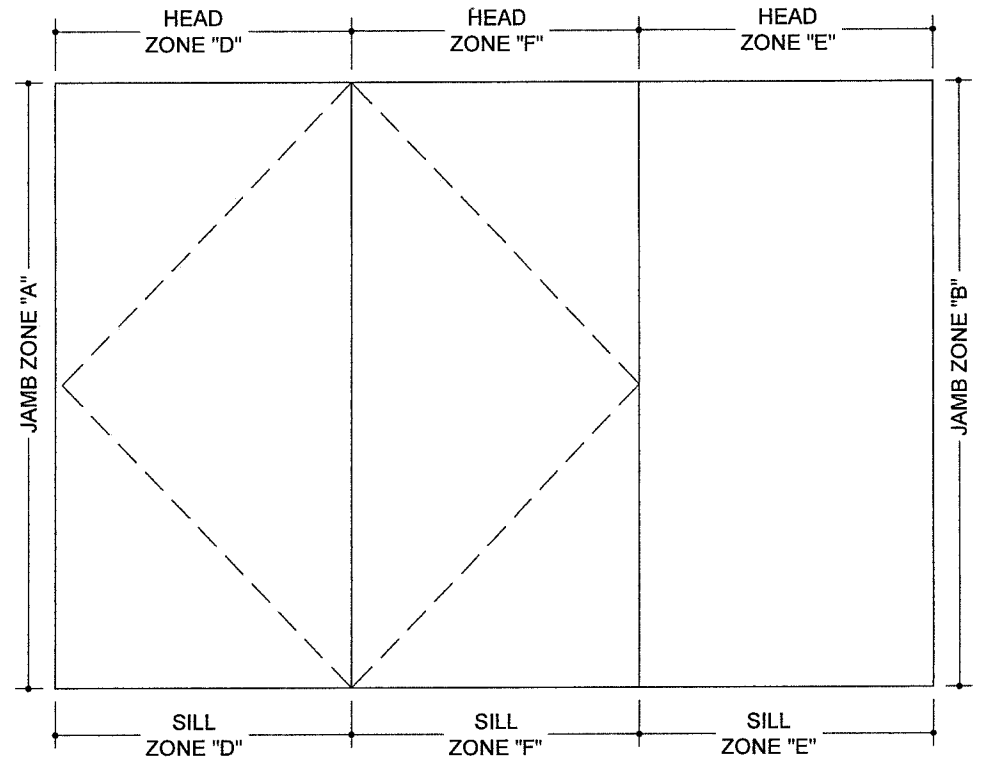

LOAD ZONES FOR XXO CONFIGURATION (OXX SIMILAR)

Design Pressure	
Reinforced:	See Sheet 2, Tables 1 & 2
Unreinforced:	See Sheet 2, Tables 3 & 4

NOTES:

- SEE SHEET 1 FOR GLASS AND ANCHOR TYPE DESCRIPTIONS.
- DOORS MAY BE LEFT OR RIGHT-HANDED.
- ANCHOR QUANTITIES ARE BASED ON SPACING AS FOLLOWS (4" MIN. O.C. FOR CONCRETE, 4" MIN. O.C. FOR CMU):  
 JAMBS (ALL): 13-1/4" MAX. FROM CORNERS AND 23-1/8" MAX. O.C.  
 HEAD & SILL OF DOORS: 6" MAX. FROM CORNERS, 9" MAX. FROM ASTRAGAL CENTERS AND 20-7/8" MAX. O.C.  
 HEAD & SILL OF SIDE LITES: 6" MAX. FROM CORNERS AND 24-3/4" MAX. O.C.
- FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SIZE.
- FOR ANCHORAGE INSTALLATION DETAILS SEE SHEETS 14 & 15.
- CONFIGURATIONS WHERE THE DOOR LOCKSTILE ABUTS A SIDE LITE ARE NOT AVAILABLE WITH REINFORCEMENT.
- SIDE LITE OVERLAPS DOOR BY 3/4" ONCE ASSEMBLED.

**PRODUCT RENEWED**  
 as complying with the Florida Building Code  
 NOA-No. 22-0608.04  
 Expiration Date 08/02/2027  
 By: Ishay I. Chandra  
 Miami-Dade Product Control

**PRODUCT REVISED**  
 as complying with the Florida Building Code  
 NOA-No. 20-0427.02  
 Expiration Date: 08/02/2022  
 By: Ishay I. Chandra  
 Miami-Dade Product Control

Revision: G) CORRECTED JAMB A QUANTITIES IN TABLE 10. - AK - 04/15/20


1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	Drawn By	JENS ROSOWSKI	No.	11005-2
	Sheet	NTS	DWG	12 OF 15
	Scale	FD-101 NI	Series	

REGISTRATION #29296  
 ANTHONY LYNN MILLER  
 LICENSE  
 No. 58705  
 STATE OF FLORIDA  
 PROFESSIONAL ENGINEER  
 A. LYNN MILLER, P.E.  
 P.E.# 58705


TABLE 11:

OXO DOORS, GLASS TYPES A & B			ANCHOR TYPE & SUBSTRATE		LOAD ZONES			
MAX SIDE LITE FRAME WIDTH	MAX 'XX' DOOR FRAME WIDTH	MAX FRAME HEIGHT	2,3, WOOD 3 ALUM		1,2, CONCRETE			
			O - JAMB "B"	O - HEAD & SILL "E"	XX - HEAD & SILL "F"	O - JAMB "B"	O - HEAD & SILL "E"	XX - HEAD & SILL "F"
10.750	47.750	79.750	4	3	8	4	2	5
		83.750	5	3	7	4	2	5
		87.750	5	3	7	4	2	5
		91.750	5	3	7	4	2	5
		95.750	5	3	7	4	2	5
12.750	51.750	79.750	5	3	8	4	2	5
		83.750	5	3	8	4	2	5
		87.750	5	3	7	4	2	5
		91.750	6	3	7	4	3	5
		95.750	6	3	7	4	3	5
19.000	55.750	79.750	6	3	8	4	3	5
		83.750	6	3	8	4	3	5
		87.750	6	3	8	4	3	5
		91.750	6	3	8	4	3	5
		95.750	6	3	7	4	3	5
21.750	59.750	79.750	6	3	8	4	3	5
		83.750	6	3	8	4	3	5
		87.750	6	3	8	4	3	5
		91.750	6	3	8	4	3	5
		95.750	6	3	8	4	3	5
27.750	63.750	79.750	6	3	8	4	3	5
		83.750	6	3	8	4	3	5
		87.750	6	3	8	4	3	5
		91.750	6	3	8	4	3	5
		95.750	6	3	8	4	3	5
36.125	67.750	79.750	5	3	8	4	3	3
		83.750	6	3	8	4	3	5
		87.750	6	3	8	4	3	5
		91.750	6	3	8	4	3	5
		95.750	6	3	8	4	3	5
36.750	71.750	79.750	5	3	8	4	3	3
		83.750	5	3	8	4	3	3
		87.750	6	3	8	4	3	5
		91.750	6	3	8	4	3	5
		95.750	6	3	8	4	3	5

ANCHOR QUANTITIES FOR THE DOOR AND SIDE LITE TO BE DETERMINED INDEPENDENTLY.

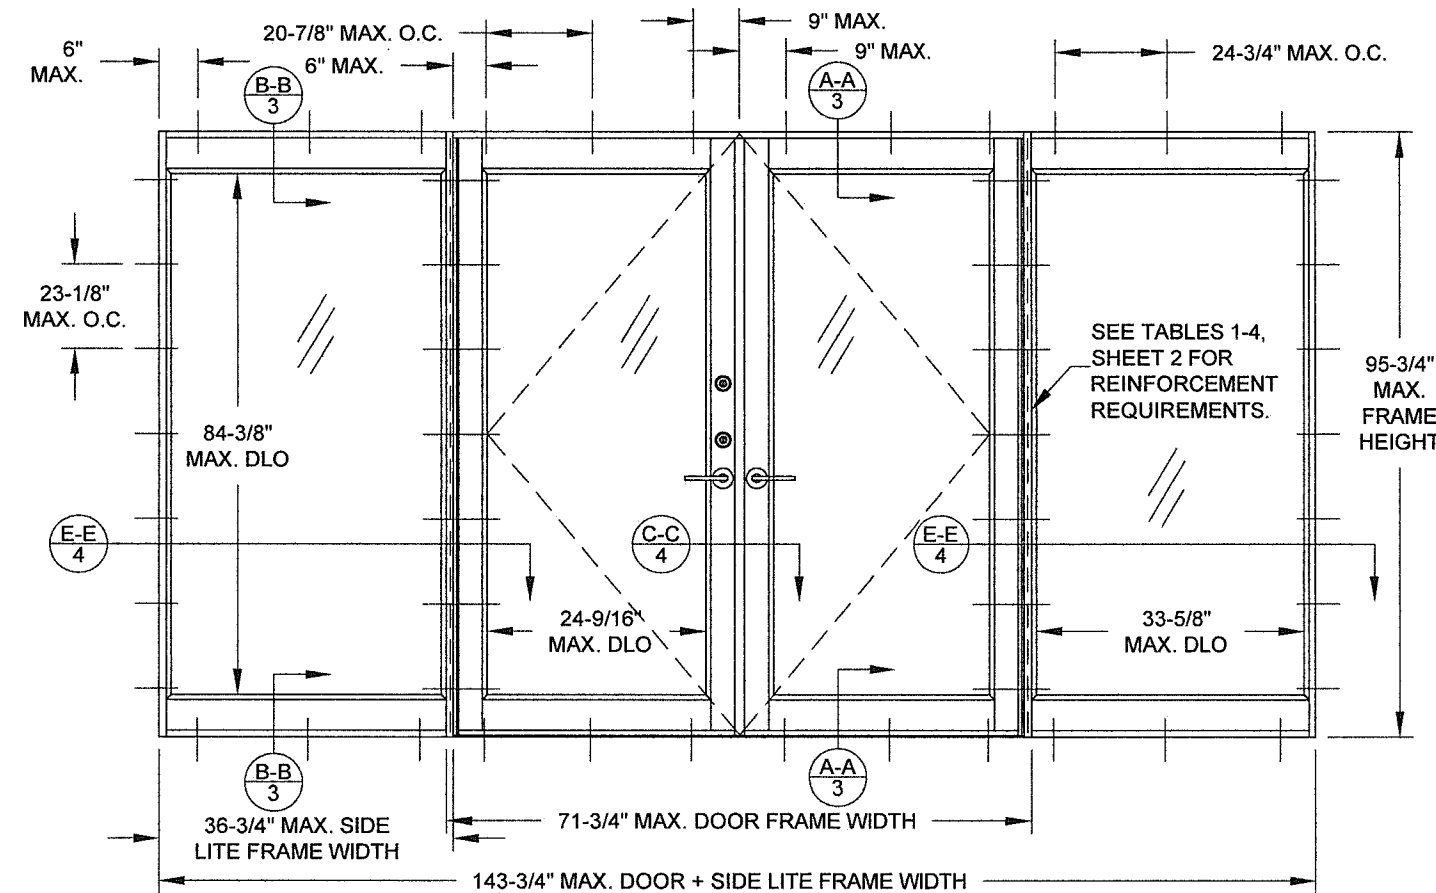

TYP. ELEVATION OF OXO CONFIGURATION

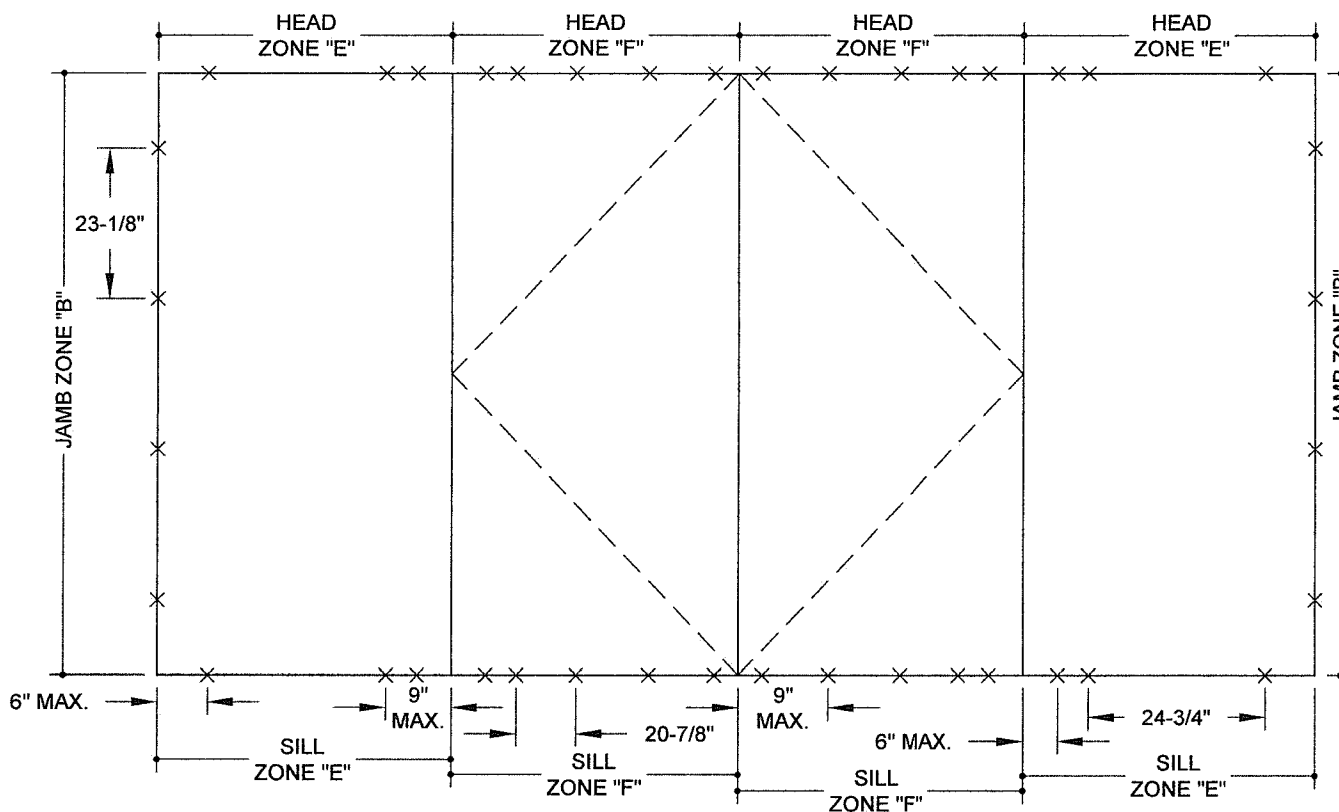

LOAD ZONES FOR OXO CONFIGURATION & ANCHORAGE LAYOUT USED IN EXAMPLE

Design Pressure	
Reinforced:	See Sheet 2, Tables 1 & 2
Unreinforced:	See Sheet 2, Tables 3 & 4

NOTES:

- SEE SHEET 1 FOR GLASS AND ANCHOR TYPE DESCRIPTIONS.
- DOORS MAY BE LEFT OR RIGHT-HANDED.
- ANCHOR QUANTITIES ARE BASED ON SPACING AS FOLLOWS (4" MIN. O.C. FOR CONCRETE, 4" MIN. O.C. FOR CMU):  
 JAMBS (ALL): 13-1/4" MAX. FROM CORNERS AND 23-1/8" MAX. O.C.  
 HEAD & SILL OF DOORS: 6" MAX. FROM CORNERS, 9" MAX. FROM ASTRAGAL CENTERS AND 20-7/8" MAX. O.C.  
 HEAD & SILL OF SIDE LITES: 6" MAX. FROM CORNERS AND 24-3/4" MAX. O.C.
- FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SIZE.
- FOR ANCHORAGE INSTALLATION DETAILS SEE SHEETS 14 & 15.
- CONFIGURATIONS WHERE THE DOOR LOCKSTILE ABUTS A SIDE LITE ARE NOT AVAILABLE WITH REINFORCEMENT.
- SIDE LITE OVERLAPS DOOR BY 3/4" ONCE ASSEMBLED.

EXAMPLE:  
 OXO WITH GLASS TYPE B,  
 71-3/4" WIDE X 95-3/4" HIGH DOUBLE DOOR  
 WITH (2) 36-3/4" X 95-3/4" SIDE LITES,  
 ANCHOR TYPE 2 INTO CONCRETE,  
 OVERALL DESIGN PRESSURE = +65 / -65 PSF,  
 SEE EXAMPLE 6, SHEET 2 FOR DP EXAMPLE


DOOR ANCHOR REQUIREMENTS FROM TABLE 11:  
 4 ANCHORS @ EACH SIDE LITE JAMB  
 5 ANCHORS EACH DOOR PANEL @ HEAD  
 5 ANCHORS EACH DOOR PANEL @ SILL  
 3 ANCHORS EACH SIDE LITE @ HEAD  
 3 ANCHORS EACH SIDE LITE @ SILL

SEE CIRCLED VALUES ON TABLE 11.  
 x = DENOTES ANCHOR LOCATION.


**PRODUCT RENEWED**  
 as complying with the Florida Building Code  
 NOA-No. 22-0608.04  
 Expiration Date 08/02/2027  
 By *Ishag I. Chande*  
 Miami-Dade Product Control

**PRODUCT REVISED**  
 as complying with the Florida Building Code  
 NOA-No. 20-0427.02  
 Expiration Date: 08/02/2022  
 By *Ishag I. Chande*  
 Miami-Dade Product Control


Revision  
 G) NO CHANGES THIS SHEET. - AK - 04/15/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	JENS ROSOWSKI	11005-2	G
	By	JENS ROSOWSKI			
	Drawn	JENS ROSOWSKI			
 REGISTRATION #29296 ALUM. FRENCH DOOR & SIDE LITES, INC. OXO DETAILS FD-101 NI	Sheet	13 OF 15	Scale	NTS	
	Series	FD-101 NI	Desc.	OXO DETAILS	
	Title	ALUM. FRENCH DOOR & SIDE LITES, INC.			


ANTHONY LYNN MILLER  
 LICENSE No. 58705  
 4/20/20  
 STATE OF FLORIDA  
 PROFESSIONAL ENGINEER  
 A. LYNN MILLER, P.E.  
 P.E.# 58705

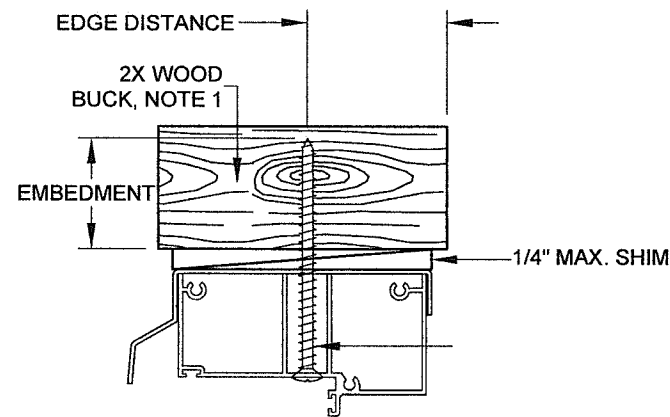


**DOOR HEAD (WOOD)**

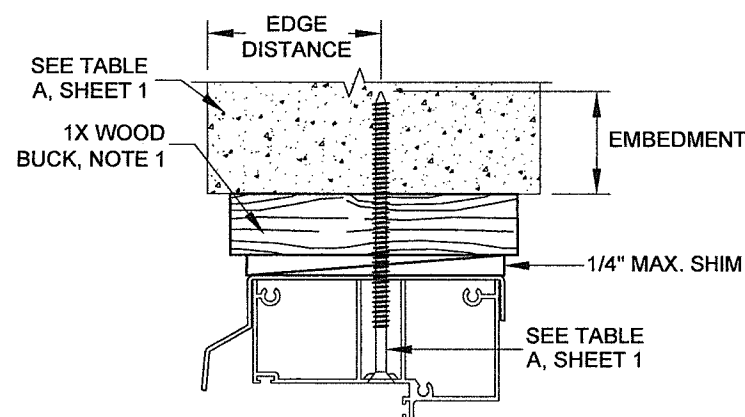


**DOOR HEAD (CONC)**

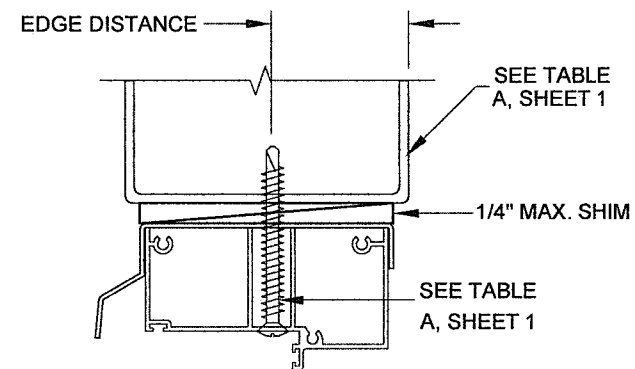


**DOOR HEAD (ALUMINUM)**

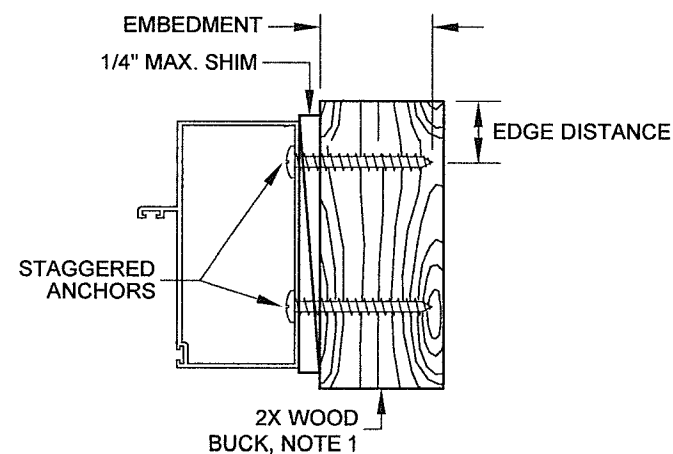


**DOOR JAMB (WOOD)**

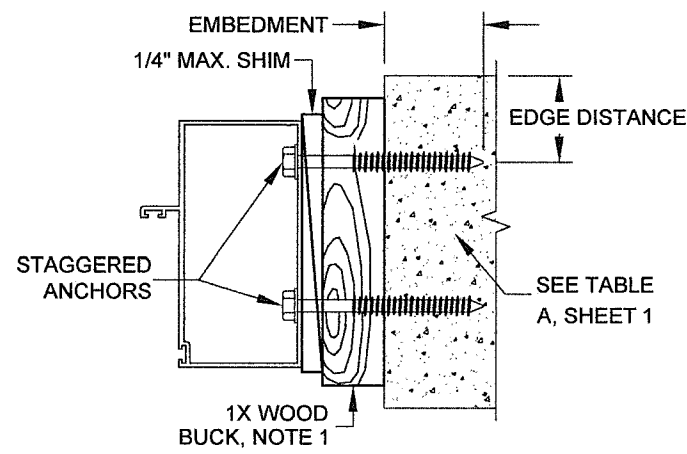


**DOOR JAMB (CONC)**

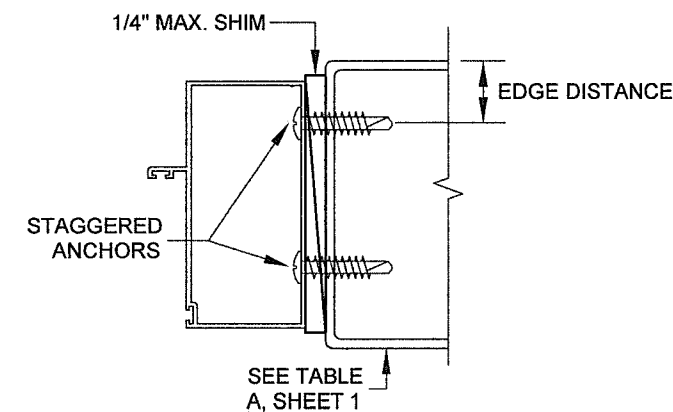


**DOOR JAMB (ALUMINUM)**

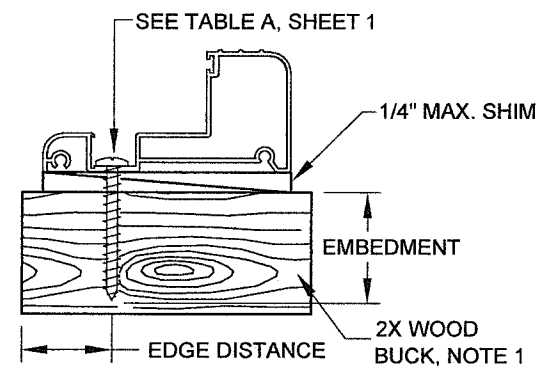

**DOOR SILL (WOOD)**

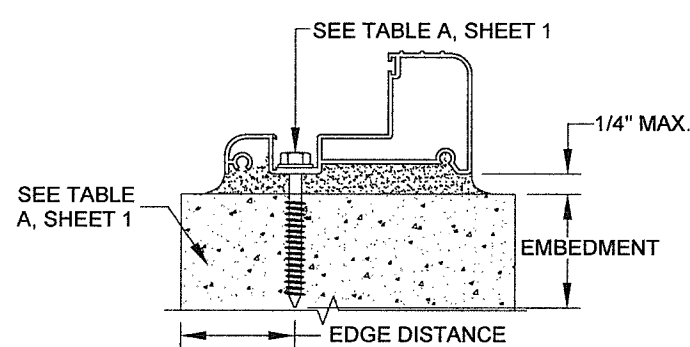

**DOOR SILL (CONC)**

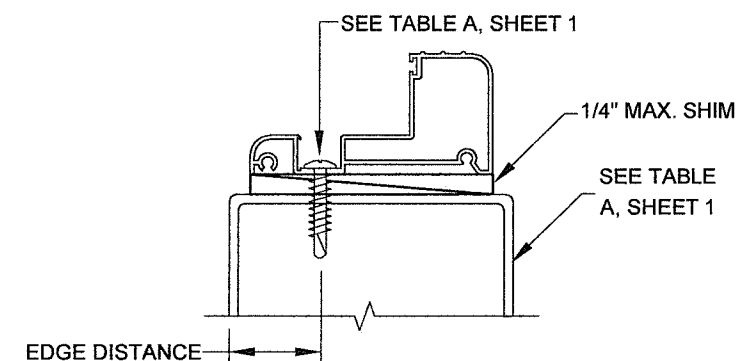

**DOOR SILL (ALUMINUM)**

1. WOOD BUCKS DEPICTED AS 1x ARE LESS THAN 1 1/2" THICK. 1x WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SOLID CONCRETE OR CMU. WOOD BUCKS DEPICTED AS 2x ARE 1 1/2" THICK OR GREATER. INSTALLATION TO THE SUBSTRATE OF WOOD BUCKS TO BE ENGINEERED BY OTHERS OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION (AHJ).

2. IF SILL IS TIGHT TO SUBSTRATE, GROUT OR OTHER MATERIAL IS NOT REQUIRED. IF USED, NON-SHRINK, NON-METALLIC GROUT (3350 PSI MIN.), (DONE BY OTHERS) MUST FULLY SUPPORT THE ENTIRE LENGTH OF THE SILL THAT IS NOT TIGHT TO THE SUBSTRATE, AND TRANSFER SHEAR LOAD TO SUBSTRATE. IF SUBSTRATE IS WOOD, 30# FELT PAPER OR MASTIC IS REQUIRED BETWEEN THE GROUT AND WOOD SUBSTRATE, OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION.

3. TYP. ANCHOR TYPE, EMBEDMENT & EDGE DISTANCE PER SUBSTRATE, SEE TABLE A, SHEET 1..




**PRODUCT RENEWED**  
as complying with the Florida Building Code  
NOA-No. 22-0608.04  
Expiration Date 08/02/2027  
By Ishag I. Chande  
Miami-Dade Product Control

**PRODUCT REVISED**  
as complying with the Florida Building Code  
NOA-No. 20-0427.02  
Expiration Date: 08/02/2022  
By Ishag I. Chande  
Miami-Dade Product Control

Revision  
G) NO CHANGES THIS SHEET. - AK - 04/15/20


1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	No.	11005-2
	DWG	14 OF 15	Scale	FD-101 NI
	Sheet	NTS	Series	NTS
ALUM. FRENCH DOOR & SIDE LITES, NI		DOOR INSTALL DETAILS		
REGISTRATION #29296		FD-101 NI		


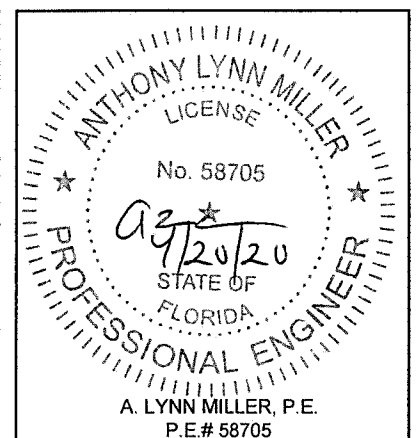


**PRODUCT RENEWED**  
 as complying with the Florida  
 Building Code  
 NOA-No. 22-0608.04  
 Expiration Date 08/02/2027  
 By Ishag I. Chank  
 Miami-Dade Product Control


**PRODUCT REVISED**  
 as complying with the Florida  
 Building Code  
 NOA-No. 20-0427.02  
 Expiration Date: 08/02/2022  
 By: Ishag I. Chank  
 Miami-Dade Product Control

Revision  
 G) NO CHANGES THIS SHEET. -  
 AK - 04/15/20


1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941)-480-1600	Date	04/04/12	Rev.	G
	By	JENS ROSOWSKI	No.	11005-2
	Drawn	JENS ROSOWSKI	DWG	15 OF 15
 REGISTRATION #29296	Sheet	15 OF 15	Scale	FD-101 NI
	Series	NTS	Desc.	SIDE LITE INSTALL DETAILS

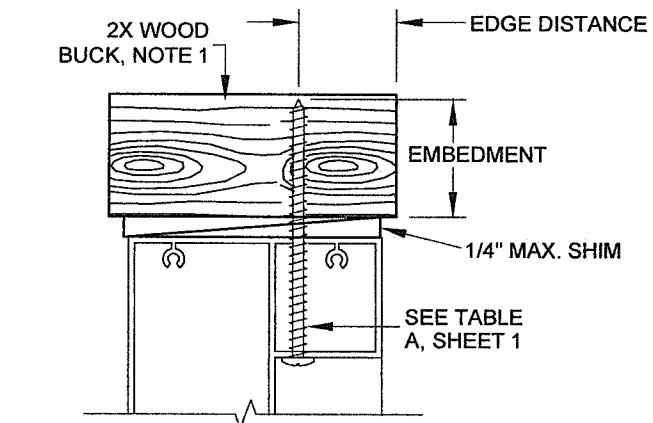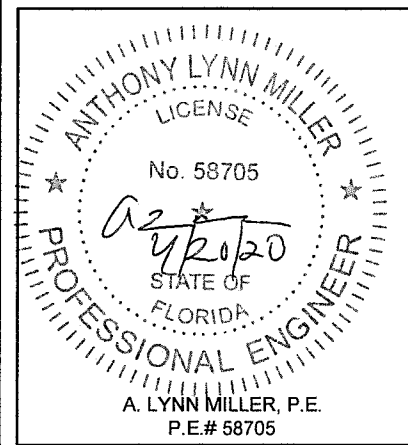


**SIDE LITE HEAD (WOOD)**

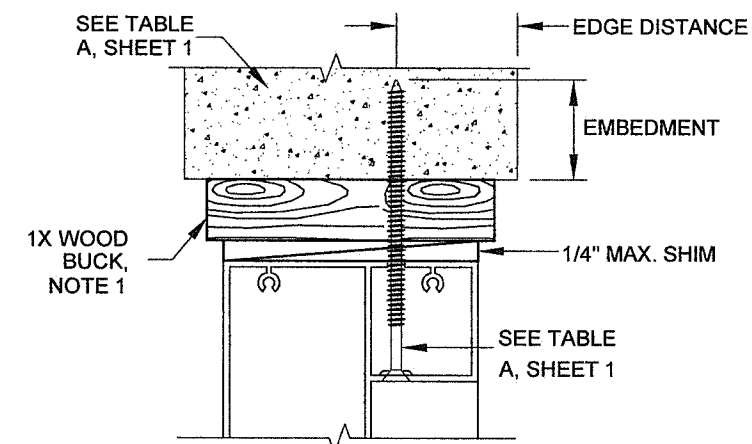


**SIDE LITE HEAD (CONC)**

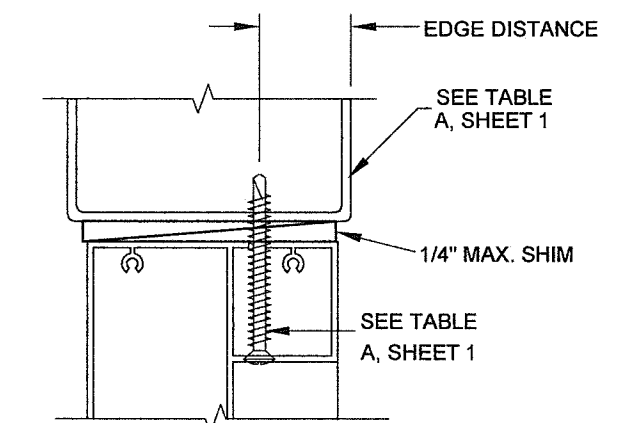


**SIDE LITE HEAD (ALUMINUM)**

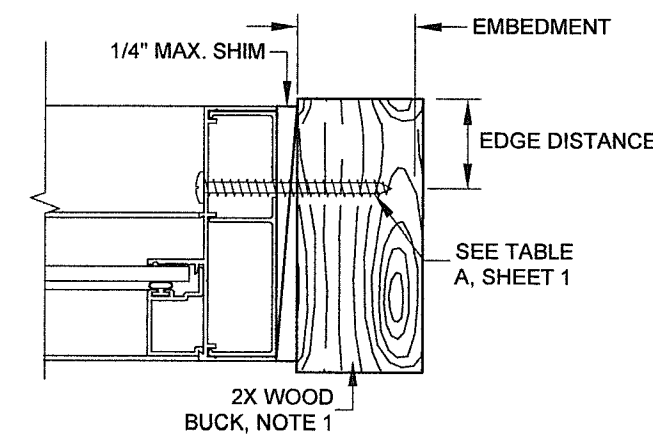


**SIDE LITE JAMB (WOOD)**

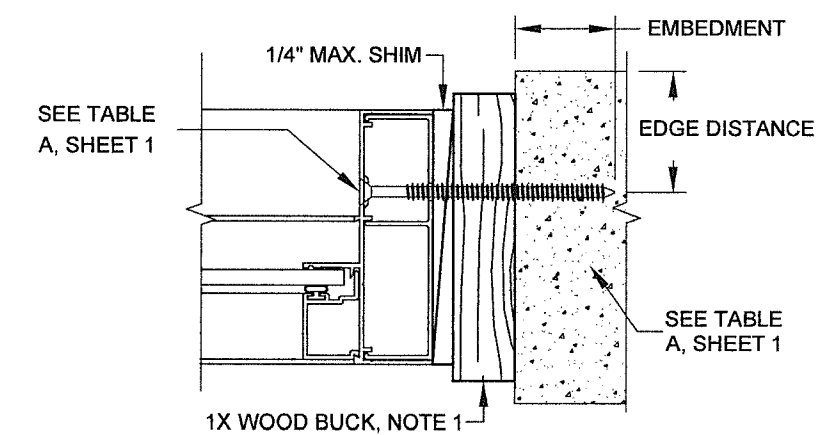


**SIDE LITE JAMB (CONC)**

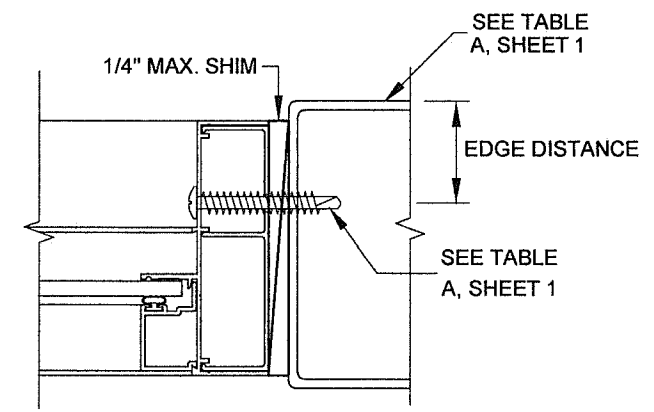


**SIDE LITE JAMB (ALUMINUM)**

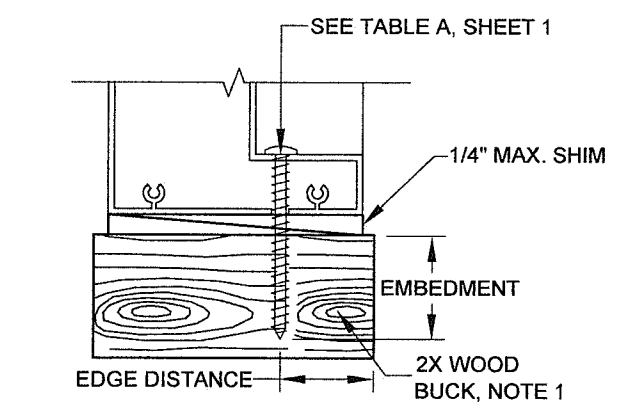

**SIDE LITE SILL (WOOD)**

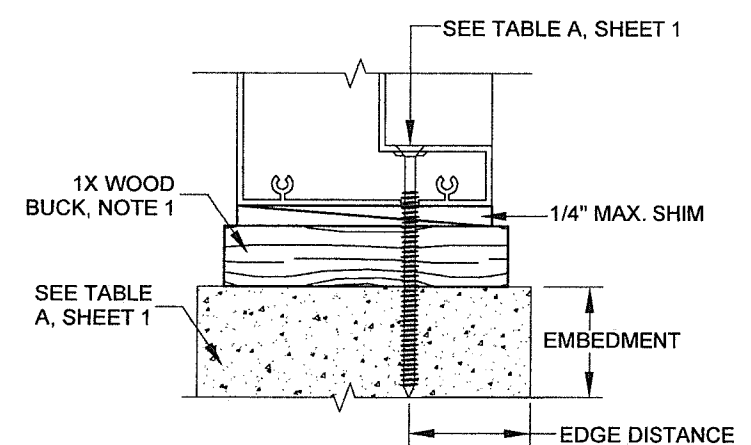

**SIDE LITE SILL (CONC)**

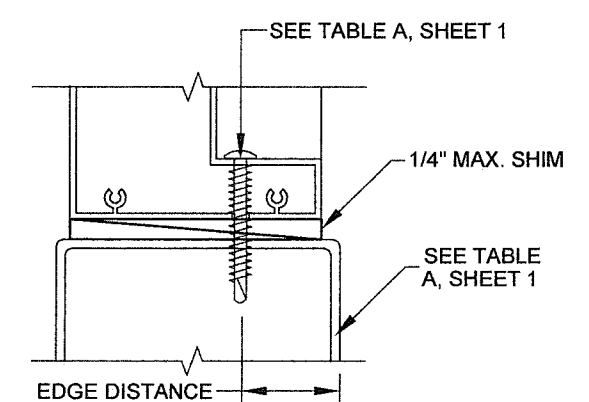

**SIDE LITE SILL (ALUMINUM)**

- WOOD BUCKS DEPICTED AS 1x ARE LESS THAN 1 1/2" THICK. 1x WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SOLID CONCRETE OR CMU. WOOD BUCKS DEPICTED AS 2x ARE 1 1/2" THICK OR GREATER. INSTALLATION TO THE SUBSTRATE OF WOOD BUCKS TO BE ENGINEERED BY OTHERS OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION (AHJ).
- IF SILL IS TIGHT TO SUBSTRATE, GROUT OR OTHER MATERIAL IS NOT REQUIRED. IF USED, NON-SHRINK, NON-METALLIC GROUT (3350 PSI MIN.), (DONE BY OTHERS) MUST FULLY SUPPORT THE ENTIRE LENGTH OF THE SILL THAT IS NOT TIGHT TO THE SUBSTRATE, AND TRANSFER SHEAR LOAD TO SUBSTRATE. IF SUBSTRATE IS WOOD, 30# FELT PAPER OR MASTIC IS REQUIRED BETWEEN THE GROUT AND WOOD SUBSTRATE, OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION.
- TYP. ANCHOR TYPE, EMBEDMENT & EDGE DISTANCE PER SUBSTRATE, SEE TABLE A, SHEET 1..

