

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

11805 SW 26 Street, Room 208

Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

PRODUCT CONTROL SECTION

www.miamidade.gov/building

MIAMI-DADE COUNTY

NOTICE OF ACCEPTANCE (NOA)

Labrador & Fundora Corp. dba V & V Windows 14150 NW 56th Court, Suite 600 Opa-Locka, FL 33054

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "100" Aluminum Single Hung Window – L.M.I.

APPROVAL DOCUMENT: Drawing No. W11-38, titled "Series 100 Alum. Single Hung Wdw. (L.M.I.)", sheets 1 through 9 of 9, dated 07/15/11, with revision G dated 02/06/25, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and Expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA No. 23-0620.07 and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.

MIAMI-DADE COUNTY APPROVED

NOA No. 25-0423.04 **Expiration Date: October 20, 2026** Approval Date: May 29, 2025 Page 1

Labrador & Fundora Corp. dba V & V Windows

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. (Submitted under NOA No. 11-0907.03)
- 2. Drawing No W11-38, titled "Series 100 Alum. Single Hung Wdw. (L.M.I.)", sheets 1 through 7 of 7, dated 07/15/11, with revision F dated 06/07/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. (Submitted under NOA No. 23-0620.07)

B. TESTS

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202-94

along with marked-up drawings and installation diagram of a single hung window, prepared by American Test Lab of South Florida, Inc., Test Report No. **ATLSF-0913.01-10**, dated 07/11/11, signed and sealed by Julio E. Gonzalez, P.E.

(Submitted under NOA No. 11-0907.03)

C. CALCULATIONS

Anchor verification calculations and structural analysis, complying with FBC 6th Edition (2017), dated 09/25/17 and updated on 08/14/20 to comply with FBC 7th Edition (2020), prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

(Submitted under NOA No. 20-0828.15)

2. Glazing complies with ASTM E1300-09

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 20-0915.22 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 11/19/20, expiring on 07/08/24.
- 2. Notice of Acceptance No. 22-1116.01 issued to Kuraray America, Inc. for their "SentryGlas® (Clear and White) Glass Interlayers" dated 12/15/22, expiring on 07/04/28.

Manuel Perez, P.E. Product Control Examiner NOA No. 25-0423.04

Expiration Date: October 20, 2026 Approval Date: May 29, 2025

Labrador & Fundora Corp. dba V & V Windows

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA'S (CONTINUED)

F. STATEMENTS

- 1. Statement letter of conformance, complying with FBC 7th Edition (2020), with FBC 8th Edition (2023) and of no financial interest, dated June 07, 2023, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
 - (Submitted under NOA No. 23-0620.07)
- 2. Laboratory compliance letter for Test Report No. ATLSF-0913.01-10, issued by American Test Lab of South Florida, Inc., dated 07/11/11, signed and sealed by Julio E. Gonzales, P.E.

(Submitted under NOA No. 11-0907.03)

G. OTHERS

1. Notice of Acceptance No. **20-0828.15**, issued to Labrador & Fundora Corp. dba V & V Windows for their Series "100" Aluminum Single Hung Window - L.M.I., approved on 12/17/20 and expiring on 10/20/26.

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No W11-38, titled "Series 100 Alum. Single Hung Wdw. (L.M.I.)", sheets 1 through 7 of 7, dated 07/15/11, with revision F dated 06/07/23, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

Manuel Perez, P.E. Product Control Examiner NOA No. 25-0423.04

Expiration Date: October 20, 2026 Approval Date: May 29, 2025

Labrador & Fundora Corp. dba V & V Windows

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

- 2. NEW EVIDENCE SUBMITTED (CONTINUED)
- B. TESTS
 - 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202-94

along with marked-up dwg. & installation diagram of an alum. horiz. sliding window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-24-8219**, dated 12/23/24 & 04/17/25, signed and sealed by Ram N. Tawari, P.E.

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, updated and complying with FBC 8th Edition (2023), dated 04/10/25, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 24-0205.08 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers" dated 03/21/24, expiring on 07/08/29.
- 2. Notice of Acceptance No. 23-0717.30 issued to Kuraray America, Inc. for their "SentryGlas® (Clear and White) Glass Interlayers" dated 08/31/23, expiring on 07/04/28.

F. STATEMENTS


- 1. Statement letter of conformance, complying with **FBC 8**th **Edition (2023)** and of no financial interest, dated April 09, 2025, issued by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.
- 2. Proposal No. **24-0529** issued by Product Control, dated 06/07/24, signed by Manuel Perez, P.E.

G. OTHERS

1. Notice of Acceptance No. **23-0620.07**, issued to Labrador & Fundora Corp. dba V & V Windows for their Series "100" Aluminum Single Hung Window - L.M.I., approved on 07/06/20 and expiring on 10/20/26.

Manuel Perez, P.E. Product Control Examiner NOA No. 25-0423.04

Expiration Date: October 20, 2026 Approval Date: May 29, 2025

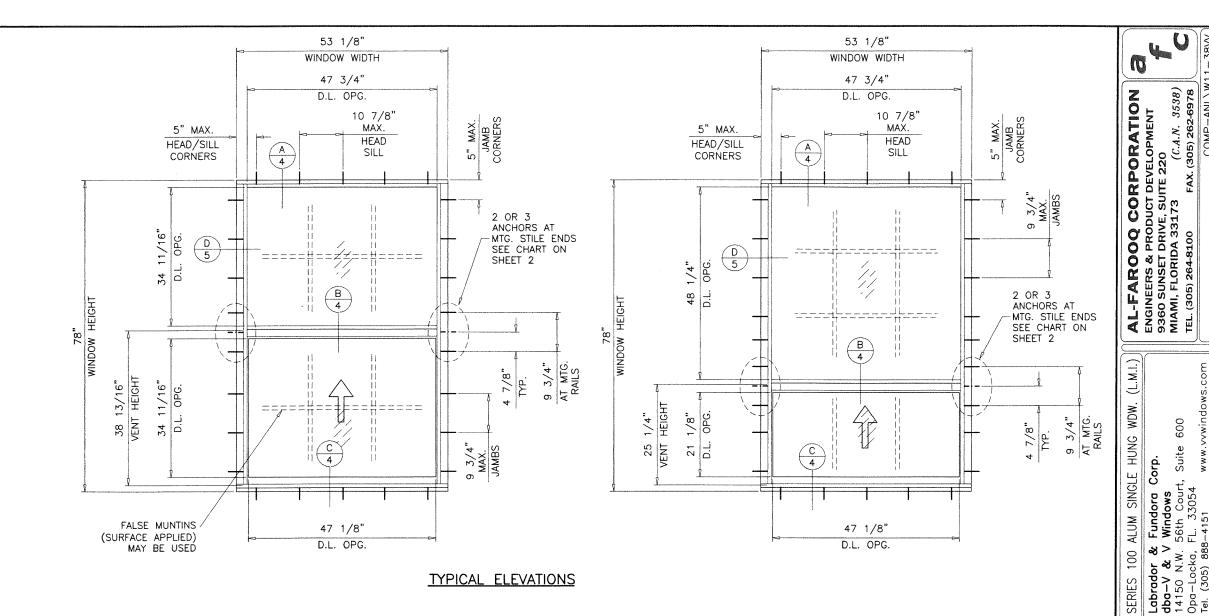

SERIES 100 ALUMINUM SINGLE HUNG WINDOW

DESIGN LOAD RATINGS FOR THESE WINDOWS TO BE AS PER CHARTS SHOWN ON SHEETS 2 & 3.

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE COMBINATIONS OF S.H./S.H. OR SINGLE HUNG WITH OTHER WINDOW TYPES IN MODULES OF TWO OR MORE WINDOWS USING MIAMI-DADE COUNTY APPROVED MULLIONS IN BETWEEN.
LOWER DESIGN PRESSURE FROM WINDOWS OR MULLION APPROVAL WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC.

CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.


THESE WINDOWS ARE RATED FOR LARGE & SMALL MISSILE IMPACT SHUTTERS ARE NOT REQUIRED.

PRODUCT REVISED
As complying with the Florida
Building Code
NOA-No. 25-0423.04

Expiration Date: 10/20/2026

By: Manuel Pres
Miami-Dade Product Control

APR 2 1 2025




=				Т.
<u></u>	date: 07-15-11	\subseteq	(e)	revision
		50	OU	ф
	scale: 1/2"=1'-0"		ပ	07.2
		77	۵	09.2
	dr. by: TARIQ		ш	07.1
		70	L	0.90
	cnk. by:	\equiv	ပ	02.0

By description
REV. PER RER C
UPDATED TO 20:
UPDATED TO 20:
UPDATED TO 20:
UPDATED TO 20:

drawing no.

W11-38 (sheet 1 of 9

		EQUAL	LITES	WIND	ows			EQUA	L LITE	s WIND	ows
			LOAD CAI						N LOAD CA		
WINDO	W DIMC	GLASS	TYPE	GLASS	TYPES		TYPE		W DIMS.		TYPE
WIDTH	W DIMS.	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	WIDTH	HEIGHT	EXT.(+)	1NT.(-)
19-1/8"	TICKSTT	60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		_	
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"		_	l -
37"	26"	60.0	60.0	75.0	75.0	80.0	120.0	37"	26"	_	_
42"	(4)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(4)	-	_
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"		_	_
53-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	53-1/8"		_	_
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		_	_
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			_
37"	38-3/8"	60.0	60.0	75.0	75.0	80.0	120.0	37"	38-3/8"	-	_
42"	(4)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(4)	_	
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"		_	_
53-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	53-1/8"			
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"			-
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"		_	_
37"	50-5/8"	60.0	60.0	75.0	75.0	80.0	120.0	37"	50-5/8"		-
42"	(6)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(7)		
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"		_	_
53-1/8"		60.0	60.0	75.0	75.0	80.0	116.1	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"			-
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"		_	
37"	58"	60.0	60.0	75.0	75.0	80.0	120.0	37"	58"	-	_
42"	(6)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(7)		-
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"			
53-1/8"		60.0	60.0	75.0	75.0	80.0	106.7	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"			_
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			
37"	60"	60.0	60.0	75.0	75.0	80.0	120.0	37"	60"		
42"	(7)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(8)		
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"		_	
53-1/8"		60.0	60.0	75.0	75.0	80.0	104.6	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"			
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			
37"	63"	60.0	60.0	75.0	75.0	80.0	120.0	37"	63"		
42"	(7)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(8)		
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"			
53-1/8"		60.0	60.0	75.0	75.0	80.0	101.9	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		<u> </u>	
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"	70"		 -
37"	72"	60.0	60.0	75.0	75.0	80.0	120.0	37"	72"		-
42"	(8)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(9)	-	1000
48"	ta analas ana		_	75.0	75.0	80.0	114.0	48"		80.0	120.0
53-1/8"		-	-	75.0	75.0	80.0	95.5	53-1/8" 19-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			
26-1/2"	74 1/4"	60.0	60.0	75.0	75.0	80.0	120.0	1	74-1/4"		_
37"	74-1/4"	60.0	60.0	75.0	75.0	80.0 80.0	120.0 120.0	37" 42"	(9)		
42"	(8)	60.0	60.0	75.0	75.0 75.0	80.0	113.0	48"	(3)	80.0	120.0
48"			_	75.0	+	 	+	53-1/8"		80.0	120.0
53-1/8"		 		75.0 75.0	75.0 75.0	80.0 80.0	94.3 120.0	19-1/8"		- 80.0	120.0
19-1/8" 26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			
37"	70"	60.0	60.0	75.0	75.0	80.0	120.0	37"	78"	_	-
42"	78" (8)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(9)		 -
42 48"	(0)	- 60.0	- 60.0	75.0	75.0	80.0	111.6	48"		80.0	120.0
53-1/8"				75.0	75.0	80.0	92.6	53-1/8"		80.0	120.0
33-1/6]	1	1	1 / 0.0	1 / 0.0	1 00.0	1 32.0		<u> </u>		1 .20.0





NOTE: GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219

> **PRODUCT REVISED** As complying with the Florida Building Code NOA-No. 25-0423.04 **Expiration Date: 10/20/2026**

By: Manuel Perez Miami-Dade Product Control

EQUAL LITES





PER

ANCHORS

OF


NO.

INDICATE


PARENTHESIS

Z


. No



GLAZING OPTIONS



GLASS TYPE 'B'

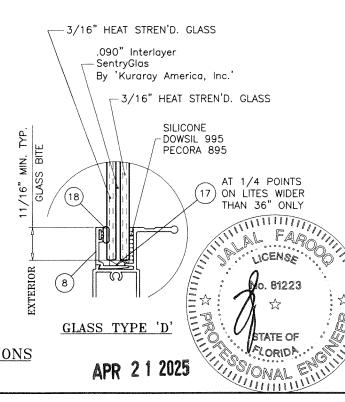

APR 2 1 2025



 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220

 MIAMI, FLORIDA 33173
 (C.A.N. 3538)

 TEL. (305) 264-8100
 FAX. (305) 262-6978

(L.M.I.)


WDW.

ALUM SINGLE HUNG Labrador & Fundora Corp.
dba-V & V Windows
14150 N.W. 56th Court, Suite 6
0pa-Locka, FL. 33054
rel. (305) 888-4151 www.vv SERIES 100

> <u>ب</u> <u>₽</u>

drawing no. W11 - 38sheet 2 of 9

	U	NEQUA	L LITE	S WINI	oows	ANNUAL ANNUAL PROPERTY OF THE PARTY OF THE P		UNEQU	JAL LIT	ES WIN	Dows
				ACITY - G. STILE				1	N LOAD CA		1
WINDOV	V DIMS.	GLASS		GLASS 'B' &		GLASS		WINDOV	V DIMS.	GLASS 'I	3
WIDTH	HEIGHT	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	EXT.(+)	1NT.(-)	WIDTH	HEIGHT	EXT.(+)	1NT.(-)
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		_	
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"		_	
37"	50-5/8"	60.0	60.0	75.0	75.0	80.0	120.0	37"	50-5/8"		-
42"	(6)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(6)		-
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"			-
53-1/8"		60.0	60.0	75.0	75.0	80.0	116.1	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		-	_
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			-
37"	58"	60.0	60.0	75.0	75.0	80.0	120.0	37"	58"	_	_
42"	(6)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(6)		
48"		60.0	60.0	75.0	75.0	80.0	120.0	48"]
53-1/8"		_	_	75.0	75.0	80.0	107.4	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		-	-
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"		_	
37"	60"	60.0	60.0	75.0	75.0	80.0	120.0	37"	60"		-
42"	(7)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(7)	*****	-
48"		_	_	75.0	75.0	80.0	120.0	48"		-	_
53-1/8"		_	_	75.0	75.0	80.0	105.8	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		-	_
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			
37"	63"	60.0	60.0	75.0	75.0	80.0	120.0	37"	63"	-	
42"	(7)	60.0	60.0	75.0	75.0	80.0	120.0	42"	(7)	-	
48"		_	_	75.0	75.0	80.0	120.0	48"		-	
53-1/8"		_	_	75.0	75.0	80.0	103.8	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"	:	-	
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"		_	
37"	72"	_	_	75.0	75.0	80.0	120.0	37"	72"	••••	
42"	(8)		_	75.0	75.0	80.0	120.0	42"	(8)		-
48"			_	_	_	80.0	120.0	48"		***	
53-1/8"			-		_	80.0	100.6	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		****	
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"		_	-
37"	74-1/4"		_	75.0	75.0	80.0	120.0	37"	74-1/4"	-	_
42"	(8)	_		75.0	75.0	80.0	120.0	42"	(8)	-	
48"		_	_		_	80.0	120.0	48"		-	
53-1/8"		_			_	80.0	100.4	53-1/8"		80.0	120.0
19-1/8"		60.0	60.0	75.0	75.0	80.0	120.0	19-1/8"		_	
26-1/2"		60.0	60.0	75.0	75.0	80.0	120.0	26-1/2"			
37"	78"	_	_	75.0	75.0	80.0	120.0	37"	78"		
42"	(8)		_	-	_	80.0	120.0	42"	(8)		-
48"		_	_	-		80.0	120.0	48"		_	_
53-1/8"		_	_		_	80.0	100.4	53-1/8"		80.0	120.0



UNEQUAL LITES (ORIEL TYPE)

PRODUCT REVISED
As complying with the Florida
Building Code
NOA-No. 25-0423.04

Expiration Date: 10/20/2026

By: Manuel Pers

By: Will Street Sontrol

APR 2 1 2025





SERIES 100 ALUM SINGLE HUNG WDW. (L.M.I.)

k Fundora Corp.
V Windows
56th Court, Suite 6
FL. 33054
www.vv

NOTE: GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION


DECLARATORY STATEMENT DCA05-DEC-219

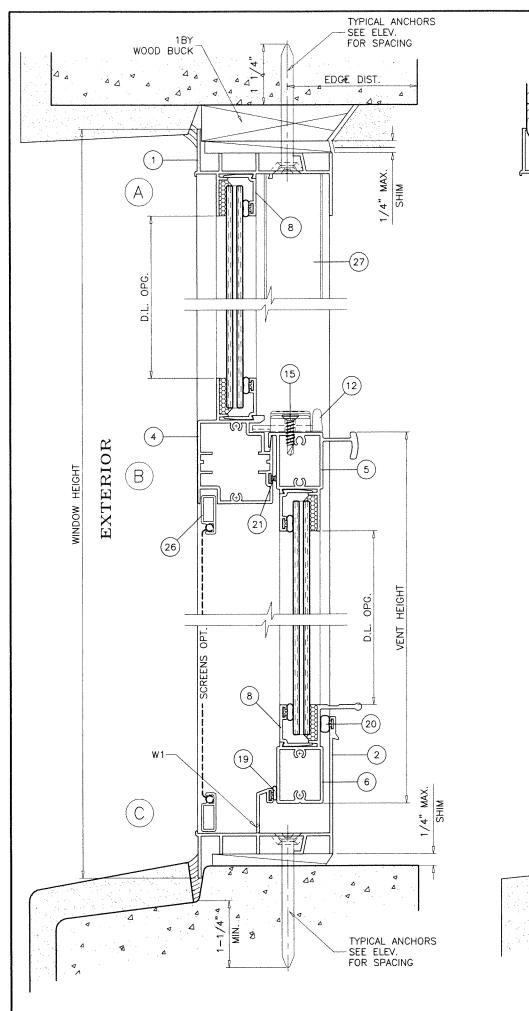




WOOD BUCK

EDGE DIST.





WOOD BUCKS AND METAL STRUCTURE NOT BY 'V & V WDW. MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

TYPICAL ANCHORS

SEE ELEV. FOR SPACING

TYPICAL ANCHORS: SEE ELEV. FOR SPACING

1/4" DIA. ULTRACON+ BY 'DEWALT' (Fu=164 KSI, Fy=148 KSI) INTO 2BY WOOD BUCKS OR WOOD STRUCTURES 1-1/2" MIN. PENETRATION INTO WOOD (HEAD/SILL/JAMBS)

THRU 1BY BUCKS INTO CONC. OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

DIRECTLY INTO CONCRETE OR BLOCKS 1-1/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS) 1-1/4" MIN. EMBED INTO BLOCKS (JAMBS)

#14 SMS OR SELF DRILLING SCREWS (GRADE 2 CRS)

INTO MIAMI-DADE COUNTY APPROVED MULLIONS

INTO METAL STRUCTURES (HEAD/SILL/JAMBS) (3) THREADS MIN. PENETRATION BEYOND SUBSTRATE ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.) STEEL: 1/8" THK. MIN. (Fy = 36 KSI MIN.) (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

TYPICAL EDGE DISTANCE

INTO CONCRETE AND MASONRY = 2-1/2" MIN. INTO WOOD STRUCTURE = 1" MIN. INTO METAL STRUCTURE = 3/4" MIN.

WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN. CONCRETE AT HEAD, SILL OR JAMBS f'c = 3000 PSI MIN. C-90 HOLLOW/FILLED NORMAL WEIGHT BLOCK AT JAMBS f'm = 2000 PSI MIN.

WEEPHOLES:

W1 = 3/16" X 3/4" WEEP SLOT AT 1-3/8" FROM EACH END

SEALANT:

ALL FRAME AND VENT CORNERS, INSTALLATION SCREWS AT SILL AND ALL METAL PARTS CONNECTIONS SEALED WITH PTI SILICONE.

> **PRODUCT REVISED** NOA-No.

By: Manuel Peres Miami-Dade Product Control

25-0423.04 APR 2 1 2025

(C.A.N. 3538) (305) 262-6978 AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173 (C.A.N. 3538)
TEL. (305) 264-8100 FAX. (305) 262-6978

Fundora Corp.
Windows
56th Court, Suite (
FL. 33054 www.vv

100 ALUM SINGLE HUNG WDW.

by description

REV. PER RER C

UPDATED TO 20

UPDA

revisions:

no date

c 07.28.15

D 09.27.17

E 07.14.20

F 06.07.23


G 02.06.25 07-15-11 1/2" b. 후.


drawing W11 - 38


sheet 4 of 9

As complying with the Florida Building Code

Expiration Date: 10/20/2026

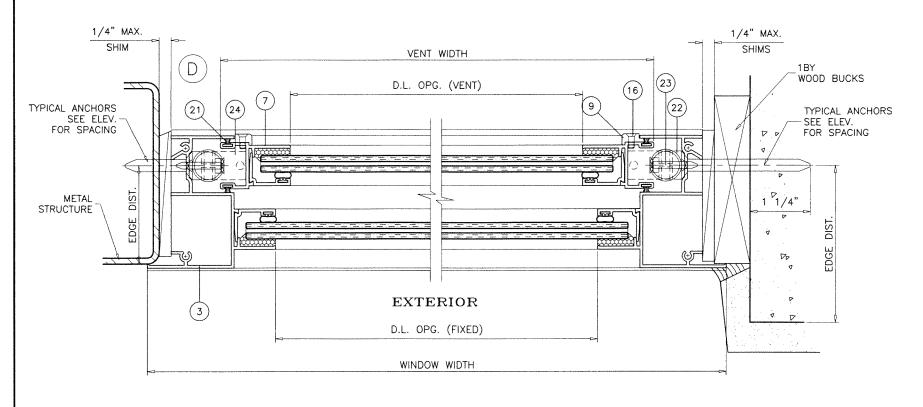



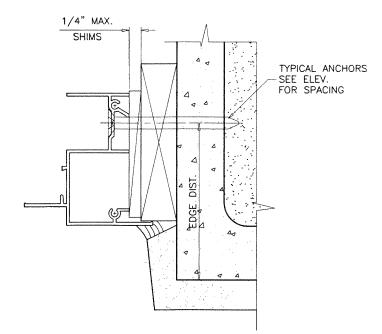

PRODUCT REVISED As complying with the Florida Building Code
NOA-No. 25-0423.04

Expiration Date: 10/20/2026 By: Manuel Perez

Miami-Dade Product Control

APR 2 1 2025




HUNG WDW. (L.M.I.)


1/2" = 1" Cevisions: C 07.28.15 D OFFED THIS C 07.28.15 D OFFED THIS C 07.14.20 EDITORIAL CHANK F OFFED TO 20 C OFFED THIS C OFFED TO 20 OFFED T

drawing no.

W11 - 38

sheet 5 of 9

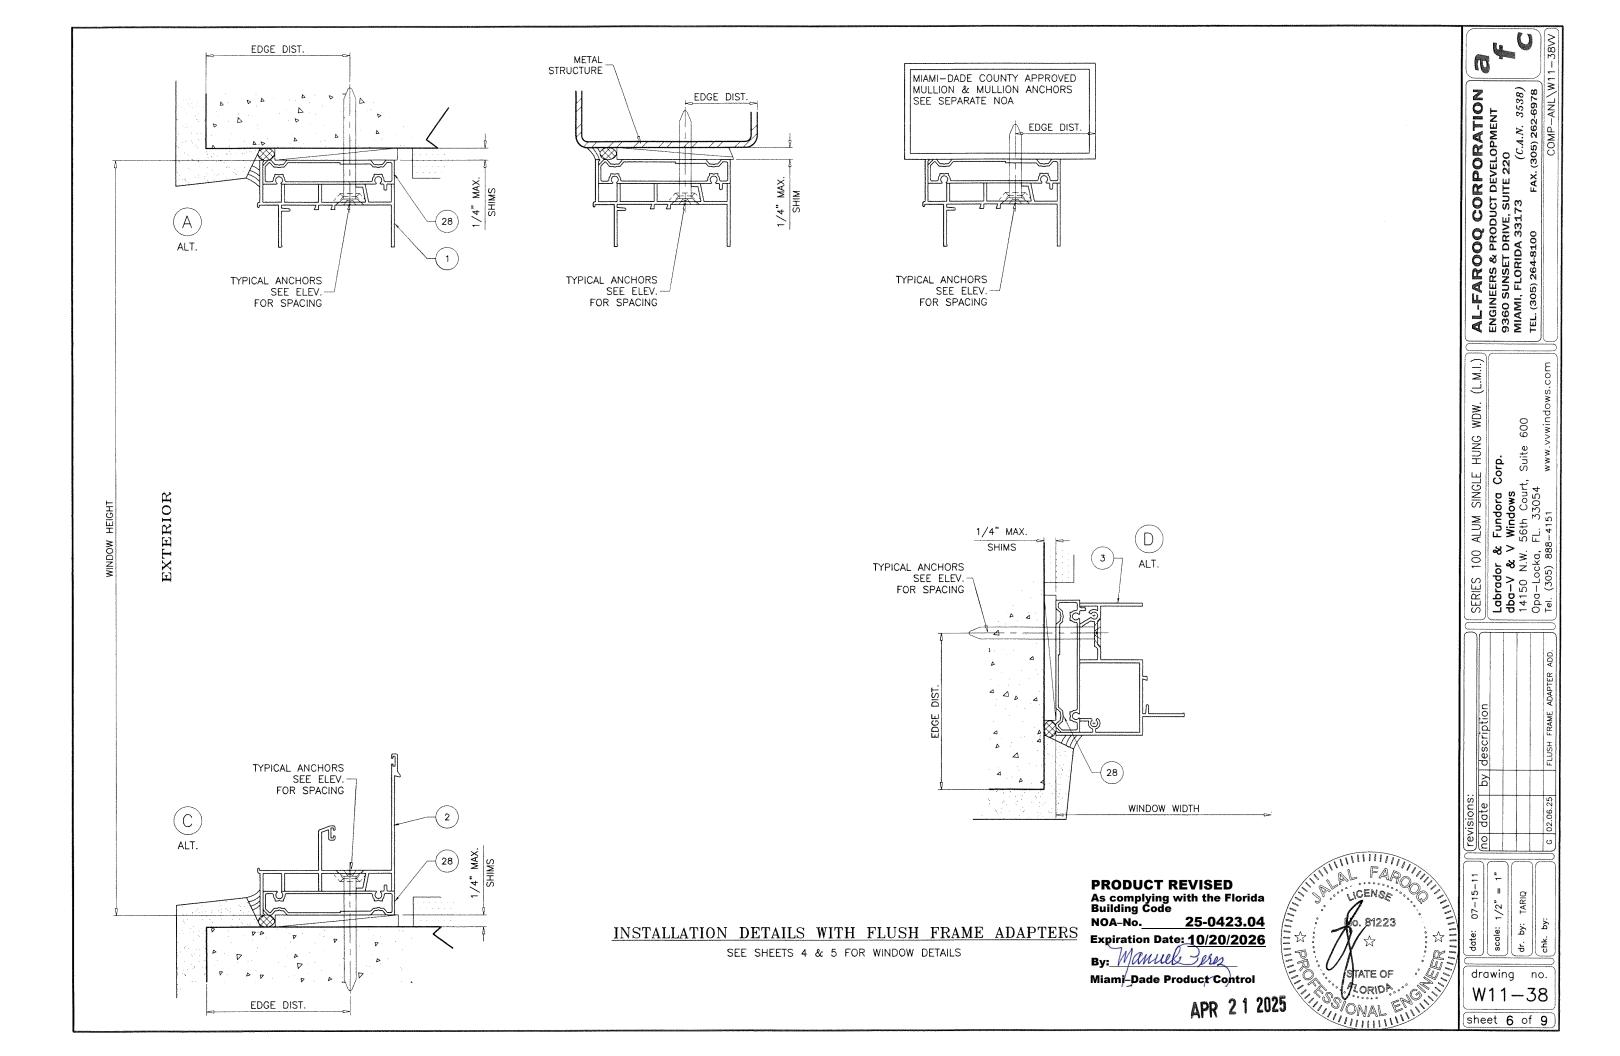

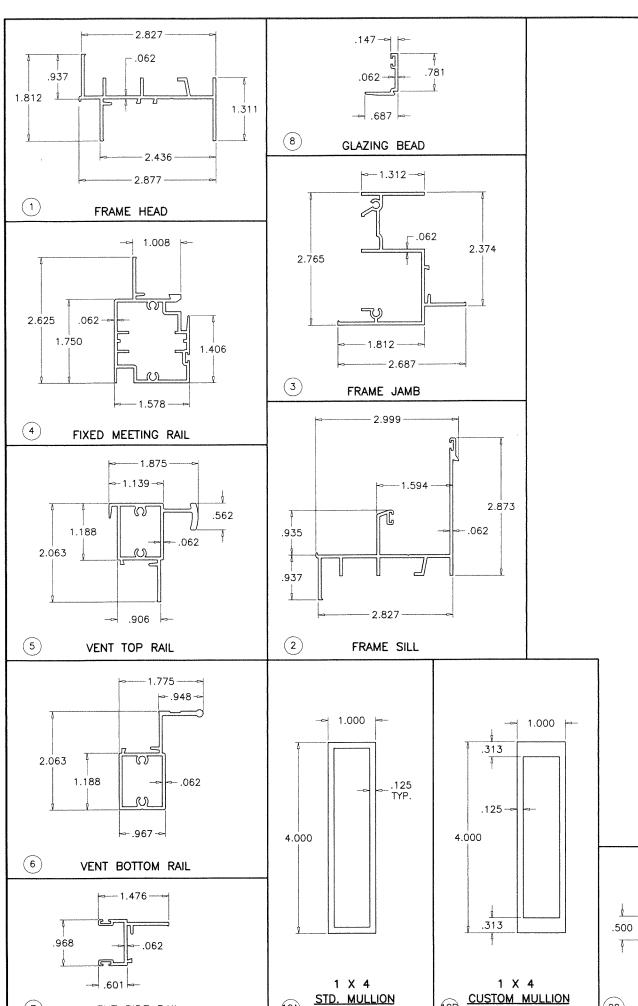

(7)


VENT SIDE RAIL

(10B)

6063-T6

6063-T6

ITEM	PART #	QUANTITY	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS
1	V101	1	FRAME HEAD	6063-T6	_
2	V102	1	FRAME SILL	6063-T6	
3	V103	2	FRAME JAMB	6063-T6	_
4	V104	1/ VENT	FIXED MTG. RAIL	6063-T6	_
5	V105	1/ VENT	VENT TOP RAIL	6063-T6	
6	V106	1/ VENT	VENT BOTTOM RAIL	6063-T6	_
7	V107	2/ VENT	VENT SIDE RAIL	6063-T6	_
8	V108	AS REQD.	GLAZING BEAD	6063-T6	_
9	V109	4	SASH GUIDE	NYLON	_
10A		AS REQD.	1X4 STD. MULLION	6063-T6	_
10B		AS REQD.	1X4 CUSTOM MULLION	6063-T6	_
12	SL203	2/ VENT	SWEEP LATCH		SULLIVAN & ASSOC.
13	#8 X 1-1/4"	AS REQD.	FRAME/VENT ASSEMBLY SCREWS		PH SMS
14	#8 X 1/2"	2	BOTTOM RAIL LOWER SCREW	-	PH SMS
15	#8 X 1/2"	2	LATCH INSTALLATION SCREW		OH SMS
16	#6 X 1"	4	SASH GUIDE INSTALLATION SCREW	-	OH SMS
17	_	2/ LITE	SETTING BLOCKS	EPDM	DUROMETER 80±5 SHORE A
18	9146QU	AS REQD.	GLAZING BEAD BULB	NEOPRENE	ULTRAFAB, DUAL DUROMETER, T-SLOT=50, BULB=73
19	9146QU	AS REQD.	BULB SEAL	NEOPRENE	ULTRAFAB, DUAL DUROMETER, T-SLOT=50, BULB=73
20	-	AS REQD.	FRAME SILL W'STRIPPING	NEOPRENE	_
21	W222122G	AS REQD.	FIN SEAL W'STRIPPING	WOOL	ULTRAFAB
22		2	SUPERBOOST BALANCES	-	BALANCE SYSTEMS INC.
23	#10 X 1"	1/ BALANCE	BALANCE MOUNTING SCREWS		FH SMS
24		1/ BALANCE	BALANCE CONNECTING CLIP	_	_
25	#8 X 1/2"	2/ BALANCE	CONNECTING CLIP SCREWS	_	OH SMS
26	-	AS REQD.	5/16" BOX SCREEN		OPTIONAL
27	2/ WDW.	AS REQD.	SASH STOP (3" LONG)	RIGID PVC	_
28	V110	AS REQD.	FLUSH FRAME ADAPTER	6063-T6	




PRODUCT REVISED
As complying with the Florida
Building Code
NOA-No. 25-0423.04

Expiration Date: 10/20/2026

By: Manuel eres
Miami-Dade Product Control

APR 2 1 2025



	/	-/		١	١			١
١	d	\subseteq	date: 07-15-11	\subseteq	(e)	revisions:		
V	ra			=	no	no date	by des	qe
1 .	wi		scale: $1/2$ " = 1"		ပ	C 07.28.15		REV.
1 -	ng				۵	D 09.27.17		UPD
_;			dr. by: TARIQ		ш	E 07.14.20		EDITC
38	nc				ш	F 06.07.23		UPD
3	١.		cnk. by:		C	20 20 00		0

sheet 7 of 9

 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220

 MIAMI, FLORIDA 33173
 (C.A.N. 3538)

 TEL. (305) 264-8100
 FAX. (305) 262-6978

(L.M.I.)

900

ırt, Suite


100 ALUM SINGLE HUNG WDW.

SERIES

WINDOW DIMS.			NCHORS SIDE OF MULL		CHORS DE OF MULL	
WINDOV	W DIMS.	1 X 4 STD. MULL	1 X 4 CUSTOM MULL	1 X 4 STD. MULL	1 X 4 CUSTOM MULL	
	LENOTH (L)	EXT.(+)	EXT.(+)	EXT.(+)	EXT.(+)	
<u> </u>	LENGTH (L)	INT.(-)	INT.(-)	INT.(-)	INT.(-)	
19-1/8"		120.0	120.0	120.0	120.0	
26-1/2"		120.0	120.0	120.0	120.0 120.0	
37"	50-5/8"	120.0	120.0	120.0		
42"		120.0	120.0	120.0	120.0 120.0	
48"		120.0	120.0	120.0 120.0	120.0	
53-1/8"		120.0	120.0		120.0	
19-1/8"		120.0	120.0	120.0	120.0	
26-1/2"		120.0	120.0	120.0	120.0	
37"	58"	120.0	120.0	120.0		
42"		120.0	120.0	120.0	120.0	
48"		120.0	120.0	120.0	120.0	
53-1/8"		120.0	120.0	120.0	120.0	
19-1/8"		120.0	120.0	120.0	120.0	
26-1/2"		120.0	120.0	120.0	120.0	
37"	60"	120.0	120.0	120.0	120.0	
42"		120.0	120.0	120.0	120.0	
48"		120.0	120.0	120.0	120.0	
53-1/8"		116.7	116.7	120.0	120.0	
19-1/8"		120.0	120.0	120.0	120.0	
26-1/2"		120.0	120.0	120.0	120.0	
37"	63"	120.0	120.0	120.0	120.0	
42"		117.6	117.6	120.0	120.0	
48"		110.8	110.8	120.0	120.0	
53-1/8"		107.1	107.1	120.0	120.0	
19-1/8"		120.0	120.0	120.0	120.0	
26-1/2"		120.0	120.0	120.0	120.0	
37"	72"	104.8	104.8	120.0	120.0	
42"	1	96.8	96.8	120.0	120.0	
48"		90.0	90.0	115.0	120.0	
53-1/8"		85.9	85.9	108.2	120.0	
19-1/8"		120.0	120.0	120.0	120.0	
26-1/2"		120.0	120.0	120.0	120.0	
37"	74-1/4"	100.5	100.5	120.0	120.0	
42"	'''	92.7	92.7	117.5	120.0	
48"		86.0	86.0	106.8	120.0	
53-1/8"		81.9	81.9	100.2	120.0	
19-1/8"		120.0	120.0	120.0	120.0	
26-1/2"		120.0	120.0	120.0	120.0	
37"	78"	94.2	94.2	116.4	120.0	
42"	,,,	86.6	86.6	104.9	120.0	
48"		80.0	80.0	94.9	119.2	
53-1/8"	ļ	75.9	75.9	88.7	111.4	

MULLION LOAD CAPACITY - PSF

UN-CLIPPED MULLIONS

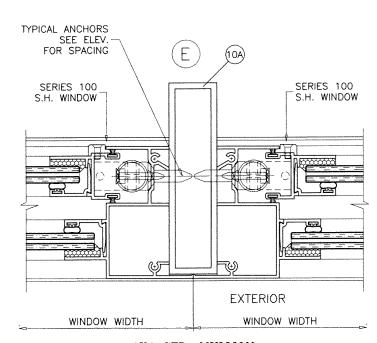


1X4 STD. MULLION

TOTAL PRPERTIES Ix = 3.2036 IN 4 $Sx = 1.6018 \text{ IN} \ 3$


NOTES:

- 1. USE CHART ON THIS SHEET FOR SIDE BY SIDE CONNECTION CAPACITY OF WINDOW MULLION.
- 2. FOR SINGLE HUNG WINDOW CAPACITY SEE SHEETS 2 & 3.
- 3. LOWER VALUES FROM STEPS 1 OR 2 WILL APPLY TO ENTIRE SYSTEM.

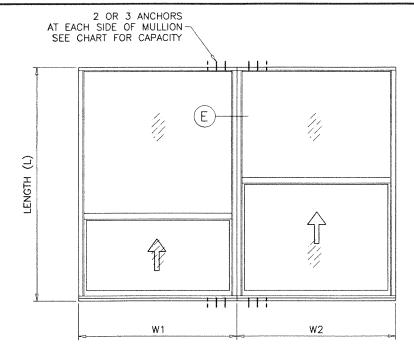

TYPICAL ELEVATION SIDE BY SIDE WINDOWS SIDE BY SIDE APPLIES TO TWO OR MORE WINDOWS

$$WIDTH (W) = \frac{W1 + W2}{2}$$

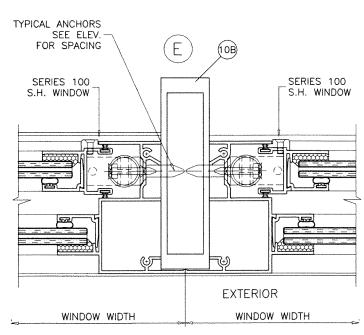

1X4 CUSTOM MULLION

TOTAL PRPERTIES

 $Ix = 4.0996 \text{ IN} \ 4$ $Sx = 2.0498 \text{ IN} \ 3$


> **PRODUCT REVISED** As complying with the Florida Building Code

25-0423.04 NOA-No.

Expiration Date: 10/20/2026

By: Manuel Perez Miami-Dade Product Control

APR 2 1 2025



 AL-FAROOQ CORPORATION

 ENGINEERS & PRODUCT DEVELOPMENT

 9360 SUNSET DRIVE, SUITE 220

 MIAMI, FLORIDA 33173
 (C.A.N. 3538)

 TEL. (305) 264-8100
 FAX. (305) 262-6978

(L.M.I.) WDW. HUNG

Suite ALUM


revisions:
no date
c 07.28.15
D 09.27.17
E 07.14.20
F 06.07.23


þ.

drawing no.


sheet 8 of 9

W11 - 38

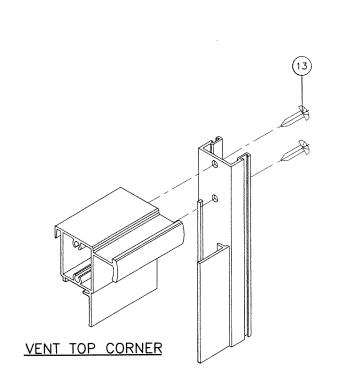


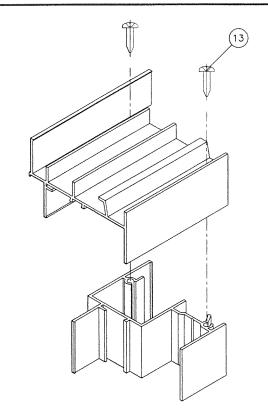



FRAME TOP CORNER

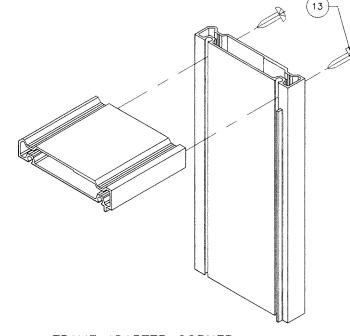

FRAME ADAPTER CORNER





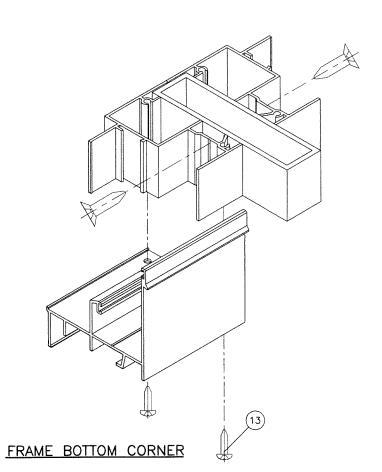

PRODUCT REVISED
As complying with the Florida
Building Code
NOA-No. 25-0423.04

Expiration Date: 10/20/2026

By: Manuel Pres

Miami-Dade Product Control

APR 2 1 2025



\subseteq						_
C HINC WUM JAIN	L HONG WOW. (LIMIN.)	Sorp.		Suite 600		www.vvwindows.com
SERIES 100 ALIM SINGLE HING WOW (LM.)	SCINES TOO ALOIM SITUAL	Labrador & Fundora Corp.	dba-V & V Windows	14150 N.W. 56th Court, Suite 600	Opa-Locka, FL. 33054	Tel. (305) 888-4151
				ī	1	T
	no date by description	REV. PER RER COMMENTS	UPDATED TO 2017 FBC	EDITORIAL CHANGES	UPDATED TO 2023 FBC	FLUSH FRAME ADAPTER ADD
	þ					
revisions:	date	C 07.28.15	D 09.27.17	E 07.14.20	F 06.07.23	G 02 06 25
revis	no	ပ	۵	ш	L.	C
, (revis	luo (0		ш	li.	٣

drawing no. W11 - 38

sheet **9** of **9**