



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

SRS Distribution Inc.
7440 S. Hwy 121
McKinney, TX 75070

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (in Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Top Shield® OmniRidge Pro TSPRO4-N and TSPRO4-SWN Ridge Vent

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA# 20-0908.09 and consists of pages 1 through 4.

The submitted documentation was reviewed by Rafael Macedo.

08/07/25



NOA No. 25-0623.03
Expiration Date: 10/01/30
Approval Date: 08/07/25
Page 1 of 4

ROOFING COMPONENT APPROVAL

Category: Roofing
Sub-Category: Ventilation
Materials: Plastic

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Top Shield® OmniRidge Pro TSPRO4-N and TSPRO4-SWN Ridge Vent	Length 4 Feet Width 14 ½ Inches Height 1 Inch	TAS-100(A)	Low profile attic ridge vent for installation under ridge shingles.

MANUFACTURING LOCATIONS:

1. Jacksonville, AR

EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Name/Report</u>	<u>Test Identifier</u>	<u>Date</u>
PRI Construction Materials Technologies	TAS 100(A)	556T0012	05/14/25
	ASTM D 1929	556T0006	04/03/23
	ASTM D 635	556T0006	04/03/23
	ASTM D 2843	556T0005	04/03/23



NOA No. 25-0623.03
Expiration Date: 10/01/30
Approval Date: 08/07/25
Page 2 of 4

APPROVED APPLICATIONS

Tradename:	Top Shield® OmniRidge Pro TSPRO4-N and TSPRO4-SWN Ridge Vent
System Type:	Mechanical attachment of ridge vent over asphalt shingle roof systems only.
Cutout:	Truss Construction: Cut shall be 1-3/4" wide and 6" shorter at each end than the total length of the ridge vent to be installed. Ridge Pole Construction: Cut shall be 3-1/4" wide and 6" shorter at each end than the total length of the ridge vent to be installed.
Installation:	Starting from the end of the ridge, center ridge vent over the slot and fasten using approved ring shank nails at 12 inches on center in molded hole locations (ten nails per vent section).
Ridge Shingle:	Install pre-manufactured or field-cut ridge shingles over the ridge vent in compliance with the shingle manufacturer's Notice of Acceptance (NOA) and the installation instructions. Ring shank nails shall be corrosion resistant and long enough to penetrate through the wood deck a minimum of 3/16".
Net Free Area:	Refer to manufacturers published literature.

LIMITATIONS:




1. Refer to applicable Building Codes for required ventilation.
2. This acceptance is for installations on asphalt shingle roof systems only.
3. Top Shield® OmniRidge Pro TSPRO4-N and TSPRO4-SWN Ridge Vent shall not be installed on roof mean heights greater than 33 feet.
4. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.
5. All approved products listed herein shall be labeled and shall bear the imprint or identifiable marking of the manufacturer's name or logo and following statement: "Miami-Dade County Product Control Approved" or the Miami-Dade County Product Control Seal as shown below.



Top Shield® OmniRidge Pro TSPRO4-N and TSPRO4-SWN Ridge Vent



NOA No. 25-0623.03
Expiration Date: 10/01/30
Approval Date: 08/07/25
Page 3 of 4

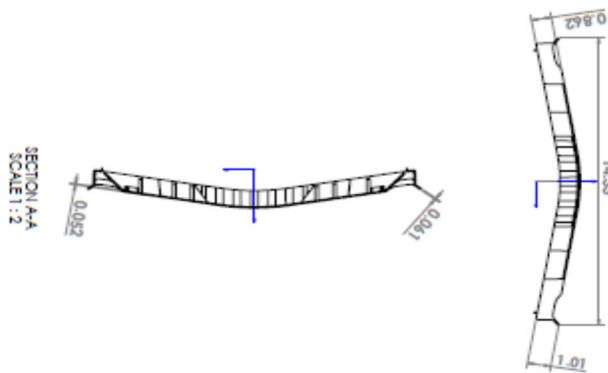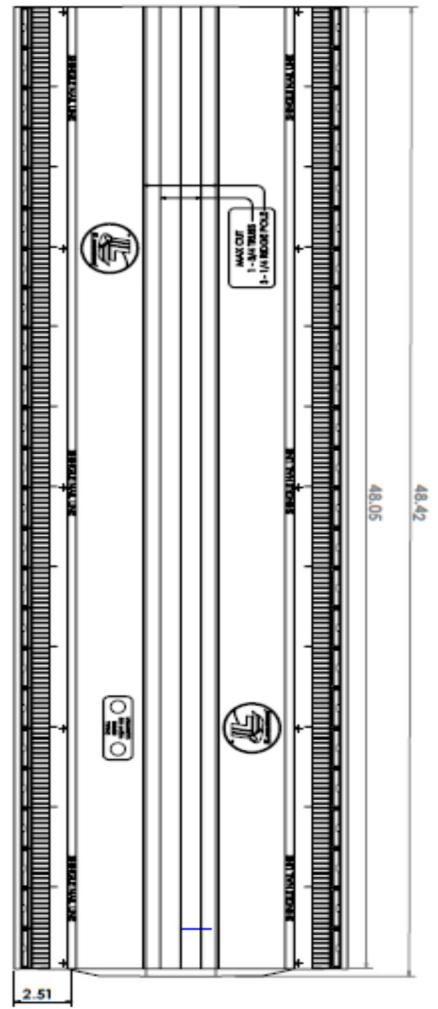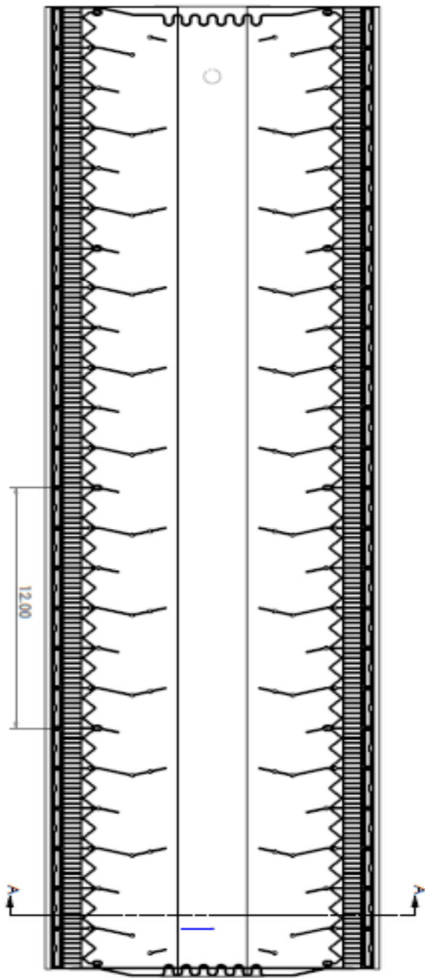

DETAIL DRAWING

END OF THIS ACCEPTANCE



NOA No. 25-0623.03
 Expiration Date: 10/01/30
 Approval Date: 08/07/25
 Page 4 of 4