



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

Sto Corporation
3800 Camp Creek Parkway Bldg. 1400 Suite 120
Atlanta, GA 30331

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: StoTherm ci GMG SM EIFS System 16ga.Steel

APPROVAL DOCUMENT: Drawing titled "StoTherm ci GMG SM", sheets 1 through 4 of 4, dated 02/26/2026, prepared by Sto Corporation, signed and sealed by William R. Heiden III, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Small Missile Impact Resistant.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 26-0305.12** and consists of this page 1 and evidence pages E-1, E-2, E-3, E-4 and E-5, as well as approval document mentioned above.

The submitted documentation was reviewed by **Ishaq I. Chanda, P.E.**



NOA No. 26-0603.02
Expiration Date: August 11, 2031
Approval Date: July 02, 2026
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS "*Submitted under NOA # 16-0418.08*"

1. Drawing titled "StoTherm ci 1177-SM for Small Missile Impact Resistance", sheets 1 through 3 of 3, dated 10/13/2015, prepared by Sto Corporation, signed and sealed by Kurt W. Heinrichs, P.E. on 06/27/2016.

B. TESTS "*Submitted under NOA # 16-0418.08*"

1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of StoTherm ci 1177-SM-150 with USG Securock Sheathing EIFS Systems, prepared by Intertek/ATI, Test Report No. **E5605.03-550-18**, dated 11/09/2015, signed and sealed by Justin P. McDonald, P.E.
2. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of StoTherm ci 1177-SM-150 with Continental Weather Defense Sheathing EIFS Systems, prepared by Intertek/ATI, Test Report No. **E5605.06-550-18**, dated 11/09/2016, signed and sealed by Justin P. McDonald, P.E.

"Submitted under NOA # 13-0109.01"


3. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Small Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of StoTherm EIFS NEXt eXP-1 (specimens 7, 8 and 10), prepared by Hurricane Test Laboratory, LLC, Test Report No. **HTL # G537-0802-10 (150)**, dated 05/09/2011, signed and sealed by Vinu J. Abraham, P.E.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).



Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 26-0603.02
Expiration Date: August 11, 2031
Approval Date: July 02, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS “Submitted under NOA # 16-0418.08”

1. Statement of code conformance to the 5th edition (2014) FBC issued by Nova Engineering and Environmental, dated 03/31/2016, signed and sealed by Kurt W. Heinrichs, P.E.
2. Statement letter of no financial interest issued by Nova Engineering and Environmental, dated 03/31/2016, signed and sealed by Kurt W. Heinrichs, P.E.

2. EVIDENCE SUBMITTED under previous approval

A. DRAWINGS

1. Drawing No. “StoTherm ci 1177-SM for Small Missile Impact Resistance”, sheets 1 through 3 of 3, dated 10/13/2015, prepared by Sto Corporation, signed and sealed by Kurt W. Heinrichs, P.E. on 03/07/2018.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance to **FBC 6th Edition (2017)**, issued and prepared by NOVA Engineering and Environmental, dated 03/07/2018, signed and sealed by Kurt W. Heinrichs, P.E.



Ishaq I. Chanda, P.E.

Product Control Unit Supervisor

NOA No. 26-0603.02

Expiration Date: August 11, 2031

Approval Date: July 02, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. EVIDENCE SUBMITTED UNDER NOA # 21-0708.12

A. DRAWINGS

1. Drawing No. "StoTherm ci 1177-SM for Small Missile Impact Resistance", sheets 1 through 3 of 3, dated 10/13/2015 and last revised on 06/22/2021, prepared by Sto Corporation, signed and sealed by Kurt W. Heinrichs, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance to **FBC 7th Edition (2020)**, issued and prepared by NOVA Engineering and Environmental, dated 06/22/2021, signed and sealed by Kurt W. Heinrichs, P.E.
2. Statement letter dated June 16, 2021, issued by Sto requesting Product renewal without change and FBC 2020 update, signed by Kevin Schroeder, Senior Tech Rep.

G. OTHER

1. This NOA **revises & renews NOA # 18-0319.16**, expiring 08/11/2026.



Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 26-0603.02
Expiration Date: August 11, 2031
Approval Date: July 02, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

4. EVIDENCE SUBMITTED UNDER NOA # 25-1205.03 AND NEW

A. DRAWINGS

1. Drawing titled "StoTherm ci GMG SM", sheets 1 through 4 of 4, dated 02/26/2026, prepared by Sto Corporation, signed and sealed by William R. Heiden III, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE


1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Test report on Flatwise Tensile Strength of Sandwich Constructions per ASTM C297-16, prepared by SGS TEC Services, Test Report No. 23-2159, dated 01/18/2024, signed by James G. McCants III.
2. Notice of Acceptance No. **24-1220.04**, issued to Atlas Molded Products, a div. of Atlas Roofing Corp. for its **ThermalStar GPS EPS Wall Insulation**, approved on 11/13/2025 and expiring on 11/13/2030.

F. STATEMENTS

1. Drawing statement of code conformance to the 8th edition (2023) of the FBC, prepared by Sto Corp., dated 10/21/2024, signed and sealed by William R. Heiden III, P.E.



Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 26-0603.02
Expiration Date: August 11, 2031
Approval Date: July 02, 2026

Sto Corporation

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

5. NEW EVIDENCE SUBMITTED

A. DRAWINGS (submitted under previous approval)

1. Drawing titled "StoTherm ci GMG SM", sheets 1 through 4 of 4, dated 02/26/2026, prepared by Sto Corporation, signed and sealed by William R. Heiden III, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Test report on Flatwise Tensile Strength of Sandwich Constructions per ASTM C297- 16, prepared by SGS TEC Services, Test Report No. 23-2159, dated 01/18/2024, signed by James G. McCants III.
2. Notice of Acceptance No. **24-1220.04**, issued to Atlas Molded Products, a div. of Atlas Roofing Corp. for its **ThermalStar GPS EPS Wall Insulation**, approved on 11/13/2025 and expiring on 11/13/2030.

F. STATEMENTS (submitted under previous approval)

1. Drawing statement of code conformance to the 8th edition (2023) of the FBC, prepared by Sto Corp., dated 10/21/2024, signed and sealed by William R. Heiden III, P.E.

G. OTHER

1. This NOA **renews NOA # 26-0305.12**, expiring 08/11/2031.



Ishaq I. Chanda, P.E.


Product Control Unit Supervisor

NOA No. 26-0603.02

Expiration Date: August 11, 2031

Approval Date: July 02, 2026

The following pages in this document were submitted by the manufacturer (third party) to represent the product being approved and establish the limits of use. The pages may include technical drawings, schematics and installation details.

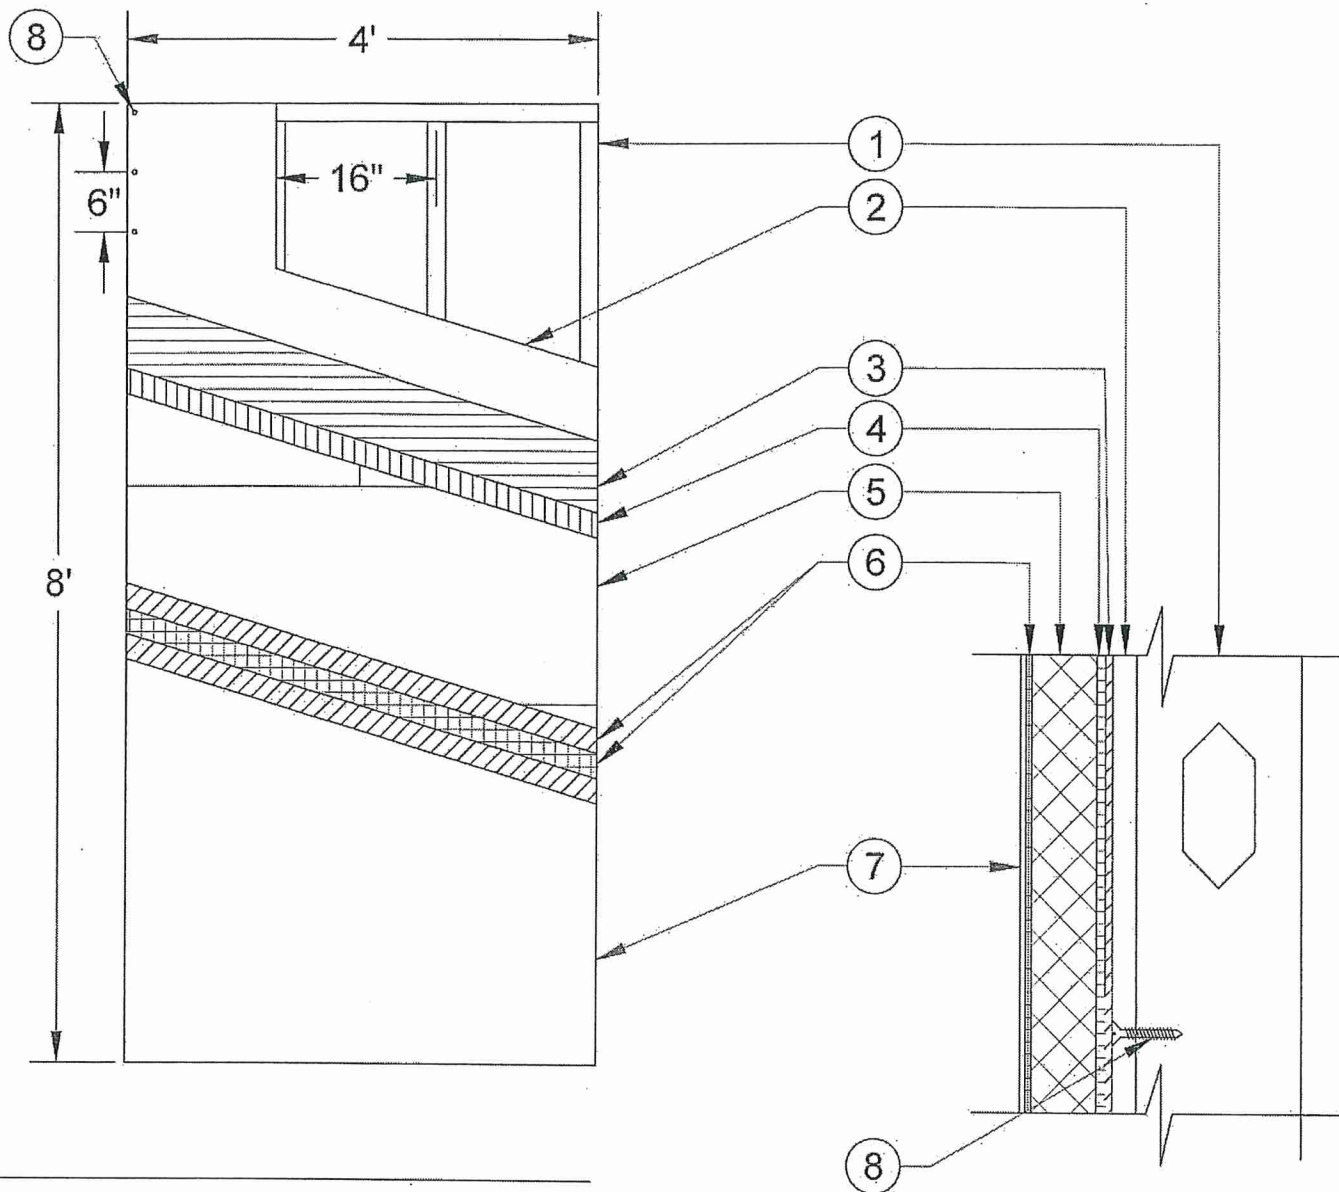

Key

- 1) 6", 16 ga steel studs and track @ 16" O.C.
- 2) 5/8" ASTM C 1177 sheathing
- 3) StoGuard with Sto Gold Coat
- 4) Sto Primer / Adhesive-B or Sto TurboStick®
- 5) Sto Insulation Board @ minimum 1" thick
- 6) Sto Primer / Adhesive-B with Sto Mesh (4.5oz/yd²) embedded
- 7) Sto Textured Finishes or StoCast Finishes
- 8) #8, 1-1/4" Wafer Head Self Drill Screws @ 6" O.C. in field and perimeter

Design Pressure Rating		
Sheathing	Intertek Report No.	Maximum Design Pressure
National Gypsum eXP	E5605.06-550-18	±150 p.s.f.
USG Securock	E5605.06-550-18	±140 p.s.f.
CertainTeed GlasRoc	E5605.06-550-18	±120 p.s.f.

Description

- 1.1 Substrates and Sto products approved with the system
 - 1.1.1 ASTM C 1177 compliant sheathing over steel 6", 16 ga studs @ 16" O.C. w/ 6", 16 ga steel track. ASTM C 1177 compliant sheathing fastened to the steel studs with #8, 1-1/4" wafer head self drill screws @ 6" O.C. in field and perimeter.
 - 1.1.2 All substrates approved under this Notice of Acceptance shall be designed by a Florida Professional Engineer or Registered Architect according to the current Florida Building Code and supplements. Provisions for diaphragm action are necessary for gypsum wall substrate and the deflection shall be limited to L/240 on all cases.
- 1.2 Components of the System/Application
 - 1.2.2 Sto Gold Coat - A ready mixed flexible waterproof material applied to the dry Sto base coat via roller to approximately 10 wet mils.
 - 1.2.3 Insulation Board - Minimum 1" thick Sto Insulation Board in compliance with ASTM C 578 type 1, 1lb cu ft density meeting the requirements of FBC 2612. Sto Insulation board supplier shall have a current NOA with Miami-Dade County. The Sto Primer / Adhesive-B mixed with Portland Cement is applied to the back of the insulation board using a 1/2" x 1/2" U shaped notched trowel or Sto TurboStick® applied to the back of the Sto insulation board using a dispensing pistol. Uniform ribbons of adhesive are formed on the insulation board parallel to the short dimension of the board. Ribbons are oriented vertically when insulation is installed to provide drainage. The boards shall be placed, applying pressure in a running bond pattern with the long dimension horizontal and from a level base starting line. Butt all joints tightly to avoid thermal breaks. Adhesive should not get between joints.
 - 1.2.4 Sto Mesh is embedded in the wet Sto base coat by troweling from the center of the mesh to the edges of the mesh and the excess Sto base coat is removed to provide a total minimum 1/16" thickness of the reinforced base coat. This process is repeated until the entire exposed area of the insulation board is covered with base coat and mesh which is then allowed to dry for a minimum of 12 hours.
 - 1.2.5 Sto Textured Finishes / StoCast Finishes applied in accordance with manufacturer's published product instructions.

General Notes

- 1) This system has been designed in accordance with the current 2020 and 2023 Florida Building Code and the latest supplement(s).
- 2) This system has been tested in accordance with the Florida Building Code Test Protocols TAS-201, TAS-202, and TAS-203 Large Missile Impact Structural and Cyclic Testing.
- 3) This system shall be installed by a licensed plastering contractor following the recommendations of Sto Corp, this notice of acceptance and the applicable sections of the Florida Building Code.
- 4) The engineer and/or architect of record for each project using this system shall size all stud framing to ensure conformance with stud deflection and stress limitations as required by governing codes and this document.
- 5) Insulation boards shall be placed in a running bond pattern.
- 6) All studs used with this system shall be completely sheathed at the interior flange or bridged at maximum every 5 ft. of stud length or as specified by stud manufacturer.
- 7) All steel studs shall be structural with min 1-5/8" min. flange width and have minimum yield strength of 33000 PSI.
- 8) Details on page No. 2, 3 and 4 are typical and show intent to prevent water infiltration into and behind the system. Alternate detailing and specific conditions not covered by the typical details are the responsibility of the licensed design professional in consultation with Sto Corp.

SHEET	DATE: 01/28/26		REVISIONS				
	SCALE: HORIZ. N/A		NO.	DESCRIPTION	DATE	BY	APPR.
1	PREPARED BY: NAME						
	APPROVED: NAME						
OF							
4							
	DWG. NAME:						


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No **26-0603.02**
Expiration Date **8/11/2031**
By **Iskang L. L...**
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. **26-0305.12**
Expiration Date **08/11/2026**
By **...**
Miami-Dade Product Control




StoTherm® ci GMG-SM
Small Missile
16 ga Steel


sto
3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com

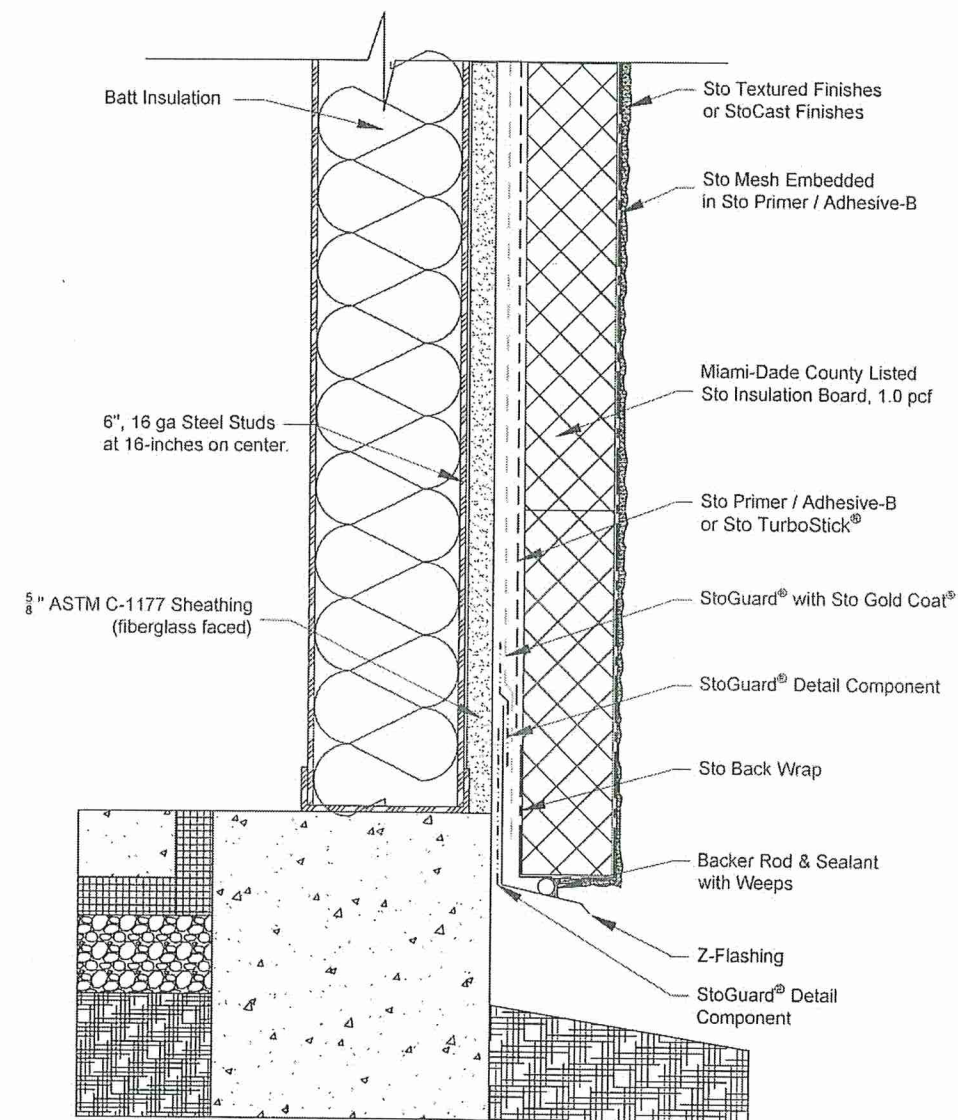

Termination at Grade
Not To Scale

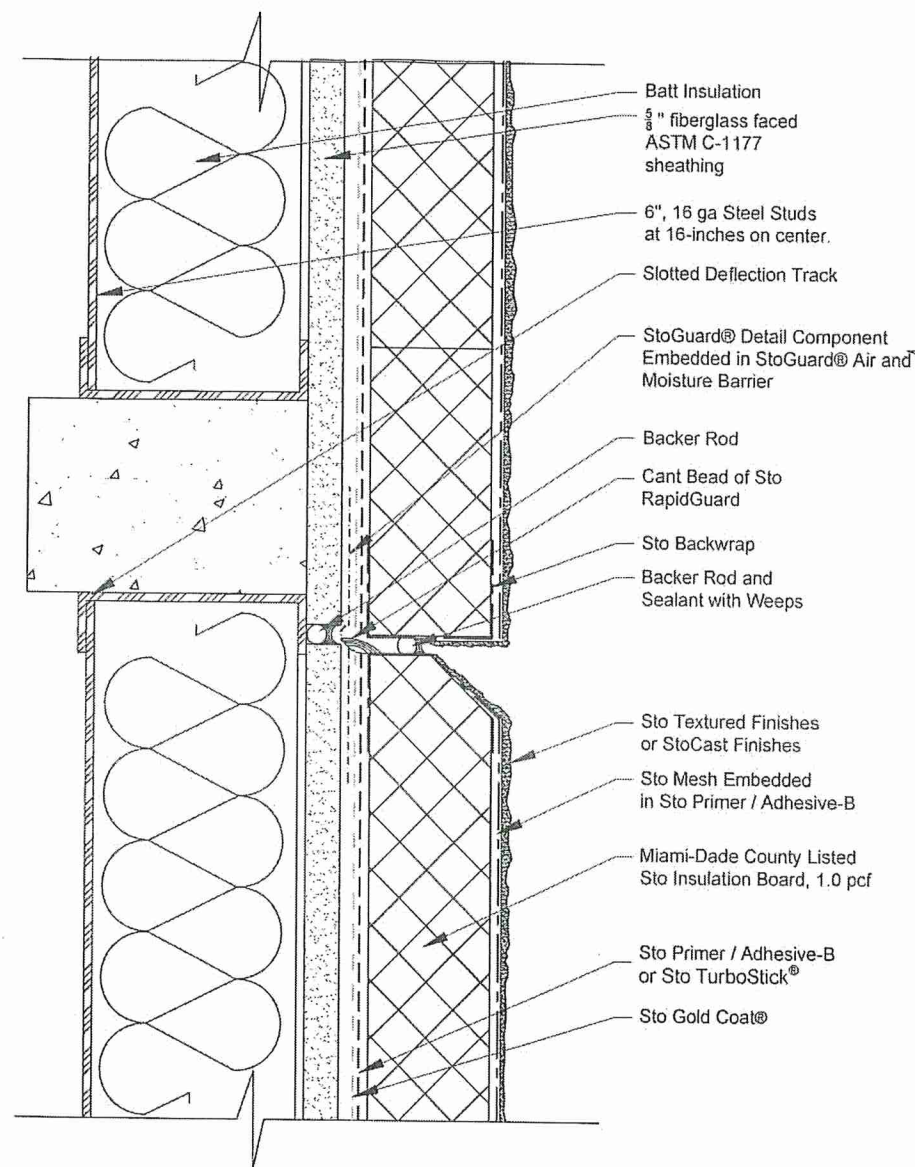

Floor Line With Deflection - Drainage at Floor Line
Not To Scale

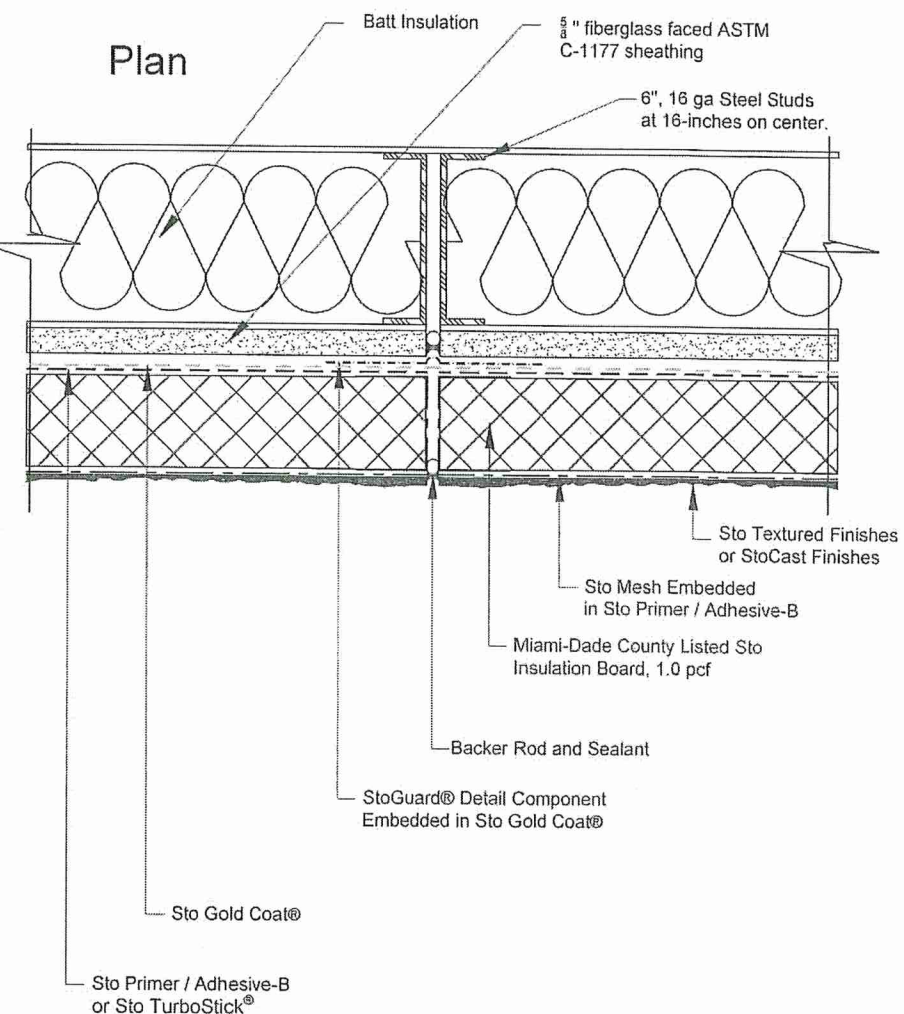


Vertical Expansion Joint In Back-Up Wall
Not To Scale

SHEET	DATE: 01/28/26	NO.	DESCRIPTION	DATE	BY	APPR
2	SCALE: HORIZ. N/A					
OF	PREPARED BY: NAME					
4	APPROVED: NAME					
	BWG NAME:					


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 26-0603-01
Expiration Date 8/11/2031
By Shing I. L. L.
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.12
Expiration Date 08/11/2026
By R. J. Jones
Miami-Dade Product Control

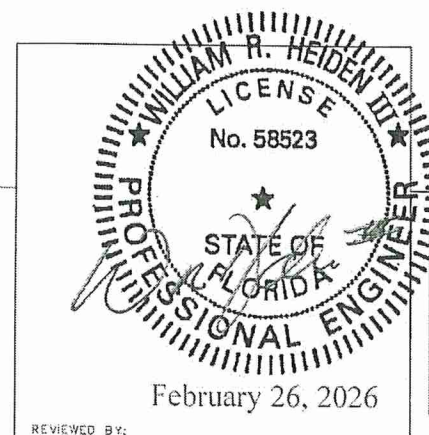


StoTherm® ci GMG-SM
Small Missile
16 ga Steel


sto
3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com

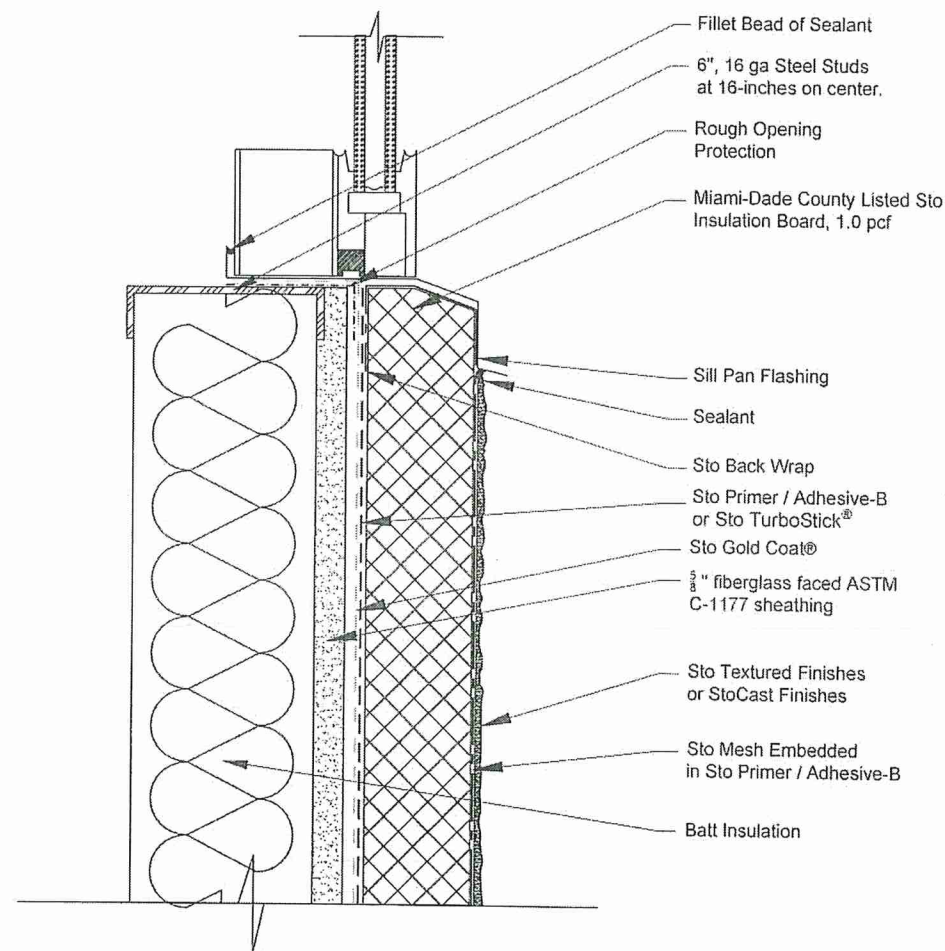

Window Sill / Receptor Style
Not To Scale

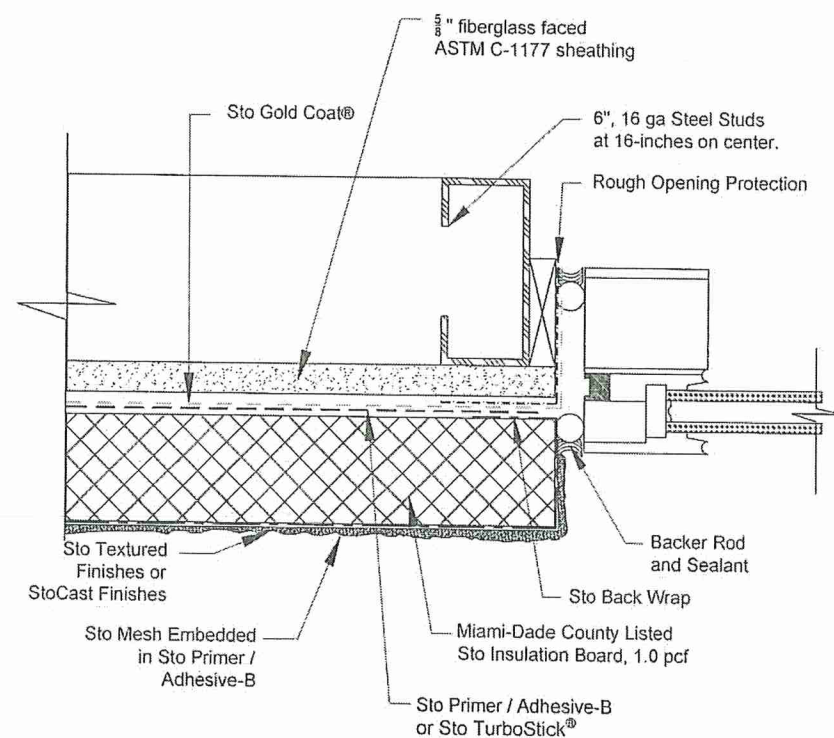

Window Jamb / Receptor Style
Not To Scale

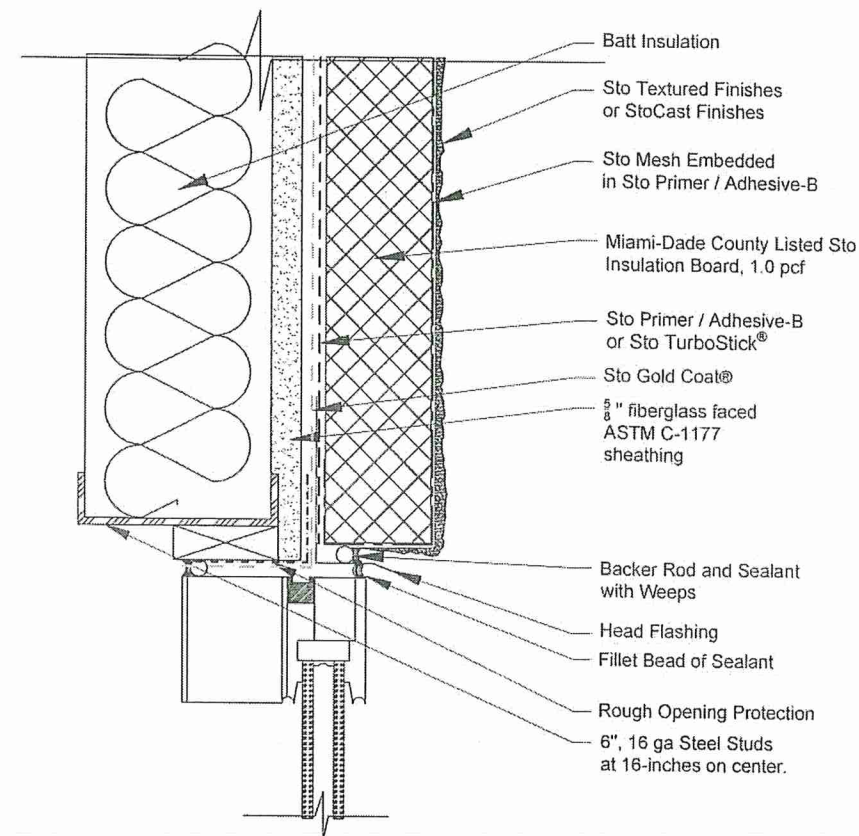


Window Head / Receptor Style
Not To Scale

SHEET	DATE: 01/28/25	NO.	DESCRIPTION	DATE	BY	APPR
3	SCALE: HORIZ. N/A					
OF	PREPARED BY: NAME					
4	APPROVED: NAME					
	DWG NAME:					


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 26-0603-02
Expiration Date 8/11/2031
By Isang I. Lee
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.12
Expiration Date 08/11/2026
By [Signature]
Miami-Dade Product Control

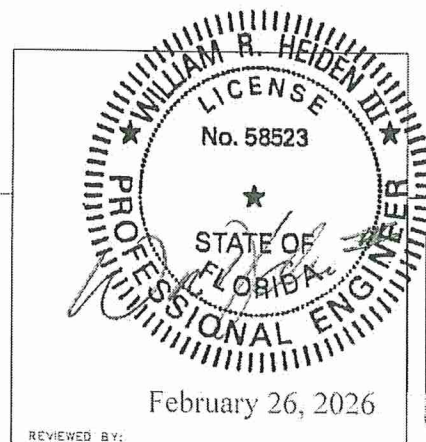


StoTherm® ci GMG-SM
Small Missile
16 ga Steel


sto
3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com

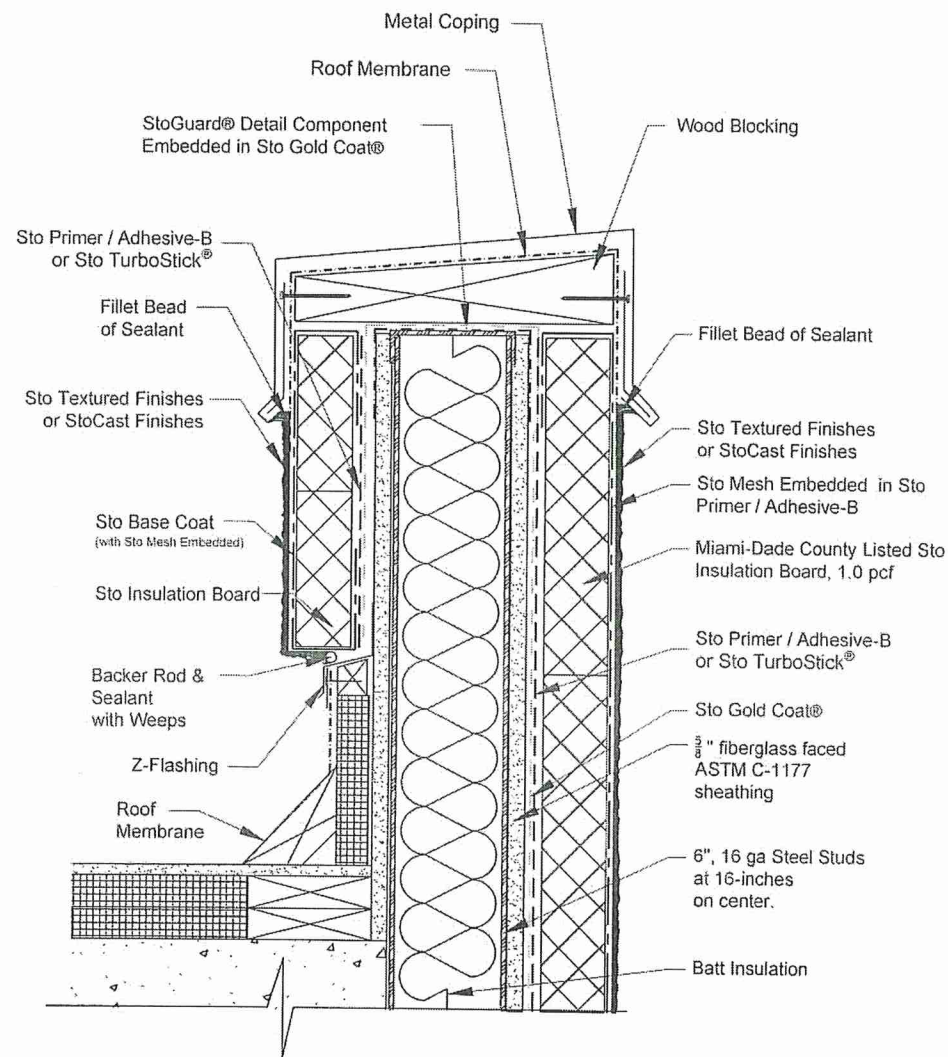

Termination at Parapet
Not To Scale

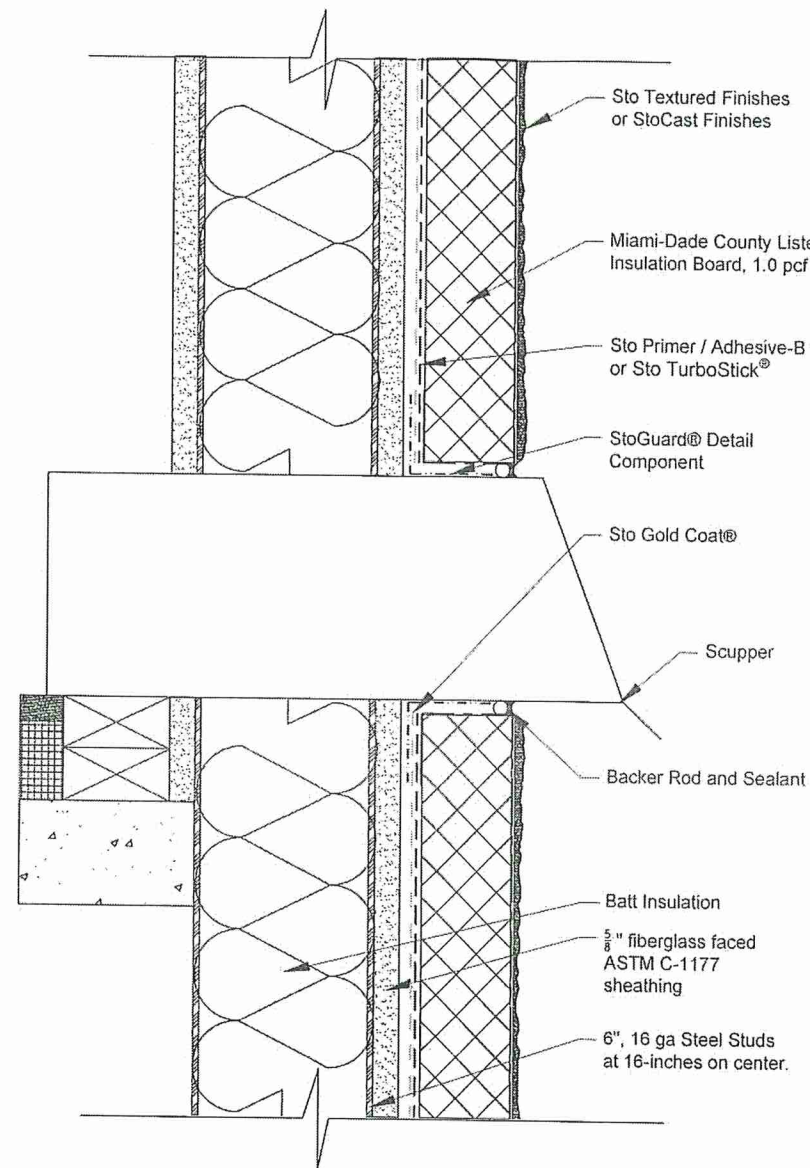

Scupper Penetration
Not To Scale

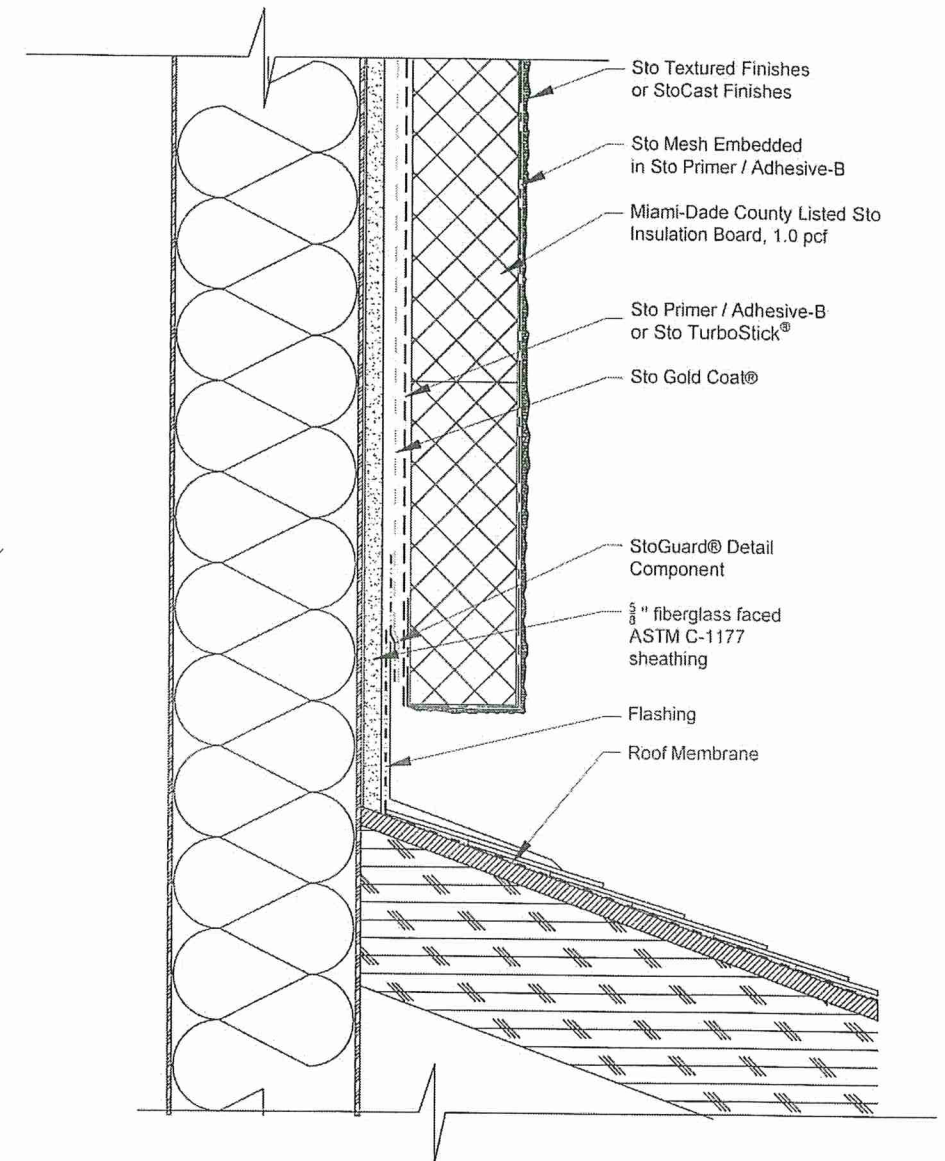


Diverter Flashing at Roof Abutment
Not To Scale

SHEET	DATE: 01/28/26	NO.	DESCRIPTION	DATE	BY	APPR
4	SCALE: HORIZ N/A					
OF	PREPARED BY: NAME					
4	APPROVED: NAME					
	DWG. NAME:					

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. **260603-02**
Expiration Date **8/11/2031**
By **Isang I. Ch...**
Miami-Dade Product Control

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. **26-0305.12**
Expiration Date **08/11/2026**
By **[Signature]**
Miami-Dade Product Control

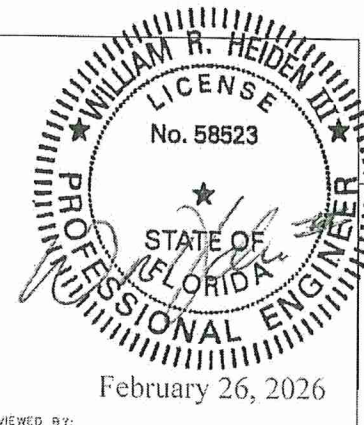

StoTherm® ci GMG-SM
Small Missile
16 ga Steel

sto
3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com