


ELEVATION DOUBLE LATERAL SERVICE

N.T.S.

NOTE:

1. CLEANOUTS IN SIDEWALKS OR OTHER NON DRIVING SURFACES SHALL BE USF No. 7715 WITHOUT BOLT HOLES, MARKED "SEWER" AND LID.
2. FOR CLEANOUTS IN DRIVING SURFACES USE VALVE BOX AND LID 7635 USF (No. 53).
3. IN GRASS AREAS CLEANOUTS BOX SHALL A 6-INCH CONCRETE COLLAR PER WASD STANDARD SS 21.0.

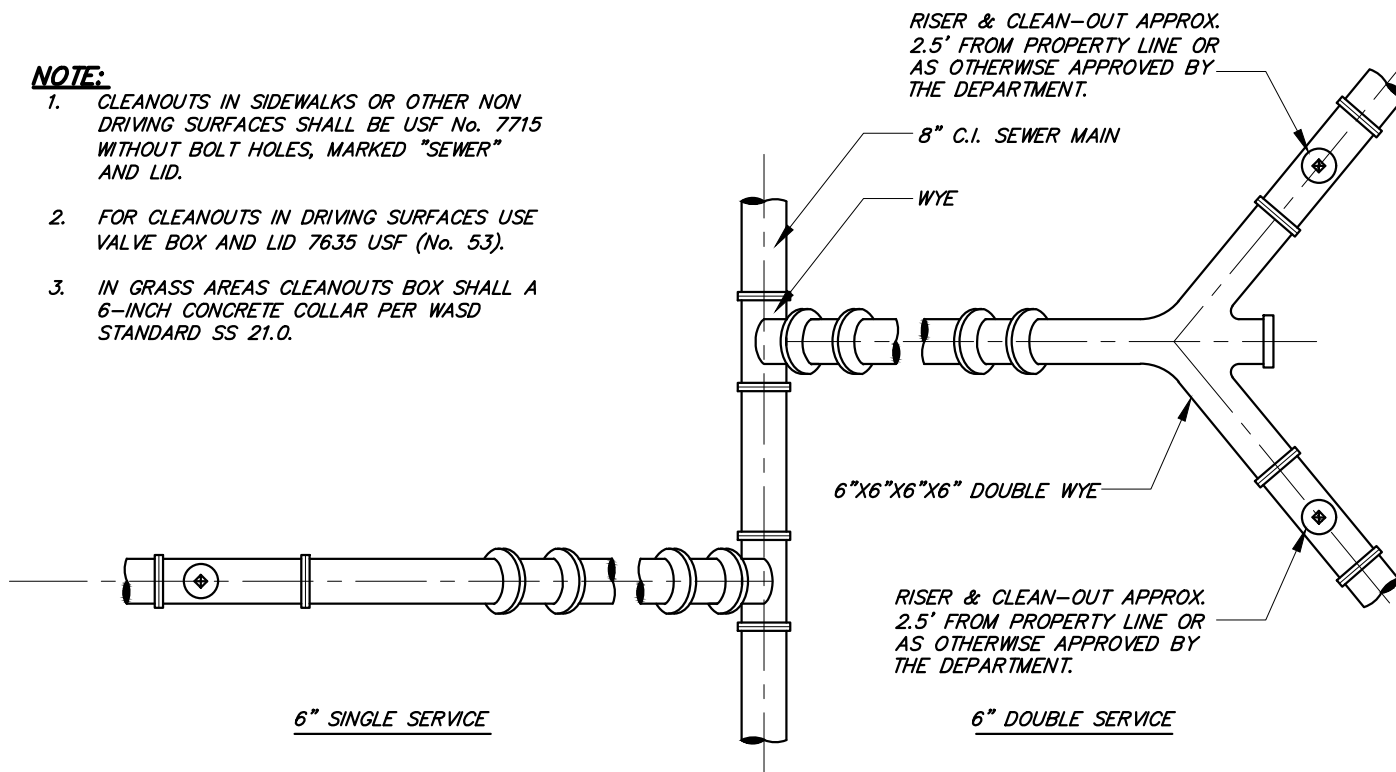

PLAN DOUBLE LATERAL SERVICE

N.T.S.

ITEM	CROSS REF.	SPEC. REF.