


DETAIL FOR CLAY AND P.V.C. PIPE ONLY


CUT AND REMOVE NECESSARY LENGTH
OF EXISTING PIPE FROM SPIGOT END

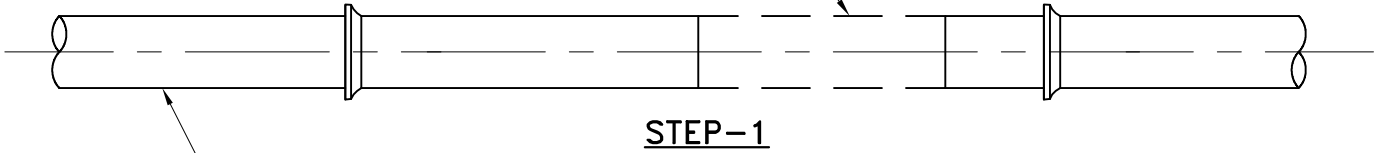

EXISTING MAIN LINE SEWER
WITHIN DEDICATED R/W OR
EASEMENT (MIN. 8")

INSERT SPIGOT END OF EXISTING
MAIN INTO BELL OF NEW "Y" SECTION

MODIFIED MAIN LINE SEWER

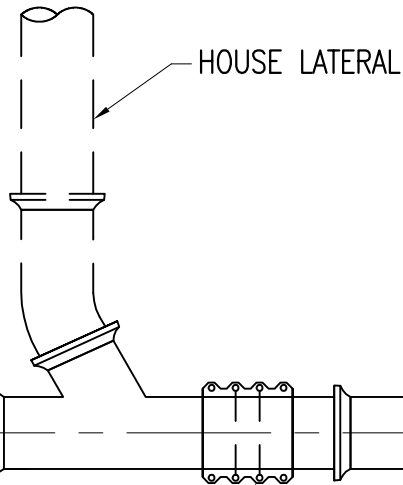

SECURE PLAIN ENDS WITH ADJUSTABLE STAINLESS STEEL
REPAIR COUPLING (FOR VCP), DOUBLE BELL P.V.C. REPAIR
COUPLING (FOR P.V.C.), & SOLID SLEEVE (FOR D.I.)

NOTES:

1. LENGTH OF THE REPAIR COUPLING TO BE AT LEAST THE SAME SIZE AS THE DIAMETER OF THE PIPE BEING REPAIRED.
2. NEW LATERALS FOR EXISTING DEEP SEWER MAINS WILL ONLY BE ALLOWED FROM MANHOLES OR AS APPROVED BY THE DEPARTMENT.
3. FOR D.I.P. MAIN CUT IN NEW D.I. TEE OR WYE.

4. WHEN INSTALLING A NEW 'Y' ASSEMBLY TO AN EXISTING CLAY SEWER MAIN, THE MAIN MUST BE TV'D BEFORE AND AFTER INSTALLATION.

WYE BRANCH AND LATERAL	SS 1.0	
I T E M	CROSS REF.	SPEC. REF.



<u>ISSUE DATE</u>	<u>APPROVED BY</u>
11/17/2009	V.F.C.

STANDARD DETAIL

**WYE BRANCH CONNECTION
FOR EXISTING SHALLOW MAIN**

SS

3.1

SHEET 1 OF 1