



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Benjamin Obdyke, Inc.
199 Precision Drive
Horsham ,PA 19044

Your application for Notice of Acceptance (NOA) of:
Roll Vent System

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 00-0726.09
EXPIRES: 11/09/2003

Raul Rodriguez
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 11/09/2000

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Applicant:

Benjamin Obdyke, Inc.
199 Precision Drive
Horsham, PA 19044-2601

Product Control No.: **00-0726.09**
Approval Date: **November 9, 2000**
Expires: **November 9, 2003**

Category: Roofing
Sub-Category: 07720 Ventilation
Materials: Plastic

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Roll Vent Ridge Vent	0.9" x 10.25" x 20"	PA 100	Plastic low profile attic ridge vent consisting of a two layer composite consisting of a nylon-polyester, for installation in shingle roof systems.

EVIDENCE SUBMITTED

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Center for Applied Engineering, Inc.	PA 100 Wind Driven Rain	CAE 96167	10/01/96



Frank Zuloaga, RRC
Roofing Product Control Examiner


APPROVED APPLICATIONS

- Tradename:** Roll Vent
- System Type C:** Mechanical attachment of ridge vent under composition ridge shingle.
- Slot:** Cut a minimum 3 ⁵/₈" slot along the apex of the roof by cutting 1 ¹³/₁₆" on each side of the ridge. The slot shall terminate approximately 6" from the rake edge.
- Installation:**
- Install exterior Aluminum diverter along entire length of ridge at location that will maintain a minimum space of ⁷/₈" between diverter and ridge cap shingle after complete installation. Apply roof cement/sealant at diverter and roof deck interface along entire ridge line.
- Loosen about 3 inches of black nylon matrix from black fabric and cut out with snips. Fold ends to create an end cap, fasten and roll out (fabric side down). Center Roll Vent over ventilation slot. Apply approximately a ¹/₄" continuous bead of roofing cement between fabric bottom of vent and roof deck.
- To splice (if necessary), remove approximately 4 inches of black nylon matrix from one section and 4 inches of black fabric from the other section. Overlap the fabric with the matrix and from a splice.
- Ridge Shingle:** Install pre-manufactured or field cut ridge shingles over the ridge vent in compliance with the shingle manufacturers Notice of Acceptance (NOA) and the installation instructions using 2¹/₂" smooth shank galvanized nails.
- Ventilation Calculations:** 18 sq" / lin. ft. of ridge installation over slot cut in decking.
- General Limitations:**
1. Refer to applicable Building Code required ventilation.
 2. Ridge vent ventilators shall not be installed on roof mean heights greater than 33 ft.



Frank Zuloaga, RRC
Roofing Product Control Examiner

DETAIL A

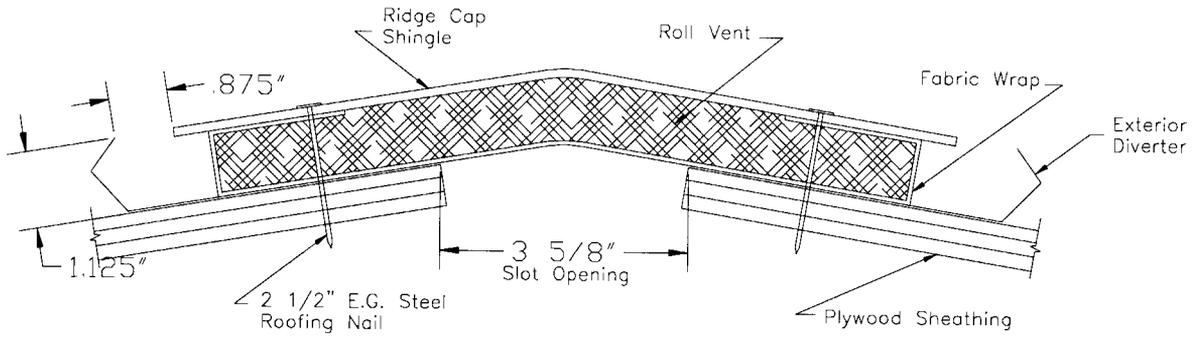

NOTICE OF ACCEPTANCE STANDARD CONDITIONS

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Metro-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
 - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
 - b) The product is no longer the same product (identical) as the one originally approved;
 - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
 - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
 - a) Unsatisfactory performance of this product or process;
 - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 1 through 5 .

END OF THIS ACCEPTANCE

Page- 5 -



Frank Zuloaga, RRC
Roofing Product Control Examiner