MIAMI-DADE COUNTY
DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/building

# NOTICE OF ACCEPTANCE (NOA)

**Willard Shutter Company, Inc.**
**4420 N.W. 35th Court**
**Miami, Florida 33142**

**SCOPE:**
This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER- Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION: " Bertha HV " Aluminum Accordion Shutter System**

**APPROVAL DOCUMENT:** Drawing No. 12-017, titled " Bertha HV Accordion Shutter System ", sheets 1 through 28 of 28, and sht. 28A of 28, prepared by Tilteco, Inc., dated January 20, 2012, signed and sealed by Walter A. Tillit Jr., P.E., on January 24, 2012, bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number & the expiration date by the Miami-Dade County Product Control Section.

**MISSILE IMPACT RATING: Large and Small Missile Impact Resistant**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, the following statement: "Miami-Dade County Product Control Approved", and NOA number, per TAS-201, TAS-202, and TAS-203, unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 12-0215.08** and consists of this page 1, evidence submitted pages E-1, E-2, E-3, E-4, & E-5 as well as approval document mentioned above.
The submitted documentation was reviewed by **Helmy A. Makar, P.E., M.S.**

MIAMI-DADE COUNTY APPROVED

08/01/2013

**NOA No. 13-0530.10**
**Expiration Date: 08/17/2018**
**Approval Date: 08/01/2013**

**Willard Shutter Company, Inc.**

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

**1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 00-0524.12**

**A. DRAWINGS**

1. *Drawing No. 00-165, prepared by Tilteco Inc., titled "ASSA / Residential Bertha Accordion Shutter", dated April 27, 2000, sheets 1 through 10 of 10, signed and sealed by Walter A. Tillit, Jr., P.E. on April 28, 2000.*

**B. TESTS**

1. *See Association's generic approval under 98-0103.*

**C. CALCULATIONS**

1. *See Association's generic approval under 98-0103.*

**D. MATERIAL CERTIFICATIONS**

1. *See Association's generic approval under 98-0103.*

**E. STATEMENTS**

1. *Release letter issued by the American Shutter Systems Association, Inc., dated April 27, 2000, certifying this product to meet the criteria of product tested and approved, and allowing Willard Shutter Company Inc. to use the test results approved under Miami-Dade County Approval No. 98-0103, signed by Ms. Trudy Midkiff.*
2. *Acknowledgment letter by Willard Shutter Company Inc., dated May 12, 2000, signed by Mr. William E. Clark Sr.*
3. *Letter by Tilteco Inc., dated May 10, 2000, certifying that the drawing (No. 00-165) prepared for Willard Shutter Company Inc., signed and sealed by Mr. Walter A. Tillit, Jr., P.E., is engineering wise identical to ASSA's generic drawing (No. 98-209).*
4. *Acceptance Letter issued to Mr. William E. Clark Sr. on August 7, 2000 and returned signed by Mr. William E. Clark Sr. on August 16, 2000, who confirmed to issue the proposed Notice of Acceptance as presented and reviewed.*

**2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 03-0106.15**

**A. DRAWINGS**

1. *Drawing No. 02-549, titled " ASSA / Residential Bertha Accordion Shutter ", sheets 1 through 10 of 10, prepared by Tilteco, Inc., dated November 19, 2002, last revision #1 dated November 19, 2002 signed and sealed Walter A. Tillit, Jr., P.E.*

**B. TESTS**

1. *None. See Association's generic approval # 03-0115.*

**C. CALCULATIONS**

1. *None. See Association's generic approval # 03-0115.*

**Helmy A. Makar, P.E., M.S.**
**Product Control Unit Supervisor**
**NOA No. 13-0530.10**
**Expiration Date: 08/17/2018**
**Approval Date: 08/01/2013**

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

**D. MATERIAL CERTIFICATIONS**

*1. None. See Association's generic approval # 03-0115.*

**E. STATEMENTS**

*1. Letter issued by Mr. Walter A. Tillit, Jr., P.E., dated December 04, 2002, indicating that the only change is update General Note numbers 1 & 12 to reference the Florida Building Code and ASCE 7-98.*

**3. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 03-0703.01**

**A. DRAWINGS**

*1. None.*

**B. TESTS**

*1. None. See Association's generic approval # 03-0115.*

**C. CALCULATIONS**

*1. None. See Association's generic approval # 03-0115.*

**D. MATERIAL CERTIFICATIONS**

*1. None. See Association's generic approval # 03-0115.*

**4. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 05-0926.06**

**A. DRAWINGS**

*1. Drawing No. **05-268**, titled "ASSA/ Residential Bertha Accordion Shutter", sheets 1 through 10 of 10, and sheet 1A of 10, prepared by Tilteco, Inc., dated 09/15/2005, last revision #1 dated 09/15/2005 signed and sealed by Walter A. Tillit Jr., P.E.*

**B. TESTS**

*1. See Association's generic approval under 05-0167.*

**C. CALCULATIONS**

*1. See Association's generic approval under 05-0167.*

**D. QUALITY ASSURANCE**

*1. By Miami-Dade County Building Code Compliance Office.*

**E. MATERIAL CERTIFICATIONS**

*1. See Association's generic approval under 05-0167.*

**Helmy A. Makar, P.E., M.S.**
**Product Control Unit Supervisor**
**NOA No. 13-0530.10**
**Expiration Date: 08/17/2018**
**Approval Date: 08/01/2013**

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

**F. STATEMENTS**

1. *Letter by Tilteco Inc., dated September 07, 2005, certifying that the drawing (No. 05-268) prepared for Willard Shutter Co., Inc., signed and sealed by Mr. Walter A. Tillit, Jr., P.E., is engineering wise identical to ASSA's generic drawing (No. 05-124).*

**5. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 07-0423.03**

**A. DRAWINGS**

1. *Drawing No. 07-090, titled " Bertha HV Accordion Shutter System ", sheets 1 through 26 of 26, prepared by Tilteco, Inc., dated April 17, 2007, signed and sealed by Walter A. Tillit Jr., P.E., on April 18, 2007.*

**B. TESTS**

1. *See Association's generic approval under 06-0130.*

**C. CALCULATIONS**

1. *See Association's generic approval under 06-0130.*

**D. QUALITY ASSURANCE**

1. *By Miami-Dade County Building Code Compliance Office.*

**E. MATERIAL CERTIFICATIONS**

1. *See Association's generic approval under 06-0130.*

**F. STATEMENTS**

1. *Release letter issued by the American Shutter Systems Association, Inc., dated April 12, 2007, certifying this product to meet the criteria of product tested and approved, and allowing Willard Shutter Company, Inc. to use the test results approved under Miami-Dade County Approval No. 06-0130, signed by Legny Santana.*
2. *Acknowledgment letter by Willard Shutter Company, Inc., dated April 12, 2007, signed by Mr. Willard E. Clark Sr.*
3. *Letter by Tilteco Inc., April 18, 2007, certifying that the drawing (No. 07-090) prepared for Willard Shutter Company, Inc., signed and sealed by Mr. Walter A. Tillit Jr., P.E., is engineering wise identical to ASSA's generic drawing (No. 05-363).*
4. *Acceptance Letter issued to Mr. Willard E. Clark Sr. on June 09, 2007, and returned signed by Mr. Willard E. Clark Sr. on June 11, 2007, indicating to please issue the proposed Notice of Acceptance as submitted and reviewed.*

**Helmy A. Makar, P.E., M.S.**
**Product Control Unit Supervisor**
**NOA No. 13-0530.10**
**Expiration Date: 08/17/2018**
**Approval Date: 08/01/2013**

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

**6. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #08-0506.10**

**A. DRAWINGS**

*1. None.*

**B. TESTS**

*1. See Association's generic approval under 06-0130.*

**C. CALCULATIONS**

*1. See Association's generic approval under 06-0130.*

**D. QUALITY ASSURANCE**

*1. By Miami-Dade County Building Code Compliance Office.*

**E. MATERIAL CERTIFICATIONS**

*1. See Association's generic approval under 06-0130.*

**F. STATEMENTS**

*1. Letter by Willard Shutter Company, Inc., dated April 22, 2008, signed by Mr. Willard E. Clark Sr., requesting a renewal of NOA #07-0423.03.*

*2. Letter by Tilteco Inc., April 10, 2008, certifying that Tilteco, Inc. is still the engineer of record for this approval and continues to be in the engineering business.*

**7. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 12-0215.08**

**A. DRAWINGS**

*1. Drawing No. 12-017, titled " Bertha HV Accordion Shutter System ", sheets 1 through 28 of 28, and sht. 28A of 28, prepared by Tilteco, Inc., dated January 20, 2012, signed and sealed by Walter A. Tillit Jr., P.E., on January 24, 2012.*

**B. TESTS**

*1. See Association's generic approval under 11-1676.*

**C. CALCULATIONS**

*1. See Association's generic approval under 11-1676.*

**D. QUALITY ASSURANCE**

*1. By Miami-Dade County Department of Permitting, Environment, and Regulatory Affairs (PERA).*

**E. MATERIAL CERTIFICATIONS**

*1. See Association's generic approval under 11-1676.*

**Helmy A. Makar, P.E., M.S.**
**Product Control Unit Supervisor**
**NOA No. 13-0530.10**
**Expiration Date: 08/17/2018**
**Approval Date: 08/01/2013**

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

**F. STATEMENTS**

1. *Release letter issued by the American Shutter Systems Association, Inc., dated January 31, 2012, certifying this product to meet the criteria of product tested and approved, and allowing Willard Shutter Company, Inc. to use the test results approved under Miami-Dade County Approval No. 11-1676, signed by Legny Rodriguez.*
2. *Acknowledgment letter by Willard Shutter Company, Inc., dated March 28, 2012, signed by Mr. Shameer Khan.*
3. *Letter by Tilteco Inc., dated January 30, 2012, certifying that the drawing (No. 12-017) prepared for Willard Shutter Company, Inc., signed and sealed by Mr. Walter A. Tillit Jr., P.E., is engineering wise identical to ASSA's generic drawing (No. 11-111).*

**8. NEW EVIDENCE SUBMITTED**

**A. DRAWINGS**

1. *None.*

**B. TESTS**

1. *See Association's generic approval under 11-1676.*

**C. CALCULATIONS**

1. *See Association's generic approval under 11-1676.*

**D. QUALITY ASSURANCE**

1. *By Miami-Dade County Department of Regulatory And Economic Resources.*

**E. MATERIAL CERTIFICATIONS**

1. *See Association's generic approval under 11-1676.*

**F. STATEMENTS**

1. *Release letter issued by the American Shutter Systems Association, Inc., dated May 22, 2013, certifying this product to meet the criteria of product tested and approved, and allowing Willard Shutter Company, Inc. to use the test results approved under Miami-Dade County Approval No. 11-1676, signed by Legny Rodriguez.*
2. *Acknowledgment letter by Willard Shutter Company, Inc., dated May 21, 2013, signed by Mr. Michael S. Woods.*
3. *Letter by Tilteco Inc., dated May 21, 2013, certifying that the drawing (No. 12-017) prepared for Willard Shutter Company, Inc., signed and sealed by Mr. Walter A. Tillit Jr., P.E., is engineering wise identical to ASSA's generic drawing (No. 11-111).*

**Helmy A. Makar, P.E., M.S.**
**Product Control Unit Supervisor**
**NOA No. 13-0530.10**
**Expiration Date: 08/17/2018**
**Approval Date: 08/01/2013**

# GENERAL NOTES:

1. BERTHA H.V. ACCORDION SHUTTER SYSTEM SHOWN ON THIS PRODUCT APPROVAL DOCUMENT (P.A.D.) HAS BEEN VERIFIED FOR COMPLIANCE IN ACCORDANCE WITH THE 2007 & 2010 EDITIONS OF THE FLORIDA BUILDING CODE. THIS ACCORDION SHUTTER SYSTEM MAY BE INSTALLED AT HIGH VELOCITY HURRICANE ZONES.
   DESIGN WIND LOADS SHALL BE DETERMINED AS PER SECTION 1620 OF THE ABOVE MENTIONED CODES, USING ASCE 7-05 STANDARD FOR INSTALLATIONS UNDER 2007 FBC & ASCE 7-10 FOR INSTALLATIONS UNDER 2010 FBC AND SHALL NOT EXCEED THE MAXIMUM (A.S.D.) DESIGN PRESSURE RATINGS INDICATED ON SHEETS 12 THRU 17 & 25, 26, 28 & 28A.
   **IN ORDER TO VERIFY THE ABOVE CONDITION, ULTIMATE DESIGN WIND LOADS DETERMINED PER ASCE 7-10 SHALL BE FIRST REDUCED TO A.S.D. DESIGN WIND LOADS BY MULTIPLYING THEM BY 0.6 IN ORDER TO COMPARE THESE W/ MAX. (A.S.D) DESIGN PRESSURE RATINGS INDICATED ON SHEETS 12 THRU 17 & 25, 26, 28 & 28A.**
   IN ORDER TO VERIFY THAT ANCHORS ON THIS P.A.D., AS TESTED, WERE NOT OVER STRESSED, A 33% INCREASE IN ALLOWABLE STRESS FOR WIND LOADS WAS NOT USED IN THEIR ANALYSIS.
   BERTHA H.V. ACCORDION SHUTTER SYSTEM'S ADEQUACY FOR WIND AND LARGE MISSILE IMPACT LOAD HAS BEEN VERIFIED IN ACCORDANCE WITH SECTION **1626** OF THE ABOVE MENTIONED CODES AS PER ATL REPORTS:
   -HV BLADE ① #0214.01-03, #0715.01-03, #1004.01-05, #1214.01-05 #0317.02-06 AND #0609.01-10 AS PER TAS 201, TAS 202 AND TAS 203 PROTOCOLS.
   -HV WINDOW BLADE ⑴A #0505.01-08 AS PER TAS 201, 202 & 203 PROTOCOLS AND 0728.01-08 AS PER TAS 202 PROTOCOL.
   -HV BLADE ② #0422.01-05 AS PER TAS 201, TAS 202 AND TAS 203 PROTOCOLS.
2. HV BLADE ① AND HV BLADE ② ARE ENGINEERED TO WORK IN UNISON WITH EACH OTHER IN AREAS WHERE THE DESIGN PRESSURES TRANSITION FROM END ZONE 5 TO INTERIOR ZONE 4. EACH WIND ZONE MUST BE CLEARLY IDENTIFIED IN ACCORDANCE WITH SECTION 6, OF ASCE 7-05 STANDARD (FBC 2007) & ASCE 7-10 (FBC 2010), ALL MOUNTING CONDITIONS AND FASTENER TYPES SCHEDULES MUST BE APPLIED TO THE CORRESPONDING WIND ZONE. THIS SHALL INCLUDE REQUIREMENTS FOR MIN. SEPARATION TO GLASS, DELIMITATION OF WIND ZONES 4 AND 5 AS WELL AS VALIDITY OF COMPONENTS FOR HV BLADE ①
   & ② ACCORDION SHUTTERS SYSTEMS FOR EITHER WIND ZONE SHALL BE PREPARED AND CERTIFIED BY A FLORIDA REGISTERED ENGINEER OR ARCHITECT BASED ON BUILDING CONFIGURATION AND ASCE 7 STANDARD, AND SHALL BE SUBMITTED TO THE BUILDING OFFICIAL AT THE TIME PERMIT IS APPLIED FOR.
   HV BLADE ① AND HV WINDOW BLADE ⑴A ARE ALSO ENGINEERED TO WORK IN UNISON WITH EACH OTHER UNDER THE GENERAL LIMITATIONS AND CONDITIONS OF USE INDICATED ON SHEET 28.
3. BERTHA H.V. ACCORDION PINS (HV SCREWS), USED AT BLADES KNUCKLE AND FOR DIRECT MOUNT CONNECTION TO TRACKS SHALL BE # 14X2.75 AND # 14X1.75 RESPECTIVELY, 410-HT MINIMUM SERIES STAINLESS STEEL SCREWS WITH 135.0 ksi YIELD STRENGTH AND 160 ksi TENSILE STRENGTH. PINS SHALL BE COATED WITH BERTHA HV DACROSHIELD COATING SYSTEM AS MANUFACTURED BY APPROVED COATING APPLICATORS, REGISTERED WITH AMERICAN SHUTTER SYSTEMS ASSOCIATION. PINS MUST BEAR THE HV MARKING ON THEIR HEAD.
4. ALL ALUMINUM EXTRUSIONS SHALL BE ALUMINUM ASSOCIATION ALLOY AND TEMPER AS INDICATED ON SHEETS 2 AND 3. MINIMUM YIELD STRENGTH FOR 6063-T6 ALLOY IS 31.7 ksi AND 35.7 ksi FOR 6005-T5 ALLOY.
5. ALL SCREWS TO BE STAINLESS STEEL 304 OR 316 AISI SERIES OR CORROSION RESISTANT COATED CARBON STEEL AS PER DIN 50018 WITH 50 ksi MIN. YIELD STRENGTH AND 90 ksi MIN. TENSILE STRENGTH AND TO COMPLY W/ FBC SECTION 2411.3.3.4.
6. BOLTS TO BE ASTM A-307 GALVANIZED STEEL, OR AISI 304 OR 316 SERIES STAINLESS STEEL WITH 35 ksi MINIMUM YIELD STRENGTH.
7. SEE THE FOLLOWING SHEETS FOR ANCHOR SPECIFICATIONS: HV BLADE ① : 13, 14, 15, 16, 17 AND 28A.
   HV BLADE ② : 26.
   HV BLADE ① & ⑴A WORKING IN UNISON; 13, 14 & 16.
8. THIS BERTHA H.V. ACCORDION SHUTTER SYSTEM BEARS A U.S. PATENT #6'779,562. COMPONENTS OF THIS APPROVAL ARE COVERED, IN WHOLE OR IN PART BY U.S. PATENT #6'458,179 ISSUED TO EASTERN METAL SUPPLY, INC.
9. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE SOUNDNESS OF THE STRUCTURE WHERE SHUTTER IS TO BE ATTACHED TO INSURE PROPER ANCHORAGE. CONTRACTOR TO SEAL/CAULK ALL SHUTTER COMPONENT EDGES WHICH REMAIN, THRU FASTENING IN CONTINUOUS CONTACT WITH THE BUILDING TO PREVENT WIND/RAIN INTRUSION.
10. EACH UNIT MUST BEAR PERMANENT LABEL IN A VISIBLE PLACE WITH WARNING NOTE: DURING PERIODS OF HURRICANE WARNINGS HOME OWNER, TENANT, OR OTHERS, MUST PROPERLY CLOSE ALL HV AND HD CENTERMATES AND ENGAGE OR LOCK ALL HV AND HD LOCKS.
11. A PERMANENT SHUTTER MANUFACTURER'S LABEL SHALL BE PLACED ON THE EXPOSED SURFACE OF THE SIDE RAIL APPROXIMATELY 4" BELOW THE TOP OF SUCH RAIL LABEL SHALL READ AS FOLLOWS:
    **WILLARD SHUTTER COMPANY, INC.**
    MIAMI, FL.
    MIAMI - DADE COUNTY PRODUCT CONTROL APPROVED.
12. BERTHA H.V. ACCORDION SHUTTER SYSTEM'S INSTALLATION SHALL COMPLY WITH SPECS INDICATED IN THIS DRAWING PLUS ANY BUILDING AND ZONING REGULATIONS PROVIDED BY THE JURISDICTION WHERE PERMIT IS APPLIED TO.
13. (a) THIS P.A.D. PREPARED BY THIS ENGINEER IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT; i.e. WHERE THE SITE CONDITIONS DEVIATE FROM THE P.A.D.
    (b) CONTRACTOR TO BE RESPONSIBLE FOR THE SELECTION, PURCHASE AND INSTALLATION INCLUDING LIFE SAFETY OF THIS PRODUCT, BASED ON THIS P.A.D., PROVIDED HE/SHE DOES NOT DEVIATE FROM THE CONDITIONS DETAILED ON THIS DOCUMENT. CONSTRUCTION SAFETY AT SITE IS THE CONTRACTOR'S RESPONSIBILITY.
    (c) THIS P.A.D. WILL BE CONSIDERED INVALID IF ALTERED BY ANY MEANS.
    (d) SITE SPECIFIC PROJECTS SHALL BE PREPARED BY A FLORIDA REGISTERED ENGINEER OR ARCHITECT WHICH WILL BECOME THE ENGINEER OF RECORD (E.O.R.) FOR THE PROJECT AND WHO WILL BE RESPONSIBLE FOR THE PROPER USE OF THE P.A.D. ENGINEER OF RECORD, ACTING AS A DELEGATED ENGINEER TO THE P.A.D. ENGINEER SHALL SUBMIT TO THIS LATTER THE SITE SPECIFIC DRAWINGS FOR REVIEW.
    (e) THIS P.A.D. SHALL BEAR THE DATE AND ORIGINAL SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER OF RECORD THAT PREPARED IT.

# TABLE OF CONTENTS


## AREA 1: HV BLADES ① ⑴A & ②

| | | |
|---|---|---|
| GENERAL NOTES | | SHEET 1 |
| SYSTEM COMPONENTS | 1-20 | SHEET 2 |
| SYSTEM COMPONENTS | 21-37 | SHEET 3 |
| TYPICAL SHUTTER ASSEMBLY | 38-43 | SHEET 4 |

## AREA 2: HV BLADE ① AND HV WINDOW BLADE ⑴A (WHERE APPLICABLE)

| | |
|---|---|
| TYPICAL SHUTTER ELEVATION & NOTES ON LOCKS | SHEET 5 |
| INSTALLATION DETAILS A-E, CONCRETE/BLOCK | SHEET 6 |
| INSTALLATION DETAILS F-L, CONCRETE/BLOCK | SHEET 7 |
| CENTERMATE DETAILS HV | SHEET 8 |
| CENTERMATE ALTERNATING DETAILS HV | SHEET 9 |
| CENTERMATE DETAILS HD | SHEET 10 |
| END CONNECTION DETAILS 1-6, CONCRETE/BLOCK | SHEET 11 |
| MAXIMUM SPAN TABLES | SHEET 12 |
| ANCHOR SCHEDULE- CONCRETE & BLOCK | SHEET 13 |
| ANCHOR SCHEDULE- CONCRETE & BLOCK | SHEET 14 |
| ANCHOR SCHEDULE- CONCRETE & BLOCK | SHEET 15 |
| ANCHOR SCHEDULE- WOOD | SHEET 16 |
| ANCHOR SCHEDULE- WOOD | SHEET 17 |
| INSTALLATION DETAILS M-R, WOOD | SHEET 18 |
| INSTALLATION DETAILS S-X, WOOD | SHEET 19 |
| END CONNECTION DETAILS 7-12 & X, WOOD | SHEET 20 |

## AREA 3: HV BLADE ② ONLY

| | |
|---|---|
| TYPICAL SHUTTER ELEVATION & NOTES ON LOCKS | SHEET 21 |
| INSTALLATION DETAILS AA-GG, CONCRETE | SHEET 22 |
| CENTERMATE DETAILS HD | SHEET 23 |
| END CONNECTION DETAILS 1-6 & X, CONCRETE/BLOCK | SHEET 24 |
| MAXIMUM SPAN TABLES | SHEET 25 |
| ANCHOR SCHEDULE, CONCRETE | SHEET 26 |

## AREA 4: HV WINDOW BLADE ⑴A ONLY

| | |
|---|---|
| TYPICAL WINDOW BLADE & WINDOW DETAIL | SHEET 27 |
| TYPICAL SHUTTER ELEVATION | SHEET 28 |

## AREA 5: HV WINDOW BLADE ① ONLY

| | |
|---|---|
| INSTALLATION DETAILS, METAL STUD WALLS | SHEET 28A |


FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 , Fax : (305)871-1631
e-mail: tilleco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 1 OF 28 |
| 6 | | | |




## (1) HV SOLID BLADE
COVERED UNDER US PATENT # 5458179

## (1A) HV WINDOW BLADE*
*SEE LIMITATIONS OF USE OF BLADE (1A) ON SHEET 28
6063-T6 ALLOY AND TEMPER




## (2) HV BLADE
COVERED UNDER US PATENT # 5458179
6005-T5 ALLOY AND TEMPER

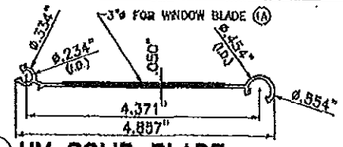


## (3) HV UNIVERSAL FLOATER
QUALIFIED FOR USE W/ HV BLADE (1) & (2)
6005-T5 ALLOY AND TEMPER

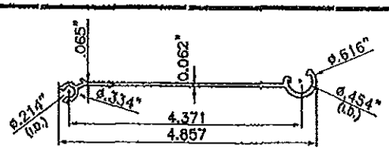


## (4) HV DIRECT MOUNT
QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER

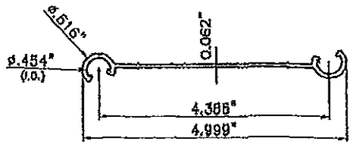


## (5) HV 90°/180° STARTER
QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER




## (6) HV ADJ. FLOOR TRACK
QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER

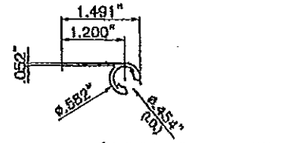


## (7) HV ADJ. ADAPTER W/LIP
QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER

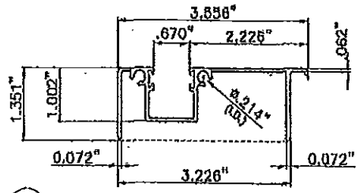


## (8) HV WALK-OVER TRACK
QUALIFIED FOR USE W/ HV BLADE (1) & (2)
6063-T6 ALLOY AND TEMPER

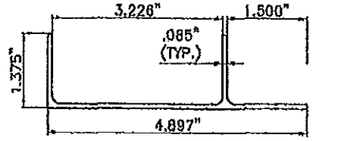


## (9) HV TRENCH TRACK
QUALIFIED FOR USE W/ HV BLADE (2) ONLY.
6063-T6 ALLOY AND TEMPER

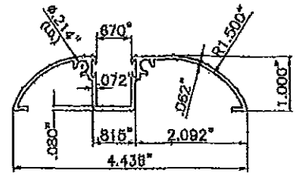


## (10) HV RAINGUARD
QUALIFIED FOR USE W/ HV BLADE 1 & 2.
6063-T6 ALLOY AND TEMPER




## (11) HV CEILING HEADER
QUALIFIED FOR USE W/ HV BLADE (1) & (1A)
SEE SECTIONS FOR VALIDITY
6063-T6 ALLOY AND TEMPER

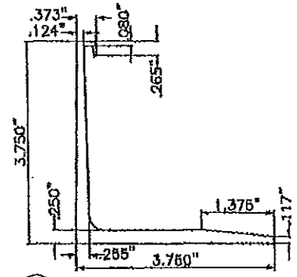


## (12) HV HEADER/SILL
QUALIFIED FOR USE W/ HV BLADE (1) & (1A)
SEE SECTIONS FOR VALIDITY
6063-T6 ALLOY AND TEMPER

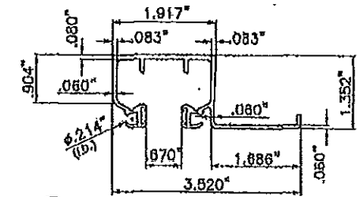


## (13) HD CEILING HEADER/SILL
QUALIFIED FOR USE W/ HV BLADE (1) & (1A)
SEE SECTIONS FOR VALIDITY
6063-T6 ALLOY AND TEMPER

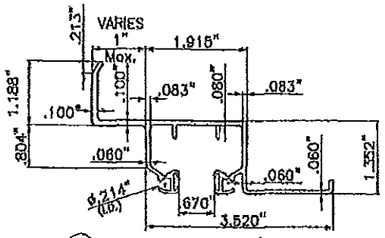


## (14) HD WALL HEADER/SILL
QUALIFIED FOR USE W/ HV BLADE (1) & (1A)
SEE SECTIONS FOR VALIDITY
6063-T6 ALLOY AND TEMPER

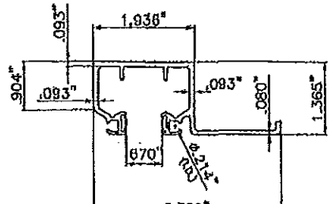


## (15) SHD CEILING HEADER/SILL
QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER

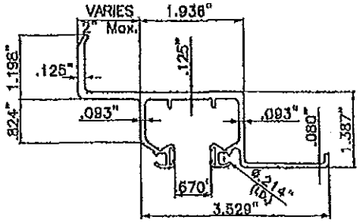


| MIN. X | MIN. Y | MIN. t |
|---|---|---|
| 1" | 1" | 0.062" |

## (16) SIDE ANGLES
QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER
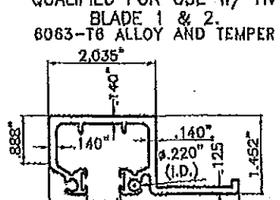
## ALUMINUM ANGLES
QUALIFIED FOR USE W/ HV BLADE (SEE SCHEDULE)
6063-T6 ALLOY AND TEMPER

| COMPONENT | A | B | T1 | T2 | BLADE QUALIFIED |
|---|---|---|---|---|---|
| (17) | 2" | 5" MAX. | 1/8" | 1/8" | HV(1) |
| (18) | 2" | 5" MAX. | 0.192" | 0.192" | HV(2) |
| (19) | 2.5" | 7" MAX. | 0.190" | 0.190" | HV(1) |

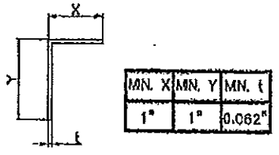


| X | Y | t |
|---|---|---|
| 2" | 2" | 0.125" |
| 3" | 3" | 0.090" |

## (20) CORNER POSTS
QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6385 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 , Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167



**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 2 OF 28 |
| 6 | | | |




## (21) HV CENTERMATE

QUALIFIED FOR USE W/ HV BLADE (1) & (1A) ONLY
6063-T6 ALLOY AND TEMPER




## (22) HV FLOATING CENTERMATE

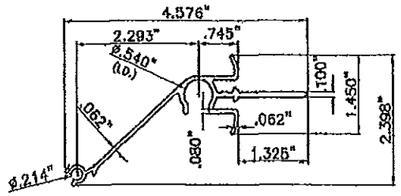QUALIFIED FOR USE W/ HV BLADE (1) & (1A) ONLY
6063-T6 ALLOY AND TEMPER




## (23) HV CORNER CENTERMATE

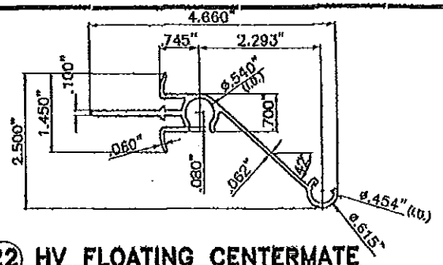QUALIFIED FOR USE W/ HV BLADE (1) ONLY
6063-T6 ALLOY AND TEMPER




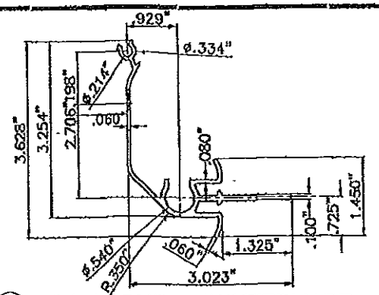


## (24) HV LOCK

QUALIFIED FOR USE W/ HV BLADE (1) & (1A) ONLY.

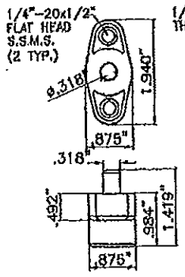


## (25) HV EGRESS LOCK

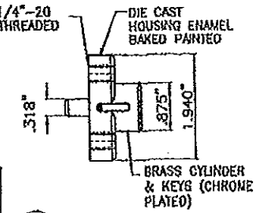QUALIFIED FOR USE W/ HV BLADE (1) & (1A) ONLY.




## (27) LOCKER FOR "T" LOCK CENTERMATE

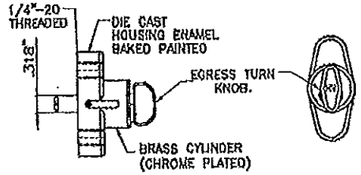QUALIFIED FOR USE W/ HV BLADE (1) ONLY
6063-T6 ALLOY AND TEMPER




## (28) HV MALE "T" LOCK CENTERMATE

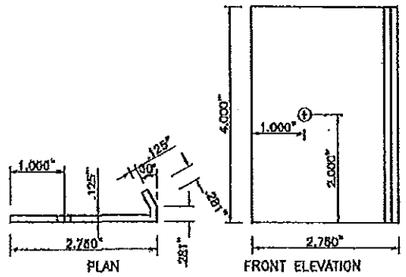QUALIFIED FOR USE W/ HV BLADE (1) ONLY
6063-T6 ALLOY AND TEMPER




## (29) HV FEMALE "T" LOCK CENTERMATE

QUALIFIED FOR USE W/ HV BLADE (1) ONLY
6063-T6 ALLOY AND TEMPER




## (30) HV "T" LOCK

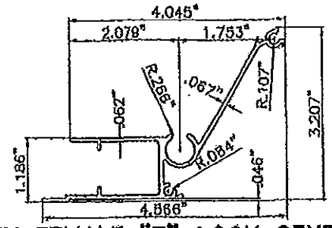QUALIFIED FOR USE W/HV BLADE (1) ONLY.




**1/4"ø-20 x 3/4" S.S. THUMBSCREW**




**1/4"ø-20 RIVNUT***

*SERIES 9444 ALUMINUM (2024-T3 ALLOY) LARGE FLANGE THIN SHEET NUTSERT, PART # 0820, AS MANUFACTURED BY AVDEL CHERRY TEXTORN, PARSIPPENY, NEW JERSEY 07054 OR EQUAL.
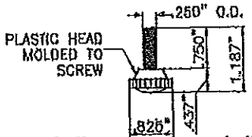
## (26) HV ALTERNATIVE LOCK

QUALIFIED FOR USE W/ HV BLADE (1) ONLY.

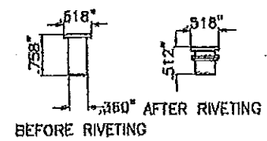


## (31) HD CENTERMATE W/ NO LOCKING ROD

QUALIFIED FOR USE W/ HV BLADE (1) & (2)
6063-T6 ALLOY AND TEMPER




## (32) HD CENTERMATE W/ LOCKING ROD

QUALIFIED FOR USE W/ HV BLADE (1) & (2)
6063-T6 ALLOY AND TEMPER




## (33) HD CENTERMATE'S INSERT

QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER




## (34) HD LOCK

BY REGENT HARDWARE MORTISE LOCKS SERIES 2333 HOOK BOLT LOCK.
QUALIFIED FOR USE W/ HV BLADE (1) & (2)




## (35) LOCKING ROD △

QUALIFIED FOR USE W/ HV BLADE (1), (1A) & (2)
6063-T6 ALLOY AND TEMPER

△ (39) INSTALLATION WILL REQUIRE A 7/16" HOLE DRILLED AT TRACKS FOR PROPER EMBEDMENT

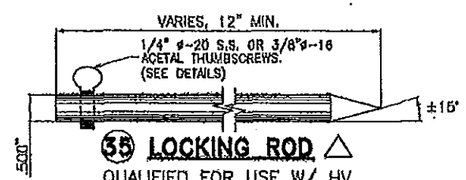


## (36) HV 3/8"ø-16 ACETAL THUMBSCREWS

QUALIFIED FOR USE W/ HV BLADE (1) & (2)




## (37) HV 1/4" ø-20 AISI 304 SERIES S.S. THUMBSCREWS

QUALIFIED FOR USE W/ HV BLADE (1) & (2)

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE

TILTECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System

H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE |
|---|---|---|
| 1 | OLD 07-090 | 01/20/12 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |

Drawn by: F.P./A.G.
DATE: 01/20/12
DRAWING No 12-017
SHEET 3 OF 28

## SHUTTER ASSEMBLY SCHEDULE FOR HV ①, HV ①A AND HV ② BLADES.

| | |
|---|---|
| ① | HV BLADE 1 |
| ①A | HV BLADE 1A |
| ② | HV BLADE 2 |
| ㊳ | HV LONG RECESSED NYLON BUSHING |
| ㊴ | HV SHORT RECESSED NYLON BUSHING |
| ㊵ | HV NYLON HAT WASHER |
| ㊶ | HV WHEEL CARRIAGE AISI 302~303 SERIES<br>ø.870"x3/16" THICK NYLON WHEEL.<br>0.188"ø AISI 302 SERIES S.S. RIVETS |
| ㊷ | HV 1 3/4" ACCORDION PIN W/ #8 HEAD * |
| ㊸ | HV 2 3/4" ACCORDION PIN W/ #8 HEAD * |
| ㊹ | POLYCARBONATE IMPACT RESISTANT HV WINDOW (SEE SHEET 27) |

*** HV PIN REQUIREMENTS AT EXTERIOR BLADE KNUCKLE FOR HV(①), HV (①A) & HV(②) BLADES.**

(1) HV PIN ㊸ SHALL ALWAYS BE USED AT ALL EXTERIOR BOTTOM KNUCKLES OF HV ACCORDION SYSTEM W/ HV ① OR HV ①A BLADE.

(2) HV PIN ㊷ MAY BE USED IN LIEU OF ㊸ AND ONLY AT EXTERIOR BOTTOM KNUCKLES OF HV ACCORDION SYSTEM W/ HV ② BLADE WHEN CORRESPONDING TO INSTALLATIONS "CC" AND "DD", SHEET 22.

(3) HV PIN ㊷ OR ㊸ W/ 1/2" O.D. 1/16" THICK S.S. WASHER SHALL BE USED FOR DIRECT MOUNT INSTALLATION PER DETAIL X, SHEETS 11 & 24.




EXTERIOR

**TYPICAL SHUTTER ASSEMBLY**

SCALE: 3/8" = 1"

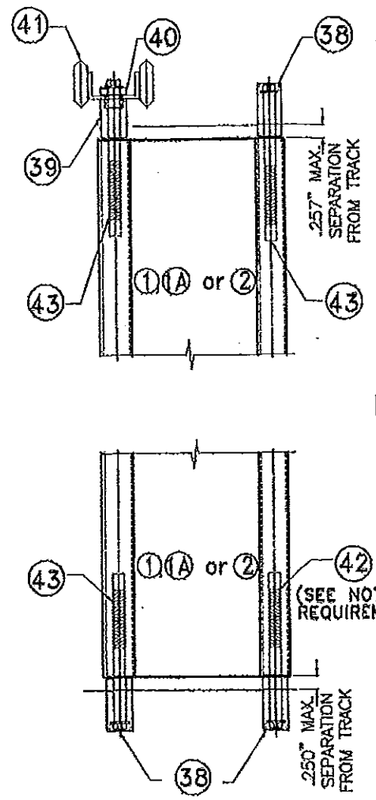


**WHEEL CARRIAGE DETAIL**

N.T.S.




EXTERIOR

**ASSEMBLY LAYOUT**

N.T.S.

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

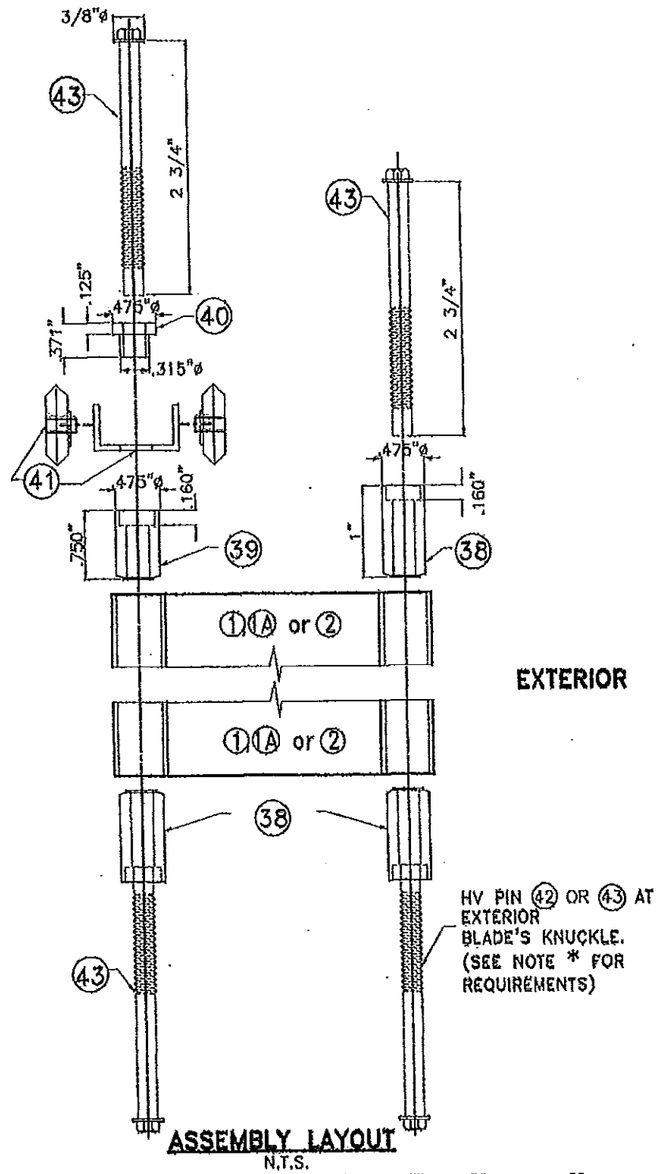PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System

H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 4 OF 28 |
| 6 | | | |




## TYPICAL ① HV BLADE SHUTTER ELEVATION
N.T.S.

## * NOTES ON HV LOCKS AND CENTERMATES:

1. **MANDATORY CONDITION #1:** ONE HV LOCK ㉔ or ㉕ SHALL BE USED AT 1/2 OF SHUTTER SPAN FOR ANY SPAN OR 12" ABOVE OR BELOW 1/2 OF SHUTTER SPAN FOR SPANS UP TO 105", AND FOR INSTALLATIONS AT ANY ELEVATION. HV LOCK ㉔ or ㉕ MAY BE USED AS AN INSIDE OR OUTSIDE LOCK, ATTACHED TO ㉑ OR ㉒ CENTERMATES W/(2) 1/4"ø-20 x 1/2" LONG FLAT HEAD S.S. M.S. LOCATION OF LOCK SHALL BE AS INDICATED ON TYPICAL SHUTTER ELEVATION.

2. **LIMITED MANDATORY CONDITION #2 ALTERNATE TO MANDATORY CONDITION #1 (VALID ONLY FOR FLOOR/CEILING INSTALLATIONS.** TWO HV LOCKS ㉔ OR ㉕ OR ONE HV LOCK ㉔ OR ㉕ W/ TWO LOCKING RODS ㉟ AT TOP & BOTTOM SHALL BE USED FOR ANY SPAN AND INSTALLATION AT ANY ELEVATION. HV LOCK ㉔ OR ㉕ SHALL BE ATTACHED TO ㉑ OR ㉒ CENTERMATES W/ SAME SPECIFICATIONS AS PER MANDATORY CONDITION #1. LOCATION OF LOCK/LOCKS AS APPLICABLE SHALL BE AS INDICATED ON TYPICAL SHUTTER ELEVATION. MAXIMUM SHUTTER SPAN SHALL BE DETERMINED AS PER SCHEDULE #3 ON SHEET 12.

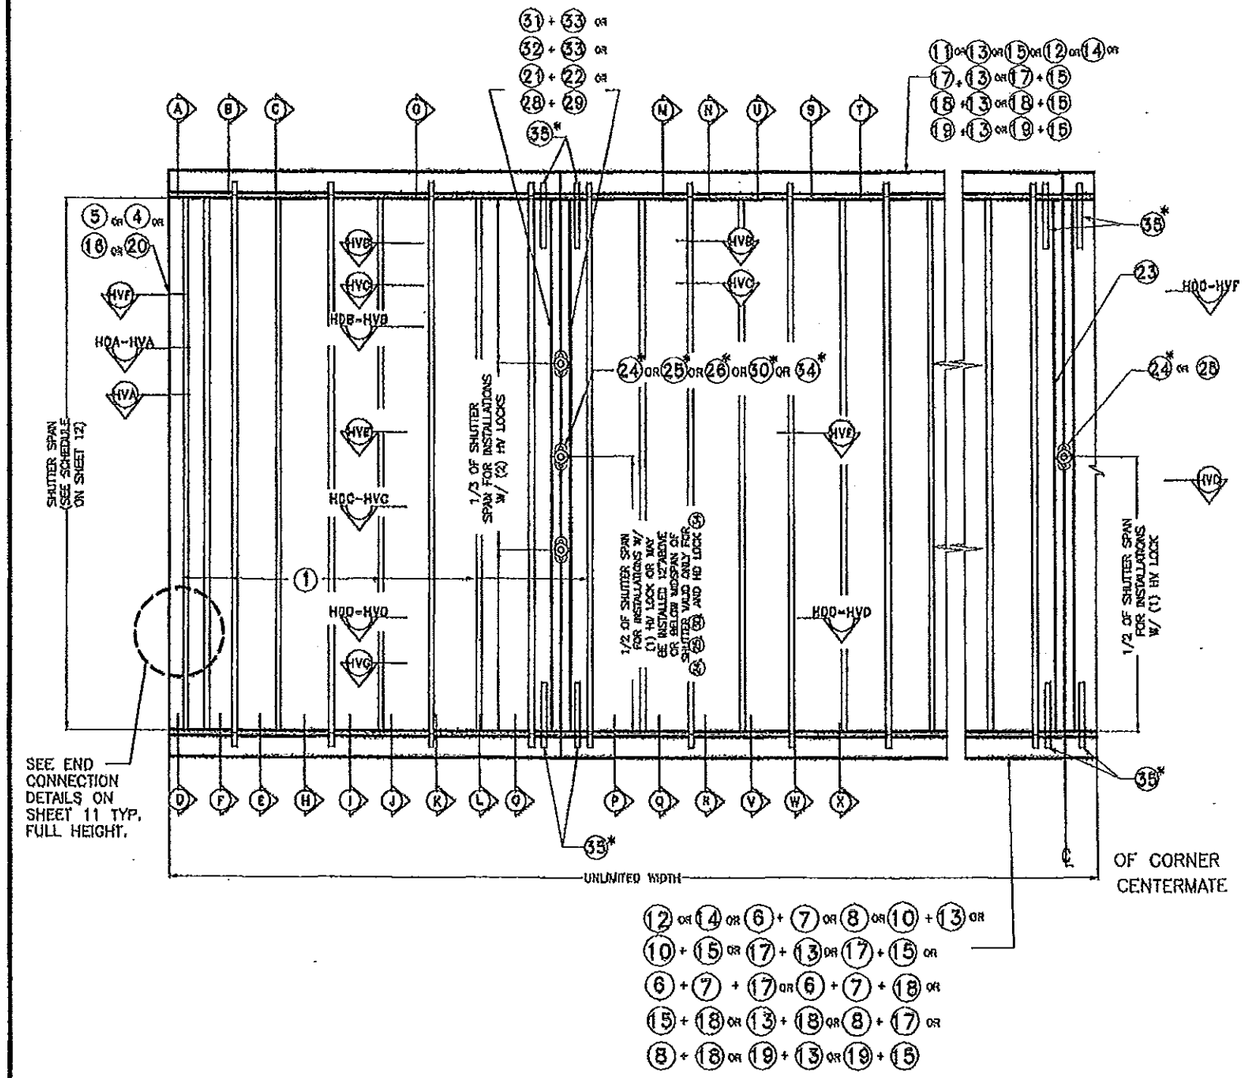3. **OPTIONAL CONDITION #1:** IF DESIRED, FOR BETTER PERFORMANCE OR FOR SECURITY PURPOSES, UP TO TWO HV LOCKS ㉔ , ㉕ OR ㉖ MAY BE USED AS AN INSIDE OR OUTSIDE LOCK. CONNECTION OF LOCKS TO CENTERMATES ㉑ OR ㉒ SHALL BE AS INDICATED ON NOTE (1) ABOVE.
LOCATION OF LOCKS SHALL BE AS INDICATED ON TYPICAL SHUTTER ELEVATION.

4. **OPTIONAL CONDITION #2 (VALID ONLY WHEN MANDATORY CONDITION #1 OR LIMITED MANDATORY CONDITION #2 IS USED W/TWO H.V. LOCKS):** LOCKING RODS ㉟ ARE NOT REQUIRED AT HURRICANE POSITION, BUT MAY BE USED IF DESIRED TO ENHANCE SHUTTER PERFORMANCE. LOCKING RODS ㉟ OR AN ALTERNATIVE DEVICE MAY ALSO BE USED AT STACKING POSITION (NON HURRICANE POSITION).

5. **MANDATORY CONDITION #2:** ONE HV LOCK ㉔ or ㉕ SHALL BE USED AT CORNER CENTERMATES FOR ANY SPAN AND INSTALLATIONS AT ANY ELEVATION. HV LOCK ㉔ or ㉖ SHALL BE USED AS AN OUTSIDE OR INSIDE LOCK, ATTACHED TO ㉓ CORNER CENTERMATE W/(2) 1/4"ø-20 x 1/2" LONG FLAT HEAD S.S. M.S. TWO LOCKING RODS ㉟ AT TOP & BOTTOM SHALL BE USED. LOCATION OF LOCK SHALL BE AS INDICATED ON TYPICAL SHUTTER ELEVATION. MAXIMUM SHUTTER SPAN SHALL BE DETERMINED AS PER SCHEDULES SHOWN ON SHEET 12.

6. **FIRST ALTERNATE TO MANDATORY CONDITION #1 VALID ONLY FOR HV LOCK ㉖ W/ SYMMETRICAL CENTERMATES ㉑ OR ㉒ :** ONE ALTERNATE HV LOCK ㉖ MAY BE USED IN LIEU OF HV LOCK ㉔ or ㉕ FOR ANY SPAN AND INSTALLATIONS AT ANY ELEVATION. ALTERNATE LOCK ㉖ MAY BE USED AS AN INSIDE OR OUTSIDE LOCK. ATTACHMENT OF 1/4"ø-20x3/4" S.S. THUMBSCREW TO ㉑ OR ㉒ CENTERMATES SHALL BE MADE W/ 1/4"ø-20x3/4" ALUM. RIVNUT AS SHOWN ON SECTION HVE, SHEET 8. ONE LOCK SHALL BE USED AT 1/2 OF SHUTTER SPAN OR TWO LOCKS AT 1/3 OF SHUTTER SPAN.

## *NOTES ON HV "T" LOCKS AND CENTERMATES:

1. **SECOND ALTERNATE TO MANDATORY CONDITION #1 VALID ONLY FOR HV "T" LOCK ㉚ , AND CENTERMATES ㉘ AND ㉙ :** ONE ALTERNATE HV "T" LOCK ㉚ MAY BE INSTALLED IN LIEU OF HV LOCKS ㉔ OR ㉕ FOR ANY SPAN AND INSTALLATION AT ANY ELEVATION. ALTERNATE LOCK ㉚ MAY BE USED AS AN INSIDE OR OUTSIDE LOCK. ATTACHMENT OF LOCK ㉚ INCLUDES USING REINFORCING LOCKER ㉗ , AS SHOWN ON SECTION HVG, SHEET 9, WHICH MUST BE CONNECTED TO CENTERMATES ㉘ AND ㉙ W/ 1/4"ø-20 x 1 1/2" LONG S.S. THREADED BOLT W/ 7/8"ø x 3/32" WINGNUT OR W/ 1/4"ø-20x1" S.S.M.S. INTO A 1/4"ø x 5/8" RIVNUT. LOCK MAY BE INSTALLED AT MIDSPAN OR 12" MAXIMUM ABOVE AND BELOW MIDSPAN. USE OF TWO LOCKING RODS ㉟ TOP AND BOTOM IS MANDATORY.

## *NOTES ON HD LOCKS & CENTERMATES:

1. **HD LOCK ㉞ W/ HD CENTERMATES ㉛ OR ㉜ W/ ㉝ :** ONE ALTERNATE HD LOCK ㉞ MAYBE USED IN LIEU OF HV LOCKS ㉔ OR ㉕ FOR ANY SPAN AND INSTALLATIONS AT ANY ELEVATION. ALTERNATE HD LOCK ㉞ MAY BE USED AS AN INSIDE OR OUTSIDE LOCK. ATTACHMENT OF HD LOCK ㉞ TO ㉝ IS W/ 3 #8 x 3/8" F.H. S.S.M.S., AND INCLUDES REINFORCEMENT INSERT ㉝ AS SHOWN ON SECTIONS HDB-HVB AND HDC-HVC, SHEET 10. LOCK MAY BE INSTALLED AT MIDSPAN OR 12" MAXIMUM BELOW OR ABOVE MIDSPAN. USE OF LOCKING RODS ㊳ IS COMPLETELY OPTIONAL.

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER
P.E. SEAL/SIGNATURE/DATE

TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 5 OF 28 |
| 6 | | | |




Ⓐ HV WALL HEADER INSTALLATION




Ⓑ HV WALL HEADER INSTALLATION

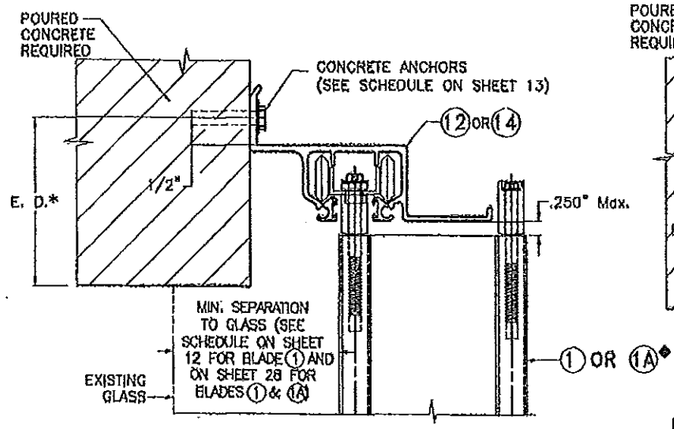


Ⓒ HV WALL HEADER INSTALLATION

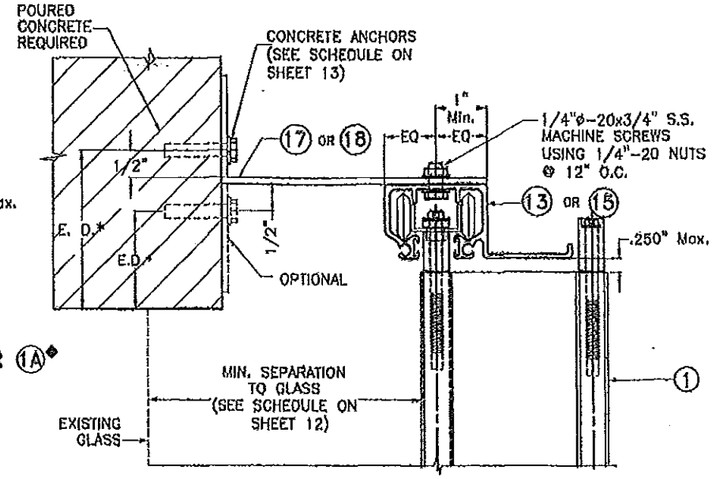


Ⓓ HV WALL SILL INSTALLATION

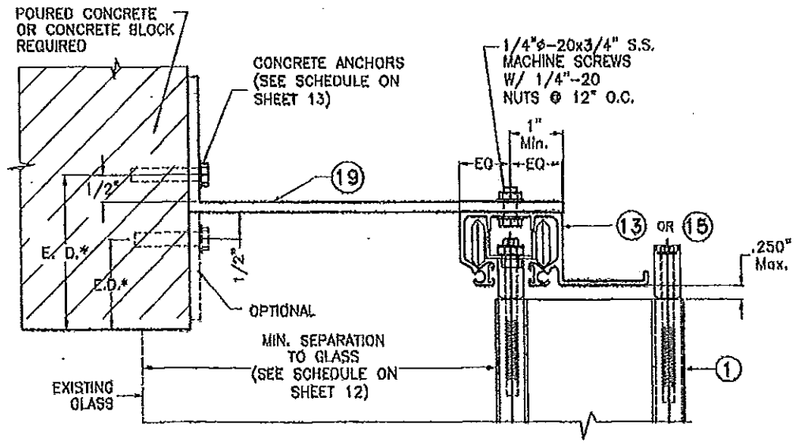


Ⓔ HV WALL SILL INSTALLATION

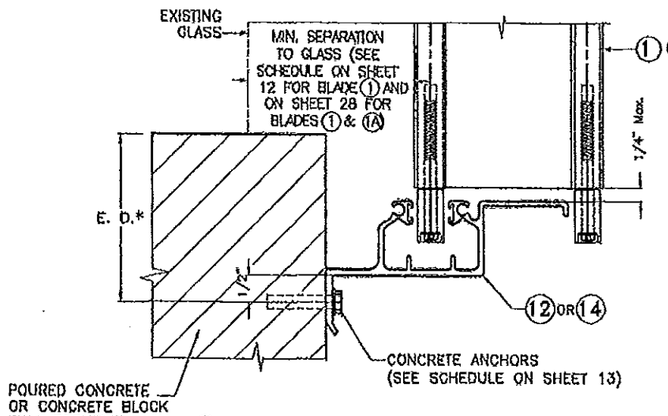


Ⓕ HV WALL SILL INSTALLATION

# INSTALLATION DETAILS W/ ① HV BLADE & (① HV + 1A HV BLADES) AS APPLICABLE

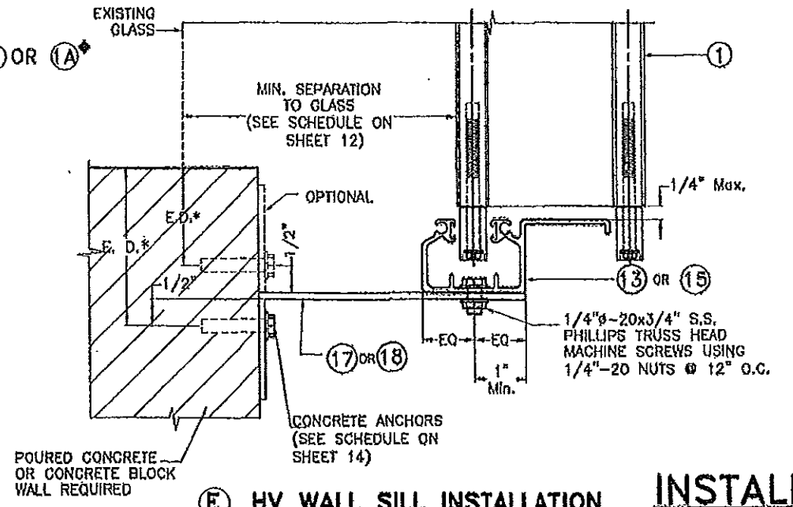NOTE FOR COMBINATION OF SECTIONS:

1- SEE SHEET 4 FOR TYPICAL SHUTTER ASSEMBLY
2- MOUNTING SECTIONS CAN BE COMBINED IN ANY WAY TO SUIT ANY INSTALLATION.

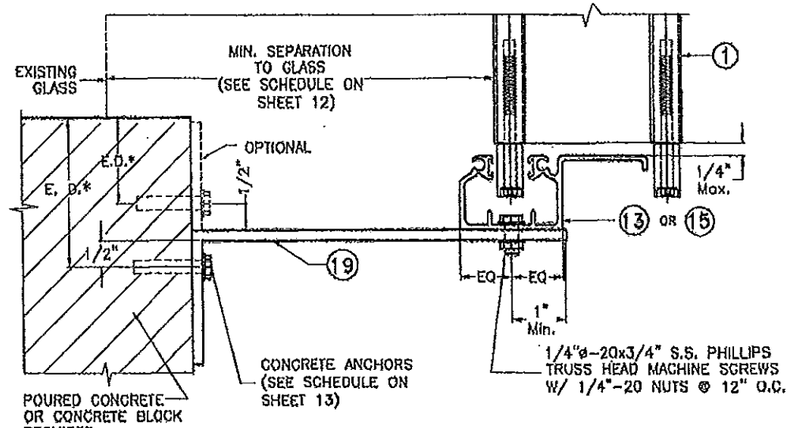* E. D. = EDGE DISTANCE (SEE SPECIFICATIONS ON SHEET 14)

◆ SEE LIMITATIONS OF USE FOR BLADE 1A ON SHEET 28

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER
P.E. SEAL/SIGNATURE/DATE

TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 308, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 ; Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 6 OF 28 |
| 6 | | | |




## G HV CEILING INSTALLATION




## H HV FLOOR INSTALLATION †

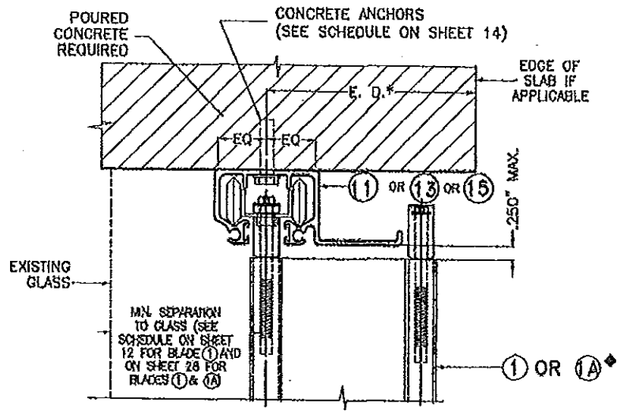


## I HV WALK-OVER INSTALLATION

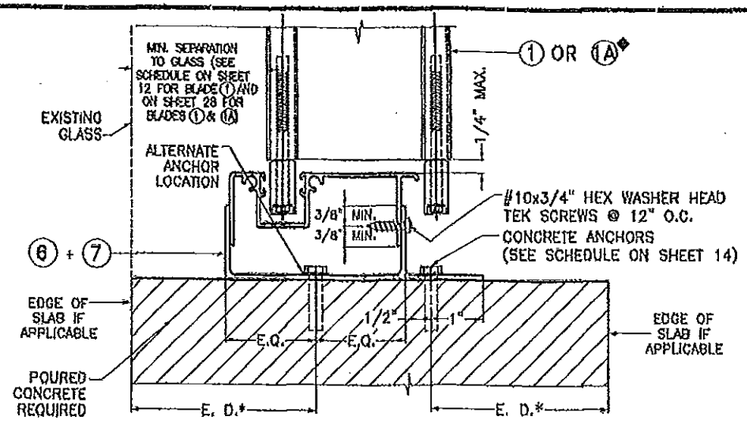


## J HV RAINGUARD INSTALLATION †

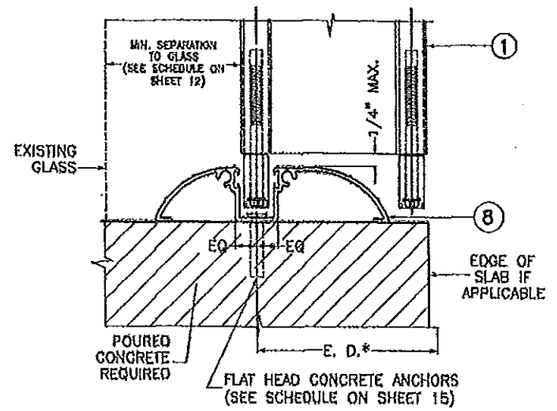


## K HV WALL FLOOR INSTALLATION

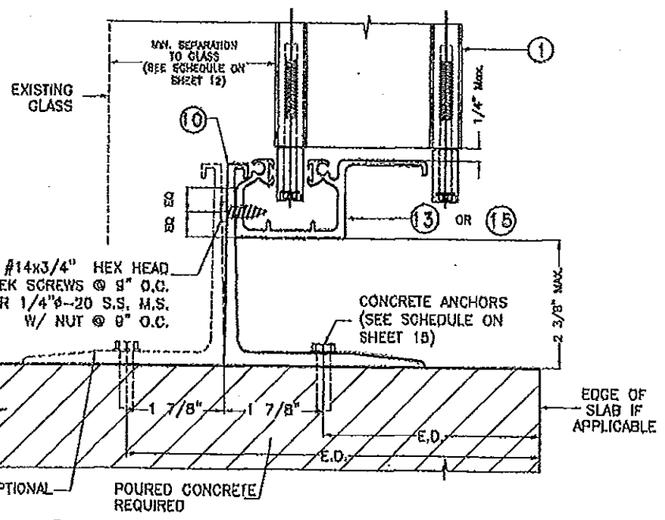


## L HV WALL WALK-OVER INSTALLATION

# INSTALLATION DETAILS W/ (1) HV BLADE & ((1) HV + (1A) HV BLADES) AS APPLICABLE

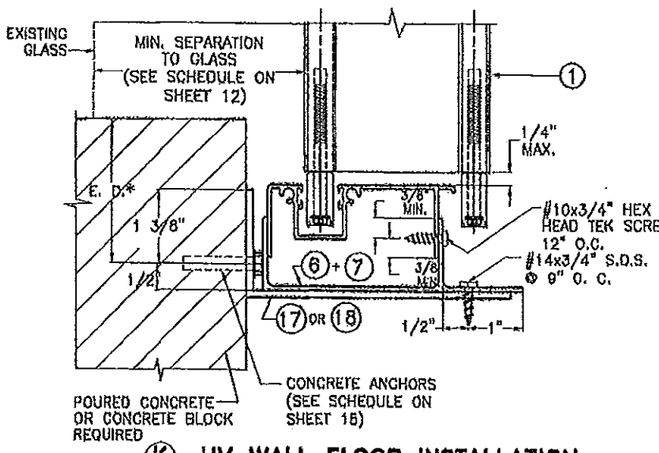FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

NOTE FOR COMBINATION OF SECTIONS:
1- SEE SHEET 4 FOR TYPICAL SHUTTER ASSEMBLY
2- MOUNTING SECTIONS CAN BE COMBINED IN ANY WAY TO SUIT ANY INSTALLATION.

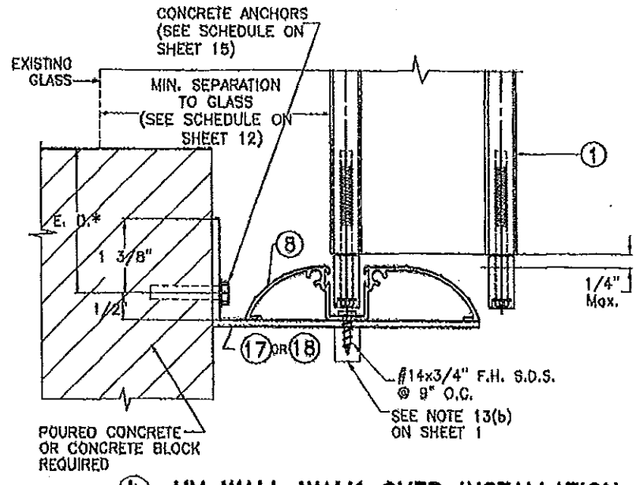* E. D. = EDGE DISTANCE (SEE SPECIFICATIONS ON SHEET 14)

NOTE:
† THIS INSTALLATION SHALL BE REMOVABLE WHEN PERFORMED ADJACENT TO AN OPERABLE EXIT OR ENTRANCE

◆ SEE LIMITATIONS OF USE FOR BLADE (1A) ON SHEET 28

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE NO. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE

TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 303, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

WILLARD SHUTTER COMPANY, INC.
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 7 OF 28 |
| 6 | | | |

SEE END WALL CONNECTION DETAILS ON SHEETS 11 & 20

# INSTALLATIONS W/ (1) HV BLADE W/ HV CENTERMATES (21), (22) OR (23)

* SEE NOTES ON LOCKING RODS (35), HV LOCKS (24) or (25) AND ALTERNATE HV LOCK (26) ON SHEET 5.

** BLADE SLACK DETAIL HVF IS VALID FOR ALL CENTERMATES APPLICATION WITH BLADE (1)

SEE END WALL CONNECTION DETAILS ON SHEETS 11 & 20

## HVA




## HVB




## HVC

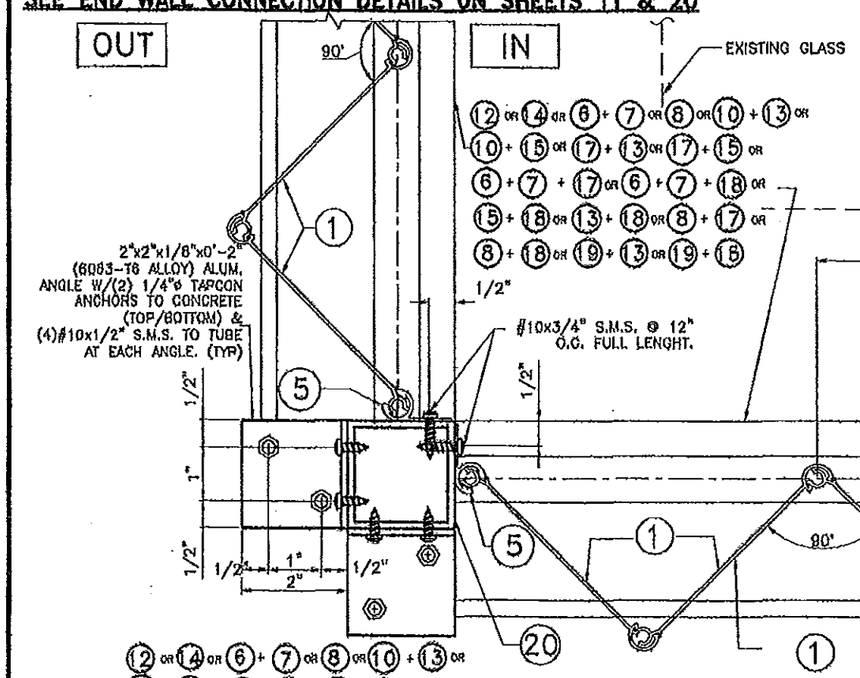


## HVD

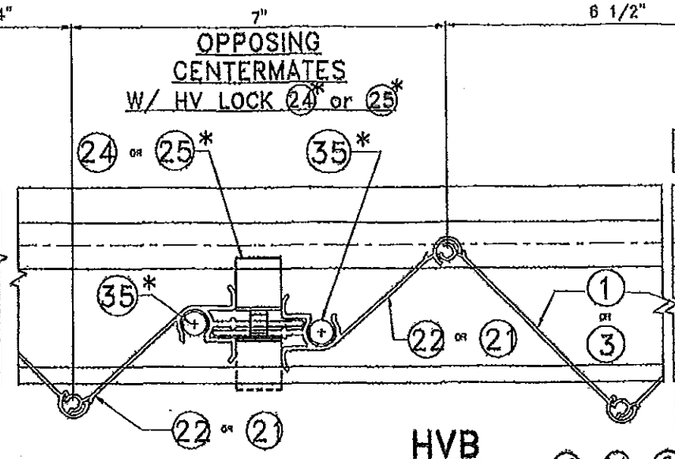


## HVE

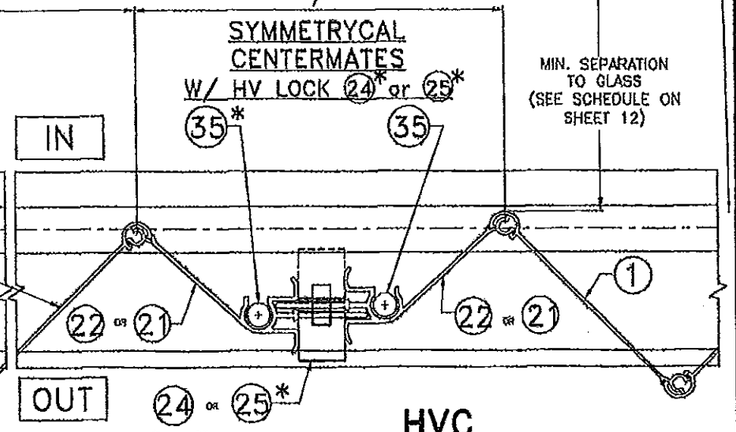


## HVF**

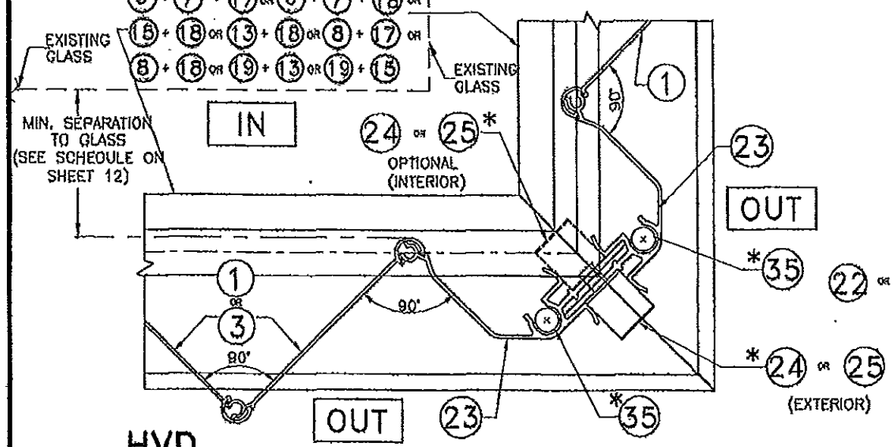


FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

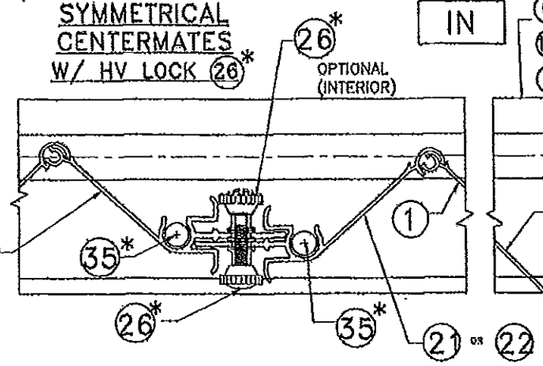PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

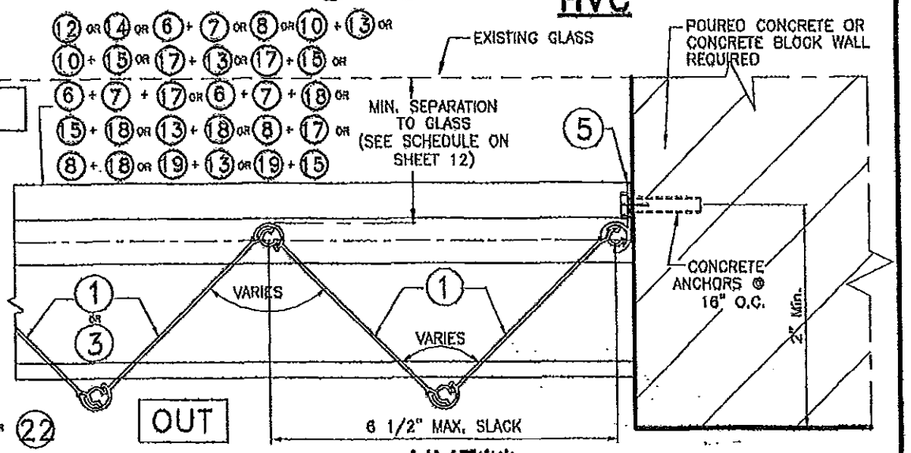WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL / SIGNATURE / DATE

TILLECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilleco@aol.com
ES-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 8 OF 28 |
| 6 | | | |

# ALTERNATE INSTALLATION W/HV "T" LOCK (30), HV MALE/FEMALE "T" LOCKS CENTERMATES (28), (29) & LOCKERS (27) W/ (1) HV BLADE *

SEE END CONNECTION DETAILS ON SHEETS 11 & 20




SEE END CONNECTION DETAILS ON SHEETS 11 & 20

* BLADE (1) SLACK DETAIL HVF, INDICATED ON SHEET 8, AS WELL AS UNIVERSAL FLOATING BLADE (3) DETAIL HDD-HVD, INDICATED ON SHEET 10, MAY BE USED WITH THIS ALTERNATE INSTALLATION DETAIL HVG SHOWN IN THIS SHEET.

* SEE NOTE 6 FOR HV LOCK (30), "T" LOCK, ON SHEET 5.

† SERIES 9444 ALUMINUM (2024-T3 ALLOY) LARGE FLANGE THIN SHEET NUTSERT, PART # 0820, AS MANUFACTURED BY AVDEL CHERRY TEXTORN, PARSIPPENY, NEW JERSEY 07054 OR EQUAL.
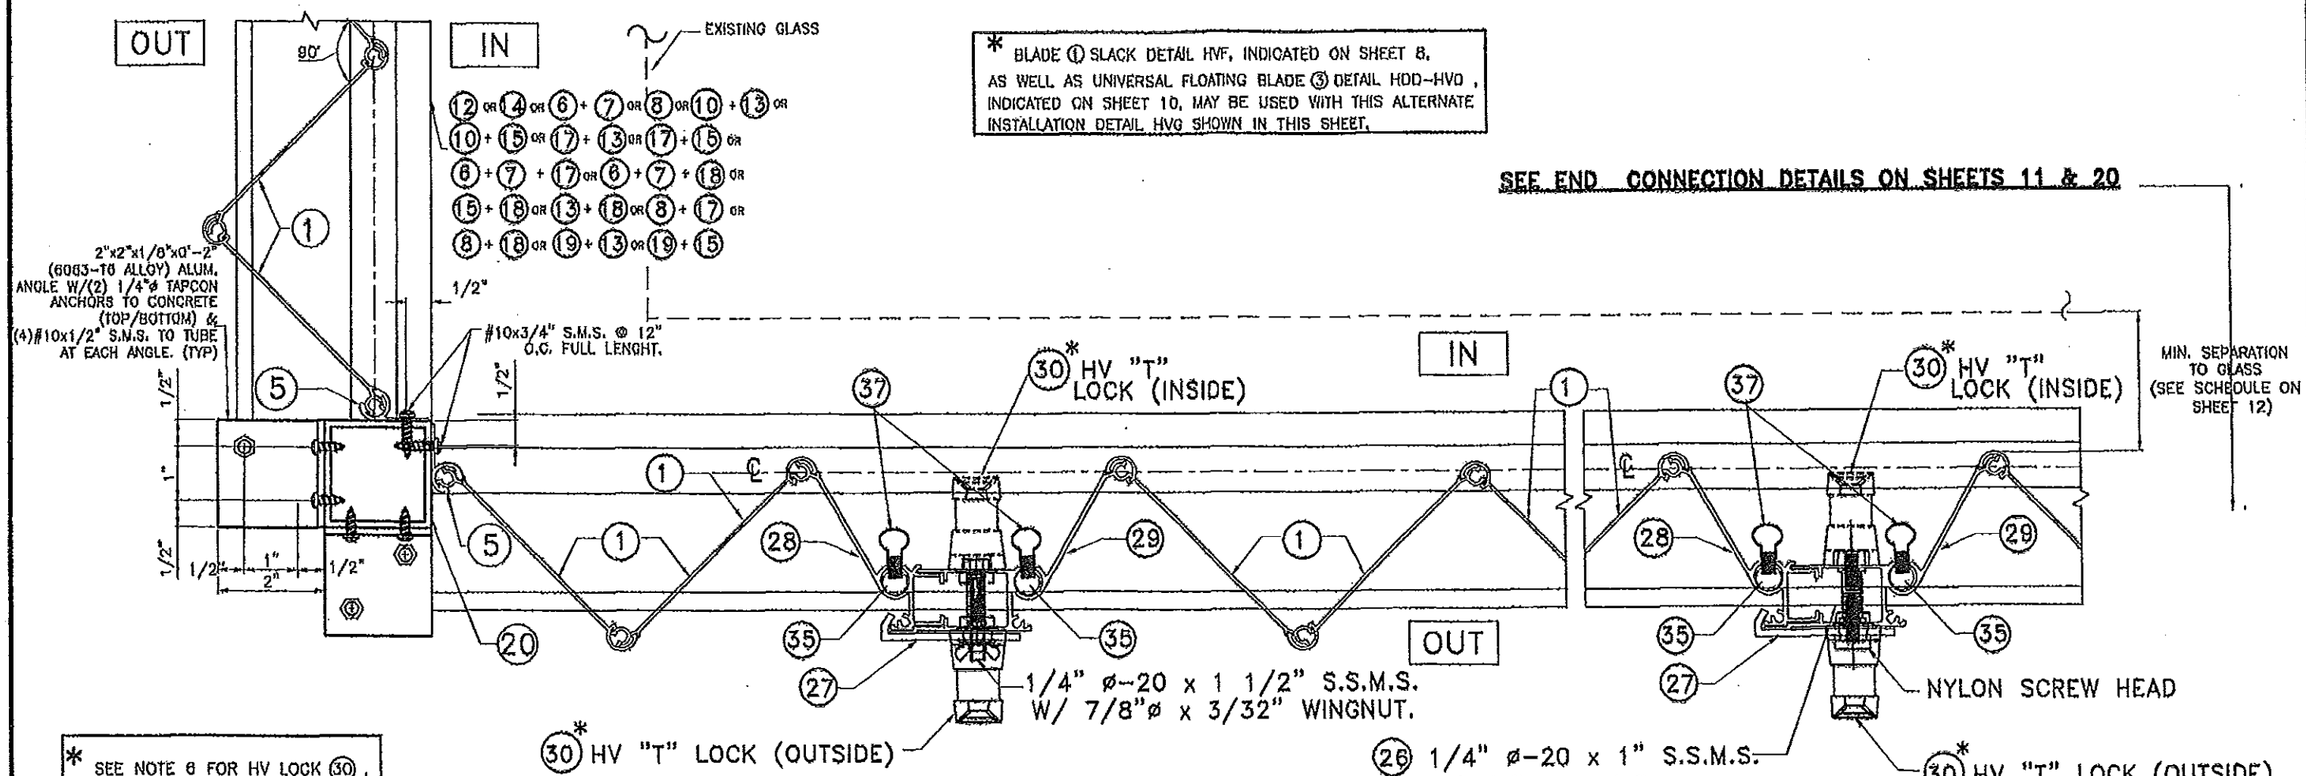
## HVG*

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE

TILTECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 9 OF 25 |
| 6 | | | |

SEE END WALL CONNECTION DETAILS ON SHEETS 11 & 20

# INSTALLATION ① HV BLADE W/ HD CENTERMATES ㉛ , ㉜ , ㉝




SEE END WALL CONNECTION DETAILS ON SHEETS 11 & 20

* SEE NOTES ON LOCKING RODS ㉟ & HD ㉞ LOCKS ON SHEET 5

** UNIVERSAL FLOATING BLADE ③ DETAIL HDD-HVD IS VALID FOR ALL CENTERMATES APPLICATIONS WITH BLADE ①

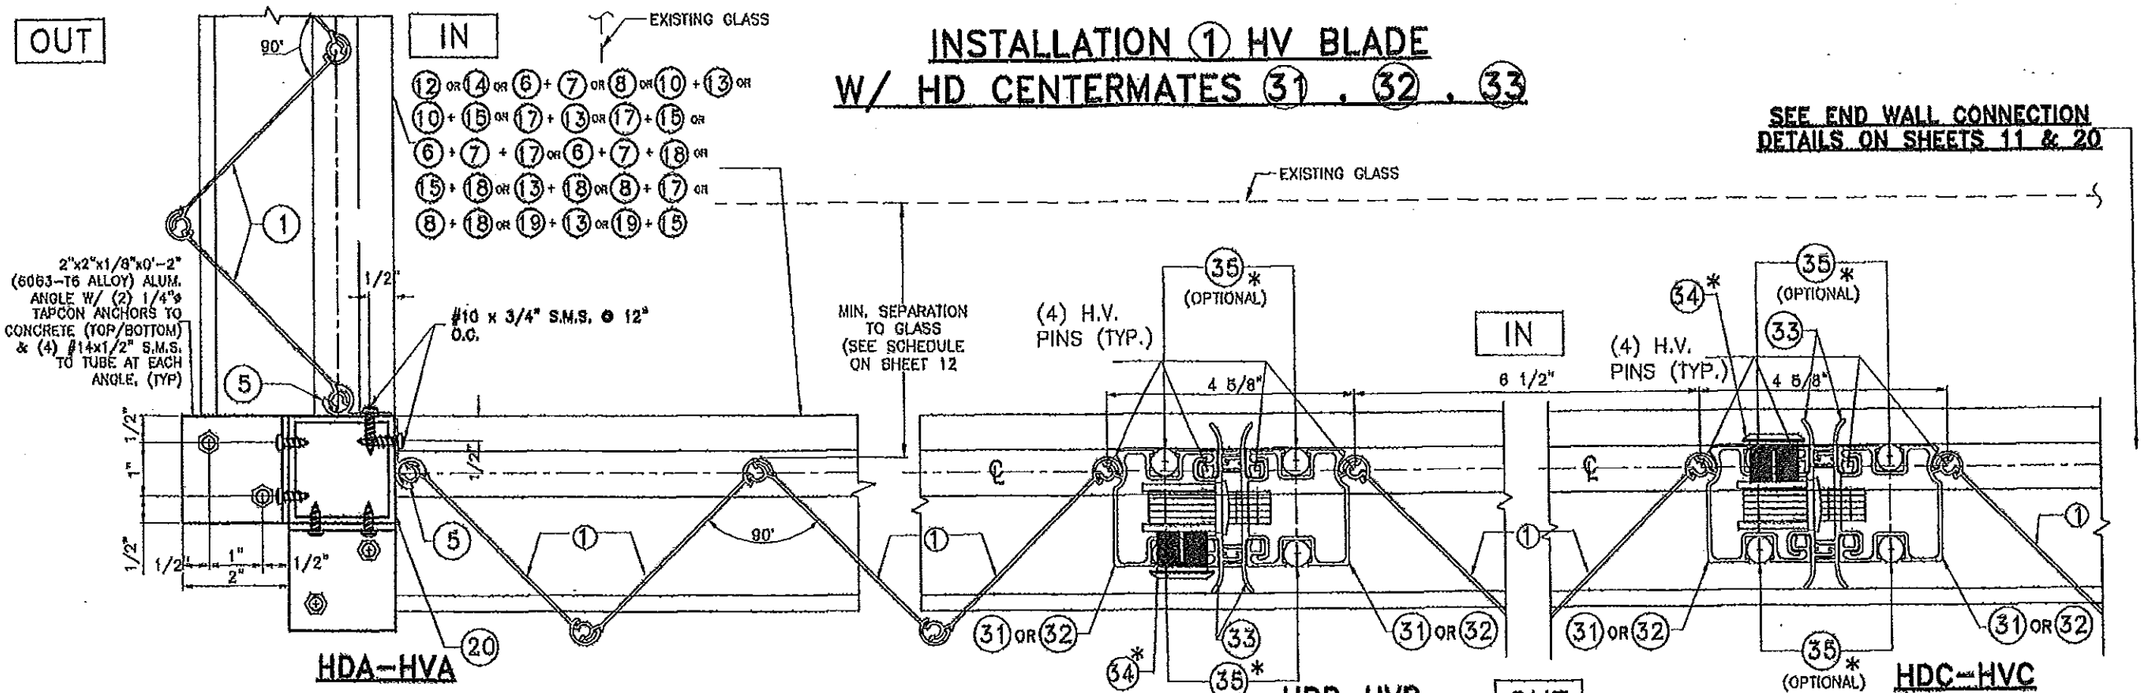


HDD-HVD**

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

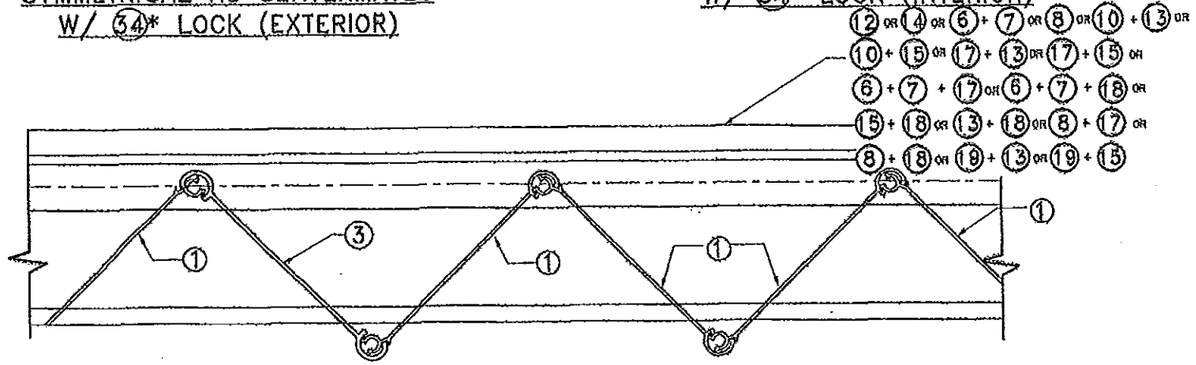MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE

TILLECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | |
| 3 | | | DRAWING No 12-017 |
| 4 | | | |
| 5 | | | SHEET 10 OF 28 |
| 6 | | | |




END CONNECTION DETAIL ①




END CONNECTION DETAIL ②

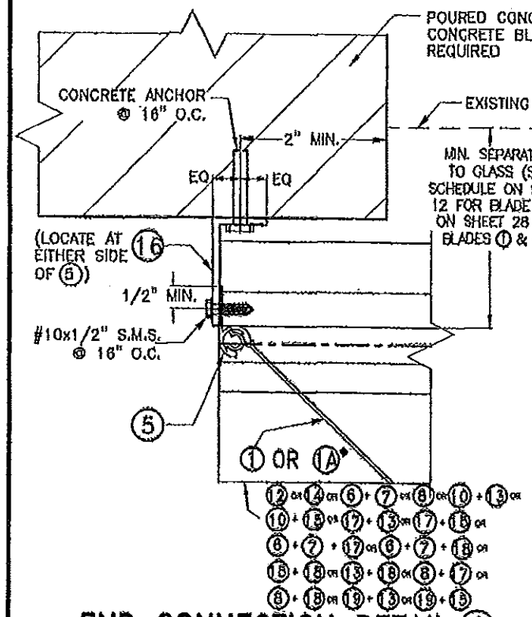


END CONNECTION DETAIL ③

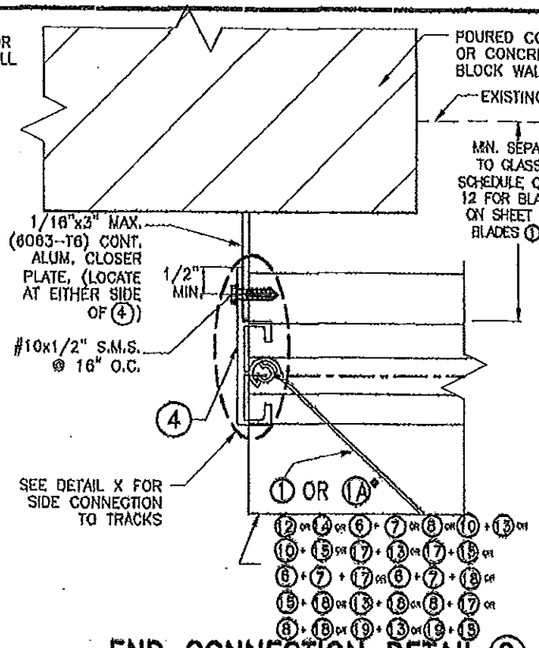


END CONNECTION DETAIL ④

♣ REQUIRED ONLY FOR SPANS GREATER THAN 12'-0"

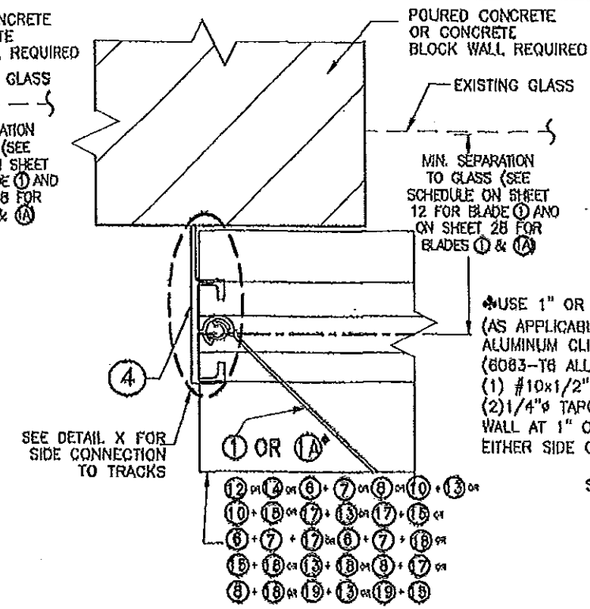


END CONNECTION DETAIL ⑤

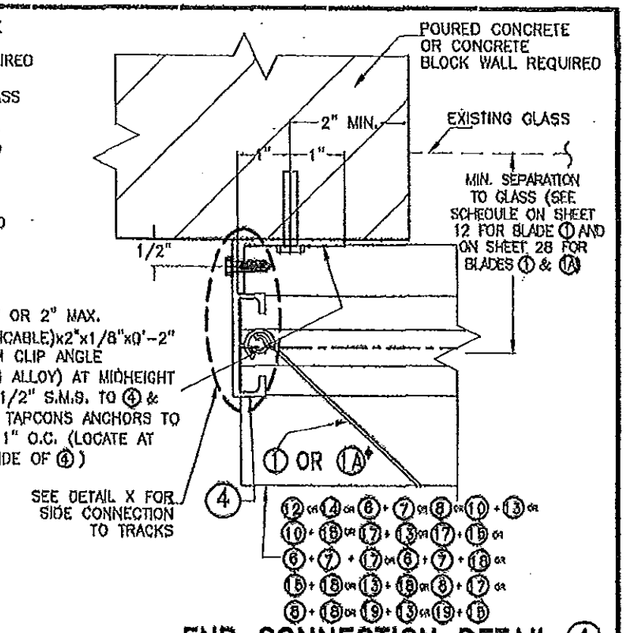


END CONNECTION DETAIL ⑥

◆ SEE LIMITATIONS OF USE FOR BLADE ⑭ ON SHEET 28

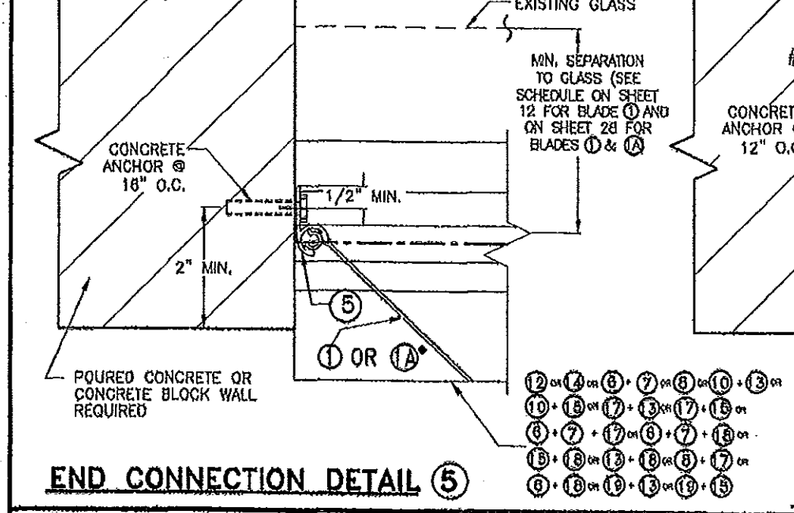


DETAIL X
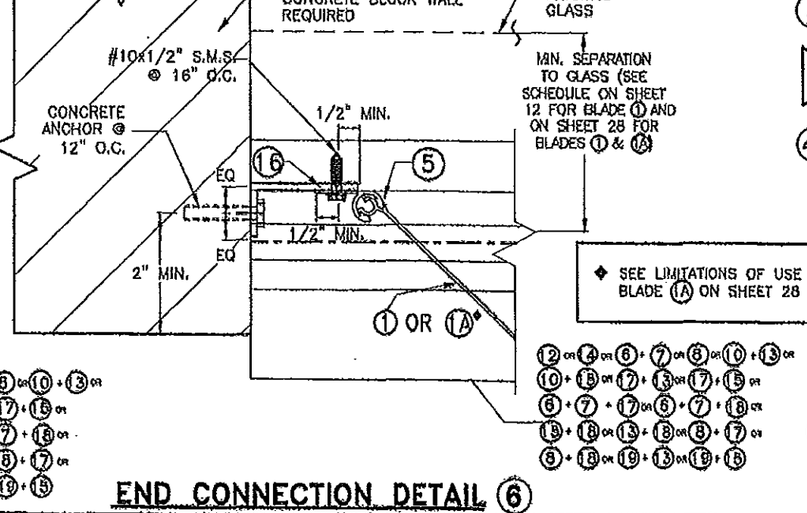
## END INSTALLATION
## ① HV BLADE OR ⑭ HV WINDOW BLADE INTO CONCRETE OR CONCRETE BLOCK WALL.

FLORIDA BUILDING CODE (**H**igh **V**elocity **H**urricane **Z**one)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

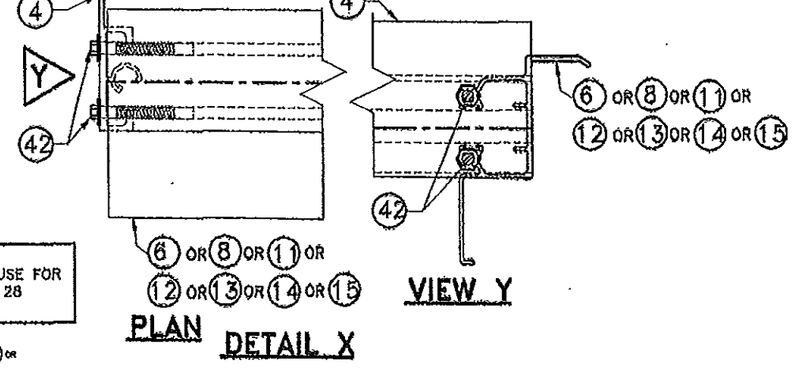PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 , Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System

H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE |
|---|---|---|
| 1 | OLD 07-090 | 01/20/12 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |

Drawn by: F.P./A.G.
DATE: 01/20/12
DRAWING No 12-017
SHEET 11 OF 28

## SCHEDULE #1

MAXIMUM SHUTTER SPAN* "L+" OR "L−" (ft.) FOR INSTALLATIONS W/ SYMMETRICAL CENTERMATES, (21) & (22) or (31) or (32) W/ ONE HV LOCK (24) or (25) or (26) or HD LOCK (34) W/ NO LOCKING RODS (35) OR CENTERMATES (28) & (29) W/ ONE HV LOCK (30) W/ TWO LOCKING RODS (35) TOP & BOTTOM ♦(SEE NOTE †)

| MAXIMUM A.S.D. DESIGN LOAD (p.s.f.) (+ OR −) | CONCRETE & WOOD INSTALLATIONS Ö | | | |
|---|---|---|---|---|
| | WALL MOUNTING | | FLOOR/CEILING MOUNTING | |
| | L+ (ft) | L− (ft) | L+ (ft) | L− (ft) |
| 30 | 13'−2" | 16'−0" | 13'−2" | 16'−0" |
| 35 | 12'−8" | 14'−10" | 12'−8" | 14'−10" |
| 40 | 12'−3" | 13'−10" | 12'−3" | 13'−10" |
| 45 | 11'−11" | 13'−1" | 11'−11" | 13'−1" |
| 50 | 11'−7" | 12'−5" | 11'−7" | 12'−5" |
| 55 | 11'−4" | 11'−10" | 11'−4" | 11'−10" |
| 60 | 11'−1" | 11'−4" | 11'−0" | 11'−4" |
| 65 | 10'−10" | 10'−10" | 10'−7" | 10'−10" |
| 70 | 10'−6" | 10'−6" | 10'−2" | 10'−6" |
| 75 | 10'−1" | 10'−1" | 9'−10" | 10'−1" |
| 80 | 9'−10" | 9'−9" | 9'−7" | 9'−10" |
| 85 | 9'−6" | 9'−6" | 9'−3" | 9'−6" |
| 90 | 9'−3" | 9'−3" | 9'−0" | 9'−3" |
| 95 | 9'−0" | 8'−9" | 8'−9" | 9'−0" |
| 100 | 8'−9" | 8'−4" | 8'−6" | 8'−9" |
| 105 | 8'−7" | 7'−11" | 8'−4" | 8'−4" |
| 110 | 8'−4" | 7'−7" | 8'−2" | 7'−11" |
| 115 | 8'−2" | 7'−3" | 8'−0" | 7'−7" |
| 120 | 8'−0" | 6'−11" | 7'−10" | 7'−4" |
| 125 | 7'−10" | 6'−8" | 7'−8" | 7'−0" |
| 130 | 7'−8" | 6'−5" | 7'−6" | 6'−9" |
| 135 | 7'−7" | 6'−2" | 7'−4" | 6'−6" |
| 140 | 7'−5" | 5'−11" | 7'−3" | 6'−3" |
| 145 | 7'−3" | 5'−9" | 7'−1" | 6'−0" |
| 150 | 7'−2" | 5'−7" | 7'−0" | 5'−10" |
| 155 | 7'−0" | 5'−5" | 6'−10" | 5'−8" |
| 160 | 6'−11" | 5'−2" | 6'−9" | 5'−6" |
| 165 | 6'−10" | 5'−1" | 6'−8" | 5'−4" |
| 170 | 6'−9" | 4'−11" | 6'−7" | 5'−2" |
| 175 | 6'−7" | 4'−9" | 6'−5" | 5'−0" |
| 180 | 6'−6" | 4'−8" | 6'−4" | 4'−10" |
| 185 | 6'−5" | 4'−6" | 6'−3" | 4'−9" |
| 190 | 6'−4" | 4'−5" | 6'−2" | 4'−7" |
| 195 | 6'−3" | 4'−3" | 6'−1" | 4'−6" |
| 200 | 6'−2" | 4'−2" | 6'−0" | 4'−5" |
| 205 | 6'−0" | 4'−1" | 6'−0" | 4'−3" |

## SCHEDULE #2

MAXIMUM SHUTTER SPAN* "L+" OR "L−" (ft.) FOR INSTALLATIONS W/ OPPOSING CENTERMATES, (21) & (22) ONE HV LOCK (24) OR (25) OR (26) W/ NO LOCKING RODS (35) ♦(SEE NOTE †)

| MAXIMUM A.S.D. DESIGN LOAD (p.s.f.) (+ OR −) | CONCRETE & WOOD INSTALLATIONS Ö | |
|---|---|---|
| | WALL MOUNTINGS & FLOOR/CEILING MOUNTINGS | |
| | L+ (ft) | L− (ft) |
| 30 | 12'−3" | 14'−9" |
| 35 | 11'−9" | 13'−8" |
| 40 | 11'−4" | 12'−9" |
| 45 | 11'−1" | 12'−0" |
| 50 | 10'−9" | 11'−5" |
| 55 | 10'−6" | 10'−11" |
| 60 | 10'−3" | 10'−5" |
| 65 | 10'−0" | 10'−0" |
| 70 | 9'−8" | 9'−8" |
| 75 | 9'−4" | 9'−4" |
| 80 | 9'−0" | 9'−0" |
| 85 | 8'−9" | 8'−9" |
| 90 | 8'−6" | 8'−6" |
| 95 | 8'−3" | 8'−3" |
| 100 | 8'−1" | 8'−1" |
| 105 | 7'−11" | 7'−11" |
| 110 | 7'−8" | 7'−7" |
| 115 | 7'−6" | 7'−3" |
| 120 | 7'−4" | 6'−11" |
| 125 | 7'−3" | 6'−8" |
| 130 | 7'−1" | 6'−5" |
| 135 | 6'−11" | 6'−2" |
| 140 | 6'−10" | 5'−11" |
| 145 | 6'−8" | 5'−9" |
| 150 | 6'−7" | 5'−7" |
| 155 | 6'−6" | 5'−5" |
| 160 | 6'−5" | 5'−2" |
| 165 | 6'−3" | 5'−1" |
| 170 | 6'−2" | 4'−11" |
| 175 | 6'−1" | 4'−9" |
| 180 | 6'−0" | 4'−8" |
| 185 | 5'−11" | 4'−6" |
| 190 | 5'−10" | 4'−5" |
| 195 | 5'−9" | 4'−3" |
| 200 | 5'−8" | 4'−2" |
| 205 | 5'−8" | 4'−1" |

## SCHEDULE #3

MAXIMUM SHUTTER SPAN* "L+" OR "L−" (ft.) INSTALLATIONS W/ SYMMETRICAL CENTERMATES (21) & (22) W/ TWO HV (24) OR (25) OR (26) LOCKS OR TWO LOCKING RODS (35) TOP/BOTTOM W/ ONE HV LOCK (24) OR (25) OR (26)♦ (SEE NOTE †)

| MAXIMUM A.S.D. DESIGN LOAD (p.s.f.) (+ OR −) | CONCRETE & WOOD INSTALLATIONS Ö | |
|---|---|---|
| | FLOOR/CEILING MOUNTING | |
| | L+ (ft) | L− (ft) |
| 30 | 13'−1" | 16'−0" |
| 35 | 12'−7" | 15'−7" |
| 40 | 12'−2" | 15'−2" |
| 45 | 11'−9" | 14'−3" |
| 50 | 11'−6" | 13'−7" |
| 55 | 11'−3" | 12'−11" |
| 60 | 11'−0" | 12'−4" |
| 65 | 10'−9" | 11'−11" |
| 70 | 10'−7" | 11'−5" |
| 75 | 10'−4" | 11'−1" |
| 80 | 10'−0" | 10'−9" |
| 85 | 9'−9" | 10'−5" |
| 90 | 9'−5" | 10'−1" |
| 95 | 9'−2" | 9'−10" |
| 100 | 9'−0" | 9'−7" |
| 105 | 8'−9" | 9'−4" |
| 110 | 8'−7" | 9'−2" |
| 115 | 8'−4" | 8'−11" |
| 120 | 8'−2" | 8'−9" |
| 125 | 8'−0" | 8'−5" |
| 130 | 7'−10" | 8'−1" |
| 135 | 7'−9" | 7'−9" |
| 140 | 7'−7" | 7'−6" |
| 145 | 7'−5" | 7'−3" |
| 150 | 7'−4" | 7'−0" |
| 155 | 7'−2" | 6'−9" |
| 160 | 7'−1" | 6'−7" |
| 165 | 7'−0" | 6'−4" |
| 170 | 6'−11" | 6'−2" |
| 175 | 6'−9" | 6'−0" |
| 180 | 6'−8" | 5'−10" |
| 185 | 6'−7" | 5'−8" |
| 190 | 6'−6" | 5'−6" |
| 195 | 6'−5" | 5'−5" |
| 200 | 6'−4" | 5'−3" |
| 205 | 6'−3" | 5'−1" |

### * NOTES:

(1) L+: MAXIMUM ALLOWABLE SPAN FOR A GIVEN POSITIVE A.S.D. DESIGN LOAD.
L−: MAX. ALLOWABLE SPAN FOR A GIVEN NEGATIVE A.S.D. DESIGN LOAD.

(2) PROCEDURE TO DETERMINE MAXIMUM SPAN FOR WALL MOUNTINGS OR FLOOR/CEILING:

GIVEN A POSITIVE A.S.D. DESIGN LOAD, DETERMINE MAXIMUM SPAN "L+" FROM SCHEDULE.
GIVEN A NEGATIVE A.S.D. DESIGN LOAD, DETERMINE MAXIMUM SPAN "L−" FROM SCHEDULE.

FINAL MAXIMUM ALLOWABLE SPAN IS EQUAL TO THE MINIMUM DETERMINED SPAN BETWEEN "L+" AND "L−".

(3) PROCEDURE TO DETERMINE MAXIMUM SPAN FOR COMBINATIONS IN BETWEEN WALL W/ FLOOR/CEILING MOUNTINGS:

FOR A GIVEN POSITIVE A.S.D. DESIGN LOAD; DETERMINE:
L1+= MAX. SPAN FOR WALL MOUNTING INSTALLATIONS.
L2+= MAX. SPAN FOR FLOOR/CEILING MOUNTING INSTALLATIONS.

FOR A GIVEN NEGATIVE A.S.D. DESIGN LOAD; DETERMINE:
L1−= MAX. SPAN FOR WALL MOUNTING INSTALLATIONS.
L2−= MAX. SPAN FOR FLOOR/CEILING MOUNTING INSTALLATIONS.

FINAL MAXIMUM ALLOWABLE SPAN IS EQUAL TO THE MINIMUM BETWEEN "L1+", "L2+", "L1−" AND "L2−"

(4) GO TO ANCHOR SCHEDULE WITH FINAL MAXIMUM ALLOWABLE SPAN AND NEGATIVE A.S.D. DESIGN LOAD TO DETERMINE MAXIMUM ANCHOR SPACING.

Ö MAXIMUM SHUTTER SPAN "L+" OR "L−" FOR INSTALLATIONS INTO WOOD SHALL BE LIMITED TO 105 psf. A.S.D. DESIGN LOAD.

† H.V. CORNER CENTERMATE #3 MAY BE USED AT ALL MOUNTING INSTALLATIONS. LOCKING SPECIFICATIONS SHALL BE AS INDICATED ON MANDATORY CONDITION #2 NOTE #5, SHEET 5.

### ♦ SEPARATION TO GLASS REQUIREMENTS

(1) SEE BELOW FOR MINIMUM SEPARATION TO GLASS SCHEDULE FOR SHUTTERS INSTALLED WITHIN THE FIRST 30'−0" ELEVATION OF BUILDING MEASURED AT BOTTOM OF SHUTTER.

(2) MINIMUM SEPARATION TO GLASS FOR SHUTTERS INSTALLED ABOVE 30'−0" ELEVATION OF BUILDING, MEASURED AT BOTTOM OF SHUTTER IS 3".

MINIMUM SEPARATION TO GLASS SCHEDULE:
SHUTTER W/ ONE LOCK WITHOUT LOCKING RODS

| SHUTTER SPAN | INSTALLATION W/ SYMMETRICAL CENTERMATES | INSTALLATION W/ OPPOSING CENTERMATES |
|---|---|---|
| 105" OR LESS | 3 5/16"§ | 4" |
| >105" TO MAX. ALLOWED | 3 7/8"§ | 4" |

§ USE 2 1/2" FOR HD LOCK (31)+(33) OR (32)+(33). USE INDICATED VALUES FOR HV CENTERMATES.

MINIMUM SEPARATION TO GLASS SCHEDULE:
SHUTTER W/ ONE LOCK & TWO LOCKING RODS OR WITH ONLY TWO LOCKS

| SHUTTER SPAN | INSTALLATION W/ SYMMETRICAL CENTERMATES | INSTALLATION W/ OPPOSING CENTERMATES |
|---|---|---|
| 105" OR LESS | 2 3/4" ** | 3 3/16" |
| >105" TO MAX. ALLOWED | 3 1/4" *** | 3 1/4" |

** USE 2 15/16" FOR HV "T" LOCK (30) W/ (35)
*** USE 4 1/8" FOR HV "T" LOCK (30) W/ (35)
USE INDICATED VALUES FOR HV CENTERMATES.

INSTALLATION LEGEND

| | CONCRETE & MANSONRY | WOOD |
|---|---|---|
| WALL MOUNTING | A, B, C, D, E, F, K & L. | M, N, O, P, Q, R, S & V. |
| FLOOR/CEILING MOUNTING | G, H, I & J. | T, U, W & X. |

# ① HV BLADE ONLY

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI−DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
8395 N.W. 38th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871−1530 , Fax : (305)871−1531
e−mail: tilteco@aol.com
EB−0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

WILLARD SHUTTER COMPANY, INC.
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633−0162 FAX (305) 638−8634


© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07−090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12−017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 12 OF 28 |
| 6 | | | |

## MAXIMUM ANCHOR* SPACING (in.) SCHEDULE FOR A GIVEN MAX. SHUTTER SPAN, A.S.D. DESIGN NEGATIVE LOAD AND A CORRESPONDING MOUNTING TYPE FOR CONCRETE OR CONCRETE BLOCK INSTALLATIONS

(SEE MOUNTINGS A, B, C, D AND F ON SHEET 8)

| MAXIMUM SPAN (ft) | POURED CONCRETE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | (A) WALL HEADER MOUNTING W/ (12) | | | | | | | | (A) WALL HEADER MOUNTING W/ (14) | | | | | | | | (B) WALL HEADER MOUNTING | | | | | | | | (D) WALL SILL MOUNTING W/ (12) | | | | | | | |
| | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | |
| | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 |
| 3'-0" OR LESS | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| 4'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 7 | -- | -- |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6.5 | -- |
| | 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | -- |
| 5'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 3.5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 3.5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 7 | -- | -- |
| | 14 | 12 | 10 | 9 | 8 | 5.5 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 4 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 3.5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 6 | -- | -- |
| 6'-0" | 14 | 12 | 10 | 9 | 8 | 5.5 | 3 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 9.5 | 7.5 | 6 | 6 | 5 | -- |
| | 14 | 12 | 10 | 9 | 8 | 5.5 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 3 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | 5.5 | 3.5 | 14 | 12 | 10 | 9 | 8 | 6 | 4.5 | -- |
| | 14 | 12 | 10 | 9 | 8 | 6 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | 4 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 | 14 | 12 | 10 | 9 | 8 | 5 | -- | -- |
| 7'-0" | 14 | 12 | 10 | 9 | 8 | 4 | -- | -- | 14 | 12 | 10 | 9 | 8 | 6.5 | 3 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | -- | 14 | 12 | 8 | 4.5 | -- | -- | -- | -- |
| | 14 | 12 | 10 | 9 | 8 | 4 | -- | -- | 14 | 12 | 10 | 9 | 8 | 6.5 | 3 | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | -- | 14 | 12 | 10 | 9 | 8 | 7 | -- | -- |
| | 14 | 12 | 10 | 9 | 4.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | 4 | -- | -- | 14 | 12 | 10 | 8 | 8 | 7 | 4 | -- | 14 | 12 | 10 | 8.5 | -- | -- | -- | -- |
| | 14 | 12 | 10 | 9 | 7.5 | 3.75 | -- | -- | 14 | 12 | 10 | 9 | 8 | 6 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | 6 | -- | 14 | 12 | 10 | 8 | -- | -- | -- | -- |
| 8'-0" | 14 | 12 | 10 | 9 | 6.5 | 3 | -- | -- | 14 | 12 | 10 | 9 | 8 | 6 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | -- | -- | 14 | 11 | 7 | -- | -- | -- | -- | -- |
| | 14 | 12 | 10 | 9 | 5.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | -- | -- | 14 | 12 | 10 | 7 | 4 | -- | -- | -- |
| | 14 | 12 | 10 | 5.5 | 3 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | 8.5 | -- | -- | 14 | 12 | 8.5 | 3 | -- | -- | -- | -- |
| | 14 | 12 | 10 | 9 | 6 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | 6 | -- | -- | 14 | 12 | 10 | 9 | 8 | 8 | -- | -- | 14 | 12 | 9.5 | -- | -- | -- | -- | -- |
| 9'-0" | 14 | 12 | 10 | 6.5 | 4.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 7.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 13 | 9.5 | 4 | -- | -- | -- | -- | -- |
| | 14 | 12 | 10 | 6.5 | 4 | -- | -- | -- | 14 | 12 | 10 | 9 | 7.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 14 | 12 | 10 | 5 | -- | -- | -- | -- |
| | 14 | 12 | 8.5 | 4 | -- | -- | -- | -- | 14 | 12 | 10 | 9 | 7.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 7.5 | -- | -- | -- | 14 | 11.5 | 4.5 | -- | -- | -- | -- | -- |
| | 14 | 12 | 10 | 6 | 4 | -- | -- | -- | 14 | 12 | 10 | 9 | 7 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 14 | 12 | 9 | 5 | -- | -- | -- | -- |
| 10'-0" | 14 | 12 | 9.5 | 5 | 3.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 5.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 11.5 | 8.5 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | 9.5 | 5 | 3.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 5.5 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 14 | 12 | 7 | -- | -- | -- | -- | -- |
| | 14 | 12 | 9.5 | 3 | -- | -- | -- | -- | 14 | 12 | 10 | 8 | 3 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 14 | 10.5 | 3 | -- | -- | -- | -- | -- |
| | 14 | 12 | 8 | 4.5 | 3 | -- | -- | -- | 14 | 12 | 10 | 9 | 5 | -- | -- | -- | 14 | 12 | 10 | 9 | 8 | -- | -- | -- | 14 | 11 | -- | -- | -- | -- | -- | -- |
| 11'-0" | 14 | 12 | 7 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 10.5 | 8 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | 7 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 10 | 5 | -- | -- | -- | -- | 14 | 12 | 5 | -- | -- | -- | -- | -- |
| | 14 | 12 | 4 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 12.5 | 9.5 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | 6.5 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 13.5 | 10 | -- | -- | -- | -- | -- | -- |
| 12'-0" | 14 | 12 | 5.5 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 9.5 | 7 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | 5.5 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 4 | -- | -- | -- | -- | -- |
| | 14 | 12 | 3 | -- | -- | -- | -- | -- | 14 | 12 | 8 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 11.5 | 8.5 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | 5 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 14 | 12 | 10 | -- | -- | -- | -- | -- | 12.5 | 9.5 | -- | -- | -- | -- | -- | -- |
| 13'-0" | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 9 | 4.5 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- |
| | 14 | 10 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 10.5 | 5.5 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 11.5 | 6 | -- | -- | -- | -- | -- | -- |
| 14'-0" | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 8 | 3 | -- | -- | -- | -- | -- | -- |
| | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 9 | -- | -- | -- | -- | -- | -- |
| | 14 | 7 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 10 | 4 | -- | -- | -- | -- | -- | -- |
| | 14 | 11.5 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 14 | 12 | -- | -- | -- | -- | -- | -- | 10.5 | 4 | -- | -- | -- | -- | -- | -- |
| 15'-0" | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 7.5 | -- | -- | -- | -- | -- | -- | -- |
| | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- |
| | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 9 | -- | -- | -- | -- | -- | -- | -- |
| | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 10 | -- | -- | -- | -- | -- | -- | -- |
| 16'-0" | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 7 | -- | -- | -- | -- | -- | -- | -- |
| | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- |
| | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 8 | -- | -- | -- | -- | -- | -- | -- |
| | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 14 | -- | -- | -- | -- | -- | -- | -- | 9.5 | -- | -- | -- | -- | -- | -- | -- |

| MAXIMUM SPAN (ft) | POURED CONCRETE/CONCRETE BLOCK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | (D) WALL SILL MOUNTING W/ (14) | | | | | | | | (D) WALL SILL MOUNTING W/ (14) | | | | | | | | (D) & (F) WALL HEADER/SILL MOUNTING | | | | | | | | | | | | | | | |
| | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | | | | | | | | |
| | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 |
| 3'-0" OR LESS | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 | 8 | 8 | 8 | 8 | 8 | 8 | 7 | 6.5 | 8 | 8 | 8 | 8 | 8 | 8 | 7 | 6.5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 6.5 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 6.5 |
| 4'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 5'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 7.5 | 5.5 | -- | -- | 8 | 8 | 8 | 8 | 7.5 | 5.5 | 4 | 3 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 6'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 7'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 8'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 9'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 10'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 11'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 12'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 13'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 14'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 15'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| 16'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |

### ANCHORS SPACING LEGEND

| |
|---|
| TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY |
| ALL POINTS SOLID--SET |
| BLUE TAP |
| TAPPER+ |

* SEE ANCHOR SPECIFICATIONS ON SHEET 14

◆ SEE LIMITATIONS OF USE FOR BLADE (1A) ON SHEET 28

**(1) HV BLADE OR (1) HV BLADE W/ (1A) HV WINDOW BLADE WORKING IN UNISON ◆**

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
3355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167



**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System

H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | |
| 3 | | | DRAWING No 12-017 |
| 4 | | | |
| 5 | | | |
| 6 | | | SHEET 13 OF 28 |

## MAXIMUM ANCHOR* SPACING (in.) SCHEDULE FOR A GIVEN MAX. SHUTTER SPAN, A.S.D. DESIGN NEGATIVE LOAD AND A CORRESPONDING MOUNTING TYPE FOR CONCRETE OR CONCRETE BLOCK INSTALLATIONS

(SEE MOUNTINGS E, G, & H ON SHEETS 8 & 7)

| MAXIMUM SPAN (ft) | POURED CONCRETE/CONCRETE BLOCK | | | | | | | POURED CONCRETE | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | (E) WALL SILL MOUNTING | | | | | | | (G) CEILING MOUNTING | | | | | | | |
| | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | |
| | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 |
| 3'-0" OR LESS | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 8 | 7 | 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 |
| 4'-0" | 14 | 12 | 10 | 9 | 8 | 7 | 5.5 | 3.5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4.5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4.5 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 |
| 5'-0" | 14 | 12 | 10 | 9 | 7.5 | 5.5 | 3.5 | – | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 |
| | 14 | 12 | 10 | 9 | 8 | 7 | 4 | – | 14 | 12 | 10 | 9 | 8 | 6.5 | 5 | 3.5 |
| | 14 | 12 | 10 | 9 | 8 | 7.5 | 4.5 | – | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4.5 |
| 6'-0" | 14 | 12 | 9.5 | 7.5 | 6.5 | 4.5 | – | – | 14 | 12 | 10 | 9 | 8 | 7.5 | 5.5 | 4 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | – | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 |
| | 14 | 12 | 10 | 9 | 7.5 | 5.5 | 3 | – | 14 | 12 | 10 | 8.5 | 7 | 5.5 | 4 | 3 |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 14 | 12 | 10 | 9 | 8 | 8.5 | 5 | 3.75 |
| 7'-0" | 14 | 12 | 8 | 6.5 | 5.5 | 3 | – | – | 14 | 12 | 10 | 9 | 8 | 6.5 | 4.5 | 3.5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 14 | 12 | 10 | 9 | 8 | 7 | 5 | 4 |
| | 14 | 12 | 10 | 8 | 6.5 | 4 | – | – | 14 | 12 | 9 | 7.5 | 6 | 4.5 | 3.5 | – |
| | 14 | 12 | 10 | 8.5 | 7 | 4 | – | – | 14 | 12 | 10 | 9 | 7.5 | 5.5 | 4 | – |
| 8'-0" | 14 | 11 | 7 | 5.5 | 4.5 | – | – | – | 14 | 12 | 10 | 9 | 7.5 | 5.5 | 4 | – |
| | 14 | 12 | 10 | 9 | 6 | 6.5 | – | – | 14 | 12 | 10 | 9 | 8 | 6 | 4 | – |
| | 14 | 12 | 8.5 | 7 | 5.5 | 3 | – | – | 14 | 12 | 8 | 6.5 | 5.5 | 4 | 3 | – |
| | 14 | 12 | 9.5 | 7.5 | 6 | – | – | – | 14 | 12 | 9.5 | 8 | 6.5 | 5 | – | – |
| 9'-0" | 13 | 9.5 | 6.5 | 5 | 3.5 | – | – | – | 14 | 12 | 10 | 8 | 6.5 | 5 | – | – |
| | 14 | 12 | 10 | 9 | 8 | – | – | – | 14 | 12 | 10 | 9 | 7.5 | 4.5 | – | – |
| | 14 | 11.5 | 7.5 | 6 | 4 | – | – | – | 14 | 11 | 7 | 5.5 | 5 | 3.5 | – | – |
| | 14 | 12 | 8 | 6.5 | 4.5 | – | – | – | 14 | 12 | 8.5 | 7 | 5.5 | 4 | – | – |
| 10'-0" | 11.5 | 8.5 | 5.5 | 4 | – | – | – | – | 14 | 12 | 9 | 7 | 6 | 4.5 | – | – |
| | 14 | 12 | 10 | 9 | 7.5 | – | – | – | 14 | 12 | 10 | 8 | 6.5 | 5 | – | – |
| | 14 | 10.5 | 7 | 5 | 3.5 | – | – | – | 13 | 9.5 | 6.5 | 5 | 4 | 3 | – | – |
| | 14 | 11 | 7.5 | 5.5 | – | – | – | – | 14 | 11.5 | 9 | 6 | 6 | 4 | – | – |
| 11'-0" | 10.5 | 8 | 5 | – | – | – | – | – | 14 | 12 | 8 | 6.5 | 5.5 | 4 | – | – |
| | 14 | 12 | 10 | – | – | – | – | – | 14 | 12 | 9 | 7 | 6 | 4.5 | – | – |
| | 12.5 | 9.5 | 6 | – | – | – | – | – | 12 | 9 | 8 | 4.5 | 4 | 3 | – | – |
| | 14 | 10 | 7 | – | – | – | – | – | 14 | 10.5 | 7 | 5.5 | 4.5 | – | – | – |
| 12'-0" | 9.5 | 7 | 4.5 | – | – | – | – | – | 14 | 11.5 | 7.5 | 6 | 5 | – | – | – |
| | 14 | 12 | 10 | – | – | – | – | – | 14 | 12 | 8 | 6.5 | 5.5 | – | – | – |
| | 11.5 | 8.5 | 4.5 | – | – | – | – | – | 11 | 8 | 5.5 | 4 | 3.5 | – | – | – |
| | 13.5 | 9.5 | 6 | – | – | – | – | – | 13 | 9.5 | 6.5 | 5 | 4 | – | – | – |
| 13'-0" | 9 | 6.5 | – | – | – | – | – | – | 14 | 10.5 | 7 | 5.5 | 4.5 | – | – | – |
| | 14 | 12 | – | – | – | – | – | – | 14 | 11.5 | 7.5 | 6 | 5 | – | – | – |
| | 10.5 | 8 | – | – | – | – | – | – | 10 | 7.5 | 5 | 4 | 3 | – | – | – |
| | 12.5 | 8.5 | – | – | – | – | – | – | 12 | 9 | 6 | 4.5 | 4 | – | – | – |
| 14'-0" | 8 | 6 | – | – | – | – | – | – | 13 | 9.5 | 6.5 | 5 | – | – | – | – |
| | 14 | 12 | – | – | – | – | – | – | 14 | 10.5 | 7 | 5.5 | – | – | – | – |
| | 10 | 7.5 | – | – | – | – | – | – | 9 | 7 | 4.5 | 3.5 | – | – | – | – |
| | 11.5 | 8 | – | – | – | – | – | – | 11 | 8 | 5.5 | 4.5 | – | – | – | – |
| 15'-0" | 7.5 | – | – | – | – | – | – | – | 12 | 9 | 6 | – | – | – | – | – |
| | 14 | – | – | – | – | – | – | – | 13.5 | 10 | 6.5 | – | – | – | – | – |
| | 9 | – | – | – | – | – | – | – | 8.5 | 6.5 | 4 | – | – | – | – | – |
| | 10 | – | – | – | – | – | – | – | 10.5 | 8 | 5 | – | – | – | – | – |
| 16'-0" | 7 | – | – | – | – | – | – | – | 11.5 | 8.5 | 5.5 | – | – | – | – | – |
| | 14 | – | – | – | – | – | – | – | 12.5 | 9.5 | 6 | – | – | – | – | – |
| | 8 | – | – | – | – | – | – | – | 8 | 6 | 4 | – | – | – | – | – |
| | 9.5 | – | – | – | – | – | – | – | 9.5 | 7 | 5 | – | – | – | – | – |

| POURED CONCRETE | | | | | | | |
|---|---|---|---|---|---|---|---|
| (H) FLOOR MOUNTING | | | | | | | |
| A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | |
| 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 |
| 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 |
| 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 |
| 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 |
| 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 |
| 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5 |
| 14 | 12 | 10 | 9 | 8 | 6 | 4 | 3.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 7 | 5.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4.5 |
| 14 | 12 | 10 | 9 | 8 | 6.5 | 5 | 3.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | 3.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 8 | 6 |
| 14 | 12 | 10 | 8 | 6.5 | 5 | 3.5 | 3 |
| 14 | 12 | 10 | 9 | 8 | 8 | 6 | 4.5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 6 | 5 |
| 14 | 12 | 10 | 9 | 8 | 8 | 4.5 | 3.5 |
| 14 | 12 | 10 | 8 | 7 | 5 | 3.5 | 3 |
| 14 | 12 | 10 | 9 | 7.5 | 5.5 | 4 | 3 |
| 14 | 12 | 8 | 6.5 | 5 | 4 | – | – |
| 14 | 12 | 10 | 9 | 7.5 | 5.5 | 4 | – |
| 14 | 12 | 10 | 9 | 8 | 6 | 4.5 | 3 |
| 12.5 | 9.5 | 6 | 5 | 4 | 3 | – | – |
| 14 | 12 | 8 | 6.5 | 5 | 4 | – | – |
| 14 | 12 | 8.5 | 7 | 5.5 | 4 | – | – |
| 14 | 11 | 7 | 5.5 | 4.5 | 3.5 | – | – |
| 14 | 12 | 8.5 | 7 | 5.5 | 4 | – | – |
| 14 | 12 | 9 | 7 | 6 | 4.5 | – | – |
| 14 | 12 | 10 | 8 | 6.5 | 5 | – | – |
| 13 | 9.5 | 6.5 | 5 | 4 | 3 | – | – |
| 14 | 11.5 | 9 | 6 | 6 | 4 | – | – |
| 14 | 12 | 8 | 6.5 | 5.5 | 4 | – | – |
| 14 | 12 | 9 | 7 | 6 | 4.5 | – | – |
| 12 | 9 | 8 | 4.5 | 4 | 3 | – | – |
| 13 | 9.5 | 6.5 | 5 | 4 | – | – | – |
| 14 | 10.5 | 7 | 5.5 | 4.5 | – | – | – |
| 14 | 11.5 | 7.5 | 6 | 5 | – | – | – |
| 10 | 7.5 | 5 | 4 | 3 | – | – | – |
| 12 | 9 | 6 | 4.5 | 4 | – | – | – |
| 13 | 9.5 | 6.5 | 5 | – | – | – | – |
| 14 | 10.5 | 7 | 5.5 | 4.5 | – | – | – |
| 9 | 6.5 | – | – | – | – | – | – |
| 14 | 10.5 | 7 | 5.5 | – | – | – | – |
| 12 | 9 | 6 | 4.5 | – | – | – | – |
| 12.5 | 9.5 | 6 | 4.5 | – | – | – | – |
| 13 | 9.5 | 6.5 | 5 | – | – | – | – |
| 14 | 10.5 | 7 | 5.5 | – | – | – | – |
| 9 | 6.5 | – | – | – | – | – | – |
| 10 | 7.5 | – | – | – | – | – | – |
| 11.5 | 8 | – | – | – | – | – | – |
| 7.5 | – | – | – | – | – | – | – |
| 14 | – | – | – | – | – | – | – |
| 9 | – | – | – | – | – | – | – |
| 10 | – | – | – | – | – | – | – |
| 7 | – | – | – | – | – | – | – |
| 14 | – | – | – | – | – | – | – |
| 8 | – | – | – | – | – | – | – |
| 9.5 | – | – | – | – | – | – | – |

### ANCHORS SPACING LEGEND

| |
|---|
| TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY |
| ALL POINTS SOLID-SET |
| BLUE TAP W/ CAP |
| TAPPER+ |

◆ SEE LIMITATIONS OF USE FOR BLADE (1A) ON SHEET 28

**(1) HV BLADE OR (1) HV BLADE W/ (1A) HV WINDOW BLADE WORKING IN UNISON ◆**

## * SPECIFICATIONS ON ANCHOR REQUIREMENTS: POURED CONCRETE OR CONCRETE BLOCK SUBSTRATES

1. ANCHORS TO SUBSTRATE SHALL BE AS FOLLOWS:

(A) TO EXISTING POURED CONCRETE: (Min. f'c = 3 ksi)
- 1/4"ø TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY ANCHORS, AS MANUFACTURED BY I.T.W. BUILDEX. (Min. f'c = 3 ksi)
- 1/4"ø x 3/4" ALL POINTS SOLID-SET ANCHORS, AS DISTRIBUTED BY ALL POINTS SCREW, BOLT & SPECIALTY COMPANY. (Min. f'c = 3 ksi)
- 1/4"ø BLUE TAP CONCRETE ANCHORS W/ CAP AS MANUFACTURED BY FLORIDA FASTENERS DIRECT, INC. (Min. f'c = 2 ksi)
- 1/4"ø TAPPER+ ANCHORS AS MANUFACTURED BY POWERS FASTENERS, INC., AND DISTRIBUTED BY ALL POINTS SCREW, BOLT & SPECIALTY COMPANY OR ANY OTHER APPROVED LICENSED OR AUTHORIZED VENDOR REGISTERED WITH THE AMERICAN SHUTTER SYSTEMS ASSOCIATION, INC. (Min. f'c = 3 ksi)

NOTES:

A.1) MINIMUM EMBEDMENT INTO POURED CONCRETE OF TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY ANCHORS AND TAPPER+ ANCHORS IS 1 3/4", AND FOR BLUE TAP W/ CAP ANCHORS IS 1 1/2".

A.2) MINIMUM EMBEDMENT OF 1/4"ø x 3/4" ALL POINTS SOLID-SET ANCHORS SHALL BE 7/8" INTO THE POURED CONCRETE. NO EMBEDMENT INTO STUCCO SHALL BE PERMITTED. 1/4"ø-20 S.S. MACHINE SCREW USED SHALL BE 1 1/2" LONG MINIMUM SHOULD STUCCO EXIST, AND 1" MINIMUM FOR WALLS WITH NO STUCCO.

A.3) IN CASE THAT PRECAST STONE, PRECAST CONCRETE PANELS, PAVERS OR ANY VENEER BE FOUND ON THE EXISTING WALL OR FLOOR, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SAID WALL FINISHES. ANCHORAGE SHALL BE AS INDICATED ON NOTES A.1) & A.2) ABOVE. FOR INSTALLATIONS ON VINYL SIDING OR EIFS WITH OR WITHOUT METAL STUDS CONSULT THIS ENGINEER. FOR INSTALLATION INTO EIFS WITH METAL STUDS SEE SHEET 28A.

(B) TO EXISTING CONCRETE BLOCK: (ASTM C-90)
- 1/4"ø TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY ANCHORS, AS MANUFACTURED BY I.T.W. BUILDEX.
- 1/4"ø x 3/4" ALL POINTS SOLID-SET ANCHORS, AS DISTRIBUTED BY ALL POINTS SCREW, BOLT & SPECIALTY COMPANY.
- 1/4"ø BLUE TAP CONCRETE ANCHORS W/ CAP AS MANUFACTURED BY FLORIDA FASTENERS DIRECT, INC.
- 1/4"ø TAPPER+ ANCHORS AS MANUFACTURED BY POWERS FASTENERS, INC., AND DISTRIBUTED BY ALL POINTS SCREW, BOLT & SPECIALTY COMPANY OR ANY OTHER APPROVED LICENSED OR AUTHORIZED VENDOR REGISTERED WITH THE AMERICAN SHUTTER SYSTEMS ASSOCIATION, INC.

NOTES:

B.1) MINIMUM EMBEDMENT INTO CONCRETE BLOCK OF TAPCON, BLUE TAP W/ CAP ANCHORS AND TAPPER+ ANCHORS IS 1 1/4" AND TAPCON WITH ADVANCED THREADFORM TECHNOLOGY ANCHORS IS 1".

B.2) MINIMUM EMBEDMENT OF 1/4"ø x 3/4" ALL POINTS SOLID-SET ANCHORS SHALL BE ENTIRELY EMBEDDED INTO THE CONCRETE BLOCK. NO EMBEDMENT INTO STUCCO SHALL BE PERMITTED. 1/4" ø-20 S.S. MACHINE SCREW USED SHALL BE 1 1/2" LONG MINIMUM SHOULD STUCCO EXIST, AND 1" MINIMUM FOR WALLS WITH NO STUCCO.

B.3) IN CASE THAT PRECAST STONE, PRECAST CONCRETE PANELS, PAVERS OR ANY VENEER BE FOUND ON THE EXISTING WALL OR FLOOR, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SAID WALL FINISHES. ANCHORAGE SHALL BE AS INDICATED ON NOTES B.1) & B.2) ABOVE. FOR INSTALLATIONS ON VINYL SIDING OR EIFS WITH OR WITHOUT METAL STUDS CONSULT THIS ENGINEER. FOR INSTALLATION INTO EIFS WITH METAL STUDS SEE SHEET 28A.

(C) ANCHORS SHALL BE INSTALLED FOLLOWING ALL OF THE RECOMMENDATIONS AND SPECIFICATIONS OF THE ANCHOR'S MANUFACTURER.

(D) SEE SCHEDULE BELOW FOR EDGE DISTANCE (E.D.) VERSUS SPACING RELATIONSHIP FOR ANCHORS.

### EDGE DISTANCE VERSUS SPACING SCHEDULE FOR ANCHORS:

MAXIMUM ANCHOR SPACINGS ARE VALID FOR EDGE DISTANCES INDICATED BELOW. FOR E. D. LESS THAN THE INDICATED, REDUCE ANCHOR SPACING BY MULTIPLYING SPACING SHOWN ON SCHEDULE BY THE FOLLOWING FACTORS. REDUCED SPACING OBTAINED USING FACTOR SHALL NOT BE LESS THAN MINIMUM SPACING INDICATED FOR EACH ANCHOR TYPE.

| ACTUAL EDGE DISTANCE E.D. | FACTOR | | | | | | |
|---|---|---|---|---|---|---|---|
| | TAPCON | TAPCON WITH ADVANCED THREADFORM TECHNOLOGY | | ALL POINT SOLID SET | BLUE TAP W/ CAP | TAPPER + MIN. SPACING | |
| | MIN. SPACING = 3" | MIN. SPACING = 3" | | MIN. SPACING = 3 1/2" | MIN. SPACING = 3" | 3 3/4" | 4" |
| | POURED CONCRETE & CONCRETE BLOCK MIN. E.D. = 3" | POURED CONCRETE MIN. E.D. = 3 1/2" | CONCRETE BLOCK MIN. E.D. = 2 1/2" | POURED CONCRETE & CONCRETE BLOCK MIN. E.D. = 3 1/2" | POURED CONCRETE & CONCRETE BLOCK MIN. E.D. = 3" | POURED CONCRETE MIN. E.D. = 3 1/2" | CONCRETE BLOCK MIN. E.D. = 2 1/2" |
| 3" | 1.0 | 0.90 | 1.0 | 0.78 | 1.0 | 0.64 | 1.0 |
| 2 1/2" | – | 0.81 | 1.0 | – | – | 0.67 | 1.0 |
| 2" | – | 0.71 | – | – | – | 0.61 | – |
| 1 3/4" | – | 0.91 (A&B WINDOWS ONLY) | – | – | – | 0.43 | – |
| 1 1/2" | 0.35 | – | – | – | – | 0.35 | – |

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 308, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 , Fax : (305)871-1531
e-mail: tiltecc@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167



**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System

H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 14 OF 28 |
| 6 | | | |

## MAXIMUM ANCHOR* SPACING (in.) SCHEDULE FOR A GIVEN MAX. SHUTTER SPAN, A.S.D. DESIGN NEGATIVE LOAD AND A CORRESPONDING MOUNTING TYPE FOR CONCRETE OR CONCRETE BLOCK INSTALLATIONS

(SEE MOUNTINGS I, J, K & L ON SHEET 7)

| MAXIMUM SPAN (ft) | POURED CONCRETE | | | | | | | | | | | | | | | | POURED CONCRETE/CONCRETE BLOCK | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | (I) WALK OVER MOUNTING | | | | | | | | (J) RAINGUARD MOUNTING | | | | | | | | (K) WALL/FLOOR MOUNTING | | | | | | | | (L) WALL/WALK OVER MOUNTING | | | | | |
| | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | | | | A.S.D. DESIGN NEGATIVE LOAD (psf) | | | | | |
| | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 | 30 | 40 | 60 | 75 | 90 | 120 | 160 | 205 |
| 3'-0" OR LESS | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 12 | 12 | 11.5 | 8.5 | 6.5 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 5.5 | 6 | 6 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 12 | 12 | 9.5 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 10.5 | 8 | 6 | 4.5 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 6.5 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 12 | 10 | 7.5 | 6 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| 4'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 11.5 | 8.5 | 6.5 | 5 | 7 | 7 | 7 | 7 | 7 | 7 | 6.5 | 4 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 4 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 12 | 9.5 | 7 | 5.5 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 9.5 | 8 | 6 | 4.5 | 7 | 7 | 7 | 7 | 7 | 7 | 6.5 | 5 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 10 | 7.5 | 6.5 | 4 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 6.5 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| 5'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 11 | 9 | 7 | 6 | 4 | 7 | 7 | 7 | 7 | 7 | 6.5 | 4 | 3 | 5 | 5 | 5 | 5 | 5 | 5 | 4 | 3 | 3 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 12 | 12 | 10 | 7.5 | 5.5 | 4 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 6 | 6 | 6 | 12 | 12 | 9.5 | 7.5 | 6 | 4.5 | 3.5 | – | 7 | 7 | 7 | 7 | 7 | 7 | 5 | 3.5 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 4 | 4 |
| | 14 | 12 | 10 | 9 | 8 | 5 | 6 | 6 | 12 | 12 | 12 | 9.5 | 8 | 6 | 4.5 | – | 7 | 7 | 7 | 7 | 7 | 7 | 6.5 | 4 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 4 | 4 |
| 6'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 11.5 | 9 | 7.5 | 5.5 | 4 | 3 | 7 | 7 | 7 | 7 | 7 | 4.5 | 3.5 | – | 5 | 5 | 5 | 5 | 5 | 4.5 | 3.5 | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 10 | 8 | 6 | 4.5 | 3.5 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 6 | 6 | 6 | 12 | 12 | 8 | 8 | 5 | 4 | 3 | – | 7 | 7 | 7 | 7 | 7 | 5.5 | 4 | – | 5 | 6 | 5 | 5 | 5 | 5 | 4 | 3 | – |
| | 14 | 12 | 10 | 9 | 8 | 6 | 6 | 6 | 12 | 12 | 10 | 8 | 6.5 | 6 | 5.75 | – | 7 | 7 | 7 | 7 | 7 | 6 | 4.5 | – | 5 | 6 | 5 | 5 | 5 | 5 | 4.5 | – | – |
| 7'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 8 | 6.5 | 5 | 3.5 | – | 7 | 7 | 7 | 6.5 | 5.5 | 4 | – | – | 5 | 6 | 5 | 5 | 5 | 4 | 3 | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 12 | 9.5 | 7 | 5 | 4 | 3 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 10 | 8.5 | 5 | 4.5 | 3 | – | – | 7 | 7 | 7 | 7 | 6.5 | 5 | 3 | – | 5 | 6 | 5 | 5 | 5 | 5 | 3.5 | 3 | 3 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | 6 | 12 | 12 | 8.5 | 7 | 6.5 | 4 | – | – | 7 | 7 | 7 | 7 | 7 | 5 | – | – | 5 | 6 | 5 | 5 | 5 | 4 | 3 | – | – |
| 8'-0" | 14 | 12 | 10 | 9 | 8 | 8 | 6 | – | 12 | 12 | 8.5 | 7 | 6.5 | 4 | 3 | – | 7 | 7 | 7 | 5.5 | 4.5 | 3 | – | – | 5 | 6 | 5 | 5 | 4.5 | 3.5 | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | – | 12 | 12 | 10.5 | 7.5 | 6 | 4.5 | 3.5 | – | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 4 | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | – | 12 | 9 | 6 | 4.5 | 4 | 3 | – | – | 7 | 7 | 7 | 7 | 6.5 | 4 | – | – | 5 | 6 | 5 | 5 | 5 | 4 | 3 | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | 6 | – | 12 | 11 | 7.5 | 6 | 5 | 3.75 | – | – | 7 | 7 | 7 | 7.5 | 6 | 4.5 | – | – | 5 | 6 | 5 | 5 | 5 | 4.5 | – | – | – |
| 9'-0" | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 11.5 | 7.5 | 6 | 5 | 3.5 | – | – | 7 | 7 | 6.5 | 6 | 4 | – | – | – | 5 | 6 | 5 | 5 | 4 | 3 | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 12 | 9.5 | 8.5 | 8.5 | 4 | 3 | – | 7 | 7 | 7 | 7 | 7 | 7 | 6 | 3 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 10.5 | 8 | 6 | 4 | 3.5 | – | – | – | 7 | 7 | 7 | 6 | 5 | 3.5 | – | – | 5 | 6 | 5 | 5 | 5 | 4 | 3 | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 10 | 8.5 | 5 | 4.5 | – | – | – | 7 | 7 | 7 | 6.5 | 5.5 | – | – | – | 5 | 6 | 5 | 5 | 5 | 4 | – | – | – |
| 10'-0" | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 10.5 | 7 | 6.5 | 4.5 | 3.5 | – | – | 7 | 7 | 6.5 | 4.5 | 3.5 | – | – | – | 5 | 6 | 5 | 4.5 | 3.5 | – | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 11 | 8.5 | 6 | 5 | 3.5 | – | – | 7 | 7 | 7 | 7 | 7 | 4.5 | – | – | 5 | 6 | 5 | 5 | 5 | 5 | 4.5 | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 9.5 | 7 | 4.5 | 3.5 | 3 | – | – | – | 7 | 7 | 7 | 6.5 | 4.5 | – | – | – | 5 | 6 | 5 | 5 | 4.5 | 3.5 | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 9 | 6 | 5 | 4 | – | – | – | 7 | 7 | 7 | 6 | 5 | – | – | – | 5 | 5 | 5 | 4.5 | 5 | – | – | – | – |
| 11'-0" | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 9.5 | 6 | 5 | 4 | 3 | – | – | 7 | 7 | 5 | 4 | 3 | – | – | – | 5 | 5 | 5 | 4 | 3.5 | – | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 12 | 10 | 7 | 5.5 | 4.5 | 3.5 | – | – | 7 | 7 | 7 | 7 | 7 | 7 | 3.5 | – | 5 | 6 | 5 | 5 | 5 | 5 | 5 | 4 | 4 |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 8.5 | 8.5 | 4 | 3.5 | 3 | – | – | – | 7 | 7 | 6 | 5 | 4 | – | – | – | 5 | 5 | 5 | 4 | 3 | – | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | 8 | – | – | 11 | 8 | 5.5 | 4 | – | – | – | – | 7 | 7 | 7 | 5.5 | 4.5 | – | – | – | 5 | 5 | 5 | 5 | 4.5 | – | – | – | – |
| 12'-0" | 14 | 12 | 10 | 9 | 8 | – | – | – | 11.5 | 8.5 | 5.5 | 4.5 | 3.5 | – | – | – | 7 | 7 | 4.5 | 3.5 | – | – | – | – | 5 | 6 | 4.5 | 3.5 | 3 | – | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | – | – | – | 12 | 9.5 | 6.5 | 5 | 4 | 3 | – | – | 7 | 7 | 7 | 7 | 7 | 6 | 3 | – | 5 | 5 | 5 | 5 | 5 | 5 | 4.5 | 3.5 | – |
| | 14 | 12 | 10 | 9 | 8 | – | – | – | 8 | 6 | 4 | 3 | – | – | – | – | 7 | 7 | 5.5 | 4.5 | 3.5 | – | – | – | 5 | 6 | 5 | 4.5 | 4 | 3 | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | – | – | – | 10 | 7.5 | 5 | 4 | – | – | – | – | 7 | 7 | 6 | 5 | – | – | – | – | 5 | 5 | 5 | 5 | 4 | – | – | – | – |
| 13'-0" | 14 | 12 | 10 | 9 | 8 | – | – | – | 10.5 | 8 | 5 | 4 | 3.5 | – | – | – | 7 | 6.5 | 4.5 | 3.5 | – | – | – | – | 5 | 5 | 4.5 | 3.5 | 3 | – | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | – | – | – | 11.5 | 8.5 | 6 | 4.5 | 3.5 | 3 | – | – | 7 | 7 | 7 | 7 | 7 | 4.5 | – | – | 5 | 5 | 5 | 5 | 5 | 5 | 4.5 | 3.5 | – |
| | 14 | 12 | 10 | 9 | 8 | – | – | – | 7 | 5.5 | 3.5 | 3 | – | – | – | – | 7 | 7 | 5 | 4 | 3 | – | – | – | 5 | 5 | 5 | 4 | 3 | – | – | – | – |
| | 14 | 12 | 10 | 9 | 8 | – | – | – | 9 | 7 | 4.5 | 3.75 | – | – | – | – | 7 | 7 | 5.5 | 4.5 | – | – | – | – | 5 | 5 | 5 | 4.5 | 4 | – | – | – | – |
| 14'-0" | 14 | 12 | 10 | 9 | – | – | – | – | 10 | 7.5 | 5 | 4 | 3 | – | – | – | 7 | 6 | 4 | 3 | – | – | – | – | 5 | 5 | 4 | 3 | – | – | – | – | – |
| | 14 | 12 | 10 | 9 | – | – | – | – | 10.5 | 8 | 5.5 | 4 | 3.5 | – | – | – | 7 | 7 | 7 | 7 | 7 | 4 | – | – | 5 | 5 | 5 | 5 | 5 | 4 | 3 | – | – |
| | 14 | 12 | 10 | 9 | – | – | – | – | 8.5 | 5 | 3 | – | – | – | – | – | 7 | 7 | 5 | 3.5 | – | – | – | – | 5 | 5 | 5 | 4 | – | – | – | – | – |
| | 14 | 12 | 10 | 9 | – | – | – | – | 8.5 | 6.5 | 4 | – | – | – | – | – | 7 | 7 | 5 | 4 | – | – | – | – | 5 | 5 | 5 | 4 | – | – | – | – | – |
| 15'-0" | 14 | 12 | 10 | – | – | – | – | – | 9 | 7 | 4.5 | 3.5 | 3 | – | – | – | 7 | 6.5 | 3.5 | – | – | – | – | – | 5 | 5 | 3.5 | 3 | – | – | – | – | – |
| | 14 | 12 | 10 | – | – | – | – | – | 10 | 7.5 | 5 | 4 | 3 | – | – | – | 7 | 7 | 7 | 7 | 7 | 3.5 | – | – | 5 | 5 | 5 | 5 | 5 | 5 | 4 | 3 | – |
| | 14 | 12 | 10 | – | – | – | – | – | 6 | 4.5 | 3 | – | – | – | – | – | 7 | 7 | 4.5 | 3 | – | – | – | – | 5 | 5 | 4.5 | 3.5 | – | – | – | – | – |
| | 14 | 12 | 10 | – | – | – | – | – | 8 | 6 | 4 | – | – | – | – | – | 7 | 7 | 5 | – | – | – | – | – | 5 | 5 | 5 | 4 | – | – | – | – | – |
| 16'-0" | 14 | 12 | 10 | – | – | – | – | – | 8.5 | 6.5 | 4 | 3.5 | – | – | – | – | 7 | 5.5 | 3.5 | – | – | – | – | – | 5 | 5 | 3.5 | – | – | – | – | – | – |
| | 14 | 12 | 10 | – | – | – | – | – | 9.5 | 7 | 4.5 | 3.5 | 3 | – | – | – | 7 | 7 | 7 | 7 | 6 | 3 | – | – | 5 | 5 | 5 | 5 | 5 | 4.5 | 3.5 | – | – |
| | 14 | 12 | 10 | – | – | – | – | – | 6 | 4.5 | 3 | – | – | – | – | – | 7 | 6.5 | 4 | – | – | – | – | – | 5 | 5 | 4 | 3.5 | – | – | – | – | – |
| | 14 | 12 | 10 | – | – | – | – | – | 7.5 | 5.5 | 3.75 | – | – | – | – | – | 7 | 7 | 4.5 | – | – | – | – | – | 5 | 5 | 4.5 | – | – | – | – | – | – |

### ANCHORS SPACING LEGEND

| |
|---|
| TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY |
| ALL POINTS SOLID-SET |
| BLUE TAP |
| TAPPER+ |

* SEE ANCHOR SPECIFICATIONS ON SHEET 14

## ① HV BLADE ONLY

FLORIDA BUILDING CODE(High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINA GARDENS, FLORIDA 33166
Phone : (305)871-1530 , Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167



**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 15 OF 28 |
| 6 | | | |

## MAXIMUM ANCHOR+ SPACING (in.) SCHEDULE FOR A GIVEN MAX. SHUTTER SPAN, NEGATIVE A.S.D. DESIGN LOAD AND A CORRESPONDING MOUNTING TYPE

(SEE MOUNTINGS ON SHEETS 18 & 19)

| MAXIMUM SPAN (ft) | SUBSTRATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | SOUTHERN PINE No. 2 W/ MIN. G=0.55, DOUGLAS FIR W/ MIN. G=0.50 | | | | | | | | | | | | SPRUCE PINE FIR NORTH W/ MIN. G=0.43 | | | | | | | | | | | | SPRUCE PINE FIR SOUTH W/ MIN. G=0.36 | | | | | | | | | | | | 1/2" MIN. CDX PLYWOOD | | | | | |
| | WALL MOUNTINGS M, N, O & R | | | | | | CEILING MOUNT T FLOOR MOUNTINGS W & X | | | | | | WALL MOUNTINGS M, N, O & R | | | | | | CEILING MOUNT T FLOOR MOUNTINGS W & X | | | | | | WALL MOUNTINGS M, N, O & R | | | | | | CEILING MOUNT T FLOOR MOUNTINGS W & X | | | | | | WALL MOUNTINGS P & Q | | | | | |
| | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | |
| | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 |
| 3'-0" OR LESS | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 6 | 6 | 6 | 5 | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 6 | 6 | 5 | 4 | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 6 | 4.5 | 4 | 3 | 6 | 5 | 4 | 4 | 4 | 3 |
| 4'-0" | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 6 | 5 | 4.5 | 4 | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 5.5 | 4.5 | 3.5 | 3 | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 4.5 | 3.5 | 3 | 2.5 | 6 | 5 | 4 | 4 | 4 | 3 |
| 5'-0" | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 5 | 4 | 3.5 | 3 | 12 | 10 | 10 | 9 | 8 | 8 | 6 | 6 | 4.5 | 3.5 | 3 | 2.5 | 12 | 10 | 10 | 9 | 8 | 7 | 6 | 5.5 | 3.5 | 3 | 2 | 2 | 6 | 5 | 4 | 4 | 4 | 3 |
| 6'-0" | 12 | 10 | 10 | 9 | 8 | 6.5 | 6 | 6 | 4.5 | 3.5 | 3 | 2.5 | 12 | 10 | 10 | 9 | 8 | 4.5 | 6 | 5.5 | 3.5 | 3 | 2.5 | 2 | 12 | 10 | 10 | 9 | 6 | 3 | 6 | 4.5 | 3 | 2 | 2 | -- | 6 | 5 | 4 | 4 | 3.5 | -- |
| 7'-0" | 12 | 10 | 10 | 9 | 6.5 | 4 | 6 | 5.5 | 4 | 3 | 2.5 | 2 | 12 | 10 | 10 | 9 | 4.5 | 3 | 6 | 5 | 3 | 2.5 | 2 | -- | 12 | 10 | 10 | 7 | 3 | -- | 5 | 4 | 2.5 | 2 | -- | -- | 6 | 5 | 4 | 4 | -- | -- |
| 8'-0" | 12 | 10 | 10 | 7.5 | 4.5 | 3 | 6 | 5 | 3 | 2.5 | 2 | 2 | 12 | 10 | 10 | 5.5 | 3 | -- | 5.5 | 4 | 2.5 | 2 | 2 | -- | 12 | 10 | 10 | 4 | -- | -- | 4.5 | 3 | 2 | -- | -- | -- | 6 | 5 | 4 | -- | -- | -- |
| 9'-0" | 12 | 10 | 10 | 5 | 3.5 | -- | 6 | 4.5 | 3 | 2 | 2 | -- | 12 | 10 | 8.5 | 4 | -- | -- | 5 | 3.5 | 2.5 | 2 | -- | -- | 12 | 10 | 4 | 2.5 | -- | -- | 4 | 3 | 2 | -- | -- | -- | 6 | 5 | 3.5 | -- | -- | -- |
| 10'-0" | 12 | 10 | 7.5 | 4 | -- | -- | 5 | 4 | 2.5 | 2 | -- | -- | 12 | 10 | 5.5 | 3 | -- | -- | 4.5 | 3 | 2 | -- | -- | -- | 12 | 10 | 3 | -- | -- | -- | 3.5 | 2.5 | -- | -- | -- | -- | 6 | 5 | -- | -- | -- | -- |
| 11'-0" | 12 | 10 | 5.5 | -- | -- | -- | 5 | 3.5 | 2 | -- | -- | -- | 12 | 10 | 4 | -- | -- | -- | 4 | 3 | 2 | -- | -- | -- | 12 | 10 | -- | -- | -- | -- | 3 | 2.5 | -- | -- | -- | -- | 6 | 5 | -- | -- | -- | -- |
| 12'-0" | 12 | 10 | 4.5 | -- | -- | -- | 4.5 | 3 | 2 | -- | -- | -- | 12 | 10 | 3 | -- | -- | -- | 3.5 | 2.5 | -- | -- | -- | -- | 12 | 10 | -- | -- | -- | -- | 3 | 2 | -- | -- | -- | -- | 6 | 5 | -- | -- | -- | -- |
| 13'-0" | 12 | 10 | -- | -- | -- | -- | 4 | 3 | -- | -- | -- | -- | 12 | 10 | -- | -- | -- | -- | 3.5 | 2.5 | -- | -- | -- | -- | 12 | 7 | -- | -- | -- | -- | 2.5 | 2 | -- | -- | -- | -- | 6 | 4 | -- | -- | -- | -- |
| 14'-0" | 12 | 10 | -- | -- | -- | -- | 4 | 3 | -- | -- | -- | -- | 12 | 7 | -- | -- | -- | -- | 3 | 2 | -- | -- | -- | -- | 12 | 5 | -- | -- | -- | -- | 2.5 | 2 | -- | -- | -- | -- | 6 | 3 | -- | -- | -- | -- |
| 15'-0" | 12 | -- | -- | -- | -- | -- | 3.5 | -- | -- | -- | -- | -- | 12 | -- | -- | -- | -- | -- | 3 | -- | -- | -- | -- | -- | 11.5 | -- | -- | -- | -- | -- | 2 | -- | -- | -- | -- | -- | 6 | -- | -- | -- | -- | -- |
| 16'-0" | 12 | -- | -- | -- | -- | -- | 3 | -- | -- | -- | -- | -- | 12 | -- | -- | -- | -- | -- | 2.5 | -- | -- | -- | -- | -- | 11 | -- | -- | -- | -- | -- | 2 | -- | -- | -- | -- | -- | 6 | -- | -- | -- | -- | -- |

+ NOTES ON ANCHORS REQUIREMENTS: WOOD SUBSTRATES.

1. ANCHORS TO WALL, FLOOR OR SOLID WOOD SOFFIT SHALL BE AS FOLLOWS:

- 1/4"ø TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY ANCHORS, AS MANUFACTURED BY I.T.W. BUILDEX W/ MINIMUM THREADED PENETRATION AS INDICATED AT EACH SECTION ON SHEETS 18 & 19. EXCEPTION: SEE NOTE 2 BELOW.

2. ANCHORS TO HOLLOW CEILING SHALL BE AS PER MOUNTING TYPE U, SHEET 19 AND SHALL CONSIST OF LAG SCREWS AS PER N.D.S. 2005 SPECIFICATIONS.

3. SUBSTRATE SHALL CONSIST OF THE FOLLOWING:

-SOUTHERN PINE No. 2 W/ G=0.55 (N.D.S)
-DOUGLAS FIR W/ G=0.50 (N.D.S.)
-SPRUCE PINE FIR NORTH W/ G=0.43 (N.D.S.)
-SPRUCE PINE FIR SOUTH W/ G=0.36 (N.D.S.)
-MIN. 1/2" CDX PLYWOOD (1986 APA)

4. ANCHORS SHALL BE INSTALLED FOLLOWING ALL OF THE RECOMMENDATIONS AND SPECIFICATIONS OF THE ANCHOR'S MANUFACTURER.

## (1) HV BLADE OR (1) HV BLADE W/ (1A) HV WINDOW BLADE WORKING IN UNISON ◆

◆ SEE LIMITATIONS OF USE OF BLADE (1A) ON SHEET 28

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL / SIGNATURE / DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167



**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 16 OF 28 |
| 6 | | | |

## MAXIMUM ANCHOR+ SPACING (in.) SCHEDULE FOR A GIVEN MAX. SHUTTER SPAN, NEGATIVE A.S.D. DESIGN LOAD AND A CORRESPONDING MOUNTING TYPE

(SEE MOUNTINGS ON SHEET 19)

| MAXIMUM SPAN (ft) | SUBSTRATE | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | SOUTHERN PINE No. 2 W/ MIN. G=0.55, DOUGLAS FIR W/ MIN. G=0.50 | | | | | | SPRUCE PINE FIR NORTH W/ MIN. G=0.43 | | | | | | SPRUCE PINE FIR SOUTH W/ MIN. G=0.36 | | | | | |
| | B.O. WALL MOUNTINGS S & V | | | | | | B.O. WALL MOUNTINGS S & V | | | | | | B.O. WALL MOUNTINGS S & V | | | | | |
| | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | | NEGATIVE A.S.D. DESIGN LOAD (psf) | | | | | |
| | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 | 30 | 40 | 60 | 75 | 90 | 105 |
| 3'-0" OR LESS | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| 4'-0" | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| 5'-0" | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 11.5 | 10 |
| 6'-0" | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 11.5 | 9.5 | 8 |
| 7'-0" | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 10 | 12 | 12 | 12 | 10 | 8 | 8 |
| 8'-0" | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 10.5 | 9 | 12 | 12 | 11 | 8.5 | 7 | 7 |
| 9'-0" | 12 | 12 | 12 | 12 | 12 | 10.5 | 12 | 12 | 12 | 11 | 9 | 8 | 12 | 12 | 9.5 | 7.5 | 6.5 | 6 |
| 10'-0" | 12 | 12 | 12 | 12 | 11.5 | 9.5 | 12 | 12 | 12 | 10 | 8 | 7 | 12 | 12 | 8.5 | 7 | 6 | 5.5 |
| 11'-0" | 12 | 12 | 12 | 12 | 10 | 8.5 | 12 | 12 | 11.5 | 9 | 7.5 | 6.5 | 12 | 12 | 8 | 6 | 5 | 5 |
| 12'-0" | 12 | 12 | 12 | 11.5 | 9.5 | 8 | 12 | 12 | 10.5 | 8 | 7 | 6 | 12 | 11 | 7 | 6 | 5 | 4.5 |
| 13'-0" | 12 | 12 | 12 | 10.5 | 8.5 | 7.5 | 12 | 12 | 9.5 | 7.5 | 6 | 5.5 | 12 | 10 | 6.5 | 5 | 4.5 | 4 |
| 14'-0" | 12 | 12 | 12 | 9.5 | 8 | 6 | 12 | 12 | 9 | 7 | 6 | 4.5 | 12 | 9.5 | 6 | 5 | 4 | 3.5 |
| 15'-0" | 12 | 12 | 11 | 9 | 7.5 | 5 | 12 | 12 | 8 | 6.5 | 5.5 | 3.5 | 11.5 | 8.5 | 6 | 4.5 | 4 | 3 |
| 16'-0" | 12 | 12 | 10.5 | 8.5 | 6.5 | 4 | 11.5 | 12 | 8 | 6 | 4.5 | 3 | 11 | 8 | 5.5 | 4 | 3 | – |

① HV BLADE ONLY

+ NOTES ON ANCHORS REQUIREMENTS: WOOD SUBSTRATES.

1. ANCHORS TO WALL, FLOOR OR SOLID WOOD SOFFIT SHALL BE AS FOLLOWS:
   - 1/4"ø TAPCON OR TAPCON WITH ADVANCED THREADFORM TECHNOLOGY ANCHORS, AS MANUFACTURED BY I.T.W. BUILDEX W/ MINIMUM THREADED PENETRATION AS INDICATED AT EACH SECTION ON SHEETS 18 & 19. EXCEPTION: SEE NOTE 2 BELOW.
2. ANCHORS TO HOLLOW CEILING SHALL BE AS PER MOUNTING TYPE U, SHEET 19 AND SHALL CONSIST OF LAG SCREWS AS PER NDS 2005 SPECIFICATIONS.
3. SUBSTRATE SHALL CONSIST OF THE FOLLOWING:
   - -SOUTHERN PINE No. 2 W/ G=0.55 (N.D.S)
   - -DOUGLAS FIR W/ G=0.50 (N.D.S.)
   - -SPRUCE PINE FIR NORTH W/ G=0.43 (N.D.S.)
   - -SPRUCE PINE FIR SOUTH W/ G=0.36 (N.D.S.)
   - -MIN. 1/2" CDX PLYWOOD (1986 APA)
4. ANCHORS SHALL BE INSTALLED FOLLOWING ALL OF THE RECOMMENDATIONS AND SPECIFICATIONS OF THE ANCHOR'S MANUFACTURER.

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SIGNATURE / DATE

TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 , Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE |
|---|---|---|
| 1 | OLD 07-090 | 01/20/12 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |

Drawn by: F.P./A.Q.
DATE: 01/20/12
DRAWING No 12-017
SHEET 17 OF 28

# INSTALLATION DETAILS ON EXISTING WOOD BUILDINGS FOR (1) HV & (1A) HV◆ BLADES (AS APPLICABLE)

## MAX. SHUTTER SPAN L+ OR L- FOR INSTALLATIONS INTO WOOD WITH HV BLADE (1) ONLY SHALL BE LIMITED TO 105.0 psf. A.S.D. DESIGN LOAD. SEE SHEET 28 FOR MAX SPAN & DESIGN LOAD FOR INSTALLATION WITH BLADE (1) & (1A) WORKING IN UNISON




(M) HV WALL HEADER INSTALLATION




(N) HV WALL HEADER INSTALLATION

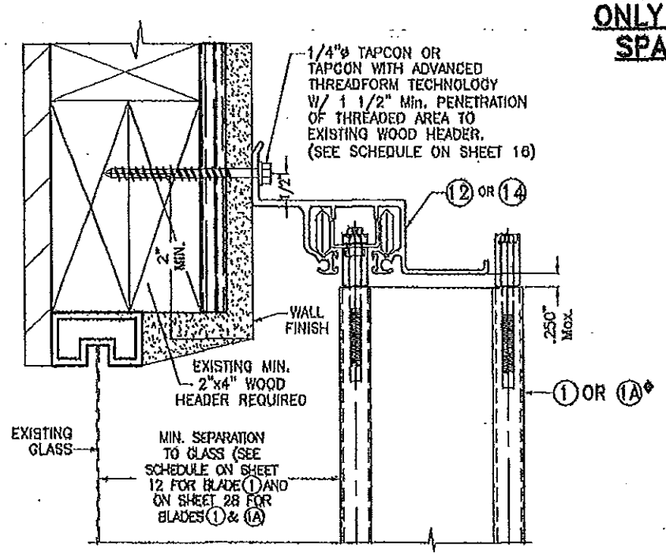


(O) HV WALL SILL INSTALLATION

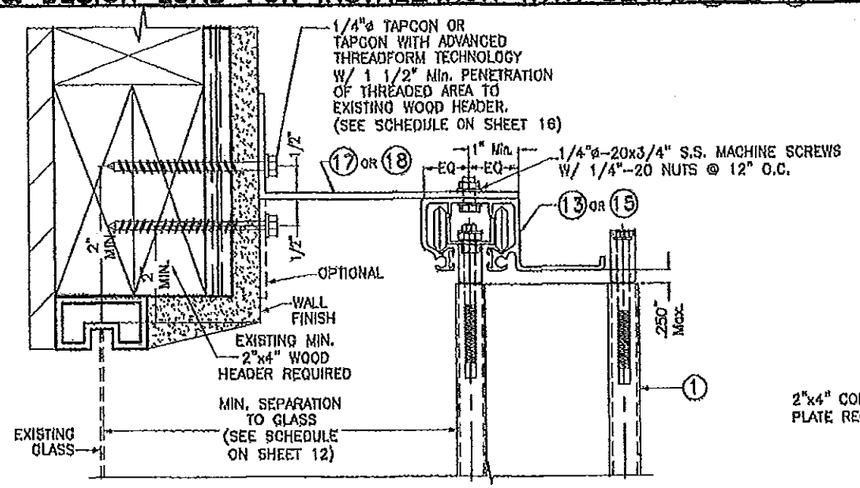


(P) HV WALL SILL INSTALLATION

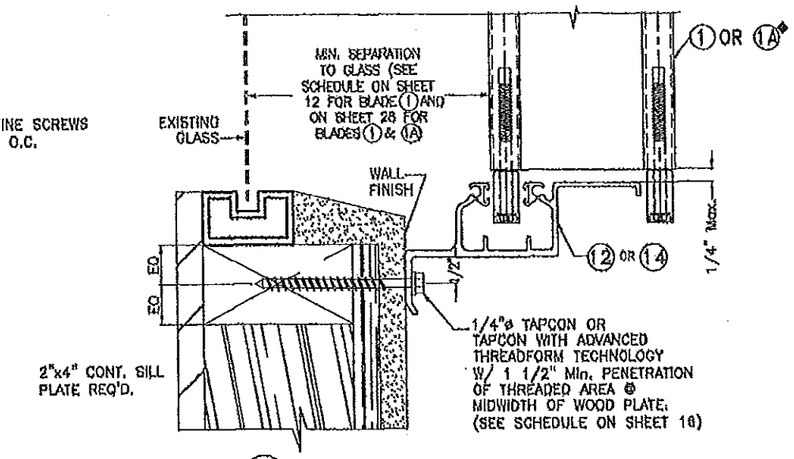


(Q) HV WALL SILL INSTALLATION

NOTE:
1--SEE SHEET 4 FOR TYPICAL SHUTTER ASSEMBLY.
2--MOUNTING SECTIONS CAN BE COMBINED IN ANY WAY TO SUIT ANY INSTALLATION.

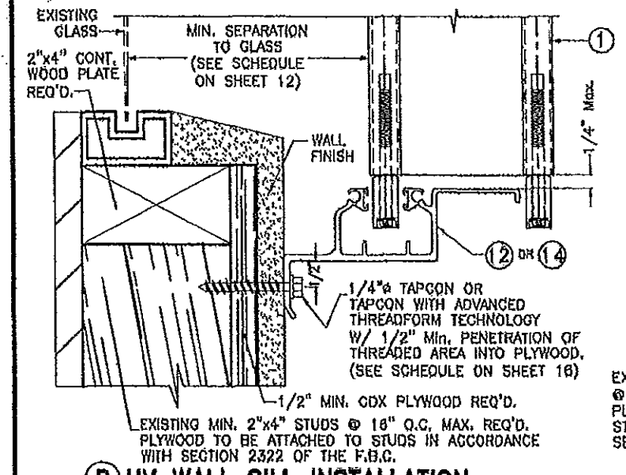◆ SEE LIMITATIONS OF USE OF BLADE (1A) ON SHEET 28

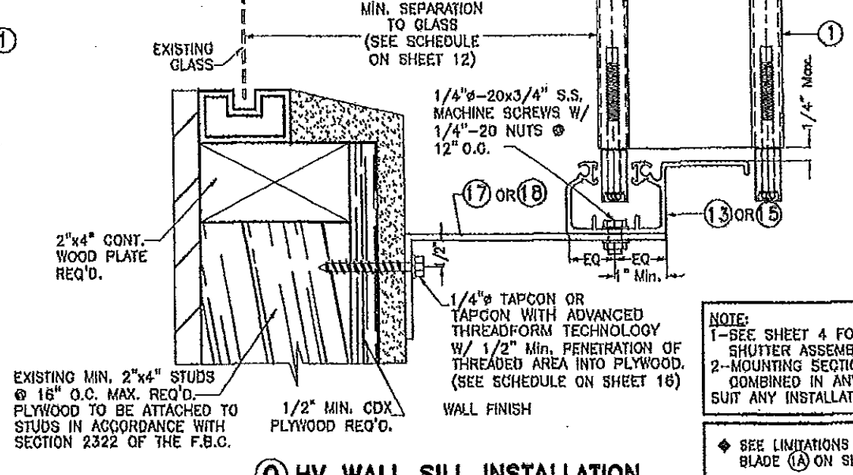


(R) HV WALL SILL INSTALLATION

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-9215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

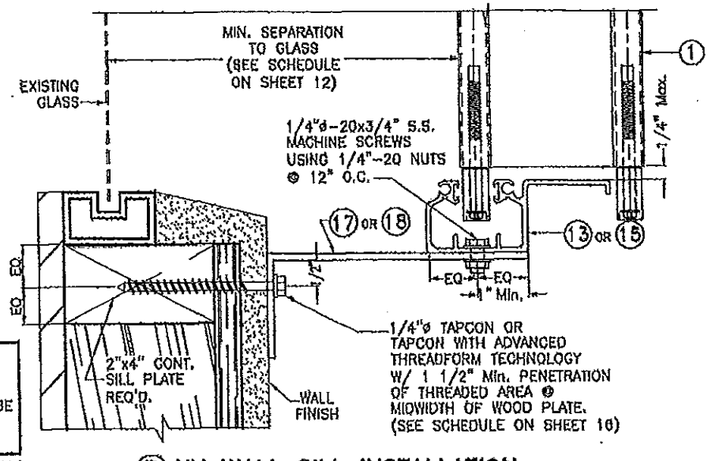MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE NO. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL / SIGNATURE / DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167



WILLARD SHUTTER COMPANY, INC.
(ASSA # 180)
4420 N.W. 36 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 18 OF 28 |
| 6 | | | |

# INSTALLATION DETAILS ON EXISTING WOOD BUILDINGS FOR (1) HV & (1A) HV◆ BLADES (AS APPLICABLE)

## MAX. SHUTTER SPAN L+ OR L- FOR INSTALLATIONS INTO WOOD WITH HV BLADE (1) ONLY SHALL BE LIMITED TO 105.0 psf. A.S.D. DESIGN LOAD. SEE SHEET 28 FOR MAX SPAN & DESIGN LOAD FOR INSTALLATION WITH BLADE (1) & (1A) WORKING IN UNISON




Ⓢ HV WALL HEADER INSTALLATION




Ⓣ HV CEILING INSTALLATION

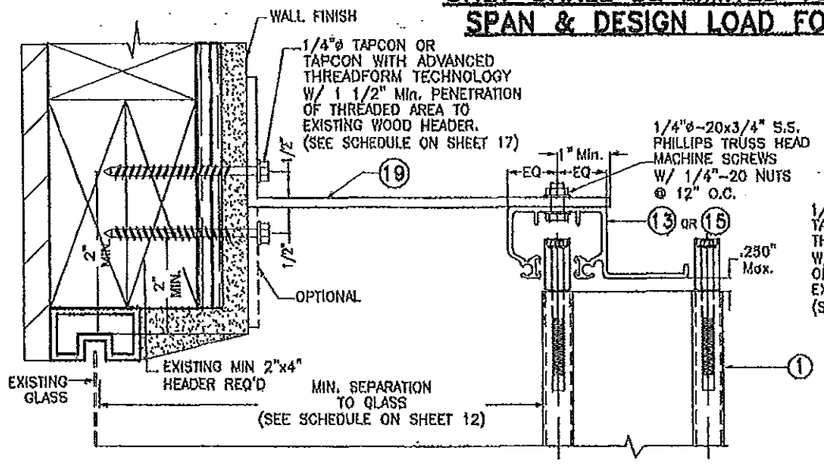


Ⓤ HV CEILING INSTALLATION

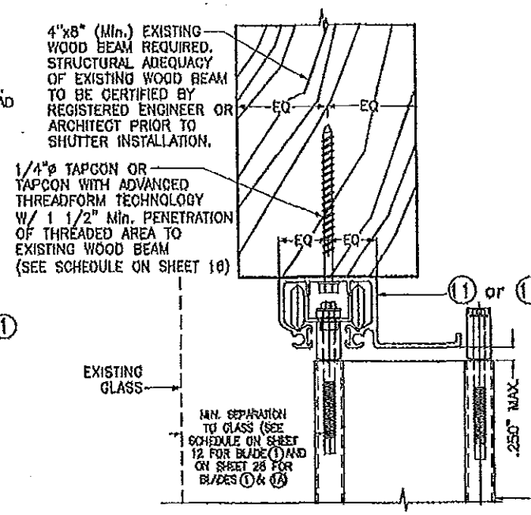


Ⓥ HV WALL SILL INSTALLATION

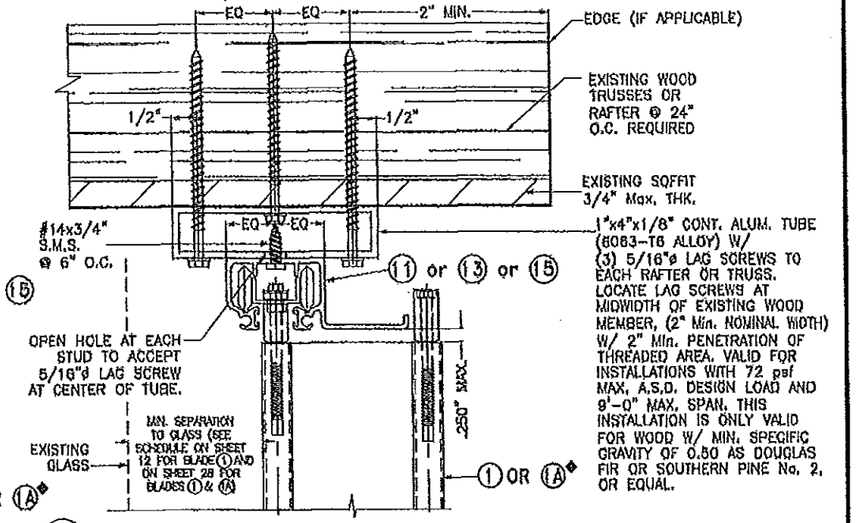


Ⓦ HV FLOOR INSTALLATION

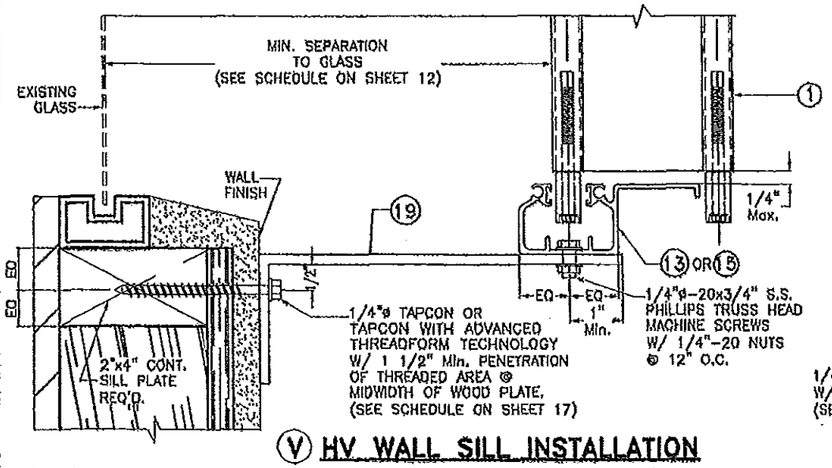


Ⓧ HV WALK-OVER INSTALLATION

NOTES:
1--SEE SHEET 4 FOR TYPICAL SHUTTER ASSEMBLY.
2--MOUNTING SECTIONS CAN BE COMBINED IN ANY WAY TO SUIT ANY INSTALLATION.

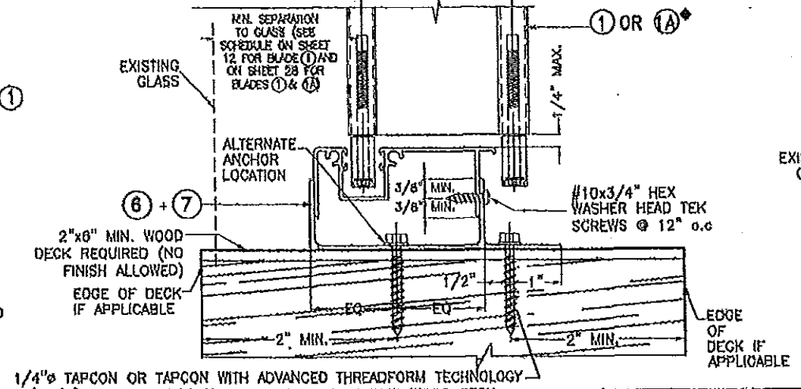◆ SEE LIMITATIONS OF USE OF BLADE (1A) ON SHEET 28

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

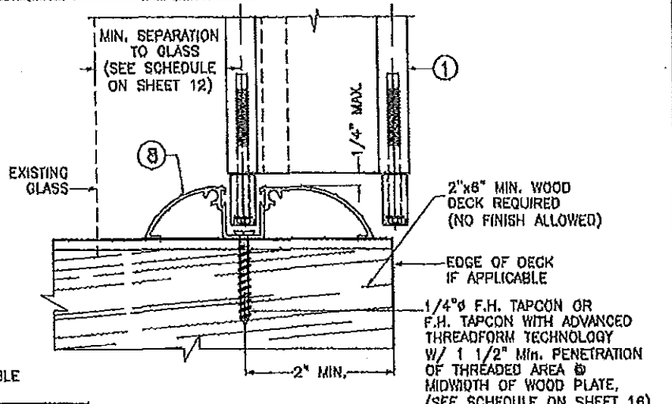PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER
P.E. SEAL/SIGNATURE/DATE

TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 , Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL. 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 19 OF 28 |
| 6 | | | |

# END INSTALLATIONS ① HV & ⑭ HV◆ BLADES INTO 2"x4" MIN. WOOD STUDS.













## END CONNECTION DETAIL ⑦

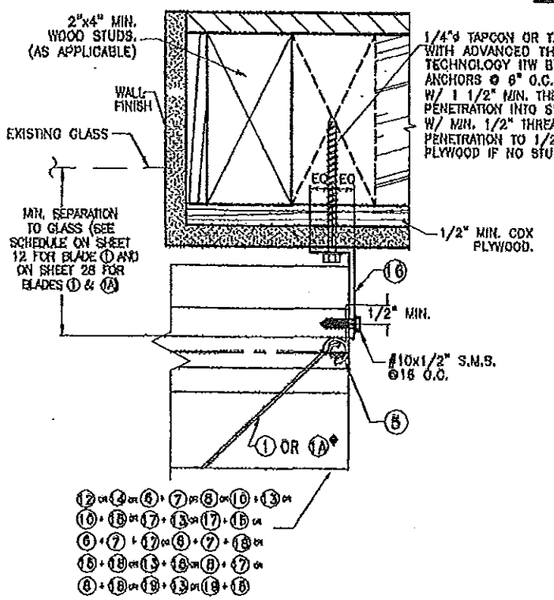

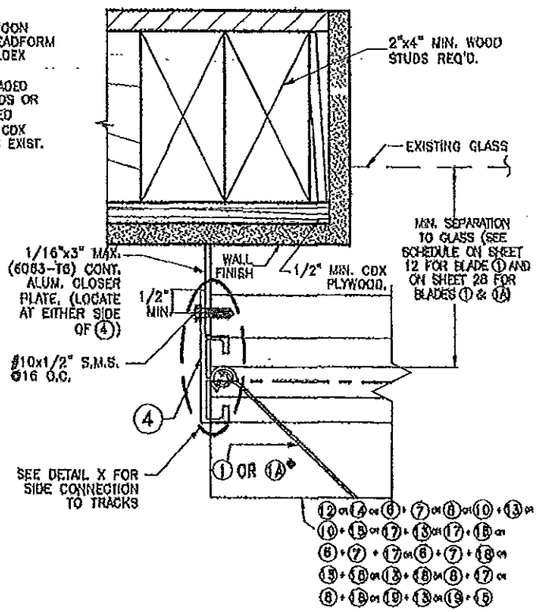
## END CONNECTION DETAIL ⑧

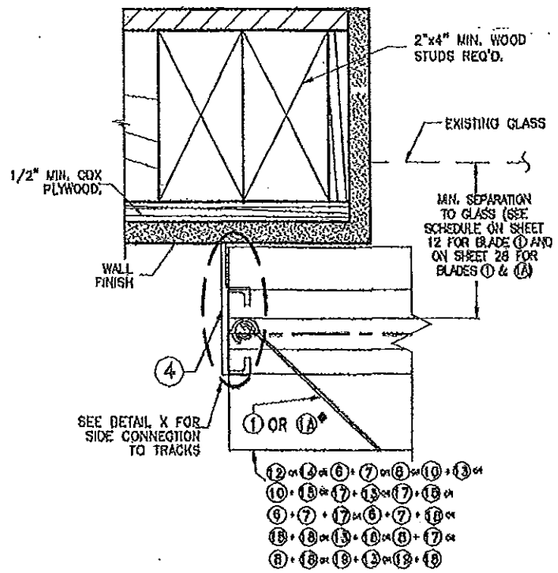

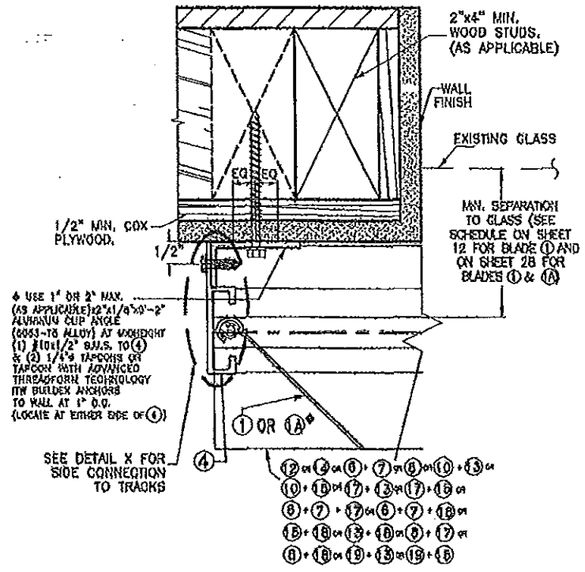
## END CONNECTION DETAIL ⑨

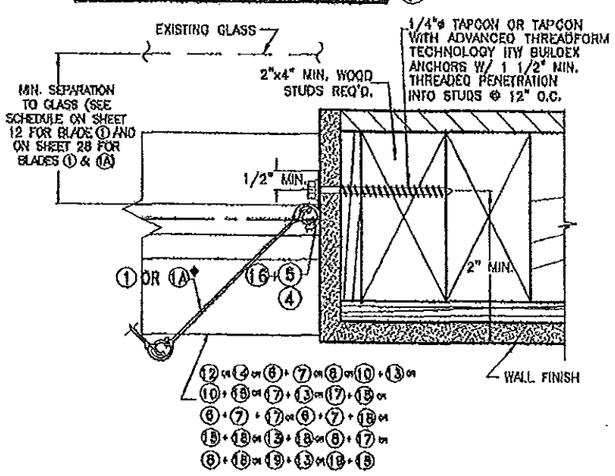


## END CONNECTION DETAIL ⑩

◆ REQUIRED ONLY FOR SPANS GREATER THAN 12'-0"

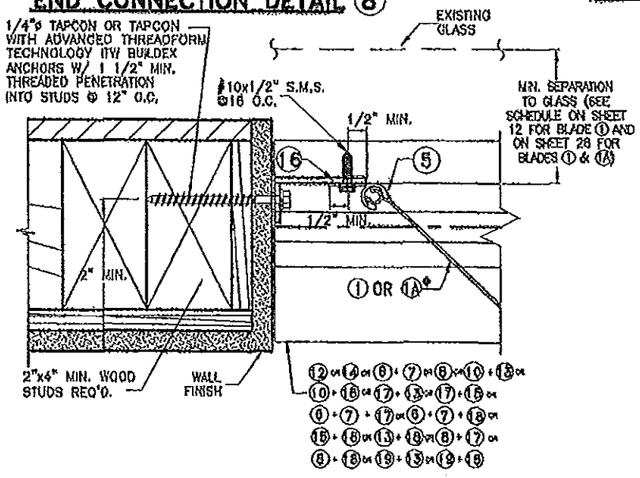◆ SEE LIMITATIONS OF USE OF BLADE ⑭ ON SHEET 28

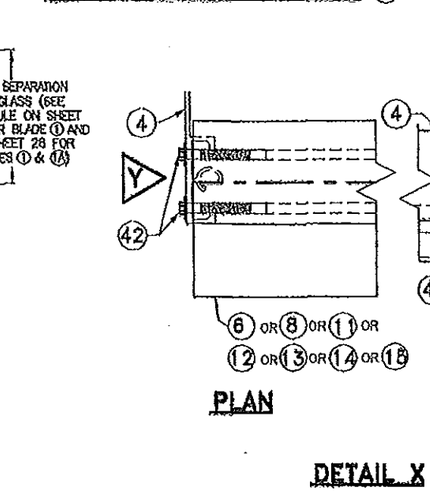


## END CONNECTION DETAIL ⑪




## END CONNECTION DETAIL ⑫

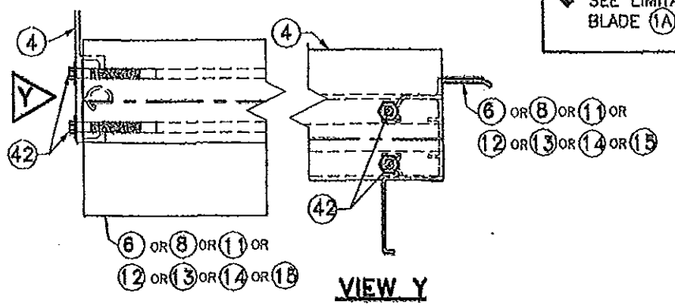


## DETAIL X

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

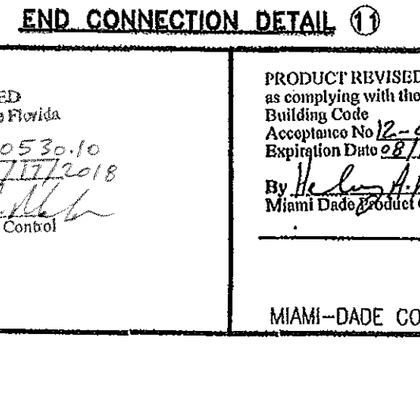PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

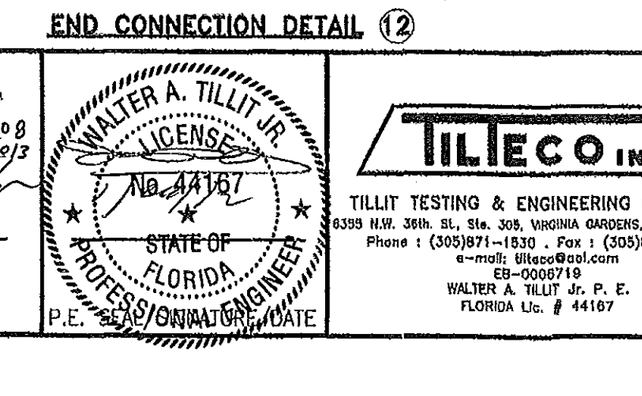MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6399 N.W. 36th. St, Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tiltecc@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167



**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE |
|---|---|---|
| 1 | OLD 07-090 | 01/20/12 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |

Drawn by: F.P./A.G.
DATE: 01/20/12
DRAWING No 12-017
SHEET 20 OF 28




## TYPICAL (2) HV BLADE SHUTTER ELEVATION

N.T.S.

### * NOTES ON HD LOCKS AND CENTERMATES:

1. **MANDATORY CONDITION # 1:** ONE (34) H.D. LOCK SHALL BE USED FOR ANY SPAN AND INSTALLATION AT HEAVY DUTY SYMMETRICAL CENTERMATES, (31) OR (32)+(33) AND AT ANY ELEVATION. (34) H.D. LOCK MAY BE USED AS AN INSIDE OR OUTSIDE LOCK, ATTACHED TO (33) HEAVY DUTY SYMMETRICAL CENTERMATES WITH (3) #8 x 3/8" LONG FLAT HEAD S.S. M.S. LOCKING RODS (35) ARE NOT MANDATORY, i.e. THEY ARE COMPLETELY OPTIONAL.

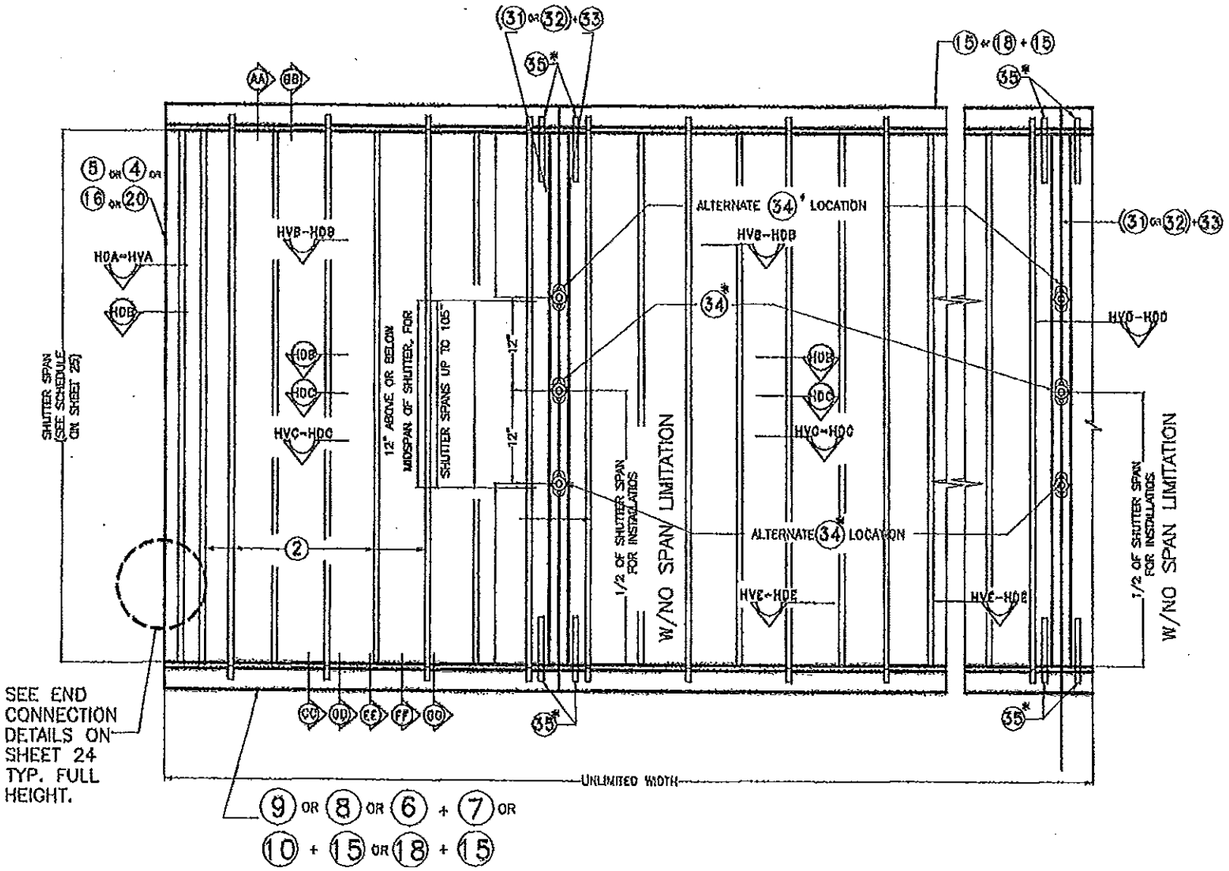2. **MANDATORY CONDITION # 2:** LOCATION OF (34) H.D. LOCK SHALL BE AS INDICATED ON SHUTTER ELEVATION, i.e., FOR SHUTTER SPANS UP TO 105". (34) H.D. LOCK MAY BE INSTALLED AT MID HEIGHT OF SHUTTER OR AT 12" ABOVE OR BELOW MID HEIGHT OF SHUTTER. FOR SHUTTER SPANS GREATER THAN 105", (34) H.D. LOCK SHALL BE INSTALLED AT MID HEIGHT OF SHUTTER.

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE

TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 385, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 , Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

WILLARD SHUTTER COMPANY, INC.
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 21 OF 28 |
| 6 | | | |




AA HD WALL HEADER INSTALLATION




BB HD CEILING INSTALLATION

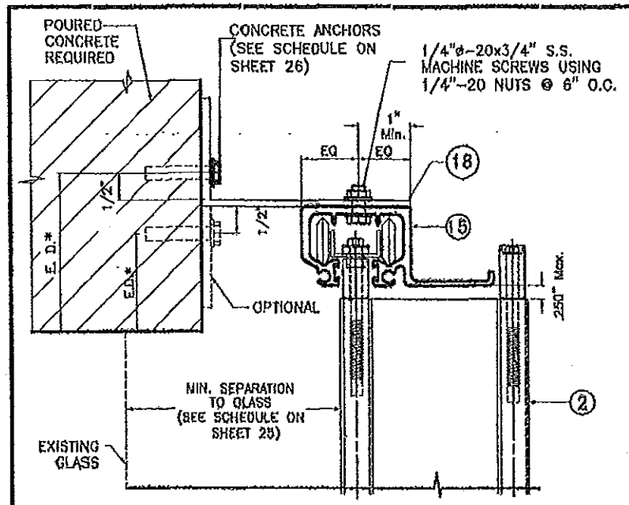


CC HD TRENCH INSTALLATION

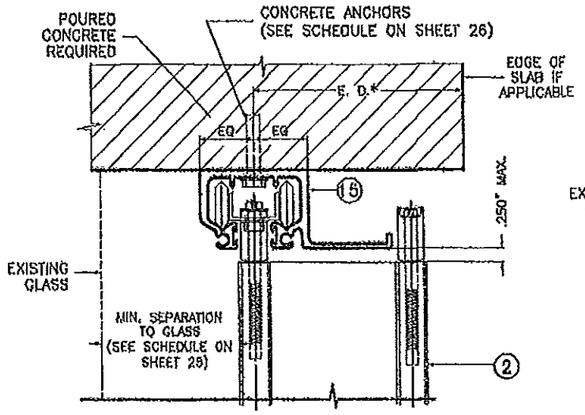


DD HD WALK-OVER INSTALLATION

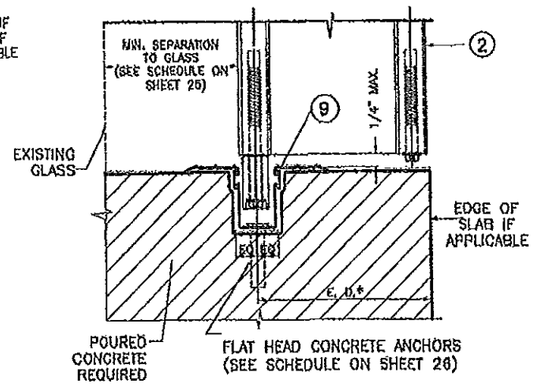


EE HD WALL SILL INSTALLATION

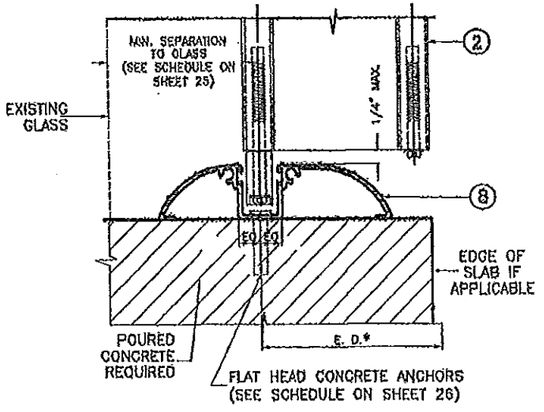


FF HD RAINGUARD INSTALLATION

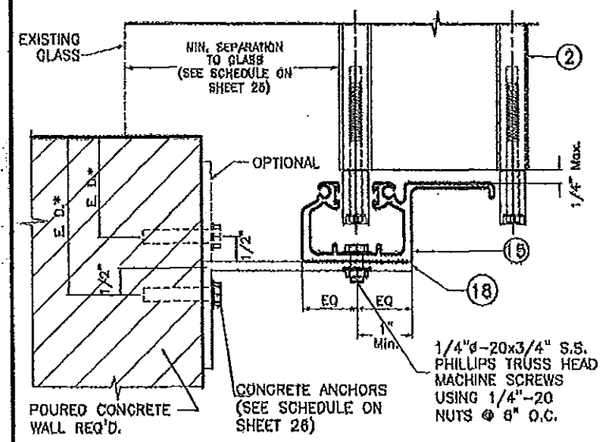


GG HD FLOOR INSTALLATION

NOTE FOR COMBINATION OF SECTIONS:

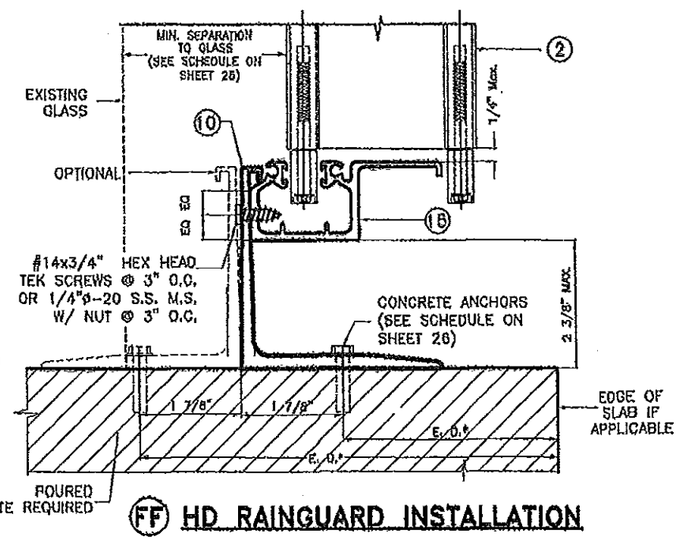1- SEE SHEET 21 FOR TYPICAL SHUTTER ASSEMBLY.
2- MOUNTING SECTIONS CAN BE COMBINED IN ANY WAY TO SUIT ANY INSTALLATION.

* E. D. = EDGE DISTANCE (SEE SPECIFICATIONS ON SHEET 26)
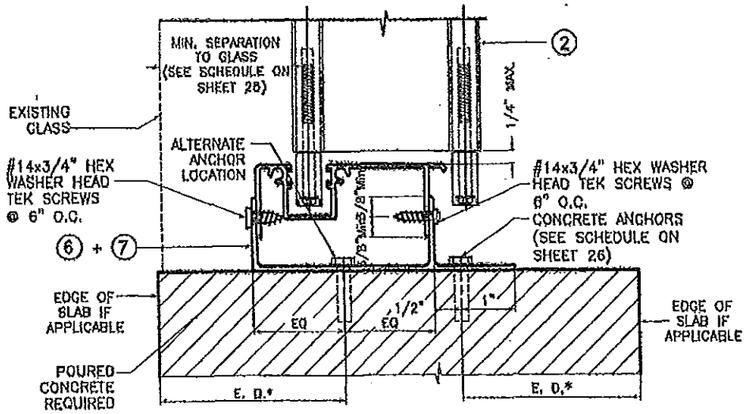
# INSTALLATION DETAILS W/ ② HV BLADE

SCALE: 3/8"=1"

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE NO. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE

TILTECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0008718
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL. 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 22 OF 28 |
| 6 | | | |

SEE END WALL CONNECTION DETAILS ON SHEET 24

# INSTALLATION
## ② HV BLADE

* SEE NOTES ON LOCKING RODS ㉟ & HD ㉞ LOCKS ON SHEET 21

SEE END WALL CONNECTION DETAILS ON SHEET 24




HVA–HDA

MIN. SEPARATION TO GLASS (SEE SCHEDULE ON SHEET 25)




HVB–HDB
SYMMETRICAL HD CENTERMATES
W/ ㉞* LOCK (EXTERIOR)

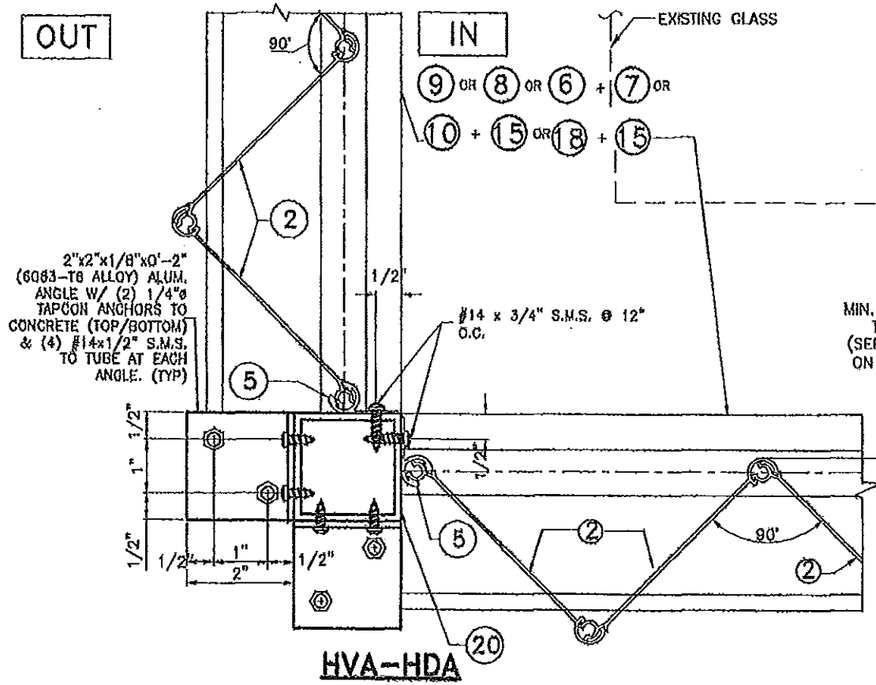IN
6 1/2"
OUT




HVC–HDC
SYMMETRICAL HD CENTERMATES
W/ ㉞* LOCK (INTERIOR)

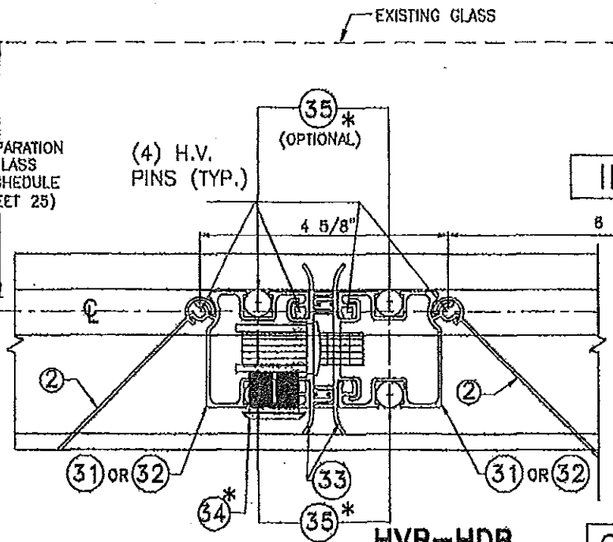


HVD–HDD

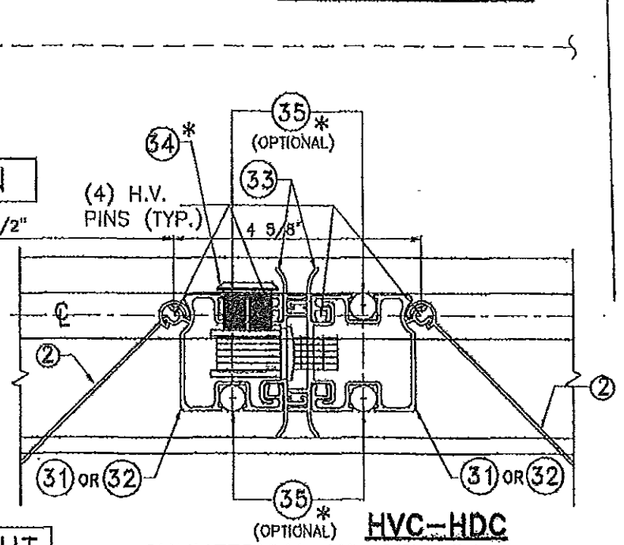


HVE–HDE

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

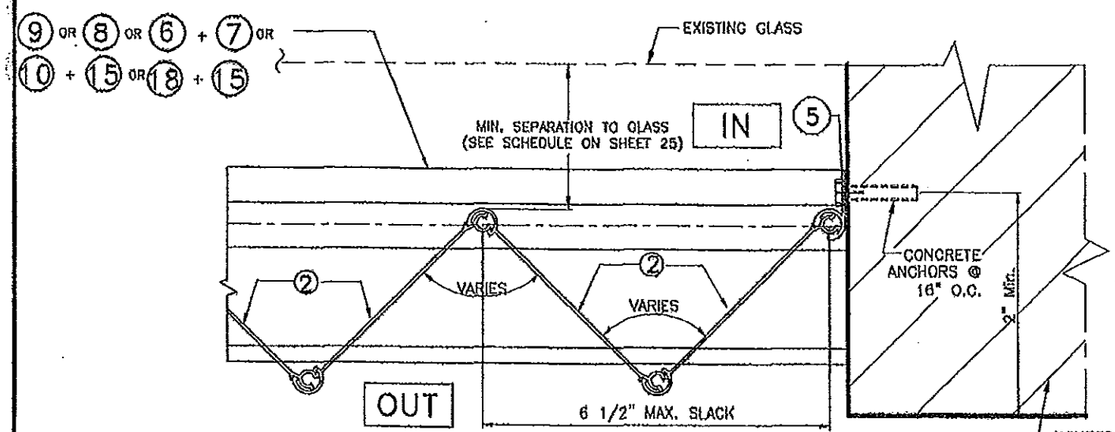PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

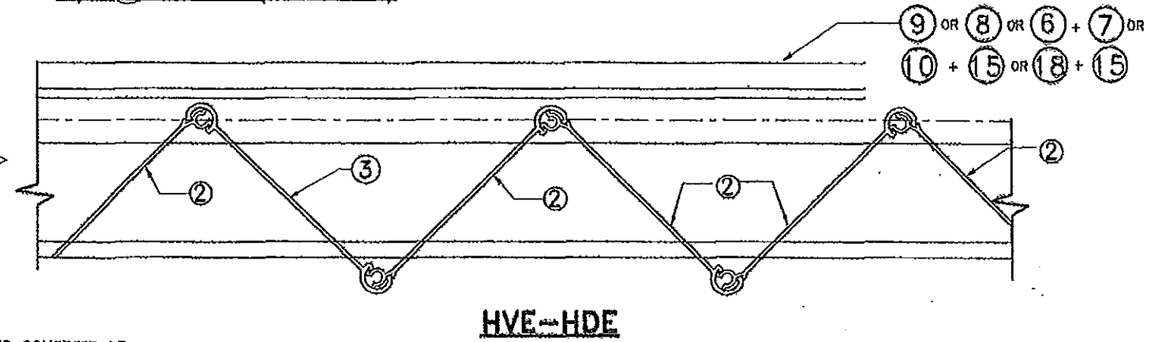MIAMI–DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL SIGNATURE/DATE

TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

WILLARD SHUTTER COMPANY, INC.
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 23 OF 28 |
| 6 | | | |




END CONNECTION DETAIL (1)




END CONNECTION DETAIL (2)

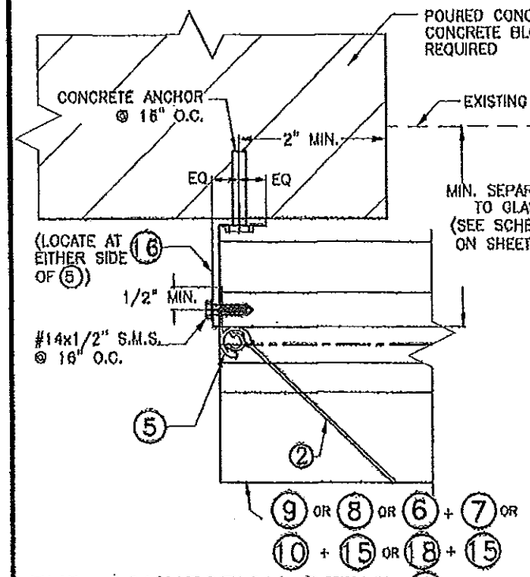


END CONNECTION DETAIL (3)

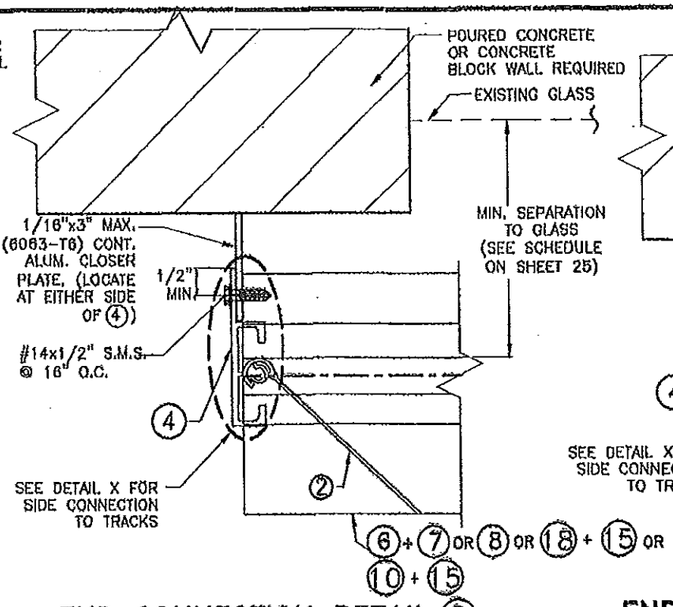


END CONNECTION DETAIL (4)

♦ REQUIRED ONLY FOR SPANS GREATER THAN 12'-0"

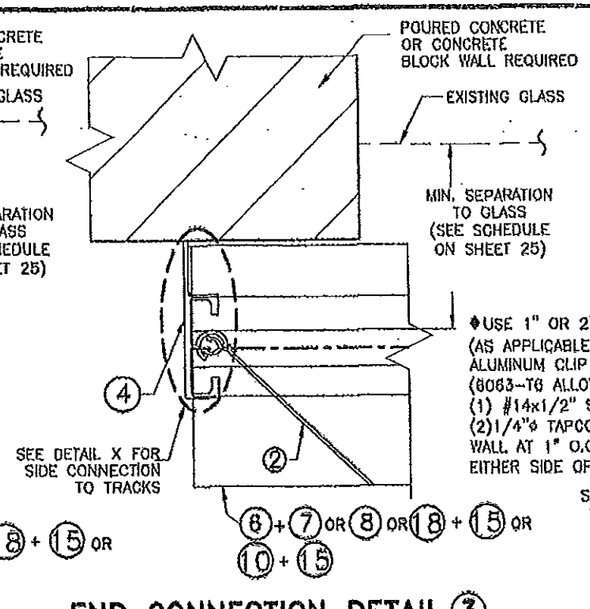


END CONNECTION DETAIL (5)

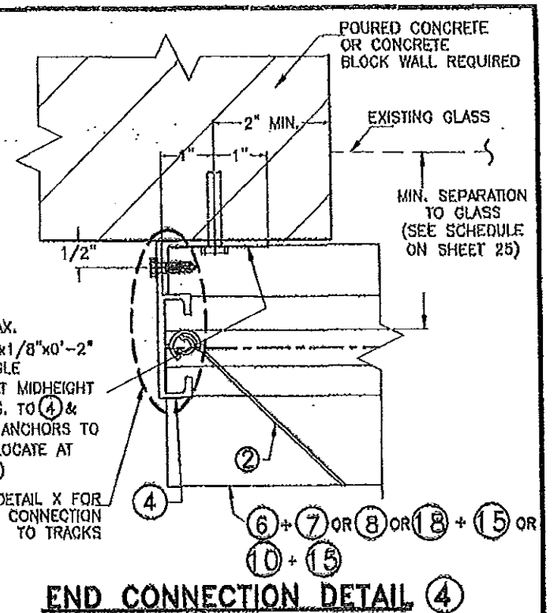


END CONNECTION DETAIL (6)

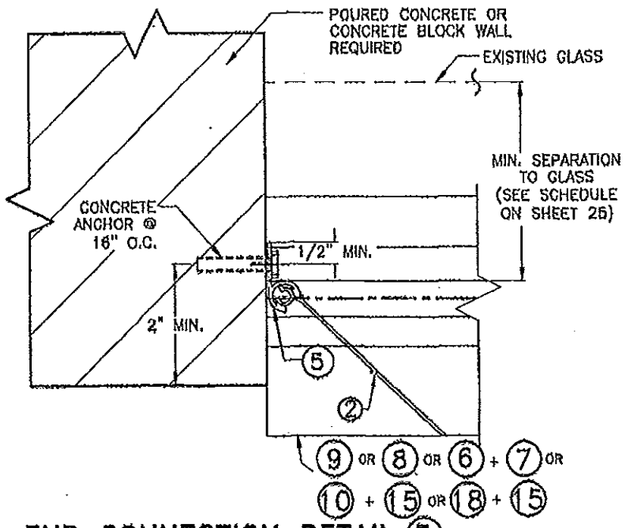


PLAN

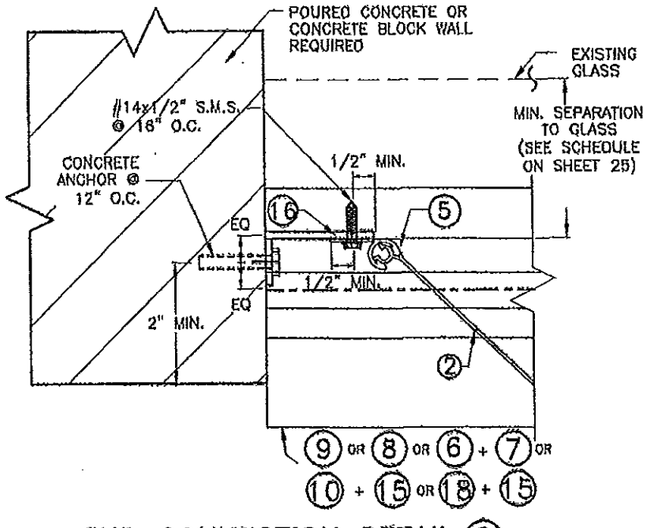


VIEW Y

DETAIL X
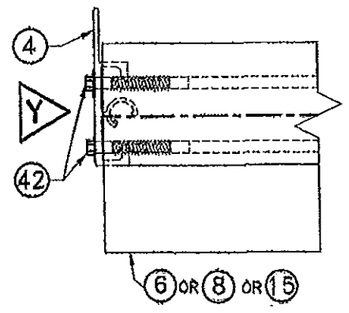
# END INSTALLATION
# (2) HV BLADE INTO CONCRETE OR CONCRETE BLOCK WALL.

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

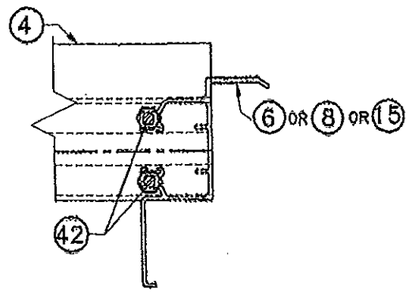PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 12-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL SIGNATURE / DATE

TILTECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 24 OF 28 |
| 6 | | | |

## MAXIMUM SHUTTER SPAN "L+" OR "L−" (ft.) * INSTALLATIONS W/ SYMMETRICAL HD CENTERMATES (31) OR (32) W/ ONE HD (34) LOCK & NO LOCKING RODS (35) ♦

| MAXIMUM A.S.D. DESIGN LOAD (p.s.f.) (+ OR −) | POURED CONCRETE INSTALLATIONS | |
|---|---|---|
| | ALL MOUNTING CONDITIONS | |
| | L+ (1) | L- (1) |
| 30 OR LESS | 15'-5" | 18'-0" |
| 35 | 14'-10" | 18'-0" |
| 40 | 14'-4" | 17'-10" |
| 45 | 13'-11" | 17'-6" |
| 50 | 13'-6" | 17'-0" |
| 55 | 13'-3" | 16'-10" |
| 60 | 12'-11" | 16'-2" |
| 65 | 12'-8" | 15'-6" |
| 70 | 12'-6" | 14'-11" |
| 75 | 12'-3" | 14'-8" |
| 80 | 12'-0" | 14'-0" |
| 85 | 11'-10" | 13'-7" |
| 90 | 11'-6" | 13'-2" |
| 95 | 11'-3" | 12'-10" |
| 100 | 10'-6" | 12'-6" |
| 105 | 10'-0" | 12'-2" |
| 110 | 9'-6" | 11'-11" |
| 115 | 9'-1" | 11'-8" |
| 120 | 8'-9" | 11'-6" |
| 125 | -- | 11'-2" |
| 130 | -- | 10'-11" |
| 135 | -- | 10'-9" |
| 140 | -- | 10'-6" |
| 145 | -- | 10'-4" |
| 150 | -- | 10'-2" |
| 155 | -- | 10'-0" |
| 160 | -- | 9'-10" |
| 165 | -- | 9'-9" |
| 170 | -- | 9'-7" |
| 175 | -- | 9'-5" |
| 180 | -- | 9'-4" |
| 185 | -- | 9'-2" |
| 190 | -- | 9'-0" |
| 195 | -- | 8'-9" |

### * NOTES:

(1) L+: MAXIMUM ALLOWABLE SPAN FOR A GIVEN POSITIVE A.S.D. DESIGN LOAD.
L−: MAX. ALLOWABLE SPAN FOR A GIVEN NEGATIVE A.S.D DESIGN LOAD.

(2) PROCEDURE TO DETERMINE MAXIMUM SPAN FOR WALL MOUNTINGS OR FLOOR/CEILING:

GIVEN A POSITIVE A.S.D. DESIGN LOAD, DETERMINE MAXIMUM SPAN "L+" FROM SCHEDULE.
GIVEN A NEGATIVE A.S.D. DESIGN LOAD, DETERMINE MAXIMUM SPAN "L−" FROM SCHEDULE.

FINAL MAXIMUM ALLOWABLE SPAN IS EQUAL TO THE MINIMUM DETERMINED SPAN BETWEEN "L+" AND "L−".

(3) PROCEDURE TO DETERMINE MAXIMUM SPAN FOR COMBINATIONS IN BETWEEN WALL W/ FLOOR/CEILING MOUNTINGS:

FOR A GIVEN POSITIVE A.S.D. DESIGN LOAD:
DETERMINE:
$L_{1+}$= MAX. SPAN FOR WALL MOUNTING INSTALLATIONS.
$L_{2+}$= MAX. SPAN FOR FLOOR/CEILING MOUNTING INSTALLATIONS.

FOR A GIVEN NEGATIVE A.S.D. DESIGN LOAD:
DETERMINE:
$L_{1-}$= MAX. SPAN FOR WALL MOUNTING INSTALLATIONS.
$L_{2-}$= MAX. SPAN FOR FLOOR/CEILING MOUNTING INSTALLATIONS.

FINAL MAXIMUM ALLOWABLE SPAN IS EQUAL TO THE MINIMUM BETWEEN "$L_{1+}$", "$L_{2+}$", "$L_{1-}$" AND "$L_{2-}$"

(4) GO TO ANCHOR SCHEDULE WITH FINAL MAXIMUM ALLOWABLE SPAN AND MAXIMUM A.S.D. DESIGN LOAD TO DETERMINE MAXIMUM ANCHOR SPACING.

### ♦ SEPARATION TO GLASS REQUIREMENTS

MINIMUM SEPARATION TO GLASS FOR SHUTTERS INSTALLED AT ALL ELEVATIONS OF BUILDING IS 3".

| INSTALLATION LEGEND | |
|---|---|
| SUBSTRATE / MOUNTINGS | POURED CONCRETE (SHEET 22) |
| WALL MOUNTING | AA & EE |
| FLOOR/CEILING MOUNTING | BB, CC, DD, FF & GG |

## (2) HV BLADE ONLY

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER
P.E. SEAL/SIGNATURE/DATE

TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System

H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 25 OF 28 |
| 6 | | | |

ANCHORS SPACING LEGEND

| |
|---|
| 1/4"ø TAPCON |
| 5/16"ø TAPCON XL |

## MAXIMUM ANCHOR* SPACING (in.) SCHEDULE FOR A GIVEN MAX. SHUTTER SPAN, MAXIMUM A.S.D. DESIGN LOAD AND A CORRESPONDING MOUNTING TYPE FOR CONCRETE INSTALLATIONS

| MAXIMUM SPAN (ft) | POURED CONCRETE | | | | |
|---|---|---|---|---|---|
| | ALL MOUNTINGS AA THRU GG (SHEET 22) | | | | |
| | USE MAXIMUM VALUES BETWEEN POSITIVE AND NEGATIVE A.S.D. LOADS | | | | |
| | 50 OR LESS | >50 TO 90 | >90 TO 120 | >120 TO 160 | >160 TO 195 |
| 8'-9" OR LESS | 8" | 4 1/2" | 3 1/2" | – | – |
| | 12" | 8" | 6" | 4" | 3 3/4" |
| >8'-9" UP TO 12'-1" | 6" | 3 1/2" | 3" ‡ | – | – |
| | 10" | 6" | 4" | 4" | – |
| >12'-1" UP TO 18'-0" | 4" | 3 1/2" | – | – | – |
| | 7 1/2" | 5 1/2" | 4" | – | – |

NOTE:

‡ VALID ONLY FOR UP TO 10'-0" SPAN

*SPECIFICATIONS ON ANCHOR REQUIREMENTS: POURED CONCRETE SUBSTRATE

(A) ANCHORS TO WALL SHALL BE AS FOLLOWS:

A.1) TO EXISTING POURED CONCRETE: (Min. f'c = 3192 psi)
-- 1/4"ø TAPCON ANCHORS, AS MANUFACTURED BY I.T.W. BUILDEX.
MINIMUM EMBEDMENT INTO POURED CONCRETE OF TAPCON IS 1 3/4".

A.2) TO EXISTING POURED CONCRETE: (Min. f'c = 2899 psi)
– 5/16"ø TAPCON XL ANCHORS, AS MANUFACTURED BY I.T.W. BUILDEX.
MINIMUM EMBEDMENT INTO POURED CONCRETE OF 5/16" TAPCON XL ANCHORS IS 2 1/4".

A.3) IN CASE THAT PRECAST STONE, PRECAST CONCRETE PANELS, PAVERS OR ANY VENEER BE FOUND ON THE EXISTING WALL OR FLOOR, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SAID WALL FINISHES. ANCHORAGE SHALL BE AS INDICATED ON NOTE A.1) ABOVE. FOR INSTALLATIONS ON VINYL SIDING OR EIFS CONSULT THIS ENGINEER.

(B) ANCHORS SHALL BE INSTALLED FOLLOWING ALL OF THE RECOMMENDATIONS AND SPECIFICATIONS OF THE ANCHOR'S MANUFACTURER.

(C) SEE BELOW FOR MINIMUM REQUIRED EDGE DISTANCE FOR ANCHORS.

MINIMUM REQUIRED EDGE DISTANCE FOR ANCHORS

MAXIMUM ANCHOR SPACINGS ARE VALID FOR
3" EDGE DISTANCE FOR 1/4"ø TAPCON AND
3 5/8" EDGE DISTANCE FOR 5/16"ø TAPCON XL.

## ② HV BLADE ONLY

FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL / SIGNATURE / DATE


TILLECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 . Fax : (305)871-1531
e-mail: tilleco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167


**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE |
|---|---|---|
| 1 | OLD 07-090 | 01/20/12 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |

Drawn by: F.P./A.G.
DATE: 01/20/12
DRAWING No 12-017
SHEET 26 OF 28




SCALE: 3/8"=1"




SECTION X–X
SCALE: 1" = 1"

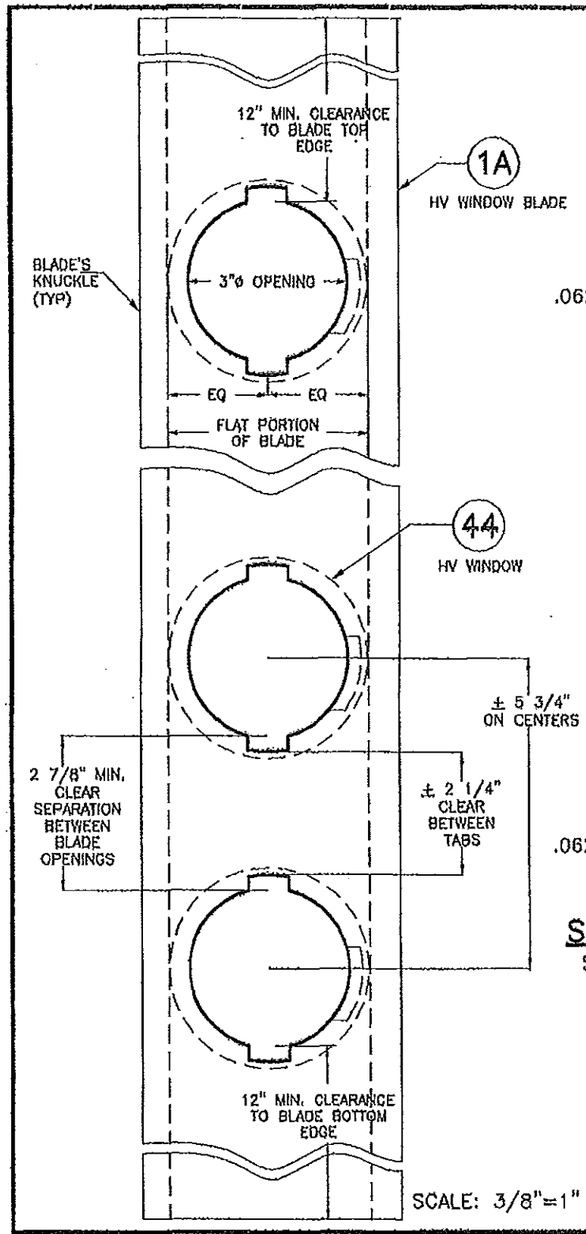


SECTION Y–Y
SCALE: 1" = 1"

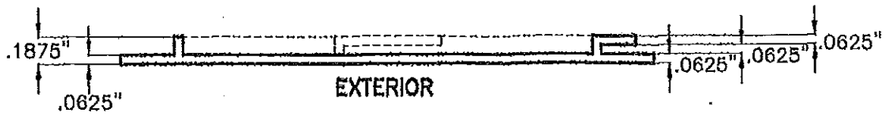


EXTERIOR ELEVATION
SCALE: 1" = 1"

(44) POLYCARBONATE IMPACT RESISTANT HV WINDOW
BAYER MAKROLON 3103 POLYCARBONATE RESINS, UV–STABILIZED GRADE OR SABIC INNOVATIVE PLASTIC LEXAN 103 RESIN (SEE NOTE "F" ON SHEET 28).

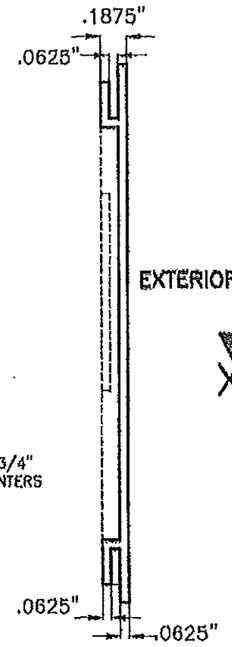POLYCARBONATE SOURCES FOR (44)

| TYPICAL PROPERTIES | APPLICABLE STANDARD REFERENCE | RESULT | |
|---|---|---|---|
| | | BAYER MATERIAL / SCIENCE LLC MAKROLON 3103 | SABIC INNOVATIVE PLASTIC LEXAN 103 RESIN |
| PHYSICAL: | | | |
| SPECIFIC GRAVITY | ASTM D792 | 0.043 lb/in³ | 0.043 lb/in³ |
| MECHANICAL: | | | |
| TENSILE YIELD STRENGTH | ASTM D638 | 9,400 p.s.i. | 9,500 p.s.i. |
| FLEXURAL STRENGTH AT YIELD | ASTM D790 | 12,500 p.s.i. | 13,400 p.s.i. |
| FLEXURAL MODULUS | ASTM D790 | 340,000 p.s.i. | 345,000 p.s.i. |
| IMPACT: | | | |
| NOTCHED IZOD | ASTM D256 | 18 FT-lb/in | 17 FT-lb/in |
| FIRE BURNING CHARACTERISTICS: | | | |
| SMOKE DENSITY | ASTM D2843 | 47.2 % | 64.5 % MAX |
| RATE OF BURNING | ASTM D635 | C-1 CLASS | C-1 CLASS |
| SELF IGNITION | ASTM D1929 | 1040 °F | 980 °F |
| WEATHERING: | ASTM G155 | | |
| TENSILE STRENGTH AFTER WEATHERING | ASTM 638 | 9302 p.s.i. | 8840 p.s.i. |
| TENSILE STRESS BEFORE WEATHERING | ASTM 638 | 8461 p.s.i. | 8880 p.s.i. |
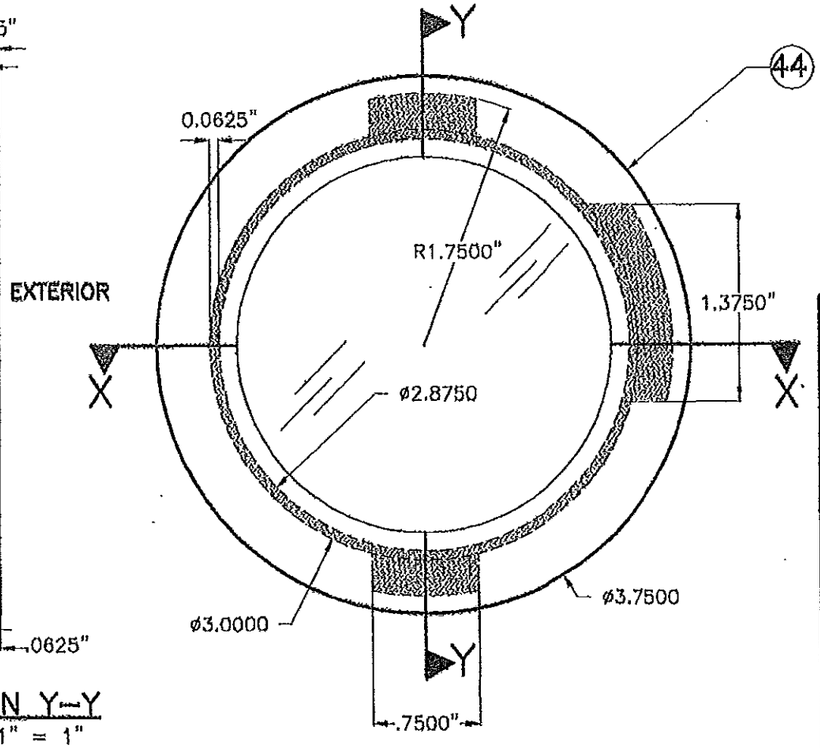
# TYPICAL HV WINDOW BLADE (1A) AND POLYCARBONATE HV WINDOW DETAIL

FLORIDA BUILDING CODE(High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SIGNATURE / DATE

TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1630 . Fax : (305)871-1631
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

**WILLARD SHUTTER COMPANY, INC.**
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 27 OF 28 |
| 6 | | | |




ELEVATION




PLAN

## TYPICAL 1 HV BLADE WORKING IN UNISON WITH HV WINDOW BLADE 1A SHUTTER*

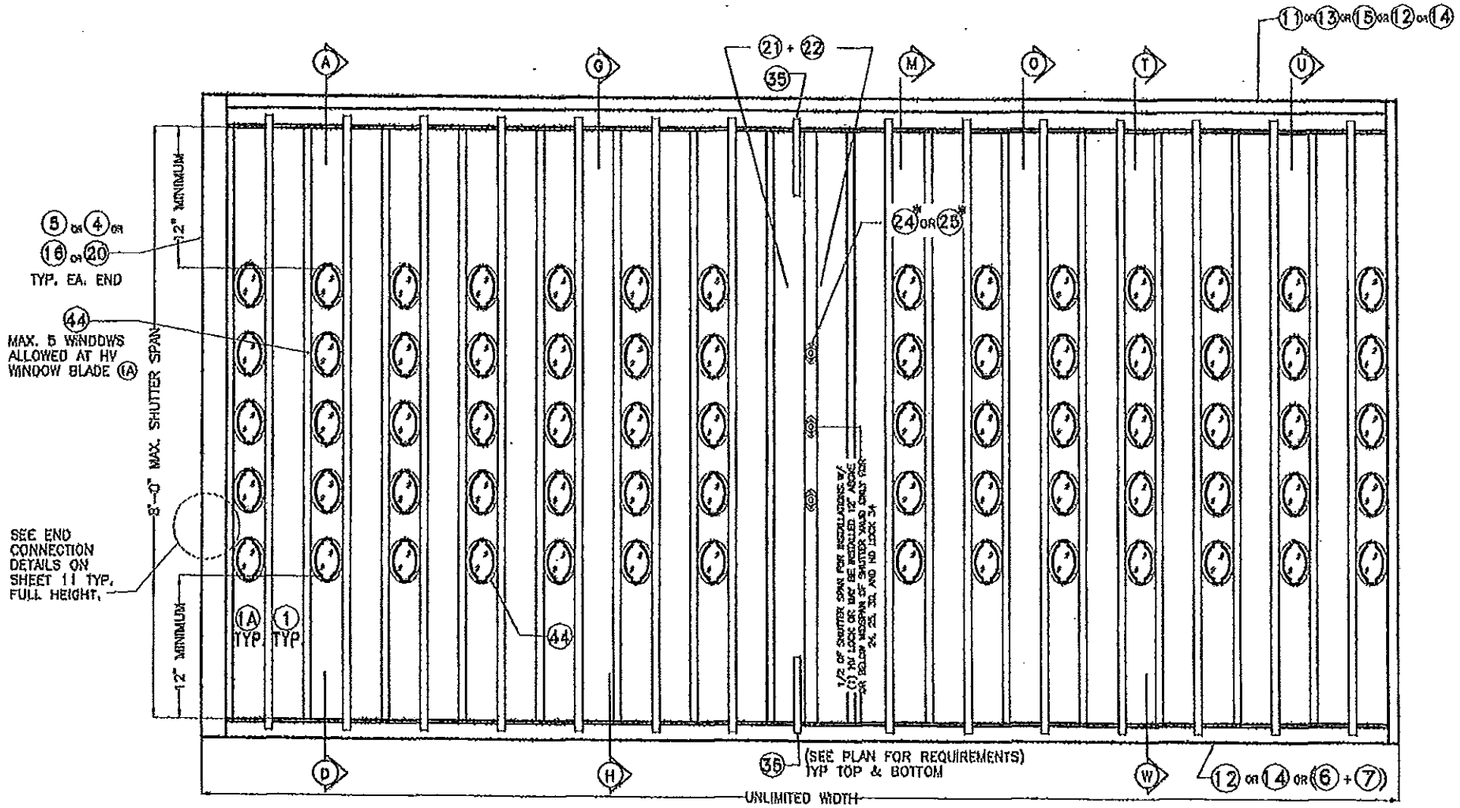N.T.S.

## * GENERAL LIMITATIONS AND CONDITIONS OF USE FOR BERTHA 1 HV BLADE ACCORDION SHUTTER SYSTEM WORKING IN UNISON WITH HV WINDOW BLADE 1A

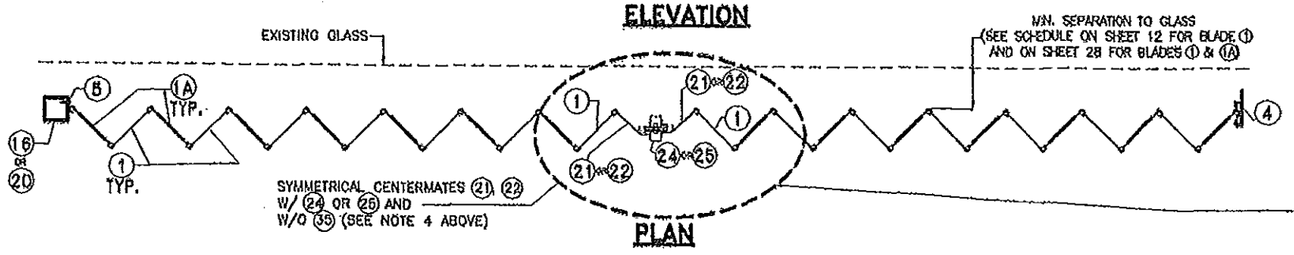1. MAX. A.S.D. DESIGN PRESSURE RATING: +110, – 110 p.s.f.

2. MAX. SHUTTER SPAN: 96".

3. ALLOWED MOUNTINGS: A, D, G & H ON SHEETS 6, 7; AS WELL AS MOUNTINGS M, O, T, U & W ON SHEETS 18 & 19.

4. ONLY CENTERMATES 21, 22 (BOTH W/ 24 OR 25) ARE ALLOWED WITH 21, 22 ARRANGED IN A SYMMETRICAL OR OPPOSING LAYOUT. IN CASE OF OPPOSING LAYOUT, 35 MUST BE INCLUDED ONLY AT EXTERIOR ACCESS SIDE OF CENTERMATE.

5. (A) HV WINDOW BLADE 1A SHALL ONLY ALLOW A MAXIMUM OF 5 OPENINGS (3"ø HOLES) FOR 44 PER BLADE AT SPACINGS SHOWN ON SHEET 27.

(B) MIN. CLEARANCE FROM TOP OR BOTTOM EDGE OF HV WINDOW BLADE 1A OF ANY 3"ø HOLE FOR 44 SHALL BE 12".

(C) FIRST OR LAST BLADE COMING OUT FROM STARTERS AT ENDS MAY BE HV WINDOW BLADE 1A.

(D) HV WINDOW BLADE 1A MUST BE USED ALTERNATE TO A SOLID HV BLADE 1 THROUGHOUT SHUTTER'S WIDTH.

(E) CENTERMATES SHALL ALWAYS BE INSTALLED ADJACENT TO A SOLID HV BLADE 1 AT EITHER SIDE OF THEM.

(F) POLYCARBONATE HV WINDOW 44 SHALL BE INSTALLED SO THAT TABS FACE THE INTERIOR OF THE OPENING BEING PROTECTED. HV WINDOW 44 MUST BE ONLY INSTALLED AND LOCKED USING A HV SETTING TOOL PROVIDED BY ASSA, INC.

6. SEE ANCHOR SPACING SCHEDULE FOR INSTALLATIONS INTO WOOD FRAME BUILDINGS ON SHEET 16, AS LIMITED BY SPAN AND DESIGN LOAD (SEE NOTES 1 & 2 ABOVE).

7. SEE ANCHOR SPACING SCHEDULE FOR INSTALLATIONS INTO POURED CONCRETE OR CONCRETE BLOCK WALL ON SHEETS 13 & 14 AS LIMITED BY SPAN AND DESIGN LOAD (SEE NOTES 1 & 2 ABOVE).

8. MINIMUM SEPARATION TO GLASS SCHEDULE:

| SHUTTER SPAN | MINIMUM SEPARATION TO GLASS |
|---|---|
| 96" Max. | 5" |

ALTERNATE OPPOSING CENTERMATES 21 22 W/ 35 (EXTERIOR ONLY) AND W/ 24 OR 25 (SEE NOTE 4 ABOVE)




FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI–DADE COUNTY

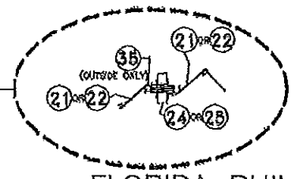WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL, SIGNATURE AND DATE

TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0008719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

WILLARD SHUTTER COMPANY, INC.
(ASSA # 180)
4420 N.W. 35 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634

© 2012 EASTERN METAL SUPPLY, INC.

# BERTHA HV
## Accordion Shutter System
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | |
| 3 | | | DRAWING No 12-017 |
| 4 | | | |
| 5 | | | |
| 6 | | | SHEET 28 OF 28 |

# INSTALLATIONS W/ (1) HV BLADE & HV CENTERMATES (21) INTO METAL STUD WALLS *




MS WALL HEADER/SILL INSTALLATION

## * GENERAL LIMITATIONS AND CONDITIONS OF USE FOR BERTHA (1) HV BLADE ACCORDION SHUTTER SYSTEM INSTALLATION TO METAL STUD WALLS

1. MAX. A.S.D. DESIGN PRESSURE RATING: +75, – 75 p.s.f.
2. MAX. SHUTTER SPAN: 84"
3. ALLOWED MOUNTING: (MS) ON THIS SHEET.
4. ONLY CENTERMATE (21) W/ (24) HV LOCK ARE ALLOWED WITH (21) ARRANGED IN A SYMMETRICAL LAYOUT. USE OF (2) (35) (6" LONG, MINIMUM) MUST ALWAYS BE INCLUDED AT EXTERIOR OR INTERIOR ACCESS SIDE OF CENTERMATE.

** BLADE SLACK DETAIL HVF IS VALID FOR CENTERMATE (21) APPLICATION WITH BLADE (1)
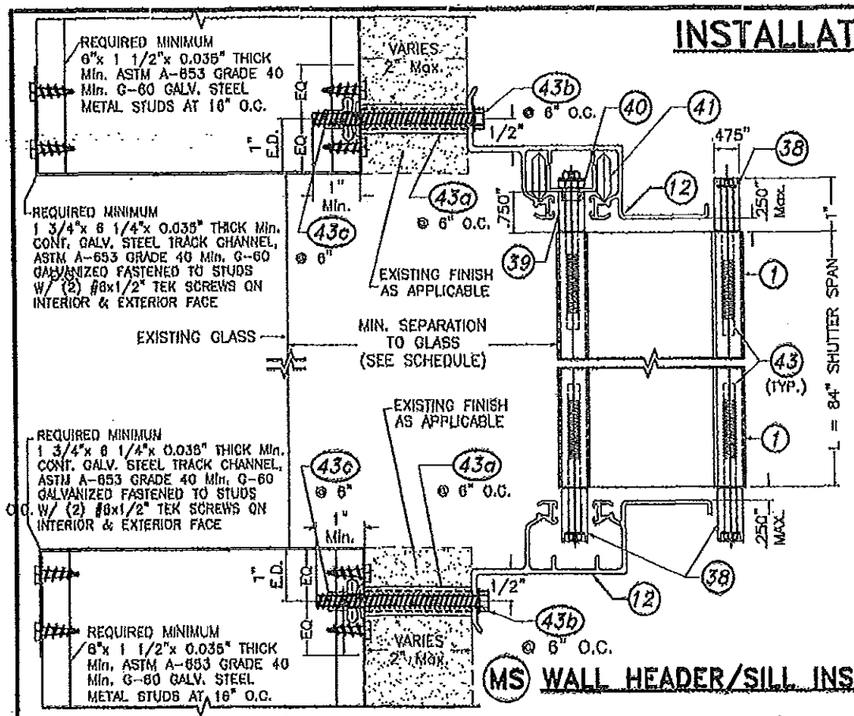
## SEPARATION TO GLASS SCHEDULE

| MAX. SHUTTER SPAN L (in) | MINIMUM SEPARATION TO GLASS |
|---|---|
| 84" OR LESS | 3 1/4" |




43a 1/4"ø NOMINAL ALUMINUM SLEEVE
6063-T5 ALLOY

43b 1/4"ø-20X3" BOLT
MUST PENETRATE 43c 1"

43c 1/4"ø ELCO CONSTRUCTION PRODUCTS FAB-LOK HD

## COMPONENTS

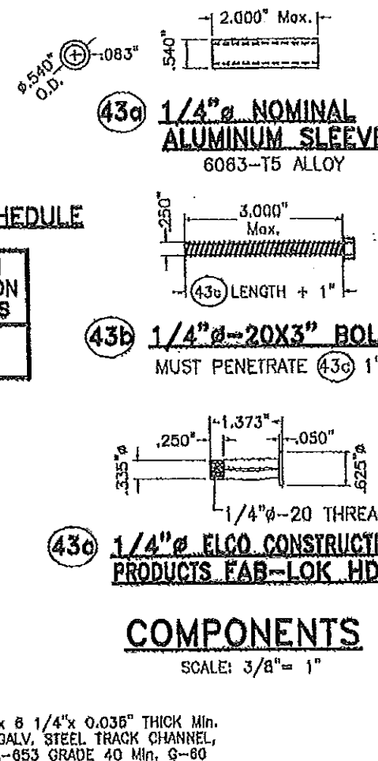SCALE: 3/8"= 1"




HVA HVB HVC BLADE SLACK DETAIL HVF FLORIDA BUILDING CODE (High Velocity Hurricane Zone)

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 13-0530.10
Expiration Date 08/17/2018
By
Miami Dade Product Control

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 12-0215.08
Expiration Date 08/17/2013
By
Miami Dade Product Control

MIAMI-DADE COUNTY

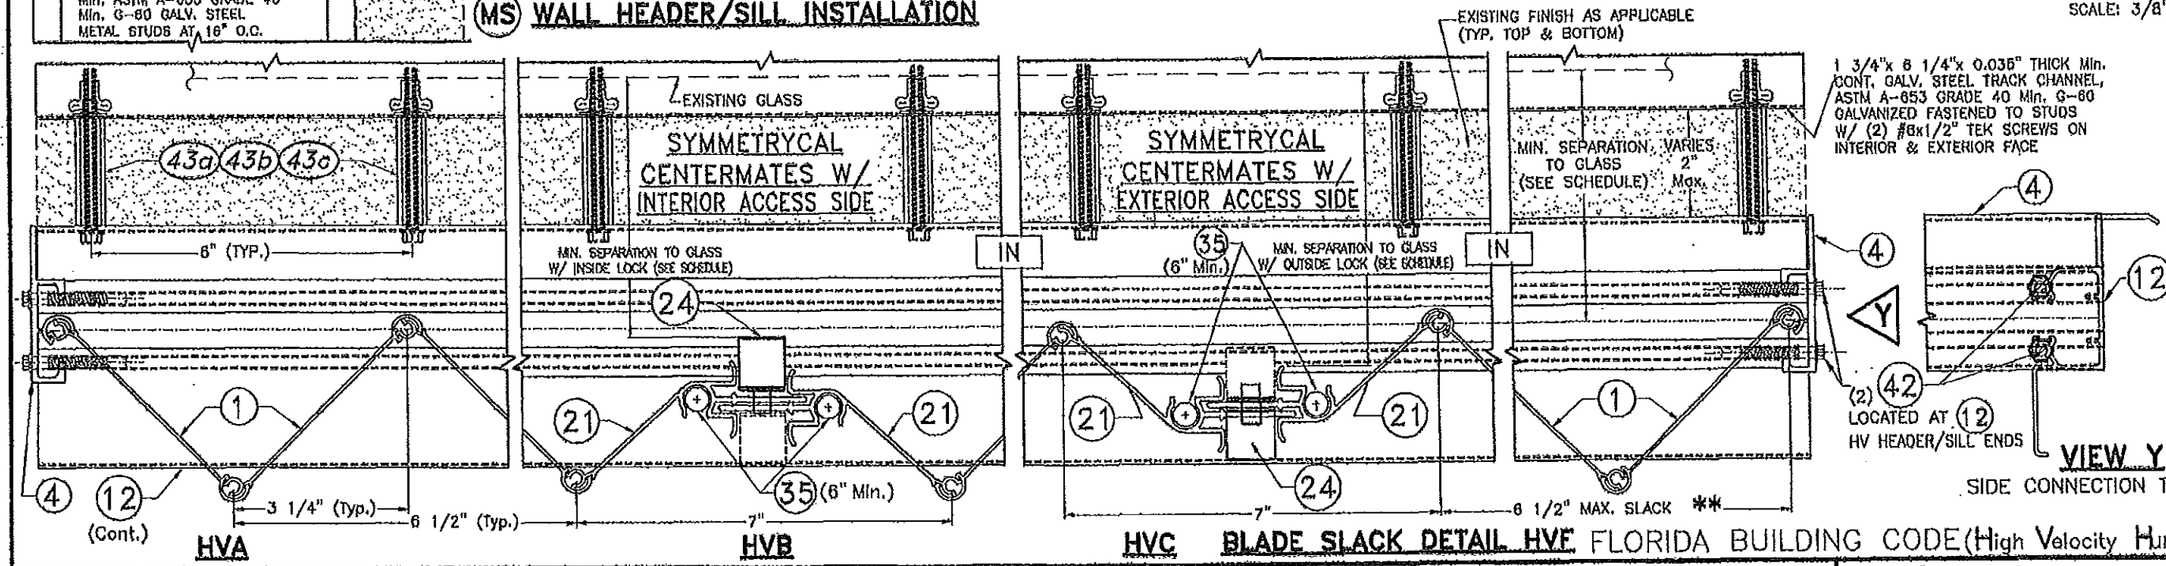WALTER A. TILLIT JR. LICENSE No. 44167 STATE OF FLORIDA PROFESSIONAL ENGINEER

P.E. SEAL/SIGNATURE/DATE


TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FLORIDA 33166
Phone : (305)871-1530 . Fax : (305)871-1531
e-mail: tilteco@aol.com
EB-0006719
WALTER A. TILLIT Jr. P. E.
FLORIDA Lic. # 44167

WILLARD SHUTTER COMPANY, INC.
(ASSA # 180)
4420 N.W. 36 COURT
MIAMI, FL 33142
PH (305) 633-0162 FAX (305) 638-8634


© 2012 EASTERN METAL SUPPLY, INC.

**BERTHA HV**
**Accordion Shutter System**
H.V. BLADE #1 W/ OR W/O H.V. WINDOW BLADE & H.V. BLADE #2

| REV. No | DESCRIPTION | DATE | Drawn by: F.P./A.G. |
|---|---|---|---|
| 1 | OLD 07-090 | 01/20/12 | DATE: 01/20/12 |
| 2 | | | DRAWING No 12-017 |
| 3 | | | |
| 4 | | | |
| 5 | | | SHEET 28A OF 28 |
| 6 | | | |