MIAMI-DADE COUNTY
DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

CGI Windows and Doors, Inc.
10100 NW 25th Street
Miami, FL 33172

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "238" Aluminum Project Out Window - L.M.I.

APPROVAL DOCUMENT: Drawing No. **W99-04**, titled "Series–238 Alum. Project Out Window", sheets 1, 1.1, 2, 3, 4, 5, 5.1, 6 and 7 of 7, dated 01/21/99, with revision I dated 04/10/15, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami–Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA# 14-0915.08** and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by **Manuel Perez, P.E.**

MIAMI-DADE COUNTY APPROVED

9/10/15

NOA No. 15-0512.21
Expiration Date: October 31, 2018
Approval Date: September 17, 2015

CGI Windows and Doors, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Manufacturer's die drawings and sections.
   (Submitted under NOA's No. 96-0717.04 and 99-0329.02)
2. Drawing No. **W99-04**, titled "Series-238 Alum. Project Out Window", sheets 1, 1.1, 2, 3, 4, 5, 5.1, 6 and 7 of 7, dated 01/21/99, with revision I dated 04/10/15, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

B. TESTS

1. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
   2) Large Missile Impact Test per FBC, TAS 201-94
   3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
   along with marked-up drawings and installation diagram of a series 7500 PVC fixed window, to qualify DuPont "Butacite" PVB interlayer, Duraseal® and Super Spacer® insulating glass spacer, prepared by Certified Test Laboratories, Test Report No. **CTLA-3056 WA**, dated 03/03/15, signed and sealed by Ramesh C. Patel, P.E.
2. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
   2) Large Missile Impact Test per FBC, TAS 201-94
   3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
   along with marked-up drawings and installation diagram of a series 7400 PVC project out window, to qualify DuPont "Butacite" PVB interlayer, Duraseal® and Super Spacer® insulating glass spacer, prepared by Certified Test Laboratories, Test Report No. **CTLA-3056 WB**, dated 03/03/15, signed and sealed by Ramesh C. Patel, P.E.
3. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
   2) Large Missile Impact Test per FBC, TAS 201-94
   3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
   along with marked-up drawings and installation diagram of a series 238 aluminum fixed window, to qualify DuPont "Butacite" PVB interlayer, Duraseal® and Super Spacer® insulating glass spacer, prepared by Certified Test Laboratories, Test Report No. **CTLA-3056 WC**, dated 04/16/15, signed and sealed by Ramesh C. Patel, P.E.
4. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
   2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
   3) Water Resistance Test, per FBC, TAS 202-94
   4) Forced Entry Test, per FBC 2411.3.2.1, TAS 202-94
   along with marked-up drawings and installation diagram of aluminum casement, project-out and fixed windows, prepared by Hurricane Test Laboratory, Inc., Test Reports No. **HTL-0080-0301-07** and **HTL-0080-0905-07**, dated 08/08/08, all signed and sealed by Vinu J. Abraham, P.E.
   (Submitted under NOA No. 08-1010.03)

Manuel Perez

Manuel Perez, P.E.
Product Control Examiner
NOA No. 15-0512.21
Expiration Date: October 31, 2018
Approval Date: September 17, 2015

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

B. TESTS (CONTINUED)

5. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94,
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of an aluminum project-out window, prepared by Hurricane Engineering & Testing, Inc. Reports No. **HETI-08-2143**, **HETI-08-2144**, **HETI-07-4298** and **HETI-07-4287**, dated 06/27/08 and 07/17/08, all signed and sealed by Candido F. Font, P.E.
(Submitted under NOA No. 08-1010.03)

6. Test reports on: 1) Air Infiltration Test, per SFBC, PA 202--94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Forced Entry Test, per FBC 2411.3.2.1, TAS 202-94
along with marked-up drawings and installation diagram of aluminum casement, project-out and fixed windows, prepared by Fenestration Testing Laboratory, Inc., Test Reports No. **FTL-1055** and **FTL-1019**, dated 10/18/94, signed and sealed by Yamil Kuri, P.E.
(Submitted under NOA No. 96-0717.04)

7. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94,
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of an aluminum casement window, prepared by Hurricane Test Laboratory, Inc., Test Reports No. **HTL-0080-0303-96** and **HTL-0080-1107-98**, dated 09/08/96 and 12/23/98 respectively, all signed and sealed by Timothy S. Marshall, P.E.
(Submitted under NOA's No. 96-0717.04 and 99-0329.02)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC-5th Edition (2014)**, dated 09/03/14, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.
(Submitted under previous NOA No. 14-0915.08)

2. Glazing complies with **ASTM E1300-09**

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

Manuel Perez

Manuel Perez, P.E.
Product Control Examiner
NOA No. 15-0512.21
Expiration Date: October 31, 2018
Approval Date: September 17, 2015

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **14-0916.11** issued to **Kuraray America, Inc.** for their **"SentryGlas® (Clear and White) Glass Interlayers"** dated 06/25/15, expiring on 07/04/18.
2. Notice of Acceptance No. **14-0423.15** issued to **Eastman Chemical Company (MA)** for their "**Saflex CP – Saflex and Saflex HP Composite Glass Interlayers with PET Core"** dated 06/19/14, expiring on 12/11/18.
3. Notice of Acceptance No. **14-0916.10** issued to **Kuraray America, Inc.** for their **"Butacite® PVB Glass Interlayer"** dated 04/25/15, expiring on 12/11/16.
4. Notice of Acceptance No. **14-0423.17** issued to **Eastman Chemical Company (MA)** for their "**Saflex Clear and Color Glass Interlayers**" dated 06/19/14, expiring on 05/21/16.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC-5th Edition (2014)**, and of no financial interest, dated 09/03/14, issued by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.
   (Submitted under previous NOA No. 14-0915.08)
2. Laboratory compliance letters for Test Reports No. **HTL-0080-0301-07** and **HTL-0080-0905-07**, issued by Hurricane Test Laboratory, Inc., dated 08/08/08, all signed and sealed by Vinu J. Abraham, P.E.
   (Submitted under NOA No.08-1010.03)
3. Test Proposal for the qualification of ***Butacite***® PVB glass interlayer by Kuraray America, Inc., as well as ***Duraseal***® and ***Super Spacer***® ***Standard*** warm-edge flexible insulating glass spacers, dated December 16, 2014, issued by RER, Product Control Section, signed by Jaime Gascon, P.E., Supervisor, Product Control Section.

G. OTHERS

1. Notice of Acceptance No. **14-0915.08**, issued to CGI Windows & Doors for their Series "238" Aluminum Project-Out Window - L.M.I. approved on 02/05/15 and expiring on 10/31/18.

Manuel Perez P.E.
Product Control Examiner
NOA No. 15-0512.21
Expiration Date: October 31, 2018
Approval Date: September 17, 2015

GENERAL WINDOW SECTIONS
FLANGE FRAME

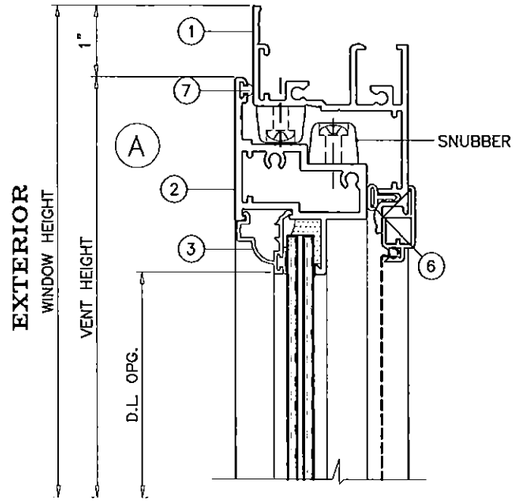

FOR GLASS TYPES, REFER TO SHEETS 3 AND 4.

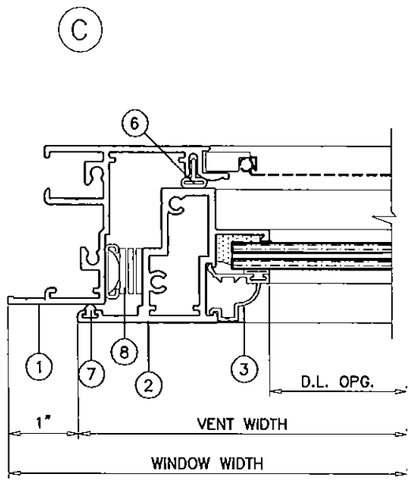

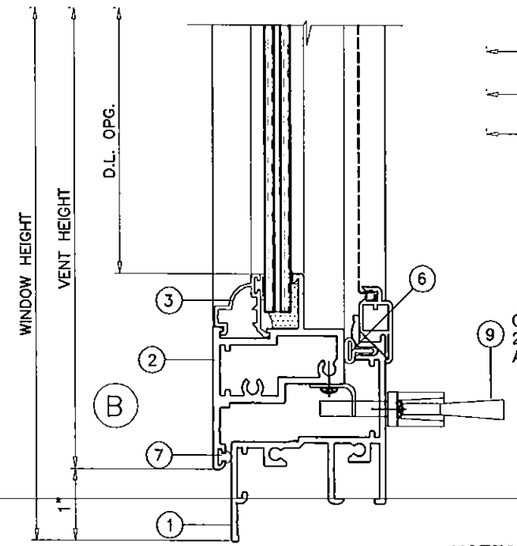

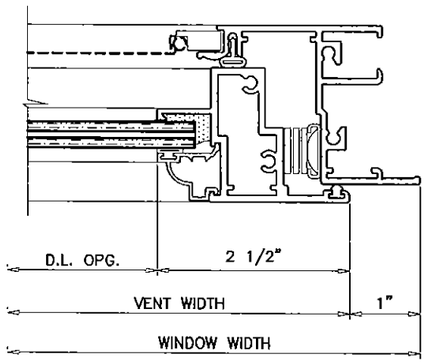

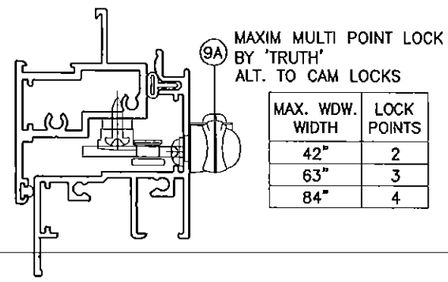

MAX. WDW. WIDTH	LOCK POINTS
42"	2
63"	3
84"	4

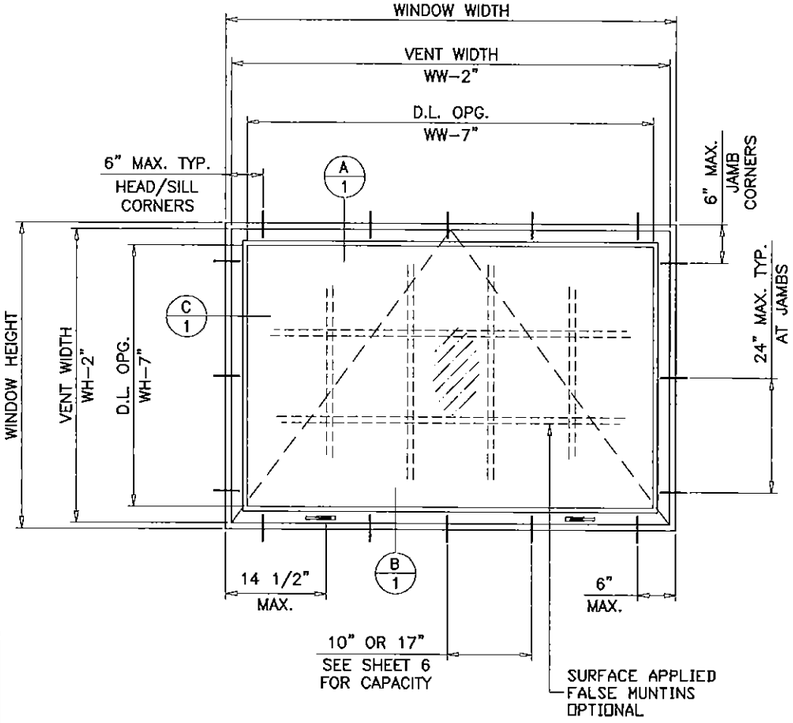

TYPICAL ELEVATION
(FLANGE FRAME)

FOR MULLION/MULTIPLE UNITS, REFER TO SEPARATE CGI MULLION N.O.A.

INSTRUCTIONS:

USE CHARTS AS FOLLOWS.

STEP 1 DETERMINE DESIGN WIND LOAD REQUIREMENT BASED ON WIND VELOCITY, BLDG. HEIGHT, WIND ZONE USING APPLICABLE ASCE 7 STANDARD.

STEP 2 SEE CHARTS ON SHEETS 3 AND 4 FOR DESIGN LOAD CAPACITY OF DESIRED GLASS SIZE/TYPE.

STEP 3 USING CHART ON SHEET 6 SELECT ANCHOR OPTION WITH DESIGN RATING MORE THAN DESIGN LOAD SPECIFIED IN STEP 1 ABOVE.

STEP 4 IF ALUMINUM BUCK SYSTEM IS USED USE CHART ON SHEET 7 TO DETERMINE CAPACITY.

STEP 5 THE LOWEST VALUE RESULTING FROM STEPS 2, 3 AND 4 SHALL APPLY TO ENTIRE SYSTEM.

NOTES:

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

WOOD BUCKS BY OTHERS, MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.

ANCHORS SHALL BE AS LISTED, SPACED AS SHOWN ON DETAILS, ANCHORS EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

ANCHORING OR LOADING CONDITIONS NOT SHOWN IN THESE DETAILS ARE NOT PART OF THIS APPROVAL.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FLORIDA BLDG. CODE.

THESE WINDOWS ARE RATED FOR LARGE MISSILE IMPACT. SHUTTERS ARE NOT REQUIRED.

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538

04 2015

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 15-0512.21
Expiration Date Oct. 31, 2018
By Manuel Perez
Miami Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions: no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		UPDATED TO 2010 FBC
G	07.31.13		NO CHANGE THIS SHEET
H	09.10.14		UPDATED TO 2014 FBC
I	04.10.15		NO CHANGE THIS SHEET

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

sheet 1 of 7

GENERAL WINDOW SECTIONS
EQUAL LEG FRAME

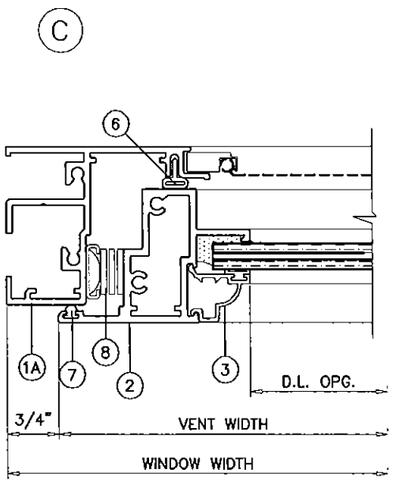

EXTERIOR

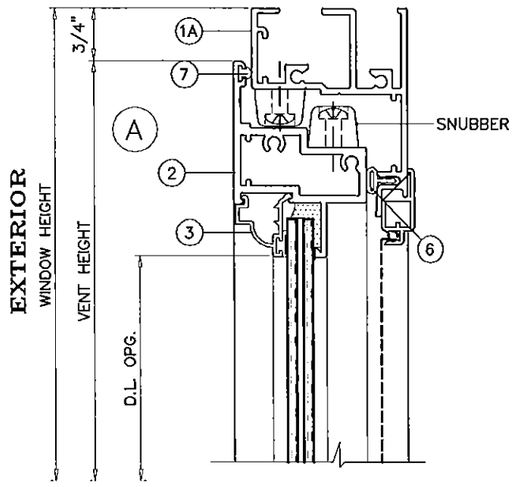

FOR GLASS TYPES,
REFER TO
SHEETS 3 AND 4.

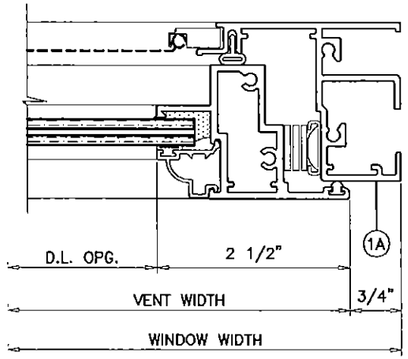

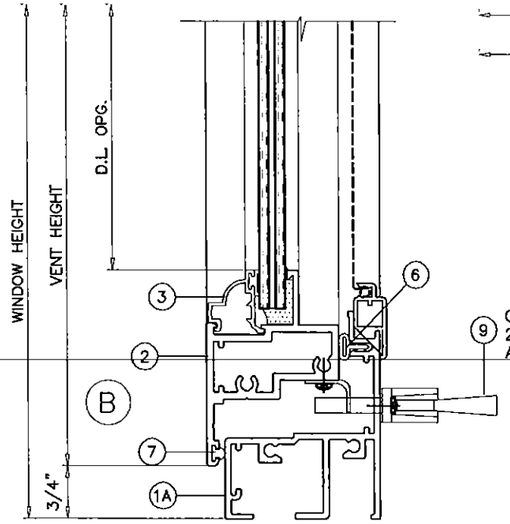

9 CAM LOCKS
2 LOCK POINTS
ALL SIZES

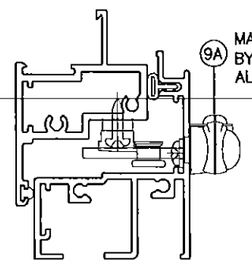

MAXIM MULTI POINT LOCK
BY 'TRUTH'
ALT. TO CAM LOCKS

MAX. WDW. WIDTH	LOCK POINTS
42"	2
63"	3
84"	4

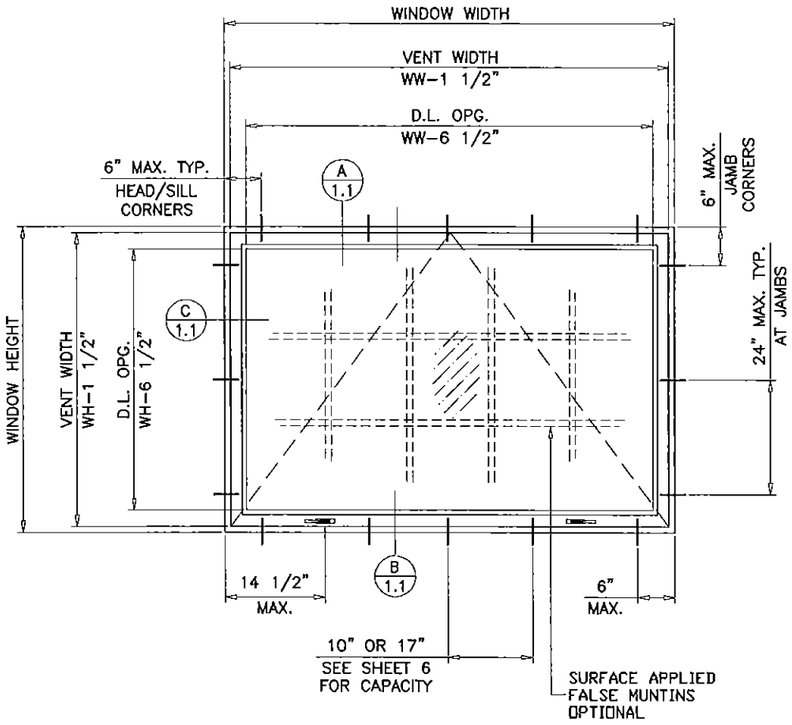

TYPICAL ELEVATION
(EQUAL LEG FRAME)

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538

MAY 04 2015

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0512.21
Expiration Date Oct 31, 2018
By Manuel Perez
Miami Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions:

no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		NO CHANGE THIS SHEET
G	07.31.13		NO CHANGE THIS SHEET
H	09.10.14		NO CHANGE THIS SHEET
I	04.10.15		NO CHANGE THIS SHEET

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

sheet 1.1 of 7

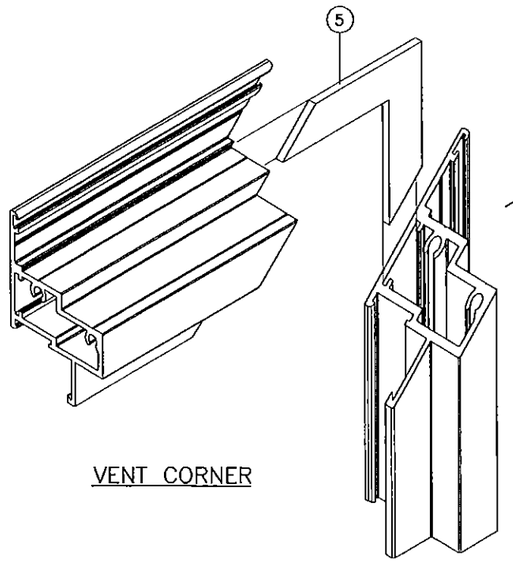

VENT CORNER

ALL FRAME AND VENT CORNERS TO BE SEALED WITH GE SILPRUF OR EQUIV.

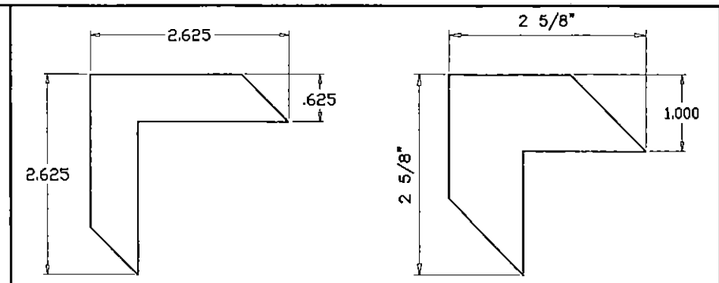

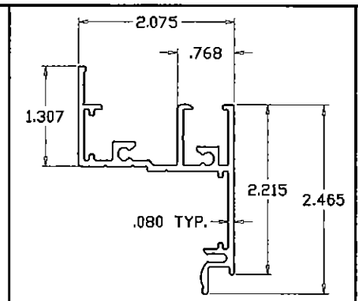

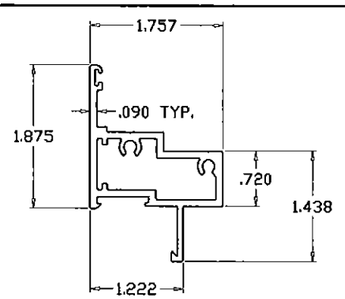

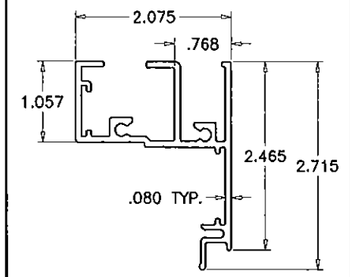

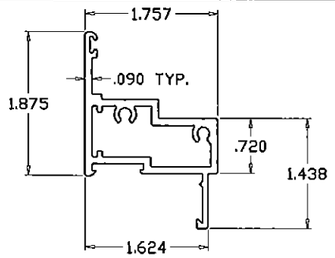

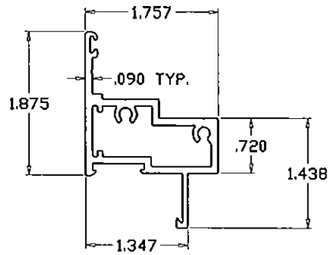





ITEM	PART #	QUANTITY	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS
1	CGI-373	4	FLANGE FRAME	6063-T6	INDALEX OR EQUIV.
1A	CGI-397	4	EQUAL LEG FRAME	6063-T6	INDALEX OR EQUIV.
2	CGI-378	4	VENT (5/16" LAM. GLASS)	6063-T6	INDALEX OR EQUIV.
2B	CGI-381	4	VENT (INSUL. LAM. GLASS)	6063-T6	INDALEX OR EQUIV.
2C	CGI-385	4	VENT (7/16" LAM. GLASS)	6063-T6	INDALEX OR EQUIV.
3	CGI-375	4	OGEE GLAZING BEAD	6063-T5	INDALEX OR EQUIV.
3A	CGI-396	4	SQUARE GLAZING BEAD	6063-T5	INDALEX OR EQUIV.
4	–	4	.060 THICK CORNER KEY	ALUMINUM	–
5	–	8	.060 THICK CORNER KEY	ST. STEEL	–
6	AP-425	AS REQD.	FRAME WEATHERSTRIPPING	–	SCHLEGEL APTUS
7	0200 X190	AS REQD.	VENT WEATHERSTRIPPING	–	SCHLEGEL Q-LON
8	35-10-00-101	2/ VENT	4 BAR HINGE, AT JAMBS	STEEL	TRUTH, ATTACHED W/ (6) #8 X 3/8" SS SMS
9	24-13-00-202	2/ VENT	FACE MOUNT LOCK	STEEL	TRUTH, ATTACHED W/ (2) #8 X 3/8" SS SMS
9A	–	2/ VENT	MULTI POINT LOCK	–	–
10	–	2/ VENT	.110 THICK LOCK KEEPER, AT FRAME JAMB FACING LOCK	STEEL	CGI, ATTACHED W/ (2) #10 X 3/8" SS SMS
11	–	2/ CORNER	FRAME AND VENT ASSEMBLY SCREWS	–	#10 X 1-1/4" SS SMS
12	–	2/ LITE	SETTING BLOCKS	EPDM	DUROMETER 80±5 SHORE A

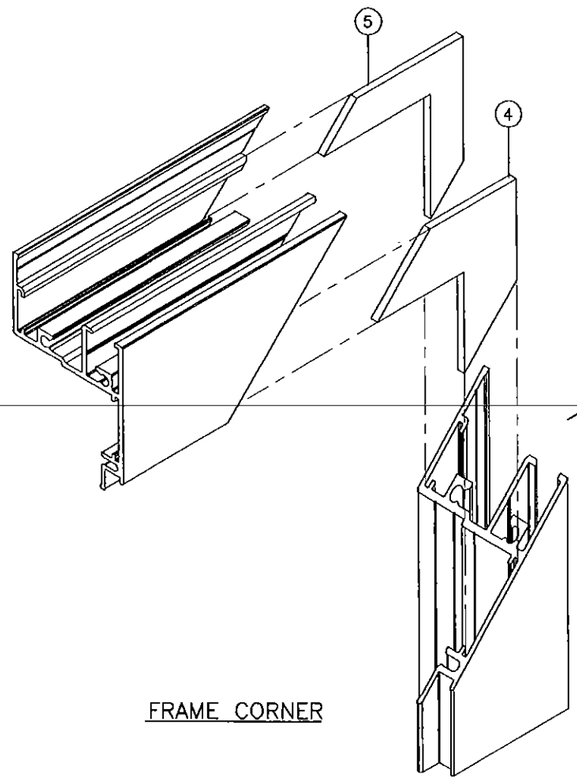

FRAME CORNER

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538

MAY 04 2015

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0512.21
Expiration Date Oct. 31, 2018
By Manuel Perez
Miami-Dade Product Control

afc
AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL (305) 264-8100 FAX. (305) 262-6978

COMP-ANL W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW & DOORS

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions:			
no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		NO CHANGE THIS SHEET
G	07.31.13		NO CHANGE THIS SHEET
H	09.10.14		UPDATED TO 2014 FBC
I	04.10.15		NO CHANGE THIS SHEET

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

sheet 2 of 7

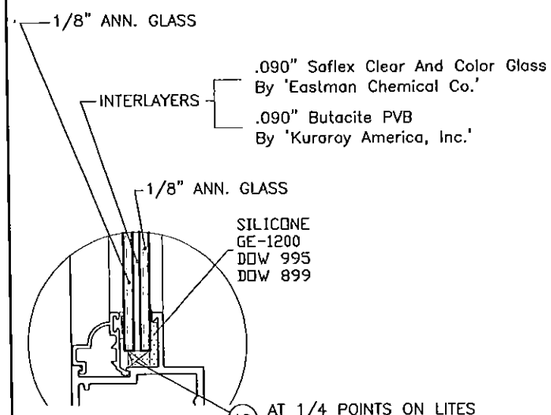

5/16" NOMINAL
GLASS TYPE '2'

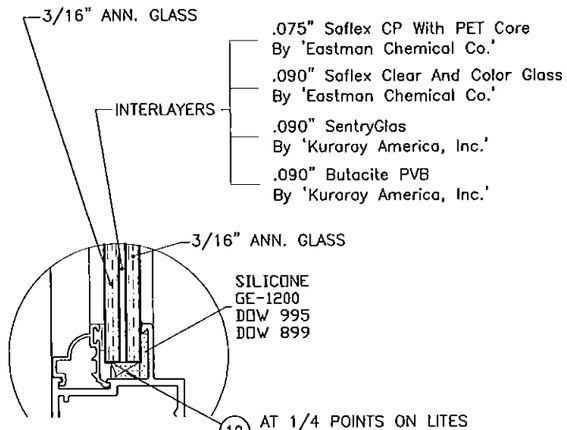

7/16" NOMINAL
GLASS TYPE '3'

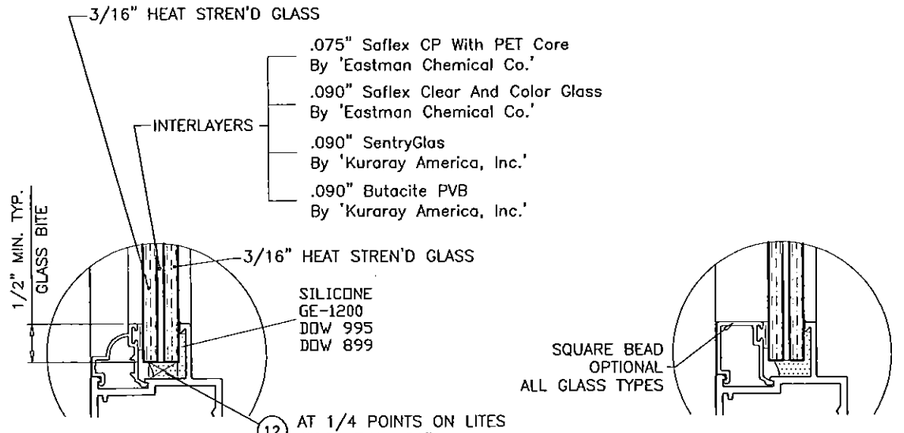

7/16" NOMINAL
GLASS TYPE '6'

PERFORMANCE VALUES OF IMPACT RESISTANT WINDOWS
NO SHUTTERS REQUIRED
REFER TO SHEETS 5 THRU 7 FOR INSTALLATION DETAILS

WINDOW DIMS.		GLASS TYPE '2'		GLASS TYPE '3'		GLASS TYPE '6'	
WIDTH	HEIGHT	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)
24"	24"	110.0	195.0	110.0	195.0	110.0	195.0
	28"	110.0	195.0	110.0	195.0	110.0	195.0
	30"	110.0	194.3	110.0	195.0	110.0	195.0
	36"	110.0	161.9	110.0	195.0	110.0	195.0
	42"	110.0	138.8	110.0	195.0	110.0	195.0
	48"	110.0	121.4	110.0	195.0	110.0	195.0
	54"	107.9	107.9	110.0	195.0	110.0	195.0
	60"	95.4	95.4	110.0	195.0	110.0	120.0
	66"	73.4	73.4	110.0	120.0	110.0	120.0
	72"	56.1	56.1	110.0	120.0	110.0	120.0
	78"	43.8	43.8	110.0	120.0	110.0	120.0
	84"	34.9	34.9	110.0	120.0	110.0	120.0
30"	24"	110.0	194.3	110.0	195.0	110.0	195.0
	28"	110.0	166.5	110.0	195.0	110.0	195.0
	30"	110.0	155.4	110.0	195.0	110.0	195.0
	36"	110.0	129.5	110.0	195.0	110.0	195.0
	42"	110.0	111.0	110.0	195.0	110.0	195.0
	48"	97.1	97.1	110.0	195.0	110.0	120.0
	54"	86.3	86.3	110.0	120.0	110.0	120.0
	60"	77.7	77.7	110.0	120.0	110.0	120.0
	66"	60.6	60.6	110.0	120.0	110.0	120.0
	72"	46.0	46.0	110.0	120.0	110.0	120.0
	78"	–	–	110.0	120.0	–	–
36"	24"	110.0	161.9	110.0	195.0	110.0	195.0
	28"	110.0	138.8	110.0	195.0	110.0	195.0
	30"	110.0	129.5	110.0	195.0	110.0	195.0
	36"	107.9	107.9	110.0	195.0	110.0	195.0
	42"	92.5	92.5	110.0	120.0	110.0	120.0
	48"	80.9	80.9	110.0	120.0	110.0	120.0
	54"	71.9	71.9	110.0	120.0	110.0	120.0
	60"	64.8	64.8	110.0	120.0	110.0	120.0

NOTE:
LOAD/AREA LIMITS
FOR +110.0, −120.0 PSF = 16.34 SQ. FT.
+110.0, −195.0 PSF = 10.00 SQ. FT.

PERFORMANCE VALUES OF IMPACT RESISTANT WINDOWS
NO SHUTTERS REQUIRED
REFER TO SHEETS 5 THRU 7 FOR INSTALLATION DETAILS

WINDOW DIMS.		GLASS TYPE '2'		GLASS TYPE '3'		GLASS TYPE '6'	
WIDTH	HEIGHT	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)
42"	24"	110.0	138.8	110.0	195.0	110.0	195.0
	28"	110.0	118.9	110.0	195.0	110.0	195.0
	30"	110.0	111.0	110.0	195.0	110.0	195.0
	36"	92.5	92.5	110.0	120.0	110.0	120.0
	42"	79.3	79.3	110.0	120.0	110.0	120.0
	48"	69.4	69.4	110.0	120.0	110.0	120.0
	54"	61.7	61.7	110.0	120.0	110.0	120.0
48"	24"	110.0	121.4	110.0	195.0	110.0	195.0
	28"	104.1	104.1	110.0	195.0	110.0	120.0
	30"	97.1	97.1	110.0	195.0	110.0	120.0
	36"	80.9	80.9	110.0	120.0	110.0	120.0
	42"	69.4	69.4	110.0	120.0	110.0	120.0
	48"	60.7	60.7	110.0	120.0	110.0	120.0
54"	24"	107.9	107.9	110.0	195.0	110.0	195.0
	28"	92.5	92.5	110.0	120.0	110.0	120.0
	30"	86.3	86.3	110.0	120.0	110.0	120.0
	36"	71.9	71.9	110.0	120.0	110.0	120.0
	42"	61.7	61.7	110.0	120.0	110.0	120.0
60"	24"	95.4	95.4	110.0	195.0	110.0	120.0
	28"	83.3	83.3	110.0	120.0	110.0	120.0
	30"	77.7	77.7	110.0	120.0	110.0	120.0
	36"	64.8	64.8	110.0	120.0	110.0	120.0
66"	24"	73.4	73.4	110.0	120.0	110.0	120.0
	28"	64.2	64.2	110.0	120.0	110.0	120.0
	30"	60.6	60.6	110.0	120.0	110.0	120.0
72"	24"	56.1	56.1	110.0	120.0	110.0	120.0
	28"	48.9	48.9	110.0	120.0	110.0	120.0
	30"	46.0	46.0	110.0	120.0	110.0	120.0
78"	24"	43.8	43.8	110.0	120.0	110.0	120.0
	28"	38.1	38.1	110.0	120.0	110.0	120.0
	30"	–	–	110.0	120.0	–	–
84"	24"	34.9	34.9	110.0	120.0	110.0	120.0
	28"	–	–	110.0	120.0	–	–

PERFORMANCE VALUES OF IMPACT RESISTANT WINDOWS
NO SHUTTERS REQUIRED
REFER TO SHEETS 5 THRU 7 FOR INSTALLATION DETAILS

WINDOW DIMS.		GLASS TYPE '2'		GLASS TYPE '3'		GLASS TYPE '6'	
WIDTH	HEIGHT	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)
19−1/8"	26"	110.0	195.0	110.0	195.0	110.0	195.0
	38−3/8"	110.0	190.6	110.0	195.0	110.0	195.0
	50−5/8"	110.0	144.5	110.0	195.0	110.0	195.0
	63"	104.2	104.2	110.0	195.0	110.0	195.0
	74−1/4"	63.0	63.0	110.0	195.0	110.0	120.0
26−1/2"	26"	110.0	195.0	110.0	195.0	110.0	195.0
	38−3/8"	110.0	137.5	110.0	195.0	110.0	195.0
	50−5/8"	104.3	104.3	110.0	195.0	110.0	195.0
	63"	77.9	77.9	110.0	120.0	110.0	120.0
	74−1/4"	46.6	46.6	110.0	120.0	110.0	120.0
37"	26"	110.0	145.4	110.0	195.0	110.0	195.0
	38−3/8"	98.5	98.5	110.0	194.5	110.0	120.0
	50−5/8"	74.7	74.7	110.0	120.0	110.0	120.0
	63"	60.0	60.0	110.0	120.0	110.0	120.0
42"	26"	110.0	128.1	110.0	195.0	110.0	195.0
	38−3/8"	86.8	86.8	110.0	120.0	110.0	120.0
	50−5/8"	65.8	65.8	110.0	120.0	110.0	120.0
53−1/8"	26"	101.3	101.3	110.0	195.0	110.0	120.0
	38−3/8"	68.6	68.6	110.0	120.0	110.0	120.0

NOTE:
GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300−09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05−DEC−219

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538
MAY 04 2015

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 15-0512.21
Expiration Date Oct. 31, 2018
By Manuel Perez
Miami Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978
COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions:			
no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		UPDATED TO 2010 FBC
G	07.31.13		REV. PER RER COMMENTS
H	09.10.14		UPDATED TO 2014 FBC
I	04.10.15		INTERLAYER REV.

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

sheet 3 of 7

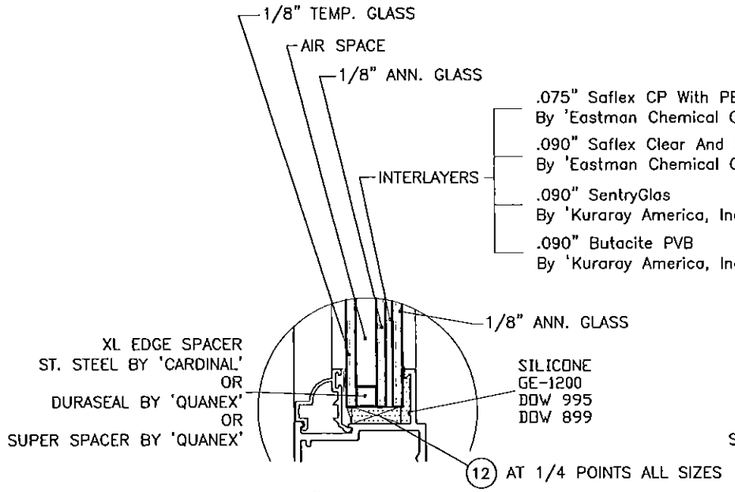

3/4" INSULATED GLASS TYPE '2A'

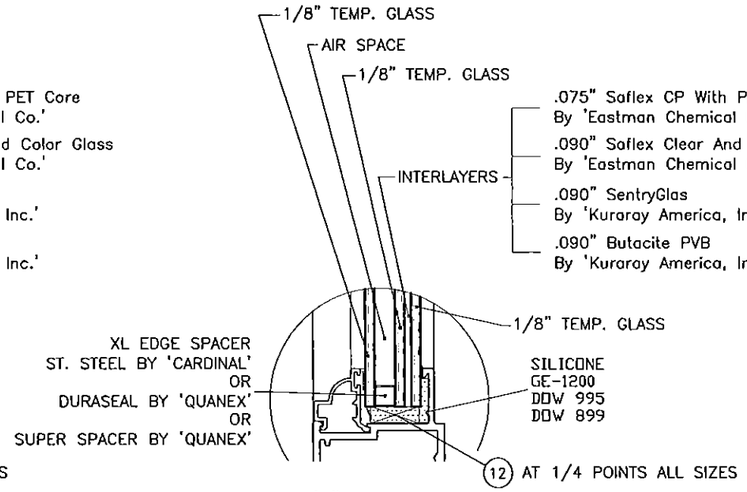

3/4" INSULATED GLASS TYPE '3A'

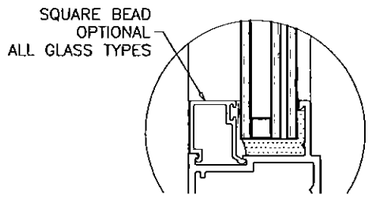

PERFORMANCE VALUES OF IMPACT RESISTANT WINDOWS
NO SHUTTERS REQUIRED
REFER TO SHEETS 5 THRU 7 FOR INSTALLATION DETAILS

WINDOW DIMS.		GLASS TYPE '2A'		GLASS TYPE '3A'	
WIDTH	HEIGHT	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)
24"	24"	110.0	195.0	110.0	195.0
	28"	110.0	195.0	110.0	195.0
	30"	110.0	194.3	110.0	195.0
	36"	110.0	161.9	110.0	195.0
	42"	110.0	138.8	110.0	195.0
	48"	110.0	121.4	110.0	195.0
	54"	107.9	107.9	110.0	195.0
	60"	95.4	95.4	110.0	120.0
	66"	73.4	73.4	110.0	120.0
	72"	56.1	56.1	109.3	109.3
	78"	43.8	43.8	85.4	85.4
	84"	34.9	34.9	68.0	68.0
30"	24"	110.0	194.3	110.0	195.0
	28"	110.0	166.5	110.0	195.0
	30"	110.0	155.4	110.0	195.0
	36"	110.0	129.5	110.0	195.0
	42"	110.0	111.0	110.0	195.0
	48"	97.1	97.1	110.0	120.0
	54"	86.3	86.3	110.0	120.0
	60"	77.7	77.7	110.0	120.0
	66"	60.6	60.6	110.0	118.2
	72"	46.0	46.0	89.8	89.8
	78"	–	–	–	–
36"	24"	110.0	161.9	110.0	195.0
	28"	110.0	138.8	110.0	195.0
	30"	110.0	129.5	110.0	195.0
	36"	107.9	107.9	110.0	195.0
	42"	92.5	92.5	110.0	120.0
	48"	80.9	80.9	110.0	120.0
	54"	71.9	71.9	110.0	120.0
	60"	64.8	64.8	110.0	120.0

PERFORMANCE VALUES OF IMPACT RESISTANT WINDOWS
NO SHUTTERS REQUIRED
REFER TO SHEETS 5 THRU 7 FOR INSTALLATION DETAILS

WINDOW DIMS.		GLASS TYPE '2A'		GLASS TYPE '3A'	
WIDTH	HEIGHT	EXT. (+)	INT. (−)	EXT. (+)	INT. (−)
42"	24"	110.0	138.8	110.0	195.0
	28"	110.0	118.9	110.0	195.0
	30"	110.0	111.0	110.0	195.0
	36"	92.5	92.5	110.0	120.0
	42"	79.3	79.3	110.0	120.0
	48"	69.4	69.4	110.0	120.0
	54"	61.7	61.7	110.0	120.0
48"	24"	110.0	121.4	110.0	195.0
	28"	104.1	104.1	110.0	120.0
	30"	97.1	97.1	110.0	120.0
	36"	80.9	80.9	110.0	120.0
	42"	69.4	69.4	110.0	120.0
	48"	60.7	60.7	110.0	118.4
54"	24"	107.9	107.9	110.0	195.0
	28"	92.5	92.5	110.0	120.0
	30"	86.3	86.3	110.0	120.0
	36"	71.9	71.9	110.0	120.0
	42"	61.7	61.7	110.0	120.0
60"	24"	95.4	95.4	110.0	120.0
	28"	83.3	83.3	110.0	120.0
	30"	77.7	77.7	110.0	120.0
	36"	64.8	64.8	110.0	120.0
66"	24"	73.4	73.4	110.0	120.0
	28"	64.2	64.2	110.0	120.0
	30"	60.6	60.6	110.0	118.2
72"	24"	56.1	56.1	109.3	109.3
	28"	48.9	48.9	95.3	95.3
	30"	46.0	46.0	89.8	89.8
78"	24"	43.8	43.8	85.4	85.4
	28"	38.1	38.1	74.3	74.3
84"	24"	34.9	34.9	68.0	68.0

PERFORMANCE VALUES OF IMPACT RESISTANT WINDOWS
NO SHUTTERS REQUIRED
REFER TO SHEETS 5 THRU 7 FOR INSTALLATION DETAILS

WINDOW DIMS.		GLASS TYPE '2A'		GLASS TYPE '3A'	
WIDTH	HEIGHT	EXT. (+)	INT. (−)	EXT. (+)	INT. (--)
19-1/8"	26"	110.0	195.0	110.0	195.0
	38-3/8"	110.0	190.6	110.0	195.0
	50-5/8"	110.0	144.5	110.0	195.0
	63"	104.2	104.2	110.0	195.0
	74-1/4"	63.0	63.0	110.0	120.0
26-1/2"	26"	110.0	195.0	110.0	195.0
	38-3/8"	110.0	137.5	110.0	195.0
	50-5/8"	104.3	104.3	110.0	195.0
	63"	77.9	77.9	110.0	120.0
	74-1/4"	46.6	46.6	90.9	90.9
37"	26"	110.0	145.4	110.0	195.0
	38-3/8"	98.5	98.5	110.0	120.0
	50-5/8"	74.7	74.7	110.0	120.0
	63"	60.0	60.0	110.0	117.0
42"	26"	110.0	128.1	110.0	195.0
	38-3/8"	86.8	86.8	110.0	120.0
	50-5/8"	65.8	65.8	110.0	120.0
53-1/8"	26"	101.3	101.3	110.0	120.0
	38-3/8"	68.6	68.6	110.0	120.0

NOTE:
LOAD/AREA LIMITS
FOR +110.0, −120.0 PSF = 16.34 SQ. FT.
+110.0, −195.0 PSF = 10.00 SQ. FT.

NOTE:
GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-09 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538
MAY 04 2015

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 15-0512.21
Expiration Date Oct. 31. 2018
By Manuel Perez
Miami-Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions:

no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		UPDATED TO 2010 FBC
G	07.31.13		REV. PER RER COMMENTS
H	09.10.14		UPDATED TO 2014 FBC
I	04.10.15		INTERLAYER & SPACER REV.

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

INSTALLATION CONDITIONS FLANGE FRAME (APPLIES TO ALL FOUR SIDES)

FOR ANCHOR PERFORMANCE VALUES SEE SHEET 6

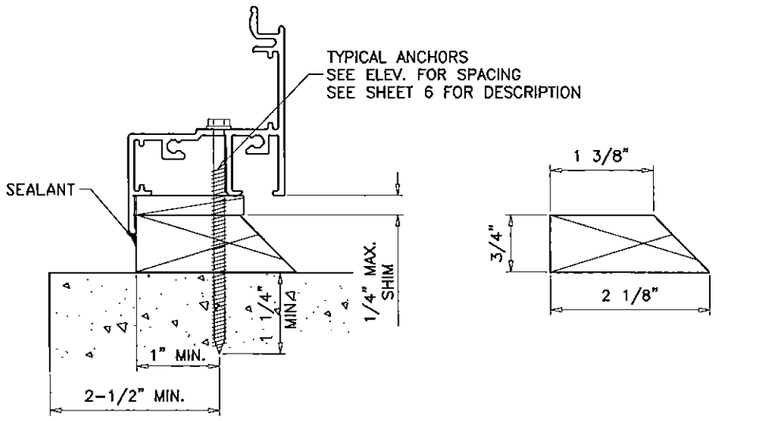

INSTALLATION TYPE '1'

WOOD BUCK TYPE '1'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

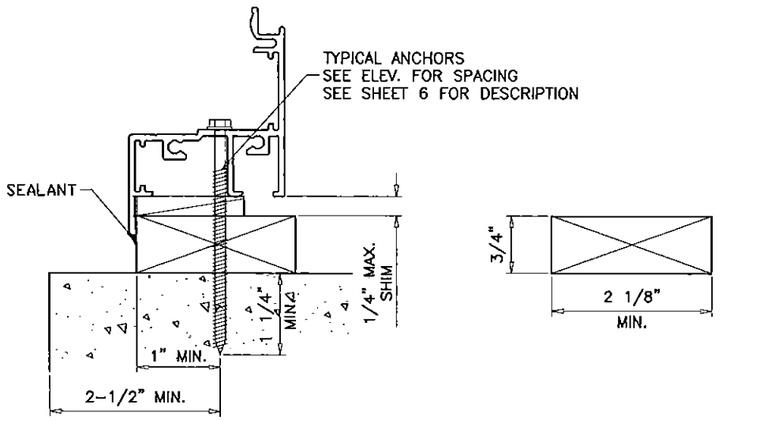

INSTALLATION TYPE '2'

WOOD BUCK TYPE '2'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

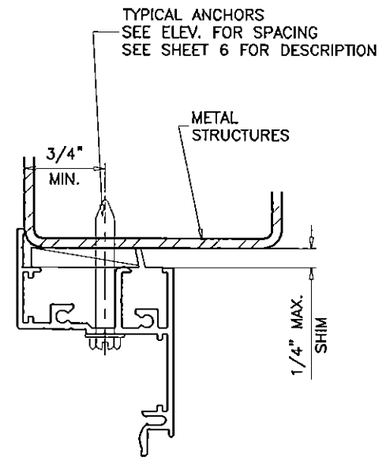

ATTACHMENT TO
METAL STRUCTURES

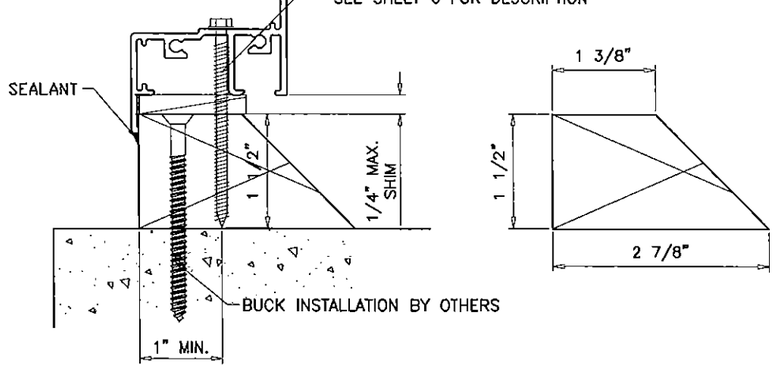

INSTALLATION TYPE '3'

WOOD BUCK TYPE '3'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

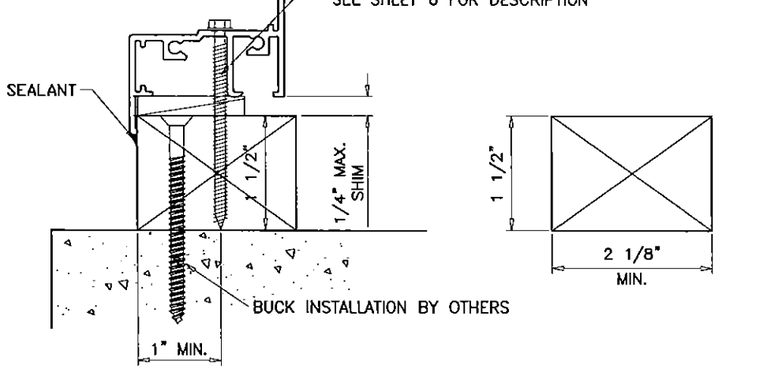

INSTALLATION TYPE '4'

WOOD BUCK TYPE '4'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

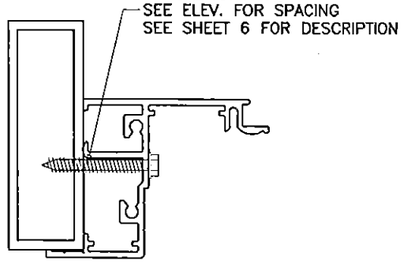

ATTACHMENT TO
APPROVED MULLIONS

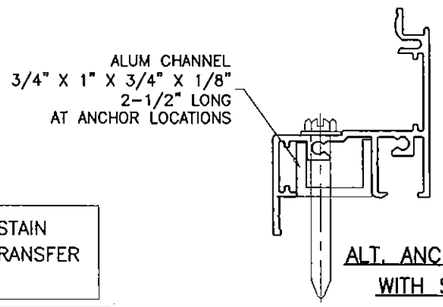

ALT. ANCHOR LOCATION
WITH SHEAR CLIP

WOOD BUCKS NOT BY CGI CORP., MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538

MAY 07 2015

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0512.21
Expiration Date Oct. 31, 2018
By Manuel Perez
Miami-Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions:

no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		NO CHANGE THIS SHEET
G	07.31.13		NO CHANGE THIS SHEET
H	09.10.14		NO CHANGE THIS SHEET
I	04.10.15		NO CHANGE THIS SHEET

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

INSTALLATION CONDITIONS EQUAL LEG FRAME (APPLIES TO ALL FOUR SIDES)

FOR ANCHOR PERFORMANCE VALUES SEE SHEET 6

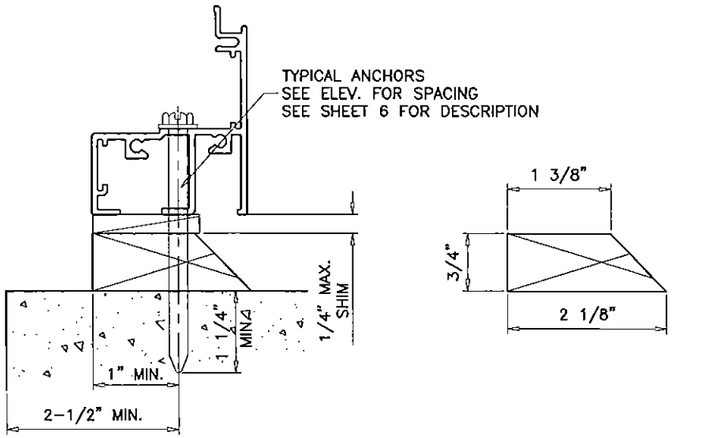

INSTALLATION TYPE '1'

WOOD BUCK TYPE '1'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

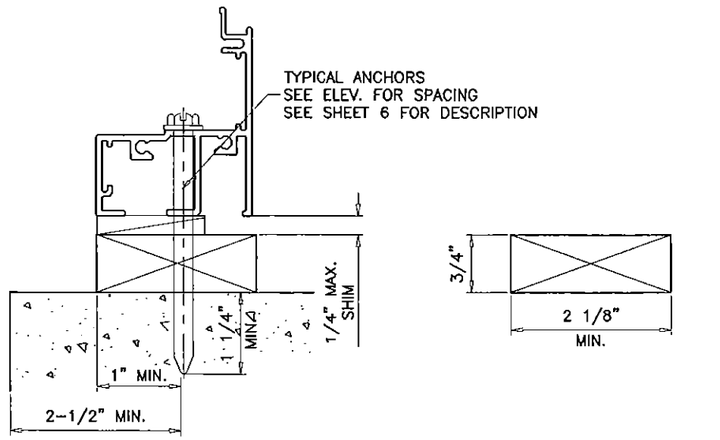

INSTALLATION TYPE '2'

WOOD BUCK TYPE '2'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

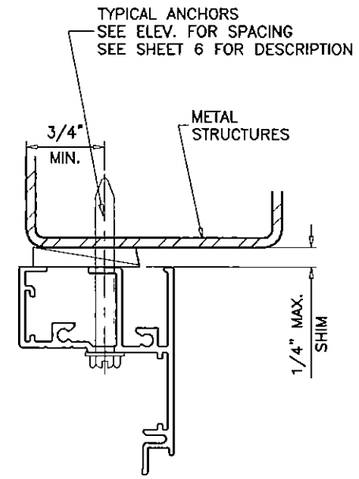

ATTACHMENT TO
METAL STRUCTURES

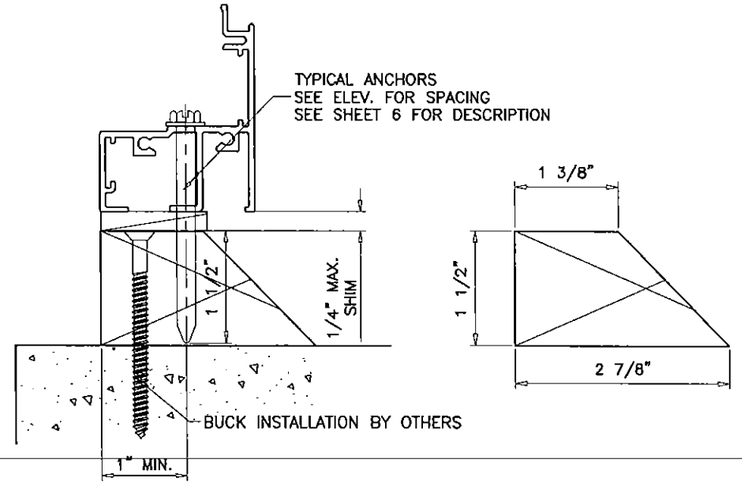

INSTALLATION TYPE '3'

WOOD BUCK TYPE '3'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

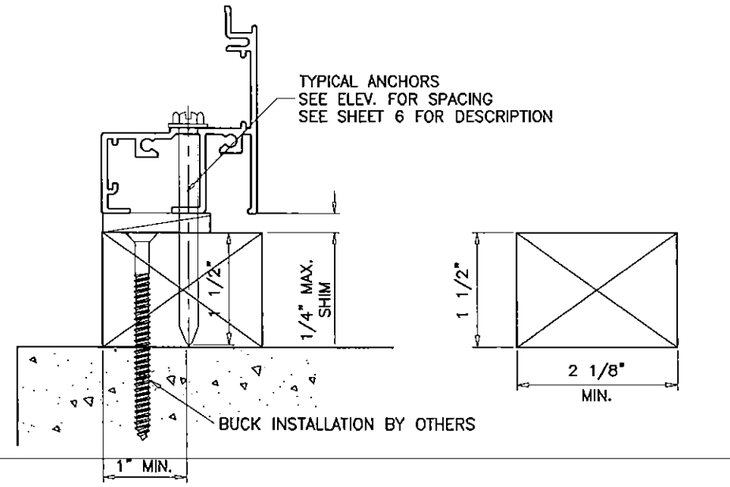

INSTALLATION TYPE '4'

WOOD BUCK TYPE '4'

MATERIAL: PRESSURE TREATED

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING WOOD

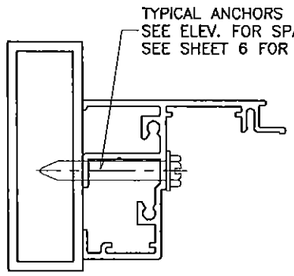

ATTACHMENT TO
APPROVED MULLIONS

WOOD BUCKS NOT BY CGI CORP., MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538

MAY 04 2015

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0512.21
Expiration Date DEC. 31, 2018
By Manuel Perez
Miami-Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW & DOORS

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL (305) 593-6590 FAX. (305) 593-6592

revisions:

no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		NO CHANGE THIS SHEET
G	07.31.13		NO CHANGE THIS SHEET
H	09.10.14		NO CHANGE THIS SHEET
I	04.10.15		NO CHANGE THIS SHEET

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

PERFORMANCE VALUES OF INSTALLATION ANCHORS
REFER TO SHEET 5 FOR DETAILS

WINDOW DIMS.		ANCHORS TYPE 'A' & 'C'				ANCHORS TYPE 'B'	
		W/O SHEAR CLIP		WITH SHEAR CLIP		WITH OR W/O SHEAR CLIP	
WIDTH	HEIGHT	AT 17" O.C.	AT 10" O.C.	AT 17" O.C.	AT 10" O.C.	AT 17" O.C.	AT 10" O.C.
24"	24"	195.0	195.0	129.0	193.5	195.0	195.0
	28"	195.0	195.0	110.6	165.9	195.0	195.0
	30"	195.0	195.0	154.8	154.8	195.0	195.0
	36"	195.0	195.0	129.0	172.0	195.0	195.0
	42"	195.0	195.0	110.6	147.4	195.0	195.0
	48"	195.0	195.0	129.0	161.3	195.0	195.0
	54"	195.0	195.0	114.7	172.0	195.0	195.0
	60"	193.6	195.0	103.2	154.8	195.0	195.0
	66"	195.0	195.0	117.3	164.2	195.0	195.0
	72"	195.0	195.0	107.5	150.5	195.0	195.0
	78"	186.2	195.0	99.2	158.8	195.0	195.0
	84"	195.0	195.0	110.6	165.9	195.0	195.0
30"	24"	195.0	195.0	154.8	154.8	195.0	195.0
	28"	195.0	195.0	132.7	132.7	195.0	195.0
	30"	195.0	195.0	123.8	123.8	195.0	195.0
	36"	193.6	195.0	103.2	137.6	195.0	195.0
	42"	165.9	195.0	88.5	117.9	195.0	195.0
	48"	193.6	195.0	103.2	129.0	195.0	195.0
	54"	172.1	195.0	91.7	137.6	195.0	195.0
	60"	154.9	195.0	82.6	123.8	195.0	195.0
	66"	176.0	195.0	93.8	131.3	195.0	195.0
	72"	161.3	195.0	86.0	120.4	195.0	195.0
	78"	148.9	195.0	79.4	127.0	195.0	195.0
36"	24"	195.0	195.0	129.0	172.0	195.0	195.0
	28"	195.0	195.0	110.6	147.4	195.0	195.0
	30"	193.6	195.0	103.2	137.6	195.0	195.0
	36"	161.3	195.0	86.0	114.7	195.0	195.0
	42"	138.3	184.4	73.7	98.3	195.0	195.0
	48"	161.3	195.0	86.0	107.5	195.0	195.0
	54"	143.4	195.0	76.4	114.7	195.0	195.0
	60"	129.1	193.6	68.8	103.2	195.0	195.0
42"	24"	195.0	195.0	110.6	147.4	195.0	195.0
	28"	177.8	195.0	94.8	126.4	195.0	195.0
	30"	165.9	195.0	88.5	117.9	195.0	195.0
	36"	138.3	184.4	73.7	98.3	195.0	195.0
	42"	118.5	158.0	63.2	84.2	179.8	195.0
	48"	138.3	172.9	73.7	92.1	195.0	195.0
	54"	122.9	184.4	65.5	98.3	186.4	195.0
48"	24"	195.0	195.0	129.0	161.3	195.0	195.0
	28"	195.0	195.0	110.6	138.2	195.0	195.0
	30"	193.6	195.0	103.2	129.0	195.0	195.0
	36"	161.3	195.0	86.0	107.5	195.0	195.0
	42"	138.3	172.9	73.7	92.1	195.0	195.0
	48"	121.0	151.3	64.5	80.6	183.5	195.0
54"	24"	195.0	195.0	114.7	172.0	195.0	195.0
	28"	184.4	195.0	98.3	147.4	195.0	195.0
	30"	172.1	195.0	91.7	137.6	195.0	195.0
	36"	143.4	195.0	76.4	114.7	195.0	195.0
	42"	122.9	184.4	65.5	98.3	186.4	195.0
60"	24"	193.6	195.0	103.2	154.8	195.0	195.0
	28"	165.9	195.0	88.5	132.7	195.0	195.0
	30"	154.9	195.0	82.6	123.8	195.0	195.0
	36"	129.1	193.6	68.8	103.2	195.0	195.0
66"	24"	195.0	195.0	117.3	164.2	195.0	195.0
	28"	188.6	195.0	100.5	14.7	195.0	195.0
	30"	176.0	195.0	93.8	131.3	195.0	195.0
72"	24"	195.0	195.0	107.5	150.5	195.0	195.0
	28"	172.9	195.0	92.1	129.0	195.0	195.0
	30"	161.3	195.0	86.0	120.4	195.0	195.0

PERFORMANCE VALUES OF INSTALLATION ANCHORS
REFER TO SHEET 5 FOR DETAILS

WINDOW DIMS.		ANCHORS TYPE 'A' & 'C'				ANCHORS TYPE 'B'	
		W/O SHEAR CLIP		WITH SHEAR CLIP		WITH OR W/O SHEAR CLIP	
WIDTH	HEIGHT	AT 17" O.C.	AT 10" O.C.	AT 17" O.C.	AT 10" O.C.	AT 17" O.C.	AT 10" O.C.
78"	24"	186.2	195.0	99.2	158.8	195.0	195.0
	28"	159.6	195.0	85.1	136.1	195.0	195.0
	30"	148.9	195.0	79.4	127.0	195.0	195.0
84"	24"	195.0	195.0	110.6	165.9	195.0	195.0
	28"	177.8	195.0	94.8	142.2	195.0	195.0

PERFORMANCE VALUES OF INSTALLATION ANCHORS
REFER TO SHEET 5 FOR DETAILS

WINDOW DIMS.		ANCHORS TYPE 'A' & 'C'				ANCHORS TYPE 'B'	
		W/O SHEAR CLIP		WITH SHEAR CLIP		WITH OR W/O SHEAR CLIP	
WIDTH	HEIGHT	AT 17" O.C.	AT 10" O.C.	AT 17" O.C.	AT 10" O.C.	AT 17" O.C.	AT 10" O.C.
19-1/8"	26"	195.0	195.0	149.4	195.0	195.0	195.0
	38-3/8"	195.0	195.0	151.9	195.0	195.0	195.0
	50-5/8"	195.0	195.0	153.5	191.9	195.0	195.0
	63"	195.0	195.0	123.3	195.0	195.0	195.0
	74-1/4"	195.0	195.0	130.8	195.0	195.0	195.0
26-1/2"	26"	195.0	195.0	107.8	161.8	195.0	195.0
	38-3/8"	195.0	195.0	109.6	146.1	195.0	195.0
	50-5/8"	195.0	195.0	110.8	138.5	195.0	195.0
	63"	167.0	195.0	89.0	155.8	195.0	195.0
	74-1/4"	177.1	195.0	94.4	151.1	195.0	195.0
37"	26"	195.0	195.0	115.9	154.5	195.0	195.0
	38-3/8"	147.3	195.0	78.5	104.7	195.0	195.0
	50-5/8"	148.8	186.0	79.3	99.2	195.0	195.0
	63"	119.6	195.0	63.8	111.6	181.4	195.0
42"	26"	191.5	195.0	102.1	136.1	195.0	195.0
	38-3/8"	129.7	173.0	69.2	92.2	195.0	195.0
	50-5/8"	131.1	163.9	69.9	87.4	195.0	195.0
53-1/8"	26"	195.0	195.0	107.6	161.4	195.0	195.0
	38-3/8"	136.7	195.0	72.9	109.3	195.0	195.0

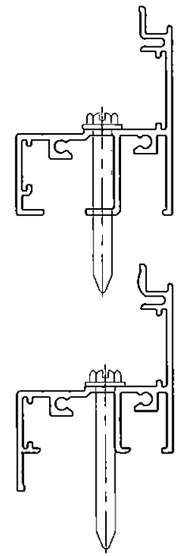

ANCHORS W/O SHEAR CLIP

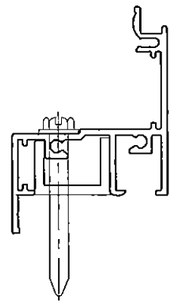

ANCHORS WITH SHEAR CLIP

TYPICAL ANCHORS: SEE ELEV. FOR SPACING

TYPE 'A'– 1/4" DIA. KWIK-CON II BY 'HILTI' (Fu=163 KSI, Fy=157 KSI)
1/4" DIA. ULTRACON BY 'ELCO' (Fu=177 KSI, Fy=155 KSI)
INTO 2BY WOOD BUCKS OR WOOD STRUCTURES
1-1/2" MIN. PENETRATION INTO WOOD

THRU 1BY BUCKS INTO CONC. OR MASONRY
1-1/4" MIN. EMBED INTO CONC. OR MASONRY

TYPE 'B'– 1/4" DIA. KWIK-CON II BY 'HILTI' (Fu=163 KSI, Fy=157 KSI)
1/4" DIA. ULTRACON BY 'ELCO' (Fu=177 KSI, Fy=155 KSI)
DIRECTLY INTO CONCRETE
1-3/4" MIN. EMBED INTO CONCRETE

TYPE 'C'– #14 SMS OR SELF DRILLING SCREWS (GRADE 2 CRS)
INTO MIAMI-DADE COUNTY APPROVED MULLIONS (MIN. THK. = 1/8")

INTO METAL STRUCTURES
STEEL : 12 GA. MIN. (Fy = 36 KSI MIN.)
ALUMINUM : 1/8" THK. MIN. (6063-T5 MIN.)
(STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

TYPICAL EDGE DISTANCE

INTO CONCRETE AND MASONRY = 2-1/2" MIN.
INTO WOOD STRUCTURE = 1" MIN.
INTO METAL STRUCTURE = 3/4" MIN.

WOOD AT HEAD, SILL OR JAMBS SG = 0.55 MIN.
CONCRETE AT HEAD, SILL OR JAMBS f'c = 3000 PSI MIN.
C-90 HOLLOW/FILLED BLOCK AT JAMBS f'm = 2000 PSI MIN.

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538

MAY 04 2015

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0512.21
Expiration Date Oct. 31, 2018
By Manuel Perez
Miami-Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions:

no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		NO CHANGE THIS SHEET
G	07.31.13		NO CHANGE THIS SHEET
H	09.10.14		UPDATED TO 2014 FBC
I	04.10.15		NO CHANGE THIS SHEET

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04

sheet 6 of 7

PERFORMANCE VALUES OF ALUMINUM BUCK INSTALLATION ANCHORS			
WINDOW DIMS.		1/4" ANCHORS INTO MASONRY	1/4" ANCHORS INTO WOOD
WIDTH	HEIGHT	EXT.(+)/INT.(−)	EXT.(+)/INT.(−)
24"	24"	195.0	195.0
	28"	195.0	195.0
	30"	195.0	195.0
	36"	195.0	195.0
	42"	195.0	169.1
	48"	195.0	148.0
	54"	195.0	131.6
	60"	177.6	118.4
	66"	161.5	107.6
	72"	148.0	98.7
	78"	136.6	91.1
	84"	126.9	84.6
28"	24"	195.0	195.0
	28"	195.0	195.0
	30"	195.0	195.0
	36"	195.0	169.1
	42"	195.0	145.0
	48"	190.3	126.9
	54"	169.1	112.8
	60"	152.2	101.5
	66"	138.4	92.3
	72"	126.9	84.6
	78"	117.1	78.1
	84"	108.7	72.5
30"	24"	195.0	195.0
	28"	195.0	195.0
	30"	195.0	189.4
	36"	195.0	157.9
	42"	195.0	135.3
	48"	195.0	118.4
	54"	195.0	105.2
	60"	177.6	94.7
	66"	161.5	86.1
	72"	148.0	78.9
	78"	136.6	72.9
36"	24"	195.0	195.0
	28"	195.0	169.1
	30"	195.0	157.9
	36"	195.0	131.6
	42"	195.0	112.8
	48"	185.0	98.7
	54"	164.4	87.7
	60"	148.0	78.9
42"	24"	190.3	169.1
	28"	163.1	145.0
	30"	152.2	135.3
	36"	126.9	112.8
	42"	108.7	96.7
	48"	95.1	84.6
	54"	84.6	75.2

PERFORMANCE VALUES OF ALUMINUM BUCK INSTALLATION ANCHORS			
WINDOW DIMS.		1/4" ANCHORS INTO MASONRY	1/4" ANCHORS INTO WOOD
WIDTH	HEIGHT	EXT.(+)/INT.(−)	EXT.(+)/INT.(−)
48"	24"	195.0	148.0
	28"	190.3	126.9
	30"	177.6	118.4
	36"	148.0	98.7
	42"	126.9	84.6
	48"	111.0	74.0
54"	24"	195.0	131.6
	28"	169.1	112.8
	30"	157.9	105.2
	36"	131.6	87.7
	42"	112.8	75.2
60"	24"	177.6	118.4
	28"	152.2	101.5
	30"	142.1	94.7
	36"	118.4	78.9
66"	24"	195.0	134.5
	28"	173.0	115.3
	30"	161.5	107.6
72"	24"	185.0	123.3
	28"	158.6	105.7
	30"	148.0	98.7
78"	24"	170.8	113.8
	28"	146.4	97.6
	30"	136.6	91.1
84"	24"	190.3	126.9
	28"	163.1	108.7
19-1/8"	26"	195.0	195.0
	38-3/8"	195.0	195.0
	50-5/8"	195.0	176.1
	63"	195.0	141.5
	74-1/4"	180.1	120.1
26-1/2"	26"	195.0	195.0
	38-3/8"	195.0	167.7
	50-5/8"	190.6	127.1
	63"	153.2	102.1
	74-1/4"	130.0	86.7
37"	26"	195.0	177.2
	38-3/8"	135.1	120.1
	50-5/8"	102.4	91.0
	63"	82.3	73.1
53-1/8"	26"	185.2	123.4
	38-3/8"	125.4	83.6

ALUMINUM BUCK FRAMING DETAILS

REFER TO SHEETS 3 THRU 6 FOR WINDOW CAPACITIES
USE LOWER APPLICABLE VALUES.

NOTE:
ALUM BUCK ANCHORS TO BE INTO CONCRETE AT HEAD & SILL.
MAY BE INTO FILLED CMU AT JAMBS.

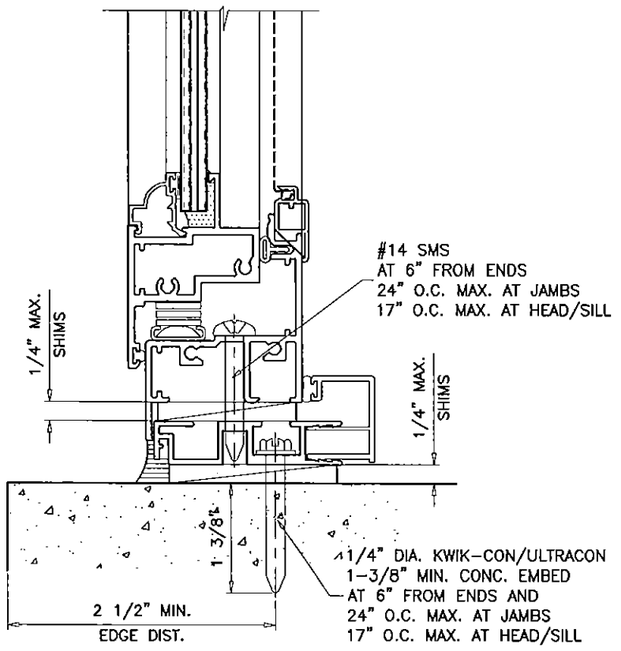

INSTALLATION TYPE '5'
INTO MASONRY

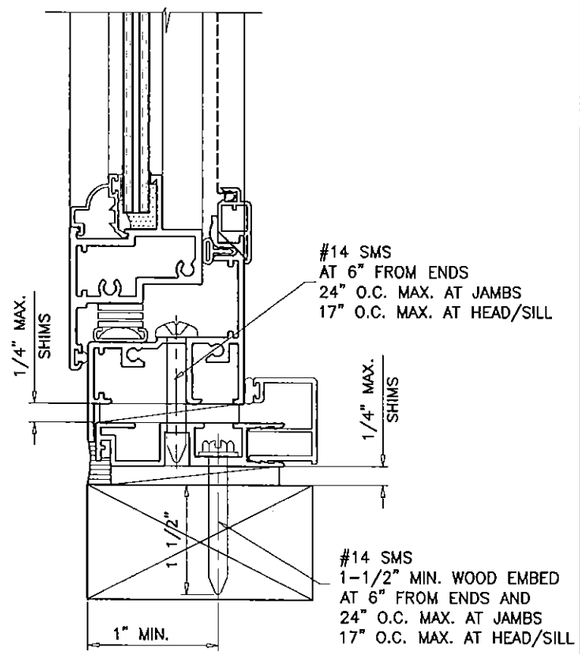

INSTALLATION TYPE '6'
2BY WOOD BUCK OR WOOD STRUCTURES

TYPICAL INSTALLATION DETAIL
ON ALL FOUR SIDES/USING ALUMINUM BUCK SYSTEM

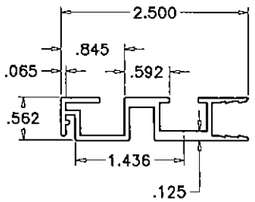

ALUMINUM BUCK
6063-T6



OPTIONAL COVER
6063-T6

Engr: JAVAD AHMAD
CIVIL
FLA. PE # 70592
C.A.N. 3538

MAY 04 2015

PRODUCT REVISED
as complying with the Florida Building Code
Acceptance No 15-0512.21
Expiration Date 05.31.2018
By Miami Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978

COMP-ANL\W99-04CGI

SERIES-238 ALUM PROJECT OUT WINDOW

CGI WINDOWS & DOORS
10100 N.W. 25TH STREET
MIAMI, FL. 33172
TEL. (305) 593-6590 FAX. (305) 593-6592

revisions:

no	date	by	description
E	09.22.08		GENERAL REV.
F	01.26.12		UPDATED TO 2010 FBC
G	07.31.13		NO CHANGE THIS SHEET
H	09.10.14		NO CHANGE THIS SHEET
I	04.10.15		NO CHANGE THIS SHEET

date: 01-21-99
scale: 1/2" = 1"
dr. by: HAMID
chk. by:

drawing no.
W99-04