



BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

www.miamidade.gov/buildingcode

Variform, Inc.
303 W. Major – P.O. Box 559
Kearney, MO 64060

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Vinyl Siding & Soffit

APPROVAL DOCUMENT: Drawing No. 1150001A, 2A, 3A, 4A & 5A, titled "Vinyl Siding Soffit", sheets 1 through 5 of 5, prepared by Variform, Inc, dated 01/1999, with no revisions, signed and sealed by Richard Boyette, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 03-1017.01** and consists of this page 1, evidence page E-1 as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



Signature
10/20/07

NOA No 07-1002.04
Expiration Date: October 31, 2012
Approval Date: November 15, 2007
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

A. DRAWINGS

1. Drawing No.1150001A, 2A, 3A, 4A & 5A, titled "Vinyl Siding Soffit", sheets 1 through 5 of 5, prepared by Variform, Inc, dated 01/1999, with no revisions, signed and sealed by Richard Boyette, P.E.
(Evidence Submitted under NOA # 03-1017.01)

B. TESTS

	Laboratory Report	Test	Date	Signature
1.	01-44749.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
2.	01-44739.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
3.	01-44750.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
4.	50437.01-106-18	ASTM G155	12/06/04	J. A. Reed, P.E.
5.	50437.01-106-18	ASTM D638	12/06/04	J. A. Reed, P.E.

(Evidence Submitted under NOA # 03-1017.01)

C. CALCULATIONS

1. None

D. QUALITY ASSURANCE

1. Building Code Compliance Office (BCCO)

E. MATERIAL CERTIFICATION

1. None

F. STATEMENTS

1. Code Compliance letter issued by R. Boyette, dated 10/23/98, signed and sealed by R. Boyette, PE.
2. Commencement letter issued by Architectural Testing on 03/29/04, signed and sealed by J. A. Reed PE.
(Evidence Submitted under NOA # 03-1017.01)


G. OTHER

1. NOA renewal request letter issued by Variform, Inc., dated 09/07/07, signed by Alan F. Hoying.

 10/20/07


Carlos M. Utrera, P.E.
Product Control Examiner
NOA No 07-1002.04

Expiration Date: October 31, 2012
Approval Date: November 15, 2007

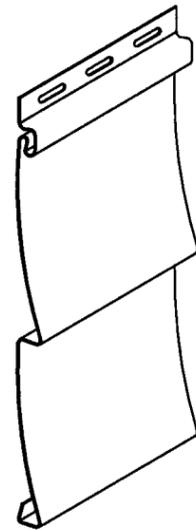

D/4
TRADITIONAL LAP


APPROVED MODELS

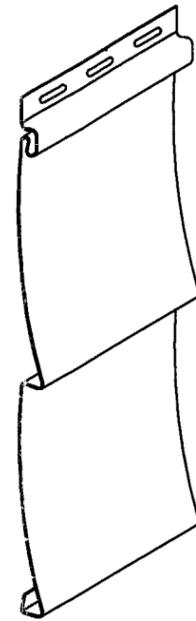

D/5
TRADITIONAL LAP

APPROVED MODELS

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

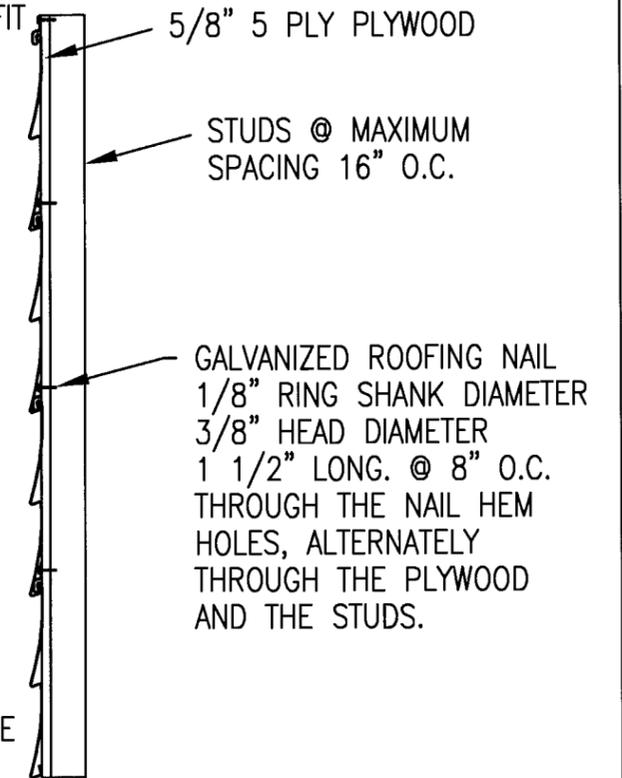

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.	NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
DURAGRAIN	1110300	DOUBLE 4	.042	46.6	DURAGRAIN	1111300	DOUBLE 5	.042	40.0
MILLBRIDGE	1110200	DOUBLE 4	.044	46.6	CHATEAU RUSTIC	1111601	DOUBLE 5	.042	40.0
CHATEAU RUSTIC	1110501	DOUBLE 4	.042	46.6	TIMBER OAK	1113200	DOUBLE 5	.048	40.0
TIMBER OAK	1112200	DOUBLE 4	.048	46.6	CONTRACTORS CHOICE	1113500	DOUBLE 5	.040	40.0
CONTRACTORS CHOICE	1112500	DOUBLE 4	.040	46.6	CHATEAU CEDAR	1113601	DOUBLE 5	.046	40.0
CHATEAU CEDAR	1112601	DOUBLE 4	.046	46.6	VARIGRAIN PREFERRED	1119300	DOUBLE 5	.046	40.0
VARIGRAIN PREFERRED	1119100	DOUBLE 4	.046	46.6	CHATEAU NOBILITY	1111701	DOUBLE 5	.038	40.0
CHATEAU NOBILITY	1110701	DOUBLE 4	.038	46.6	CHATEAU LEGACY	1113501	DOUBLE 5	.040	40.0
CHATEAU LEGACY	1112501	DOUBLE 4	.040	46.6	CHATEAU LEGEND	1119301	DOUBLE 5	.046	40.0
CHATEAU LEGEND	1119101	DOUBLE 4	.046	46.6	CAMDEN POINTE	1119700	DOUBLE 5	.044	40.0
CAMDEN POINTE	1119500	DOUBLE 4	.044	46.6	CHATEAU MYSTIQUE	1114801	DOUBLE 5	.044	50.0
VARITEK	1116803	DOUBLE 4	.036	46.6					
CHATEAU MYSTIQUE	1114701	DOUBLE 4	.044	50.0					

PRODUCT REVISED
as per change with the Florida
Building Code
Approved by 03-1017.01
Expire Date 04/29/05
By: [Signature]
Richard Dade Product Control
Division




07-1007.04
16/31/2012
By: [Signature]

RICHARD ROYETTE
FL Civil PE #2485
4031 Coconut Blvd
Boca Raton, FL 33411
Phone: 561-997-1111 / Fax
561-997-1112

NOTE 1.- VARIFORM INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2121.6.2.1 OF THE FBC

4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE FBC AND THE REQUIREMENTS OF THESE NOA
5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE FBC

VARIFORM INC. 303 W. MAJOR KEARNEY, MO. 64060		COMPANY NAME VARIFORM INC.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ± .010 ANGULAR ± 1° 300 ± .005 DO NOT SCALE DRAWING		DRAWN LRB	DATE 1/99
DESIGN ACTIVITY		SIZE B	DWG NO. 1150001A
		SHEET	

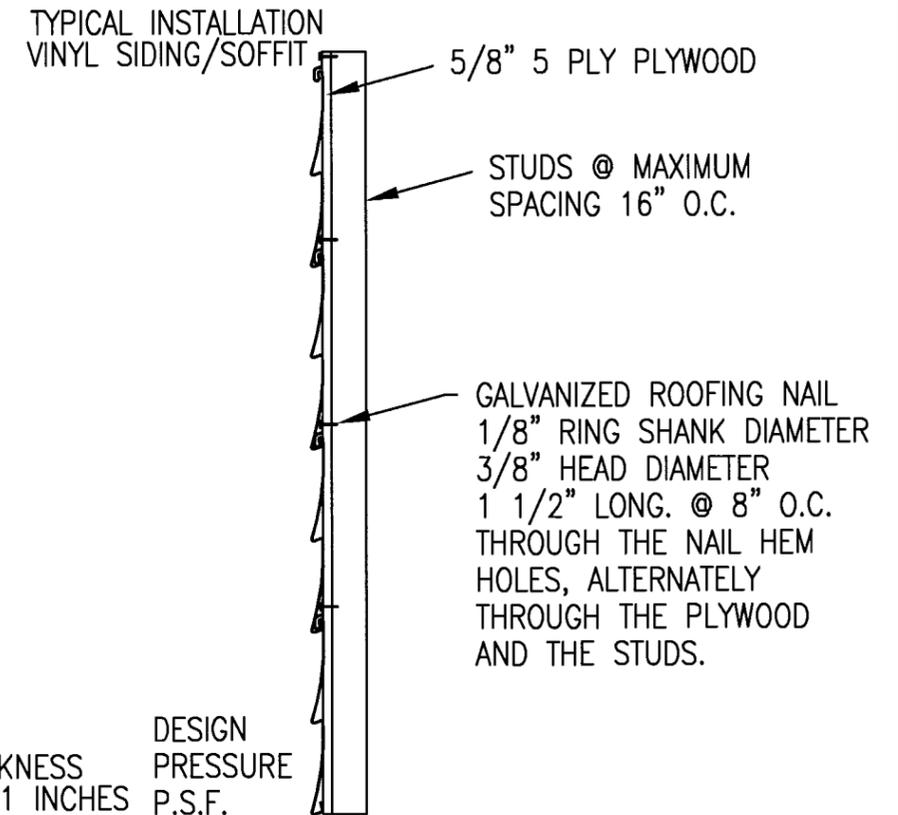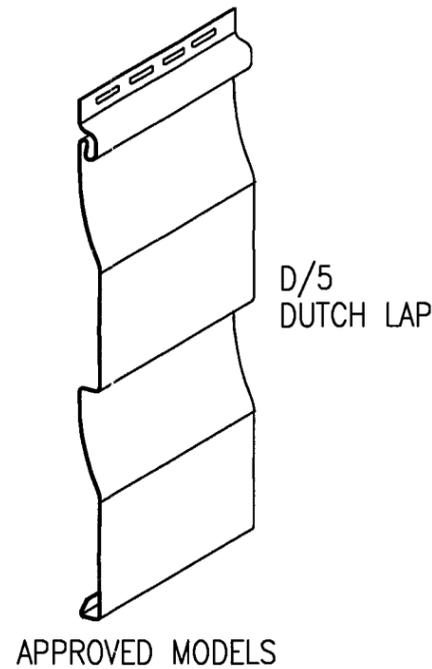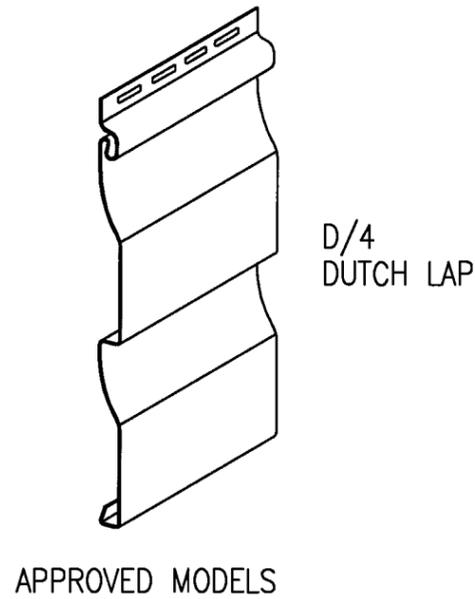

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.	NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
DURAGRAIN ✓	1110400	DOUBLE 4	.042	46.6	DURAGRAIN ✓	1111400	DOUBLE 5	.042	40.0
CHATEAU DUTCH LAP	1110901	DOUBLE 4	.042	46.6	CHATEAU DUTCH LAP ✓	1111901	DOUBLE 5	.042	40.0
CHATEAU CEDAR ✓	1112701	DOUBLE 4	.046	46.6	TIMBER OAK ✓	1113800	DOUBLE 5	.048	40.0
TIMBER OAK ✓	1112800	DOUBLE 4	.048	46.6	CHATEAU CEDAR ✓	1113701	DOUBLE 5	.046	40.0
VARIGRAIN PREFERRED ✓	1119200	DOUBLE 4	.046	46.6	VARIGRAIN PREFERRED ✓	1119400	DOUBLE 5	.046	40.0
CHATEAU NOBILITY ✓	1110601	DOUBLE 4	.038	46.6	CHATEAU NOBILITY ✓	1111501	DOUBLE 5	.038	40.0
CHATEAU LEGACY ✓	1112901	DOUBLE 4	.040	46.6	CHATEAU LEGACY ✓	1113901	DOUBLE 5	.040	40.0
CHATEAU LEGEND ✓	1119201	DOUBLE 4	.046	46.6	CHATEAU LEGEND ✓	1119401	DOUBLE 5	.046	40.0
CAMDEN POINTE ✓	1119600	DOUBLE 4	.044	46.6	CAMDEN POINTE ✓	1119800	DOUBLE 5	.044	40.0

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 03-1017.01
Expiration Date 04/29/03

By: 
Michael Stude Product Control
Division

07-1002.04
10/31/2012




NOTE 1.- VARIFORM INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2121.6.2.1 OF THE FBC

4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE FBC AND THE REQUIREMENTS OF THESE NOA
5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE FBC


VARIFORM INC. 303 W. MAJOR KEARNEY, MO. 64060		DRAWN LRB DATE 1/99		COMPANY NAME VARIFORM INC.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ± .010 ANGULAR ± 1° DO NOT SCALE DRAWING		TITLE VINYL SIDING SOFFIT		SIZE B	
DESIGN ACTIVITY		DWG NO. 1150002A		SHEET	

Handwritten signature: Drew [unclear]

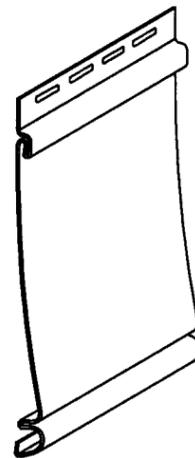

6 1/2"
HORIZONTAL


APPROVED MODELS

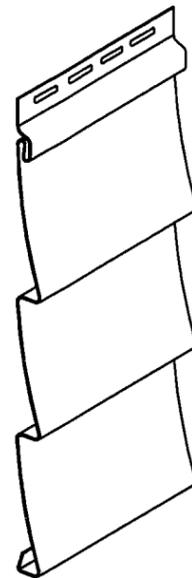

T/3
HORIZONTAL

APPROVED MODELS

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

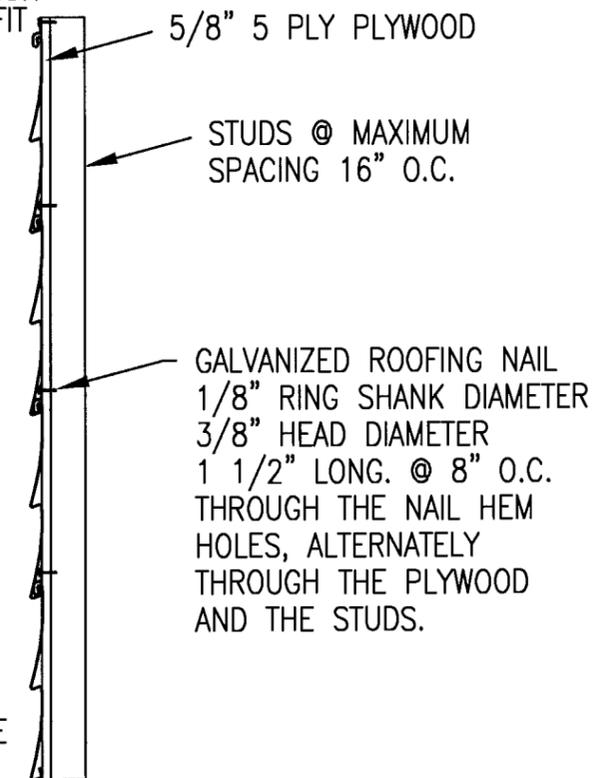

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.	NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
VICTORIA HARBOR	1112000	SINGLE 6 1/2	.044	60.0	HAMPTON III	1117000	TRIPLE 3	.040	40.0
					CONTRACTORS CHOICE	1116900	TRIPLE 3	.040	40.0

PRODUCT REVISED
as complying with the Florida
Building Code
Accepted 03-10-01
Exp. 04/29/05
By:
Michael Dade Product Control
Division

07-1002.04
10/31/2012

NOTE 1.- VARIFORM INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2121.6.2.1 OF THE FBC

4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE FBC AND THE REQUIREMENTS OF THESE NOA
5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE FBC

RICHARD BONIFED
FL OWNERS # 11710
4091 GUYTON BLVD
GUYTON, MO 64454
816-487-1111
816-487-1112

VARIFORM INC.
303 W. MAJOR
KEARNEY, MO. 64060

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
DECIMALS ± .010
ANGULAR ± 1°
DO NOT SCALE DRAWING

COMPANY NAME
VARIFORM INC.

DESIGNER
LRB

DATE
1/99


TITLE
VINYL SIDING
SOFFIT

DESIGN ACTIVITY

SIZE
B


DWG NO.
1150003A

SHEET

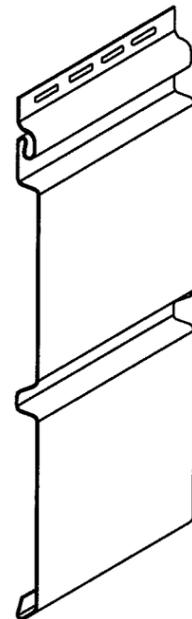

D/5
VERTICAL/SOFFIT


APPROVED MODELS

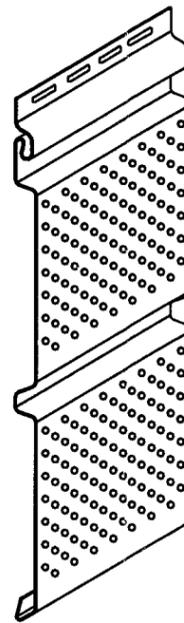

.D/5
PERFORATED
SOFFIT

APPROVED MODELS

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

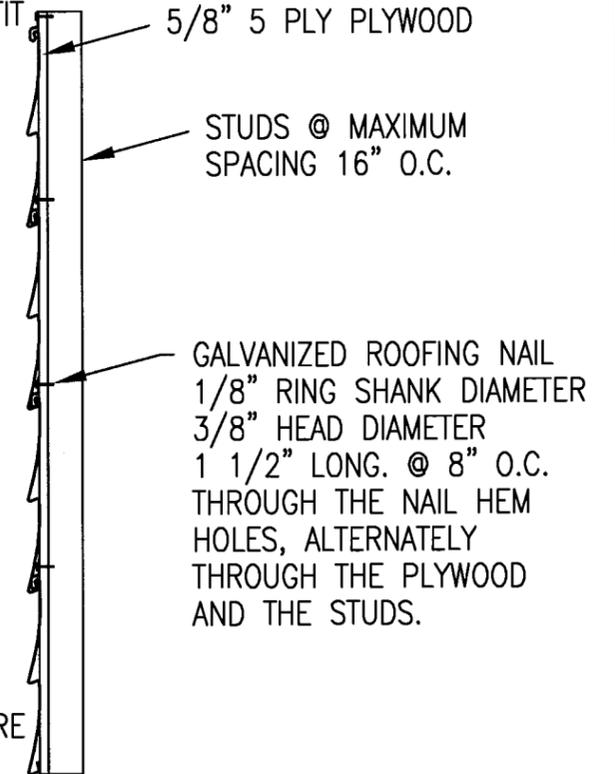

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.	NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
VERTICAL/SOFFIT	1114000	DOUBLE 5	.046	40.0	PERFORATED SOFFIT	1114100	DOUBLE 5	.046	40.0
VERTICAL/SOFFIT TIMBER OAK	1114200	DOUBLE 5	.048	40.0	PERFORATED SOFFIT TIMBER OAK	1114300	DOUBLE 5	.048	40.0
VERTICAL/SOFFIT CHATEAU	1114001	DOUBLE 5	.044	40.0	PERFORATED SOFFIT CHATEAU	1114101	DOUBLE 5	.044	40.0
ECONOMY VERTICAL/SOFFIT	1114400	DOUBLE 5	.040	40.0	ECONOMY PERFORATED SOFFIT	1114500	DOUBLE 5	.040	40.0

NOTE 1.- VARIFORM INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
 2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
 3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2121.6.2.1 OF THE FBC

4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE FBC AND THE REQUIREMENTS OF THESE NOA
 5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE FBC

PRODUCT REVISED
 as complying with the Florida
 Building Code
 Approved by 03-1017.01
 04/29/05
 07-1002.0A
 12/31/2012

VARIFORM INC.
 303 W. MAJOR
 KEARNEY, MO. 64060

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 DECIMALS ± .010
 ANGULAR ± 1°
 HOLE ± .005
 DO NOT SCALE DRAWING

COMPANY NAME
VARIFORM INC.

DESIGNER
 LRB

DATE
 1/99


TITLE
**VINYL SIDING
 SOFFIT**

DESIGN ACTIVITY

SIZE
B


DWG NO.
 1150004A

SHEET

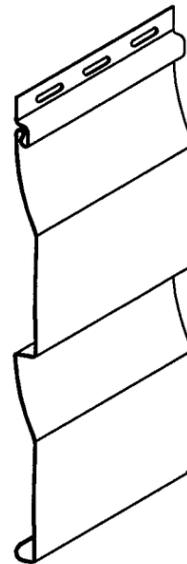

D/4.5
DUTCH LAP

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

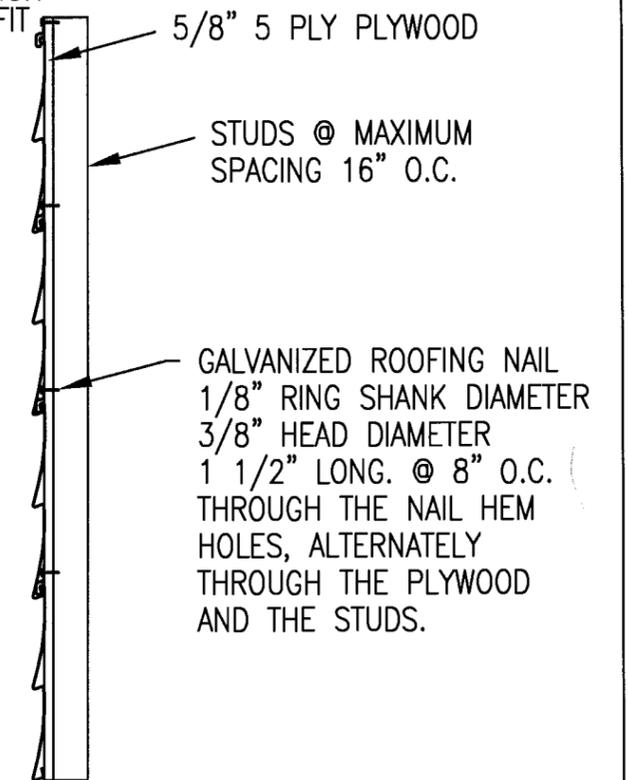

APPROVED MODELS

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
CONTRACTORS CHOICE	1111000	DOUBLE 4.5	.040	40.0
CHATEAU NOBILITY	1111001	DOUBLE 4.5	.038	40.0
VARITEK	1116603	DOUBLE 4.5	.036	40.0
CHATEAU MYSTIQUE	1114901 ✓	DOUBLE 4.5 ✓	.044 ✓	50.0 ✓

NOTE 1.- VARIFORM INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
 2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
 3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2121.6.2.1 OF THE FBC

4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE FBC AND THE REQUIREMENTS OF THESE NOA
 5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE FBC

07-1002-04
12/31/2012

PRODUCT REVISED
 to comply with the Florida
 Building Code
 Assembly No 03-1017.01
 Inspection Date 04/29/05
 Miami Code Product Control
 Division

VARIFORM INC. 303 W. MAJOR KEARNEY, MO. 64060		DRAWN LRB DATE 1/99		COMPANY NAME VARIFORM INC.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES DECIMALS TOLERANCES ANGULAR .001 ± .010 ± 1° .002 ± .006 ± 1° DO NOT SCALE DRAWING		TITLE VINYL SIDING SOFFIT		DWG NO. 1150005A	
DESIGN ACTMITY		SIZE B		SHEET	