



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Robbins Manufacturing Company
P.O. Box 17939
Tampa ,FL 33682-7939

Your application for Notice of Acceptance (NOA) of:

Robbins Lock truss Plates

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 00-1013.04
EXPIRES: 10/26/2005

Raul Rodriguez
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 01/11/2001

Robbins Manufacturing Co.

ACCEPTANCE NO: 00-1013.04

APPROVED: JAN 1 1 2001

EXPIRES: 10/26/2005

NOTICE OF ACCEPTANCE: SPECIFIC CONDITIONS

1. SCOPE:

1.1 This approves Robbins Truss Plate as described in Section 2 of this Notice of Acceptance designed to comply with the South Florida Building Code, 1994 Edition for Miami-Dade County. For the locations where the actual load as determined by the South Florida Building Code Chapter 23, do not exceed the allowable loads indicated in the approved drawings.

2. PRODUCT DESCRIPTION:

2.1 The Robbins Lock (RL) Truss Plate shall be constructed in strict compliance with the following document: Drawing No.1, sheet 1 of 1, titled "Robbins Lock (RL) Truss Plate", dated 12/12/00 and prepared by Robbins Manufacturing Company. They bear the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade Product Control Division. These documents shall hereinafter be referred to as the approved drawings.

3. LIMITATIONS:

3.1 The design values apply to the hydraulic pressing method.

4. INSTALLATION:

4.1 Robbins truss plates shall be used in the fabrication of prefabricated trusses of Southern Pine as they were tested, in strict compliance with this Notice of Acceptance and the applicable section of the South Florida Building Code.

4.2 Robbins truss plates shall be installed in strict compliance with the manufacturer's instructions, this Notice of Acceptance and the applicable Sections of the South Florida Building Code.

5. LABELING:

5.1 Each truss plate shall bear a permanent label with the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved".

6. BUILDING PERMIT REQUIREMENTS:

6.1 Application for Building Permit shall be accompanied by copies of the following:

6.1.1 This Notice of Acceptance

6.1.2 Duplicate copies of the approved drawings, as identified in Section 2 of this Notice of Acceptance.

6.1.3 Any other document required by the Building Official or the South Florida Building Code (SFBC) in order to properly evaluate the installation of this system.



Candido Font, PE, Sr., Product Control Examiner
Product Control Division

Robbins Manufacturing Co.


ACCEPTANCE NO : 00-1013.04

APPROVED: JAN 1 1 2001

EXPIRES: 10/26/2005

NOTICE OF ACCEPTANCE STANDARD CONDITIONS


1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
 - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
 - b) The product is no longer the same product (identical) as the one originally approved;
 - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
 - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
 - a) Unsatisfactory performance of this product or process.
 - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purpose.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer need not reseal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1, 2 and this last page 3.

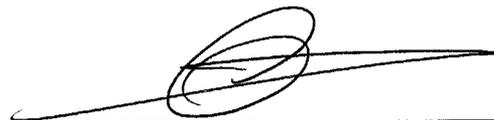

Candido Font, PE, Sr., Product Control Examiner
Product Control Division

END OF THIS ACCEPTANCE

PLATE PLAN AND SECTION

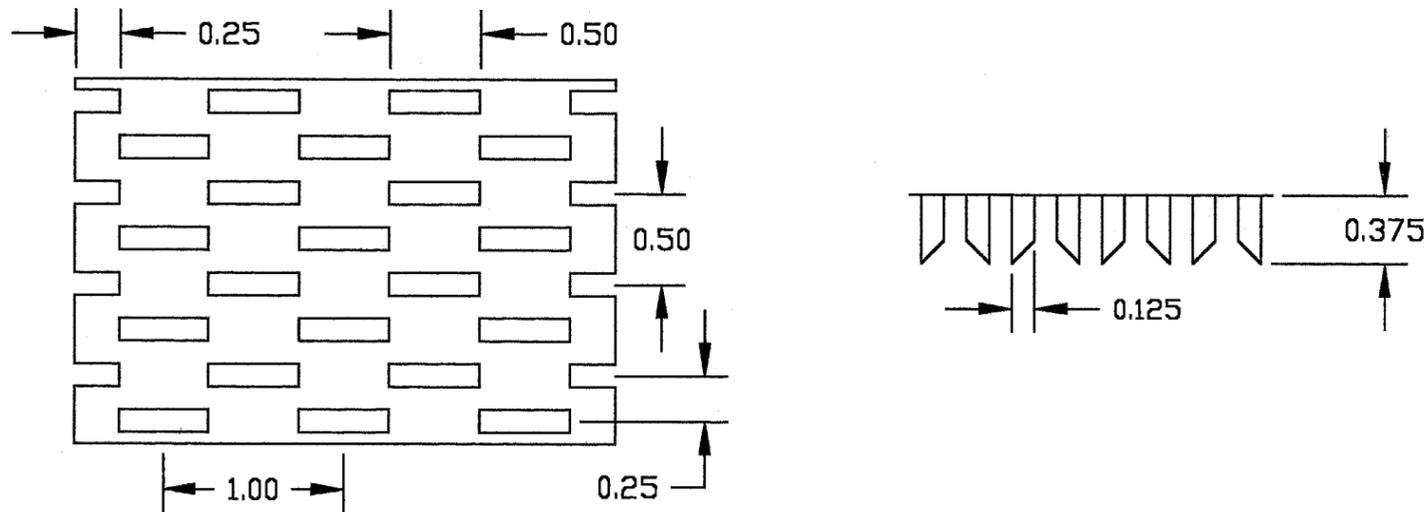

DESIGN VALUES

Hydraulic Pressing Method

LATERAL RESISTANCE

(psl/plate)

| AA | EA | AE | EE |
|-----|-----|-----|-----|
| 204 | 156 | 165 | 124 |

TENSION

| Orientation | Efficiency | Allowable |
|-------------|------------|----------------|
| 0° | 66.2% | 1,171 pli/pair |
| 90° | 25.3% | 447 pli/pair |

TRUSS PLATE CHARACTERISTICS

| | |
|-----------------------|-----------------------|
| MODEL | RL |
| THICKNESS | 0.037 in. |
| MECHANICAL PROPERTIES | ASTM A653 SQ Grade 40 |
| COATING | ASTM A924 G60 |
| TEETH DENSITY | 8 teeth/sq.in. |
| SIZE | One Inch Increments |

Notes:

- Teeth are 3/8-in. long, formed in pairs from slots 1/8-in. wide and 1/2-in. long. The slots are spaced 1 in. on-center in the A direction and 1/4 in. on-center in the E direction. The slots are fully staggered.
- "A" direction is parallel to slot length and "E" direction is perpendicular to slot length.
- The lumber used for the tested specimens was Southern Pine.
- Robbins Lock (RL) truss plates are metal connectors manufactured from 20-gage steel sheet used in the fabrication of prefabricated trusses of Southern Pine only.

SHEAR

| Orientation | Efficiency | Allowable |
|-------------|------------|--------------|
| 0° | 53.3% | 628 pli/pair |
| 30° | 53.5% | 631 pli/pair |
| 60° | 61.6% | 726 pli/pair |
| 90° | 49.7% | 586 pli/pair |
| 120° | 44.8% | 528 pli/pair |
| 150° | 38.2% | 450 pli/pair |

12-12-00

| | | |
|--|---|-------------------------|
| FOR OFFICE USE APPROVED AS COMPLYING WITH THE SOUTH FLORIDA BUILDING CODE DATE <u>January 11, 2001</u> BY <u>[Signature]</u> PRODUCT CONTROL DIVISION BUILDING CODE COMPLIANCE OFFICE ACCEPTANCE NO. <u>00-101304</u> | Robbins Manufacturing Company P.O. Box 17939 Tampa, FL 33682 | |
| | ROBBINS LOCK (RL) TRUSS PLATE | |
| DWG NO. <u>1</u> | DWG DATE <u>12-12-00</u> | SHEET NO. <u>1 of 1</u> |
| Thomas A. Albani FL. P.E. Reg. No. 39380 | | |