



**BUILDING CODE COMPLIANCE OFFICE**  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908

**CONTRACTOR LICENSING SECTION**  
(305) 375-2527 FAX (305) 375-2558

**CONTRACTOR ENFORCEMENT DIVISION**  
(305) 375-2966 FAX (305) 375-2908

**PRODUCT CONTROL DIVISION**  
(305) 375-2902 FAX (305) 372-6339

**PRODUCT CONTROL NOTICE OF ACCEPTANCE**

**Entegra Roof Tile Corporation**  
**1201 N.W. 18 Street**  
**Pompano Beach ,FL 33069**

Your application for Notice of Acceptance (NOA) of:

**Skandia Roof Tile**

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

**ACCEPTANCE NO.: 00-1106.03**  
**EXPIRES: 12/07/2005**

Raul Rodriguez  
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL  
CONDITIONS  
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.  
Director  
Miami-Dade County  
Building Code Compliance Office

**APPROVED: 12/07/2000**



APPROVED: December 7, 2000

EXPIRES: December 7, 2005

**NOTICE OF ACCEPTANCE: STANDARD CONDITIONS**

**1. SCOPE**

This approves roofing system using Entegra "Skandia" Concrete roof tile as manufactured by Entegra Roof Tile Corporation, as described in Section 2 of this Notice of Acceptance, designed to comply with the South Florida Building Code, 1994 Edition for Miami-Dade County. For the locations where the pressure requirements, as determined by applicable Building Code, do not exceed the design pressure values obtain by calculations in compliance with RAS 127 using the values listed in section 4 herein. The attachment calculations shall be done as a moment based system. The attachment calculations for a two patty system shall be done as an moment based system.

Category: Roofing  
 Sub Category: Flat Profile Tile  
 Materials: Concrete

**2. PRODUCT DESCRIPTION**

<u>Manufactured by Applicant</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Skandia	l = 16 1/2" w = 13" 1/2" thick	PA 112	Flat profile concrete roof tile for direct deck or battened nail-on.
Trim Pieces	l = varies w = varies	PA 112	Accessory trim, concrete or clay roof pieces for use at hips, rakes, ridges and valley terminations.

**2.1 Components or products manufactured by others**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>	<u>Manufacturer</u>
Roof Tile Adhesive ("Polypro® AH160")	N/A	See NOA	Two component polyurethane adhesive designed for adhesive set roof tile applications.	Polyfoam Products, Inc.
Roof Tile Adhesive TileBond	Factory premixed canisters	See NOA	Single component polyurethane foam roof tile adhesive	Flexible Products (with current NOA)
Roof Tile Mortar ("TileTite™")	N/A	PA 123	Prepared mortar mix designed for mortar set roof tile applications.	Bermuda Roof Company, Inc. with current NOA

  
 Frank Zuloaga, RRC  
 Roofing Product Control Examiner

APPROVED: December 7, 2000


EXPIRES: December 7, 2005

**NOTICE OF ACCEPTANCE: STANDARD CONDITIONS**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>	<u>Manufacturer</u>
Roof Tile Mortar ("Quikrete® Roof Tile Mortar #1140")	N/A	PA 123	Prepared mortar mix designed for mortar set roof tile applications.	Quikrete Construction Products with Current NOA
Roof Tile Mortar ("BONSAL® Roof Tile Mortar Mix")	N/A	PA 123	Prepared mortar mix designed for mortar set roof tile applications.	W. R. Bonsal Co. with current NOA
Wood Battens	<u>vertical</u> min. 1" x 4" <u>horizontal</u> min. 1" x 4" for use with vertical battens or min. 1" x 2" for use alone	Wood Preservers Institute LP - 2	Salt pressure treated or decay resistant lumber battens	generic
Tile Nails	min. 10d x 3"	PA 114 Appendix E	Corrosion resistant, smooth, screw or annular ring shank nail	generic
Tile Screws	#8 x 2 ½" long 0.335" head dia. 0.131" shank dia. 0.175" screw thread diameter	PA 114 Appendix E	Corrosion resistant coated, square drive, galvanized, coarse thread wood screw	generic
Hurricane Clip & Fasteners	<u>Clips</u> min. ½" width min. 0.062" thick	PA 114 Appendix E	Corrosion resistant bronze, aluminum, stainless steel, galvanized steel or plastic attachment clips for supplemental tile attachment. Clips are installed with corrosion resistant roofing nails compatible with the clip. A hurricane clip is required on all nail-on eave tiles.	generic

**3. LIMITATIONS**

3.1 Fire classification is not part of this acceptance

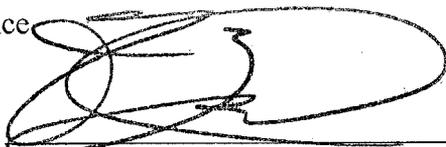

Frank Zuloaga, RRC  
Roofing Product Control Examiner

APPROVED: December 7, 2000

EXPIRES: December 7, 2005

**NOTICE OF ACCEPTANCE: STANDARD CONDITIONS**

- 3.2 For mortar or adhesive set tile applications, a static field uplift test shall be performed in accordance with RAS 106.
- 3.3 Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with PA 112, appendix 'A'. Such testing shall be submitted to the Building Code Compliance Office for review.
- 3.4 Minimum underlayments shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- 3.5 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- 3.6 This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with applicable Building Code.

**4. INSTALLATION**

- 4.1.1 "Entegra Roof Tile Corporation Skandia Flat", and its components shall be installed in strict compliance with Roofing Application Standard RAS 118, RAS 119, and RAS 120.
- 4.2 Data For Attachment Calculations

**Table 1: Aerodynamic Multipliers -  $\lambda$  (ft<sup>3</sup>)**

Tile Profile	$\lambda$ (ft <sup>3</sup> ) Batten Application	$\lambda$ (ft <sup>3</sup> ) Direct Deck Application
Skandia	0.267	0.289

**Table 2: Restoring Moments due to Gravity -  $M_g$  (ft-lbf)**

Tile Profile	3":12"		4":12"		5":12"		6":12"		Greater than 7":12"	
	Battens	Direct Deck	Battens	Direct Deck						
Entegra Skandia	6.85	7.79	6.75	7.67	6.61	7.52	6.44	7.32	6.26	N/A



Frank Zuloaga, RRC  
Roofing Product Control Examiner

APPROVED: December 7, 2000

EXPIRES: December 7, 2005

**NOTICE OF ACCEPTANCE: STANDARD CONDITIONS**

<b>Table 3: Attachment Resistance Expressed as a Moment - <math>M_r</math> (ft-lbf) for Nail-On Systems</b>				
<b>Tile Profile</b>	<b>Fastener Type</b>	<b>Direct Deck (min 15/32" plywood)</b>	<b>Direct Deck (min. 19/32" plywood)</b>	<b>Battens</b>
Skandia	2-10d Ring Shank Nails	30.9	38.1	17.2
	1-10d Smooth or Screw Shank Nail	7.3	9.8	4.9
	2-10d Smooth or Screw Shank Nails	14.0	18.8	7.4
	1 #8 Screw	30.8	30.8	18.2
	2 #8 Screw	51.7	51.7	24.4
	1-10d Smooth or Screw Shank Nail (Field Clip)	24.3	24.3	24.2
	1-10d Smooth or Screw Shank Nail (Eave Clip)	19.0	19.0	22.1
	2-10d Smooth or Screw Shank Nails (Field Clip)	35.5	35.5	34.8
	2-10d Smooth or Screw Shank Nails (Eave Clip)	31.9	31.9	32.2
	2-10d Ring Shank Nails <sup>1</sup>	50.3	65.5	48.3

1. Installation with a 4" tile headlap and fasteners are located a min. of 2½" from head of tile.

<b>Table 4: Attachment Resistance Expressed as a Moment <math>M_r</math> (ft-lbf) for Two Patty Adhesive Set Systems</b>		
<b>Tile Profile</b>	<b>Tile Application</b>	<b>Minimum Attachment Resistance</b>
Skandia	Adhesive	31.3 <sup>3</sup>

2. See manufactures component approval for installation requirements.  
 3. Flexible Products Company TileBond Average weight per patty 13.9 grams.  
 Polyfoam Product, Inc. Average weight per patty 8 grams.

<b>Table 4A: Attachment Resistance Expressed as a Moment - <math>M_r</math> (ft-lbf) for Single Patty Adhesive Set Systems</b>		
<b>Tile Profile</b>	<b>Tile Application</b>	<b>Minimum Attachment Resistance</b>
Skandia	PolyPro™	118.9 <sup>4</sup>
Skandia	PolyPro™	40.4 <sup>5</sup>

4. Large paddy placement of 45 grams of PolyPro™.  
 5. Medium paddy placement of 24 grams of PolyPro™.



Frank Zuloaga, RRC  
 Roofing Product Control Examiner

APPROVED: December 7, 2000

EXPIRES: December 7, 2005

**NOTICE OF ACCEPTANCE: STANDARD CONDITIONS**

Table 4B: Attachment Resistance Expressed as a Moment - $M_f$ (ft-lbf) for Mortar Set Systems		
Tile Profile	Tile Application	Minimum Attachment Resistance
See Specific mortar manufacturer's Notice of Acceptance.		

**5. LABELING**

All tiles shall bear the imprint or identifiable marking of the manufacturer's name or logo, or following statement: "Miami-Dade County Product Control Approved".


**6. BUILDING PERMIT REQUIREMENTS**

6.1 Application for building permit shall be accompanied by copies of the following:

6.1.1 This Notice of Acceptance.

6.1.2 Any other documents required by the Building Official in order to properly evaluate the installation of this system.

**PROFILE DRAWING**

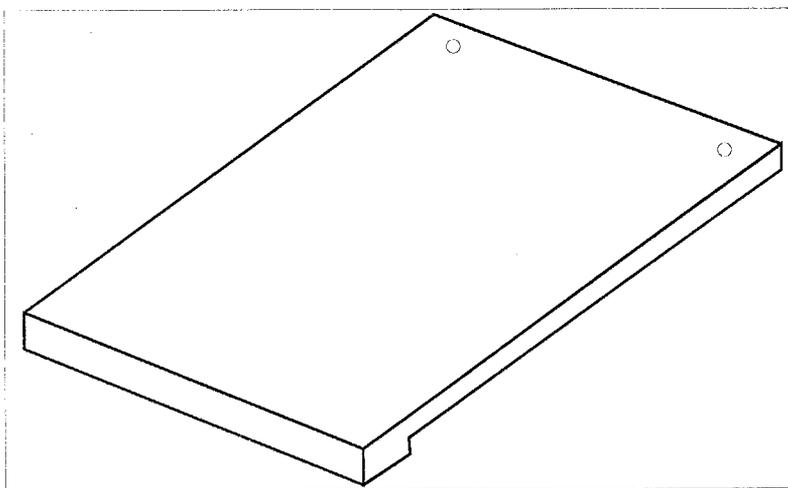

**SKANDIA FLAT CONCRETE TILE**

Frank Zuloaga, RRC  
Roofing Product Control Examiner

**APPROVED: December 7, 2000**

**EXPIRES: December 7, 2005**

**NOTICE OF ACCEPTANCE: STANDARD CONDITIONS**

1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documents, including test-supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approval", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
  - a. There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes.
  - b. The product is no longer the same product (identical) as the one originally approved.
  - c. If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product.
  - d. The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
  - a. Unsatisfactory performance of this product or process.
  - b. Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer need not reseal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1 through 7.

**END OF THIS ACCEPTANCE**

  
Frank Zuloaga, RRC  
Roofing Product Control Examiner