



**BUILDING CODE COMPLIANCE OFFICE**  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908

**CONTRACTOR LICENSING SECTION**  
(305) 375-2527 FAX (305) 375-2558

**CONTRACTOR ENFORCEMENT DIVISION**  
(305) 375-2966 FAX (305) 375-2908

**PRODUCT CONTROL DIVISION**  
(305) 375-2902 FAX (305) 372-6339

**PRODUCT CONTROL NOTICE OF ACCEPTANCE**

**CertainTeed Corporation (TX)**  
**3000 West Commerce Street**  
**Dallas ,TX 75212**

Your application for Notice of Acceptance (NOA) of:

**CertainTeed Corp. CRV Aluminum Ridge Vent**

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

Raul Rodriguez  
Chief Product Control Division

**ACCEPTANCE NO.: 01-0105.03**  
**EXPIRES: 04/05/2006**

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL  
CONDITIONS  
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.  
Director  
Miami-Dade County  
Building Code Compliance Office

**APPROVED: 04/05/2001**

**ROOFING ASSEMBLY APPROVAL**

**Category:** Roofing  
**Sub-Category:** Roof Ventilators

Approval Date: 04/05/2001

Expiration Date: 04/05/2006

**Materials:** Aluminum  
**Maximum Design Pressure** N/A.  
**Fire Classification:** N/A

**TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
CRV Aluminum Ridge Vent	See detail drawing herein	PA-100	Low profile attic ridge vent for installation in shingle roof systems. Formed from .019 embossed aluminum.

**TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS:**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>	<u>Manufacturer</u>
Roofing Nails	Min. 11 ga. x 1 1/4"	PA 114	Aluminum screw shank nails.	generic
Aluminum Screws	#8 x 1 1/2"	PA 114	Aluminum screw	generic

**EVIDENCE SUBMITTED:**

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Center for Applied Engineering, Inc.	PA 100 Wind Driven Rain	07-07-00-68	04/27/94



Frank Zuloaga, RRC  
 Roofing Product Control Examiner

**APPROVED APPLICATIONS:**

**Slot:** Cut a minimum 1½" to 3" slot along the apex of the roof by cutting ¾" to 1½" on each side of the ridge. The slot shall terminate approximately 6" from the rake edge.

**Installation:** Join ridge vent sections with connector plugs. Extend ridge vent past ends of slot to full length of ridge and cut final section. Place ridge vent centered over the void and install end plug on the end of the vent sealed with 100% silicone sealant. Apply 100% silicone sealant caulk to the bottom flange of the CRV Aluminum Ridge Vent. Align joined ridge vent over slot and fasten in place using 1½" aluminum screw shank, or aluminum roofing nails at a maximum spacing of 8" o.c. using the predrilled nail holes with the first nail 1½" to 2" from the vent end. Place straps over joints and fasten in place with two fasteners per side of strap. Use connector straps at each end of vent run.

**Net Free Area:** Refer to manufacturers published literature

**Minimum Slope:** 2:12


**LIMITATIONS:**

1. Refer to applicable building codes for required ventilation.
2. CRV Aluminum Ridge Vent shall not be installed on roof mean heights greater than 33 feet.



Frank Zuloaga, RRC  
Roofing Product Control Examiner

DETAIL

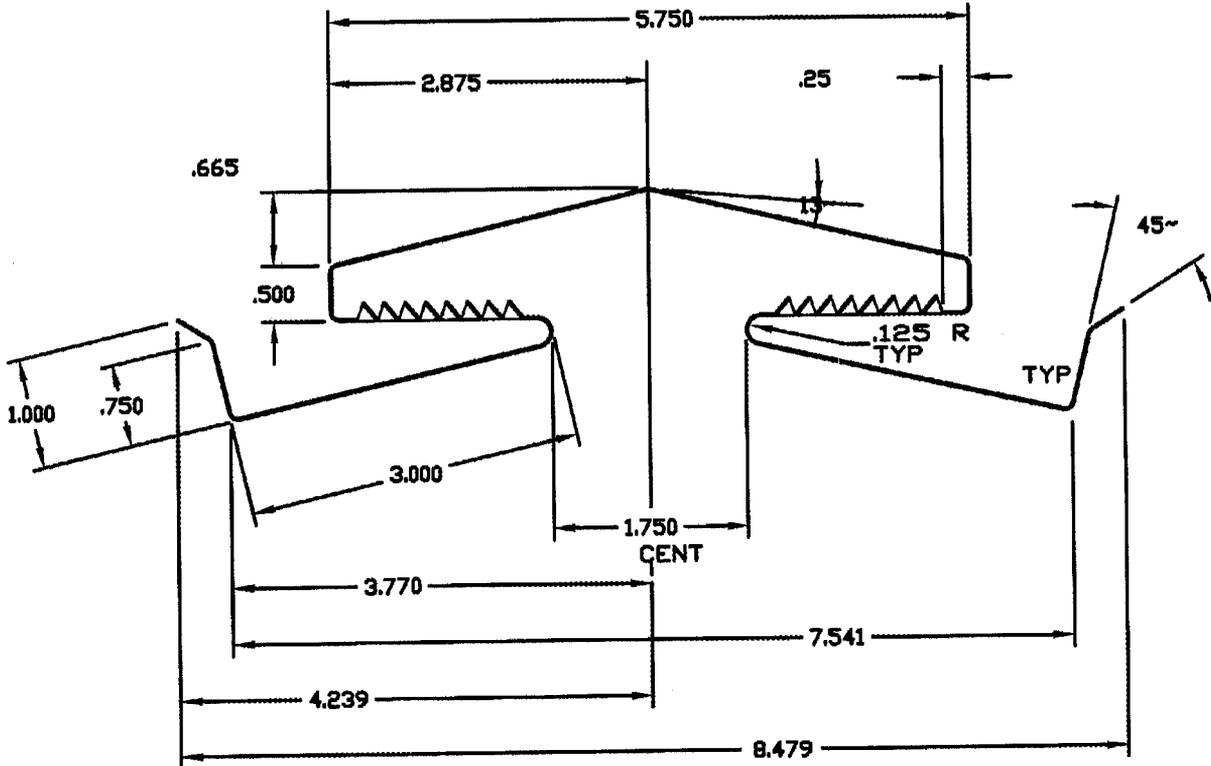

Frank Zuloaga, RRC  
Roofing Product Control Examiner

**NOTICE OF ACCEPTANCE STANDARD CONDITIONS**

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
  - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
  - b) The product is no longer the same product (identical) as the one originally approved;
  - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
  - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
  - a) Unsatisfactory performance of this product or process;
  - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 1 through 5.

**END OF THIS ACCEPTANCE**



Frank Zuloaga, RRC  
Roofing Product Control Examiner