



**BUILDING CODE COMPLIANCE OFFICE**  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908

**CONTRACTOR LICENSING SECTION**  
(305) 375-2527 FAX (305) 375-2558

**CONTRACTOR ENFORCEMENT DIVISION**  
(305) 375-2966 FAX (305) 375-2908

**PRODUCT CONTROL DIVISION**  
(305) 375-2902 FAX (305) 372-6339

**PRODUCT CONTROL NOTICE OF ACCEPTANCE**

**Johns Manville Corp.**  
717 17 Street (P.O. Box 5108)  
Denver ,CO 80217

Your application for Notice of Acceptance (NOA) of:

**Johns Manville Modified Bitumen Roofing Systems for Steel Deck**

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

**ACCEPTANCE NO.: 01-0206.18**  
**EXPIRES: 06/28/2006**

Raul Rodriguez  
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL  
CONDITIONS  
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.  
Director  
Miami-Dade County  
Building Code Compliance Office

**APPROVED: 06/28/2001**

**ROOFING ASSEMBLY APPROVAL**

Category: Roofing  
Sub-Category: APP Modified Bitumen  
Deck Type: Steel  
Maximum Design Pressure -97.5 psf  
Fire Classification: See General Limitation #1

Approval Date: **June 28, 2001**Expiration Date: **June 28, 2006****TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:**

| <u>Product</u>  | <u>Dimensions</u>          | <u>Test Specification</u>    | <u>Product Description</u>  |
|-----------------|----------------------------|------------------------------|---|
| JM APP Base     | 150 sq. ft. roll           | ASTM D 5147                  | APP modified asphalt, fiberglass reinforced, smooth surfaced base sheet.                              |
| APPeX 4S        | 32.8' x 3.28'; 90 lb. roll | ASTM D 6222, type I, grade S | APP modified asphalt, polyester reinforced, smooth surfaced membrane.                                 |
| APPeX 4.5M      | 32.8' x 3.28'; 90 lb. roll | ASTM D 6222, type I grade G  | APP modified asphalt, polyester reinforced, mineral surfaced membrane.                                |
| APPeX 4.5MFR    | 32.8' x 3.28'; 90 lb. roll | ASTM D 6222, type I grade G  | APP modified asphalt, polyester reinforced, fire-retardant, mineral surfaced membrane.                |
| APPeX 180       | 32.8' x 3.28'; 90 lb. roll | ASTM D 6222, type I, grade G | APP modified asphalt, polyester reinforced, smooth surfaced membrane.                                 |
| Bicor MFR       | 39-3/8" x 34'              | ASTM D 6223                  | APP modified asphalt, polyester / glass reinforced, granule surfaced membrane.                        |
| Tricor MFR      | 39-3/8" x 34'              | ASTM D 6223                  | APP modified asphalt, polyester / glass reinforced, granule surfaced membrane.                        |
| Bicor S         | 39-3/8" x 34'              | ASTM D 6223                  | APP modified asphalt, polyester / glass reinforced, smooth surfaced membrane.                         |
| Tricor S        | 39-3/8" x 34'              | ASTM D 6223                  | APP modified asphalt, polyester / glass reinforced, smooth surfaced membrane.                         |
| Glasply Premier | 36" x 180'                 | ASTM D 2178 Type VI          | Type VI asphalt impregnated glass felt for use in conventional and modified bitumen built-up roofing. |
| Glasply IV      | 36" x 200'                 | ASTM D 4601 Type IV          | Type IV asphalt impregnated glass felt for use in conventional and modified bitumen built-up roofing. |



Frank Zuloaga, RRC  
 Roofing Product Control Examiner

| <u>Product</u>                 | <u>Dimensions</u>                | <u>Test Specification</u> | <u>Product Description</u>   |
|--------------------------------|----------------------------------|---------------------------|--|
| Glasbase                       | 36" x 108'; roll weight: 84 lbs. | ASTM D 4601               | Type II asphalt impregnated and coated glass fiber base sheet for use in conventional and modified bitumen built-up roofing.                 |
| PermaPly 28                    | 36' x 108'; 72 lb. roll          | ASTM D 4601               | Type II asphalt impregnated and coated glass fiber base sheet  |
| Ventsulation                   | 36" x 36'                        | ASTM D 4897 Type II       | Heavy duty fiber glass base sheet impregnated and coated on both sides with asphalt with or without fine mineral stabilizer.                 |
| JM Ultrafast                   | various                          | PA 114                    | Insulation fastener assembly (steel decks only).   |
| JM CD-10                       | Various                          | PA 114                    | Insulation fastener for concrete decks.  |
| JM ISO-1 or Tapered ISO-1      | various                          | ASTM C 1289               | Rigid polyisocyanurate roof insulation for use in conventional built-up and other roof systems; available flat or tapered.                   |
| JM Fesco or Tapered Fesco      | various                          | ASTM C 728                | Rigid perlite roof insulation board for built-up roofing systems; available flat or tapered.   |
| JM 1/2" Retrofit               | various                          | ASTM C 728                | A high density perlite roof insulation board for use in conventional and modified bitumen built-up roofing systems.                          |
| E'NRG'Y-2 or Tapered E'NRG'Y-2 | various                          | ASTM C 1289               | Polyisocyanurate insulation for use with single-ply, BUR and modified bitumen roof covers (includes all Factory Mutual approved roof covers) |
| JM Fesco Foam                  | various                          | ASTM C 1289               | Rigid polyisocyanurate roof insulation with perlite board facing bonded to one side for use in conventional built-up and other roofing.      |
| Dura Board                     | Various                          | ASTM C 728                | Rigid perlite roof insulation, for use with hot mopped, heat welded or cold applied systems.   |
| Dura Foam                      | Various                          | ASTM C 1289               | Polyisocyanurate roof insulation with perlite board facing bonded to one side ofr use with hot mopped, heat welded or cold applied systems.  |
| JM Fiberglas Roof Insulation   | various                          | PA 110                    | Fiber glass roof insulation  |



Frank Zuloaga, RRC  
Roofing Product Control Examiner

| <u>Product</u>                           | <u>Dimensions</u> | <u>Test Specification</u> | <u>Product Description</u>  |
|--|-------------------|---------------------------|---|
| JM Topgard Type B                        |                   | ASTM D 1227               | Fire rated, fibered, non-asbestos, clay water base asphalt emulsion.                  |
| JM Fibrated Aluminum Roof Coating        |                   | ASTM D 2824               | Fire rated, fibered, non-asbestos aluminum coating.                                   |
| JM Premium Fibered Aluminum Roof Coating |                   | ASTM D 2824               | Fire rated, fibered, non-asbestos asphalt aluminum coating.                           |
| MBR Insulation Adhesive                  |                   | Proprietary               | One part elastomeric insulation adhesive.   |
| MBR Cold Application Adhesive            |                   | Proprietary               | One part elastomeric interply adhesive for use with modified bitumen and BUR systems. |

**EVIDENCE SUBMITTED:**

| <u>Test Agency</u>                  | <u>Test Identifier</u> | <u>Description</u>       | <u>Date</u>        |
|-------------------------------------|------------------------|--------------------------|--------------------|
| Factory Mutual Research Corporation | J.I. 0X0A9.AM          | Wind Uplift              | 03/25/94           |
|                                     | J.I. 0X7A4.AM          | Wind Uplift              | 08/26/93           |
|                                     | J.I. 3001482           |                          | 08/11/98           |
|                                     | J.I. 3002823           |                          | 04/01/99           |
|                                     | J.I. 3003468           |                          | 02/02/00           |
| Underwriters Laboratories, Inc.     | J.I. 3007148           |                          | 04/19/00           |
|                                     | R-10400                |                          | Published Annually |
| Exterior Research & Design, LLC.    | #4361-2.04.97-1        | PA 114(J) -- Wind Uplift | 04/15/97           |
|                                     | 10390A.12.97-1         | PA 114(J) -- Wind Uplift | 12/15/97           |
|                                     | 10390A.10.97-1         | PA 114(J) -- Wind Uplift | 10/15/97           |



Frank Zuloaga, RRC  
Roofing Product Control Examiner

**APPROVED ASSEMBLIES**

**Deck Type 2I:** Steel, Insulated, New Construction or Reroof

**Deck Description:** 18-22 ga. steel

**System Type B(1):** Base layer of insulation mechanically attached to roof deck. Any subsequent layers are then adhered to base layer of insulation. Membrane is subsequently fully or partially adhered to insulation.

**All General and System Limitations apply.**

| <u>Insulation<br/>Base Layer</u> | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|----------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|
|----------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|

One or more layers of the following:

Approved Type(s): **E'NRG'Y-2**

|                         |                |       |   |                     |
|-------------------------|----------------|-------|---|---------------------|
| Minimum: 1.5" x 4' x 4' | JM Ultrafast S | [ 3 ] | 8 | 1:2 ft <sup>2</sup> |
|-------------------------|----------------|-------|---|---------------------|

Approved Type(s): **JM Fesco Foam**

|                         |                |       |   |                     |
|-------------------------|----------------|-------|---|---------------------|
| Minimum: 1.5" x 3' x 4' | JM Ultrafast S | [ 2 ] | 6 | 1:2 ft <sup>2</sup> |
|-------------------------|----------------|-------|---|---------------------|

**Note: Base layer shall be mechanically attached with fasteners and density described. Insulation panels listed are minimum sizes and dimensions; if larger panels are used the number of fasteners per board shall be increased maintaining the same fastener density (See Roofing Application Standard RAS 117 for fastening details).**

| <u>Insulation<br/>Top Layer</u> | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|---------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|
|---------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|

Approved Type(s): **JM Retrofit Board**

|                         |     |     |     |     |
|-------------------------|-----|-----|-----|-----|
| Minimum: 1/2" x 2' x 4' | N/A | N/A | N/A | N/A |
|-------------------------|-----|-----|-----|-----|

Approved Type(s): **JM Fesco Board**

|                         |     |     |     |     |
|-------------------------|-----|-----|-----|-----|
| Minimum: 3/4" x 2' x 4' | N/A | N/A | N/A | N/A |
|-------------------------|-----|-----|-----|-----|

Approved Type(s): **Structodek FS**

|                         |     |     |     |     |
|-------------------------|-----|-----|-----|-----|
| Minimum: 1/2" x 4' x 4' | N/A | N/A | N/A | N/A |
|-------------------------|-----|-----|-----|-----|

**Note: Optional top layer of insulation shall be adhered with approved asphalt within the EVT range and at a rate of 20-40 lbs/100 ft<sup>2</sup>. Please refer to Roofing Application Standard RAS 117 for insulation attachment. Composite insulation boards used as a top layer shall be installed with the polyisocyanurate face down.final membrane substrate.**

Base Sheet: One ply of JM Glasbase or JM PermaPly 28 fully adhered to the insulated substrate with approved mopping asphalt at an application rate of 25 lb./sq. ± 15%.

- Ply Sheet: (Optional) One or more plies of JM APP Base, APPeX 4S or APPeX 180 heat welded to base sheet.
- Membrane: One or two plies of APPeX 4S, APPeX 180, APPeX 4.5M or APPeX 4.5 MFR heat welded. \*
- Surfacing: (Optional) Install one of the following for all systems that do not achieve acceptable fire ratings through the use of FR membrane sheets.
1. 400 lb./sq. gravel or 300 lb./sq. slag in a flood coat of approved mopping asphalt at a rate of 60 lb./sq.
  2. Karnak 97, Karnak 97 AF, Monsey Premium Long Life Aluminum Roof Coating Asbestos Free or Monsey Prograde Aluminum, JM Topgard Type A, Topgard Type B, JM Aluminum RF CT, Grundy AL MB aluminum coating at a rate of 1-1/2 gal/sq Monsey Aquabrite, Gardner asphalt emulsion, APOC Sunbright 400 or Henry 229 Aluminum Emulsion at 2½ gal/sq or APOC 212 Aluminum Roof Coating at 3 gal/sq.
  3. Grundy 20 F asphalt emulsion, Endure Asphalt Emulsion, APOC 302 or 302 AF applied at 2½ gal/sq with optional 60 lbs./sq. of roofing granules embedded in wet coating.
- Maximum Design Pressure: -45 psf See General Limitation #9.



Frank Zuloaga, RRC  
Roofing Product Control Examiner

**Deck Type 2I:** Steel, Insulated, New Construction or Reroof

**Deck Description:** 18-22 ga. steel

**System Type B(2):** Base layer of insulation mechanically attached to roof deck. Any subsequent layers are then adhered to base layer of insulation. Membrane is subsequently fully or partially adhered to insulation.

**All General and System Limitations apply.**

| <u>Insulation<br/>Base Layer</u> | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|----------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|
|----------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|

One or more layers of the following:

Approved Type(s): **E'NRG'Y-2**

|                         |                |       |    |                        |
|-------------------------|----------------|-------|----|------------------------|
| Minimum: 1.5" x 4' x 4' | JM Ultrafast S | [ 3 ] | 12 | 1:1.33 ft <sup>2</sup> |
|-------------------------|----------------|-------|----|------------------------|

Approved Type(s): **JM Fesco Foam**

|                         |                |       |   |                        |
|-------------------------|----------------|-------|---|------------------------|
| Minimum: 1.5" x 3' x 4' | JM Ultrafast S | [ 2 ] | 9 | 1:1.33 ft <sup>2</sup> |
|-------------------------|----------------|-------|---|------------------------|

**Note: Base layer shall be mechanically attached with fasteners and density described. Insulation panels listed are minimum sizes and dimensions; if larger panels are used the number of fasteners per board shall be increased maintaining the same fastener density (See Roofing Application Standard RAS 117 for fastening details).**

| <u>Insulation<br/>(Optional)Top Layer</u> | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|---|--------------------------|---------------------------------|--------------------------------|-----------------------------|
|---|--------------------------|---------------------------------|--------------------------------|-----------------------------|

Approved Type(s): **JM Retrofit Board**

|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| Minimum: ½" x 2' x 4' | N/A | N/A | N/A | N/A |
|-----------------------|-----|-----|-----|-----|

Approved Type(s): **JM Fesco Board**

|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| Minimum: ¾" x 2' x 4' | N/A | N/A | N/A | N/A |
|-----------------------|-----|-----|-----|-----|

Approved Type(s): **Structodek FS**

|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| Minimum: ½" x 4' x 4' | N/A | N/A | N/A | N/A |
|-----------------------|-----|-----|-----|-----|

**Note: Optional top layer of insulation shall be adhered with approved asphalt within the EVT range and at a rate of 20-40 lbs/100 ft<sup>2</sup>. Please refer to Roofing Application Standard RAS 117 for insulation attachment. Composite insulation boards used as a top layer shall be installed with the polyisocyanurate face down.**

**Base Sheet:** One ply of JM Glasbase or JM PermaPly 28 fully adhered to the insulated substrate with approved mopping asphalt at an application rate of 25 lb./sq. ± 15%.



Frank Zuloaga, RRC  
Roofing Product Control Examiner

- Ply Sheet: (Optional) One or more plies of JM APP Base, APPeX 4S or APPeX 180 heat welded to base sheet.
- Membrane: One or two plies of APPeX 4S, APPeX 180, APPeX 4.5M or APPeX 4.5 MFR heat welded.
- Surfacing: (Optional) Install one of the following for all systems that do not achieve acceptable fire ratings through the use of FR membrane sheets.
1. 400 lb./sq. gravel or 300 lb./sq. slag in a flood coat of approved mopping asphalt at a rate of 60 lb./sq.
  2. Karnak 97, Karnak 97 AF, Monsey Premium Long Life Aluminum Roof Coating Asbestos Free or Monsey Prograde Aluminum, JM Topgard Type A, Topgard Type B, JM Aluminum RF CT, Grundy AL MB aluminum coating at a rate of 1-1/2 gal/sq Monsey Aquabrite, Gardner asphalt emulsion, APOC Sunbright 400 or Henry 229 Aluminum Emulsion at 2½ gal/sq or APOC 212 Aluminum Roof Coating at 3 gal/sq.
  3. Grundy 20 F asphalt emulsion, Endure Asphalt Emulsion, APOC 302 or 302 AF applied at 2½ gal/sq with optional 60 lbs./sq. of roofing granules embedded in wet coating.
- Maximum Design Pressure: -52.5 psf See General Limitation #7.



Frank Zuloaga, RRC  
Roofing Product Control Examiner

**Deck Type 2I:** Steel, Insulated, New Construction or Reroof

**Deck Description:** 18-22 ga. steel deck placed over 0.25 in. thick structural steel supports spaced max. 6 ft o.c. attached with Buildex Traxx/4 or Traxx/5 fasteners spaced max. 6 in. o.c. at the supports. Side laps are secured with Buildex Traxx/1 fasteners spaced max. 30 in o.c.

**System Type B(3):** Base layer of insulation mechanically fastened, optional top layer adhered with approved asphalt.

**All General and System Limitations apply.**

| <u>Insulation<br/>Base Layer</u> | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|----------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|
|----------------------------------|--------------------------|---------------------------------|--------------------------------|-----------------------------|

One or more layers of the following:

Approved Type(s): E'NRG'Y-2

|                       |                |       |    |                        |
|-----------------------|----------------|-------|----|------------------------|
| Minimum: 2" x 4' x 8' | JM Ultrafast S | [ 3 ] | 22 | 1:1.45 ft <sup>2</sup> |
|-----------------------|----------------|-------|----|------------------------|

**Note:** Base layer shall be mechanically attached with fasteners and density described. Insulation panels listed are minimum sizes and dimensions; if larger panels are used the number of fasteners per board shall be increased maintaining the same fastener density (See Roofing Application Standard RAS 117 for fastening details).

| <u>Insulation<br/>(Optional) Top Layer</u> | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|--|--------------------------|---------------------------------|--------------------------------|-----------------------------|
|--|--------------------------|---------------------------------|--------------------------------|-----------------------------|

Approved Type(s): JM Retrofit Board

|                       |     |     |     |     |
|-----------------------|-----|-----|-----|-----|
| Minimum: ½" x 2' x 4' | N/A | N/A | N/A | N/A |
|-----------------------|-----|-----|-----|-----|

**Note:** Optional top layer of insulation shall be adhered with approved asphalt within the EVT range and at a rate of 20-40 lbs/100 ft<sup>2</sup>. Please refer to Roofing Application Standard RAS 117 for insulation attachment. Composite insulation boards used as a top layer shall be installed with the polyisocyanurate face down.

Base Sheet: None.

Ply Sheet: Three plies of JM GlasPly Premier or GlasPly IV adhered with approved mopping asphalt at an application rate of 25 lbs/square ± 15%.

Membrane: One or two plies of APPEX 4S, APPEX 180, APPEX 4.5M or APPEX 4.5 MFR heat welded.

Surfacing: (Optional) Install one of the following for all systems that do not achieve acceptable fire ratings through the use of FR membrane sheets.

1. 400 lb./sq. gravel or 300 lb./sq. slag in a flood coat of approved mopping asphalt at a rate of 60 lb./sq.
2. JM Topgard Type A, TopGard Type B or JM Aluminum Roof Coat.

Maximum Design Pressure: -75 psf (See General Limitation #7.)



Frank Zuloaga, RRC  
Roofing Product Control Examiner

**Deck Type 2I:** Steel, Insulated, New Construction

**Deck Description:** 18-22 ga. steel

**System Type C(1):** All layers of insulation mechanically attached to roof deck. Membrane is subsequently fully or partially adhered to insulation.

**All General and System Limitations apply.**

| <u>Insulation Base Layer</u>   | <u>Fastener Type</u> | <u>Fastening Detail No.</u> | <u>Fasteners Per Board</u> | <u>Fastener Density</u> |
|--|----------------------|-----------------------------|----------------------------|-------------------------|
| Approved Type(s): <b>E'NRG'Y -2</b><br>Minimum: 4' x 4' x 1.4"                     | N/A                  | N/A                         | N/A                        | N/A                     |
| Approved Type(s): <b>Fesco Foam</b><br>Minimum: 4' x 4' x 1.5"                     | N/A                  | N/A                         | N/A                        | N/A                     |
| Approved Type(s): <b>JM Fiber Glass Roof Insulation</b><br>Minimum: 3' x 4' x 3/4" | N/A                  | N/A                         | N/A                        | N/A                     |

**Note: All layers shall be simultaneously fastened; see top layer below for fasteners and density. Insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. Please refer to Roofing Application Standard RAS 117 for insulation attachment.**

| <u>Insulation Top Layer</u>  | <u>Fastener Type</u> | <u>Fastening Detail No.</u> | <u>Fasteners Per Board</u> | <u>Fastener Density</u> |
|--|----------------------|-----------------------------|----------------------------|-------------------------|
| Approved Type(s): <b>JM Fesco Board</b><br>Minimum: 2' x 4' x 3/4"     | Olympic S            | [1]                         | 4                          | 1:2 ft. <sup>2</sup>    |
| Minimum: 2' x 4' x 3/4"  | Tru-Fast S           | [1]                         | 4                          | 1:2 ft. <sup>2</sup>    |
| Minimum: 2' x 4' x 3/4"  | UltraFast S          | [1]                         | 4                          | 1:2 ft. <sup>2</sup>    |
| Approved Type(s): <b>JM Retro-Fit Board</b><br>Minimum: 2' x 4' x 1/2" | Olympic S            | [1]                         | 4                          | 1:2 ft. <sup>2</sup>    |
| Minimum: 2' x 4' x 1/2"  | Tru-Fast S           | [1]                         | 4                          | 1:2 ft. <sup>2</sup>    |
| Minimum: 2' x 4' x 1/2"  | UltraFast S          | [1]                         | 4                          | 1:2 ft. <sup>2</sup>    |

**Base Sheet:** One ply of JM Glasbase or JM PermaPly 28 fully adhered to the insulated substrate with approved mopping asphalt at an application rate of 25 lb./sq. ± 15%.

**Ply Sheet:** (Optional) One or more plies of JM APP Base, APPeX 4S or APPeX 180 heat welded to base sheet.

**Membrane:** One or two plies of APPeX 4S, APPeX 180, APPeX 4.5M or APPeX 4.5 MFR heat welded.



Frank Zuloaga, RRC  
Roofing Product Control Examiner

- Surfacing: (Optional) Install one of the following for all systems that do not achieve acceptable fire ratings through the use of FR membrane sheets.
1. 400 lb./sq. gravel or 300 lb./sq. slag in a flood coat of approved mopping asphalt at a rate of 60 lb./sq.
  2. Karnak 97, Karnak 97 AF, Monsey Premium Long Life Aluminum Roof Coating Asbestos Free or Monsey Prograde Aluminum, JM Topgard Type A, Topgard Type B, JM Aluminum RF CT, Grundy AL MB aluminum coating at a rate of 1-1/2 gal/sq Monsey Aquabrite, Gardner asphalt emulsion, APOC Sunbright 400 or Henry 229 Aluminum Emulsion at 2½ gal/sq or APOC 212 Aluminum Roof Coating at 3 gal/sq.
  3. Grundy 20 F asphalt emulsion, Endure Asphalt Emulsion, APOC 302 or 302 AF applied at 2½ gal/sq with optional 60 lbs./sq. of roofing granules embedded in wet coating.

Maximum Design  
Pressure:

-45 psf (See General Limitation #9.)



Frank Zuloaga, RRC  
Roofing Product Control Examiner

**Deck Type 2I:** Steel, Insulated, New Construction

**Deck Description:** 18-22 ga. steel, ASTM A611 Grade C steel deck placed over 0.25 in. thick structural steel supports spaced max. 6 ft o.c. attached with Buildex Traxx/4 or Traxx/5 fasteners spaced max. 6 in. o.c. at the supports. Side laps are secured with Buildex Traxx/1 fasteners spaced max. 30 in o.c.

**System Type C(2):** All layers of insulation simultaneously attached.

**All General and System Limitations apply.**

| <u>Insulation<br/>Base Layer (Optional)</u>             | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|---|--------------------------|---------------------------------|--------------------------------|-----------------------------|
| Approved Type(s): E'NRG'Y -2<br>Minimum: 4' x 4' x 1.5" | N/A                      | N/A                             | N/A                            | N/A                         |

**Note: All layers shall be simultaneously fastened; see top layer below for fasteners and density.**

| <u>Insulation<br/>Top Layer</u>                      | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|--|--------------------------|---------------------------------|--------------------------------|-----------------------------|
| Approved Type(s): DuraBoard<br>Minimum: 4' x 4' x ¾" | JM Ultrafast S           | [3]                             | 12                             | 1:1.33 ft. <sup>2</sup>     |

**Note: All layers of insulation shall be mechanically attached using the fastener density listed above. The insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. See RAS 117 for fastening details.**

**Base Sheet:** One ply of JM APP Base Sheet heat welded.

**Ply Sheet:** None.

**Membrane:** One or two plies of APPeX 4S, APPeX 180, APPeX 4.5M or APPeX 4.5 MFR heat welded.

**Surfacing:** (Optional) Install one of the following for all systems that do not achieve acceptable fire ratings through the use of FR membrane sheets.

1. 400 lb./sq. gravel or 300 lb./sq. slag in a flood coat of approved mopping asphalt at a rate of 60 lb./sq.
2. JM Topgard Type A, TopGard Type B or JM Aluminum Roof Coat.

**Maximum Design Pressure:** -67.5 psf (See General Limitation #7.)



**Deck Type 2I:** Steel, Insulated, New Construction

**Deck Description:** 18-22 ga. steel, ASTM A653 Grade 80 or ASTM A611 Grade E steel deck placed over 0.25 in. thick structural steel supports spaced max. 6 ft o.c. attached with Buildex Traxx/4 or Traxx/5 fasteners spaced max. 6 in. o.c. at the supports. Side laps are secured with Buildex Traxx/1 fasteners spaced max. 30 in o.c.

**System Type C(3):** All layers of insulation simultaneously attached.

**All General and System Limitations apply.**

| <u>Insulation<br/>Base Layer (Optional)</u>            | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|--|--------------------------|---------------------------------|--------------------------------|-----------------------------|
| Approved Type(s): E'NRG'Y-2<br>Minimum: 4' x 4' x 1.5" | N/A                      | N/A                             | N/A                            | N/A                         |

**Note: All layers shall be simultaneously fastened; see top layer below for fasteners and density.**

| <u>Insulation<br/>Top Layer</u>                        | <u>Fastener<br/>Type</u> | <u>Fastening<br/>Detail No.</u> | <u>Fasteners<br/>Per Board</u> | <u>Fastener<br/>Density</u> |
|--|--------------------------|---------------------------------|--------------------------------|-----------------------------|
| Approved Type(s): DuraBoard<br>Minimum: 4' x 4' x 3/4" | JM Ultrafast S           | [3]                             | 12                             | 1:1.33 ft. <sup>2</sup>     |

**Note: All layers of insulation shall be mechanically attached using the fastener density listed above. The insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. See RAS 117 for fastening details.**

**Base Sheet:** One ply of JM APP Base Sheet, APPeX 4S, or APPeX 180 heat welded.

**Ply Sheet:** None.

**Membrane:** One or two plies of APPeX 4S, APPeX 180, APPeX 4.5M or APPeX 4.5 MFR heat welded.

**Surfacing:** (Optional) Install one of the following for all systems that do not achieve acceptable fire ratings through the use of FR membrane sheets.

1. 400 lb./sq. gravel or 300 lb./sq. slag in a flood coat of approved mopping asphalt at a rate of 60 lb./sq.
2. JM Topgard Type A, TopGard Type B or JM Aluminum Roof Coat.

**Maximum Design Pressure:** -75 psf (See General Limitation #7.)



**Deck Type 2I:** Steel, Insulated, New Construction

**Deck Description:** 18-22 ga. steel


**System Type D:** One or more layers of insulation and base sheet simultaneously attached.

All General and System Limitations apply.

| <u>Insulation Base Layer</u>   | <u>Fastener Type</u> | <u>Fastening Detail No.</u> | <u>Fasteners Per Board</u> | <u>Fastener Density</u> |
|--|----------------------|-----------------------------|----------------------------|-------------------------|
| Approved Type(s): <b>E'NRG'Y-2</b><br>Minimum: 4' x 4' x 1.4"                        | N/A                  | N/A                         | N/A                        | N/A                     |
| Approved Type(s): <b>JM Fesco Foam</b><br>Minimum: 4' x 4' x 1.5"                    | N/A                  | N/A                         | N/A                        | N/A                     |
| Approved Type(s): <b>JM Fesco Board (flat or tapered)</b><br>Minimum: 2' x 4' x 3/4" | N/A                  | N/A                         | N/A                        | N/A                     |
| Approved Type(s): <b>JM Retro-Fit Board,</b><br>Minimum: 2' x 4' x 1/2"              | N/A                  | N/A                         | N/A                        | N/A                     |
| Approved Type(s): <b>JM Fiber Glass Roof Insulation</b><br>Minimum: 3' x 4' x 3/4"   | N/A                  | N/A                         | N/A                        | N/A                     |

**Note:** Top layer shall have preliminary attachment, prior to the installation of the base/anchor sheet, at a minimum application rate of two fasteners per board for insulation boards having no dimension greater than 4 ft., and four fasteners for any insulation board having no dimension greater than 8 ft. All layers of insulation and base sheet shall be simultaneously fastened. See base/anchor sheet below for fasteners and density.

- Base Sheet:
- (Option #1)** One ply of JM APP Base, JM PermaPly 28, JM Glasbase, JM Glasbase Plus or JM Ventsulation mechanically fastened through the insulation with JM UltraFast, Olympic or Tru-Fast metal plates and fasteners at a 4" side lap 12" o.c. and two rows staggered in the center of the sheet 18" o.c. **Maximum Design Pressure: -45 psf, See General Limitation #9.**
  - (Option #2)** One ply JM GlasBase mechanically attached through the insulation to the deck using JM Ultrafast fasteners and Square Metal Plates spaced 9" o.c. in a 4" lap and 12" o.c. in two staggered rows in the center of the sheet. **Maximum Design Pressure: -97.5 psf, See General Limitation #7.**
  - (Option #3)** Two plies of JM PermaPly 28 or JM Ventsulation mechanically attached through the insulation to the deck using JM Ultrafast fasteners and Square Metal Plates spaced 9" o.c. in a 4" lap and 12" o.c. in two staggered rows in the center of the sheet. **Maximum Design Pressure: -52.5 psf, See General Limitation #7.**

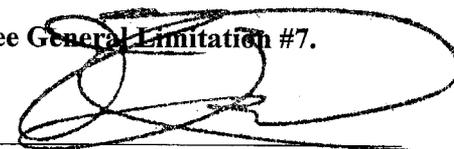

Frank Zuloaga, RRC  
Roofing Product Control Examiner

- Ply Sheet: (Optional) One or more plies of JM APP Base, APPeX 4S or APPeX 180 heat welded to base sheet.
- Membrane: One or two plies of APPeX 4S, APPeX 180, APPeX 4.5M or APPeX 4.5 MFR heat welded.
- Surfacing: (Optional) Install one of the following for all systems that do not achieve acceptable fire ratings through the use of FR membrane sheets.
1. 400 lb./sq. gravel or 300 lb./sq. slag in a flood coat of approved mopping asphalt at a rate of 60 lb./sq.
  2. Karnak 97, Karnak 97 AF, Monsey Premium Long Life Aluminum Roof Coating Asbestos Free or Monsey Prograde Aluminum, JM Topgard Type A, Topgard Type B, JM Aluminum RF CT, Grundy AL MB aluminum coating at a rate of 1-1/2 gal/sq Monsey Aquabrite, Gardner asphalt emulsion, APOC Sunbright 400 or Henry 229 Aluminum Emulsion at 2½ gal/sq or APOC 212 Aluminum Roof Coating at 3 gal/sq.
  3. Grundy 20 F asphalt emulsion, Endure Asphalt Emulsion, APOC 302 or 302 AF applied at 2½ gal/sq with optional 60 lbs./sq. of roofing granules embedded in wet coating.



---

Frank Zuloaga, RRC  
Roofing Product Control Examiner

**STEEL DECK SYSTEM LIMITATIONS:**

1. If mechanical attachment to the structural deck through the lightweight insulating concrete is proposed, a field withdrawal resistance testing shall be performed to determine fastener patterns and density. All testing and fastening design shall be in compliance with Testing Application Standard TAS 105 and Roofing Application Standard RAS 117, calculations shall be signed and sealed by a Florida Registered Engineer, Architect, or Registered Roof Consultant.

**GENERAL LIMITATIONS:**

1. Fire classification is not part of this acceptance, refer to a current Approved Roofing Materials Directory for fire ratings of this product.
2. Insulation may be installed in multiple layers. The first layer shall be attached in compliance with Product Control Approval guidelines. All other layers shall be adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq., or mechanically attached using the fastening pattern of the top layer
3. All standard panel sizes are acceptable for mechanical attachment. When applied in approved asphalt, panel size shall be 4' x 4' maximum.
4. An overlay and/or recovery board insulation panel is required on all applications over closed cell foam insulations when the base sheet is fully mopped. If no recovery board is used the base sheet shall be applied using spot mopping with approved asphalt, 12" diameter circles, 24" o.c.; or strip mopped 8" ribbons in three rows, one at each sidelap and one down the center of the sheet allowing a continuous area of ventilation. Encircling of the strips is not acceptable. A 6" break shall be placed every 12' in each ribbon to allow cross ventilation. Asphalt application of either system shall be at a minimum rate of 12 lbs./sq. **Note: Spot attached systems shall be limited to a maximum design pressure of -45 psf.**
5. Fastener spacing for insulation attachment is based on a Minimum Characteristic Force (F') value of 275 lbf., as tested in compliance with Testing Application Standard TAS 105. If the fastener value, as field-tested, are below 275 lbf. insulation attachment shall not be acceptable.
6. Fastener spacing for mechanical attachment of anchor/base sheet or membrane attachment is based on a minimum fastener resistance value in conjunction with the maximum design value listed within a specific system. Should the fastener resistance be less than that required, as determined by the Building Official, a revised fastener spacing, prepared, signed and sealed by a Florida Registered Engineer, Architect, or Registered Roof Consultant may be submitted. Said revised fastener spacing shall utilize the withdrawal resistance value taken from Testing Application Standards TAS 105 and calculations in compliance with Roofing Application Standard RAS 117.
7. Perimeter and corner areas shall comply with the enhanced uplift pressure requirements of these areas. Fastener densities shall be increased for both insulation and base sheet as calculated in compliance with Roofing Application Standard RAS 117. **(When this limitation is specifically referred within this NOA, General Limitation #9 will not be applicable.)**
8. All attachment and sizing of perimeter nailers, metal profile, and/or flashing termination designs shall conform with Roofing Application Standard RAS 111 and applicable wind load requirements.
9. The maximum designed pressure limitation listed shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners). **(When this limitation is specifically referred within this NOA, General Limitation #7 will not be applicable.)**



Frank Zuloaga, RRC  
Roofing Product Control Examiner

**NOTICE OF ACCEPTANCE STANDARD CONDITIONS**

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
  - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
  - b) The product is no longer the same product (identical) as the one originally approved;
  - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
  - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
  - a) Unsatisfactory performance of this product or process;
  - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 1 through 17.

**END OF THIS ACCEPTANCE**



Frank Zuloaga, RRC  
Roofing Product Control Examiner