



**BUILDING CODE COMPLIANCE OFFICE**  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908

**CONTRACTOR LICENSING SECTION**  
(305) 375-2527 FAX (305) 375-2558

**CONTRACTOR ENFORCEMENT DIVISION**  
(305) 375-2966 FAX (305) 375-2908

**PRODUCT CONTROL DIVISION**  
(305) 375-2902 FAX (305) 372-6339

**PRODUCT CONTROL NOTICE OF ACCEPTANCE**

**Owens Corning**  
**One Owens Corning Parkway**  
**Toledo ,OH 43659**

Your application for Notice of Acceptance (NOA) of:

**VentSure Rigid Strip Ridge Vents**

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

**ACCEPTANCE NO.: 01-0712.01**  
**EXPIRES: 09/06/2006**

Raul Rodriguez  
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL  
CONDITIONS  
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.  
Director  
Miami-Dade County  
Building Code Compliance Office

**APPROVED: 09/06/2001**

**ROOFING ASSEMBLY APPROVAL**

**Category:** Roofing  
**Sub-Category:** Roof Ventilators

Approval Date: September 6, 2001

Expiration Date: September 6, 2006

**Materials:** Plastic  
**Maximum Design Pressure** N/A  
**Fire Classification:** N/A

**TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
VentSure® Rigid Strip Ridge Vent	H=0.945" W=13.368" L=48"	PA 100	Plastic low profile attic ridge vent for installation in shingle roof systems.

**TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS:**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>	<u>Manufacturer</u>
Asphalt Roof Cement		ASTM D 4586	Asbestos-free, asphalt based roof cement.	generic
Asphalt Primer		ASTM D 41	Asphalt Primer	generic
Roofing Nails	2" long head dia. 7/16"	PA 114	Corrosion resistant annular ring shank nails	generic

**EVIDENCE SUBMITTED:**

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Architectural Testing, Inc.	PA 100	01-31144.01	7/27/99
	Wind Driven Rain	01-31464.02	
ETC Laboratories, Inc.	ASTM D 1929 ASTM D635 ASTM D 2843 ASTM D 638	ETC-00-6543-9110.0	1/15/01



Frank Zuloaga, RRC  
 Roofing Product Control Examiner


**APPROVED APPLICATIONS:**

- Slot:** Cut a minimum 1½" slot along the apex of the roof by cutting ¾" on each side of the ridge. The slot shall terminate 1 foot shorter at each end than the total length of ridge vent used.
- Installation:** Place vent sections centered over the void using a chalk line. Starting at end of vent fasten to the deck at the pre-marked locations at 9 inches o.c on both sides of vent with min 2" long corrosion resistant roofing nails.
- Ridge Shingle:** Using nail lines provided on top of vent. Nail cap shingles in place through vent using corrosion resistant roofing nails of sufficient length to penetrate through roof sheathing.
- Net Free Area:** Refer to manufacturers published literature
- Minimum Slope:** 3:12

**LIMITATIONS:**

1. Refer to applicable building codes for required ventilation.
2. VentSure® Rigid Strip Ridge Vent shall not be installed on roof mean heights greater than 33 feet.

**DETAIL DRAWING**

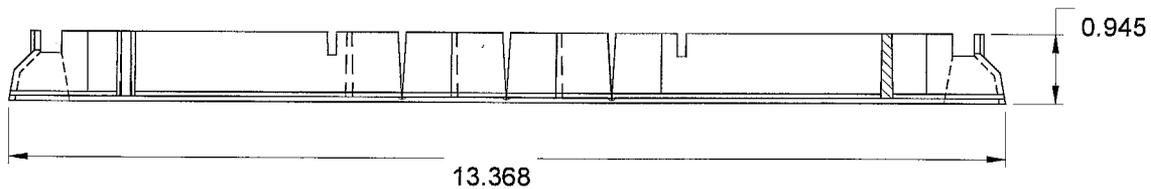

**VENTSURE® RIGID STRIP RIDGE VENT**

Frank Zuloaga, RRC  
Roofing Product Control Examiner

**NOTICE OF ACCEPTANCE STANDARD CONDITIONS**

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
  - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
  - b) The product is no longer the same product (identical) as the one originally approved;
  - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
  - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
  - a) Unsatisfactory performance of this product or process;
  - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 1 through 4.

**END OF THIS ACCEPTANCE**



Frank Zuloaga, RRC  
Roofing Product Control Examiner