



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Aeicor Metal Products, Inc.
450 West McNab Road
Fort Lauderdale ,FL 33309

Your application for Notice of Acceptance (NOA) of:

Aeicor SS-4-16 System with 1" Snap Cap

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0820.01
EXPIRES: 06/07/2006

Raul Rodriguez
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 09/20/2001

APPROVED ASSEMBLY

- System:** SS-4-16 panel with 1" Snap Cap
- Deck Type:** Wood, Non-insulated
- Deck Description:** New Construction ¹⁹/₃₂" or greater plywood or wood plank.
- Slope Range:** 2": 12" or greater
- Maximum Uplift Pressure:** The maximum allowable uplift pressure for the 16 1/2" wide panels shall be **-92.5 psf.**
- Deck Attachment:** In accordance with applicable building code, but in no case shall it be less than # 8 x 2" long screws spaced 6" O.C. In reroofing, where the deck is less than ¹⁹/₃₂" thick (Minimum ¹⁵/₃₂"") The above attachment method must be in addition to existing attachment.
- Underlayment:** Minimum underlayment shall be an ASTM D 226 Type II installed with a minimum 4" side-lap and 6" end-laps. Underlayment shall be fastened with corrosion resistant tin-caps and 1 1/4" annular ring-shank nails, spaced 6" o.c. at all laps and two staggered rows 12" o.c. in the field of the roll.
- Panel Clip:** Panels shall be installed with approved clips, attached to substrate with one corrosion resistant #8-14 screws of sufficient length to penetrate through the sheathing ³/₁₆" at a maximum spacing not to exceed 8" o.c.
- Valleys:** Valley construction shall be in compliance with RAS 133 and with the current published installation instructions and details in Aeicor Metal Roofing Installation Manual.
- Fire Barrier Board:** For class A or B fire rating, install minimum 1/4" thick Georgia Pacific "Dens Deck" (with current NOA) or minimum 4mm thick of Tritex, RockRoof (with current NOA) or ⁵/₈" water resistant type X gypsum sheathing with treated core facer.
- Metal Panels and Accessories:** Install the "SS-4-16 Snap Cap Panel" and accessories in compliance with the current published installation instructions and details in Aeicor Metal Roofing Installation Manual. Flashings, penetrations, valley construction and other details shall be constructed in compliance with RAS 133.



Frank Zuloaga, RRC
Roofing Product Control Examiner

- System:** SS-4-16 panel with 1" Snap Cap
- Deck Type:** Steel, Non-insulated
- Deck Description:** New Construction 22 gage type B steel deck.
- Slope Range:** 2": 12" or greater
- Maximum Uplift Pressure:** The maximum allowable uplift pressure for the 16 1/2" wide panels shall be **-97.5 psf.**
- Deck Attachment:** Minimum 22 gage Type B steel deck fastened to steel supports at a maximum span of 5 feet o.c. Steel deck shall be fastened with minimum 5/16" puddle welds with 1 x 7/8" weld washer at a maximum spacing of 6" o.c. Side laps shall be fastened with #10 x 3/4" HH TEK screws.
- Fire Barrier Board:** 1/4" Dens Deck fasten to steel deck with approved insulation fasteners & 3" steel plate at a density of 1:4ft in accordance with RAS 117.
- For class A or B fire rating, install minimum 1/4" thick Georgia Pacific "Dens Deck" (with current NOA) Insulation shall be attached to decking with Inst-stik Roofing adhesive 3/4" to 1" minimum wide beads of adhesive spaced 12" o.c.
- Underlayment:** A single layer of any Miami-Dade County Product Control Approved self-adhered underlayment with a 4" overlap is fully adhered to Dens deck.
Or
An ASTM D 226 Type II installed with a minimum 4" side-lap and 6" end-laps. Underlayment fastened with approved insulation fasteners and plates. Spaced 12" o.c. on the laps and two rows spaced 24" o.c. in the field of roll.
- Panel Clip:** Panels shall be installed with approved clips, attached to substrate with one corrosion resistant #8 Wafer Head TEK screws of sufficient length to penetrate through the bottom flute a minimum of 3/4". Once the clips are secured in place, the clip tabs are folded over and the snap cap is applied along the full length of the seam.
- Valleys:** Valley construction shall be in compliance with RAS 133 and with the current published installation instructions and details in Aeicor Metal Roofing Installation Manual.
- Metal Panels and Accessories:** Install the "SS-4-16 Snap Cap Panel" and accessories in compliance with the current published installation instructions and details in Aeicor Metal Roofing Installation Manual. Flashings, penetrations, valley construction and other details shall be constructed in compliance with RAS 133.







Frank Zuloaga, RRC
Roofing Product Control Examiner

SYSTEM LIMITATIONS

1. Fire classification is not part of this acceptance, refer to current Approved Roofing Materials Directory for fire ratings of this product.
2. Increased design pressures at perimeter and corner areas, in compliance with applicable building code may be met through rational analysis by increasing the number of attachment points in these areas. The maximum fastener spacing noted in the "Systems Description" section of this approval shall not be exceeded. All rational analysis computation shall be prepared, signed and sealed by a Florida registered Professional Engineer, Registered Architect, or Registered Roof Consultant.
3. Panels may be roll formed in continuous length from eave to ridge. Maximum lengths shall be as described in RAS 133.
4. All panels shall be permanently labeled with the manufacturer's name and/or logo, and the following statement: "Miami Dade County Product Control Approved. All clips shall be permanently labeled with manufacturer's name, and/or logo, and/or model.

PROFILE DRAWINGS
AEICOR SS-4-16 PANEL AND ATTACHMENT CLIP

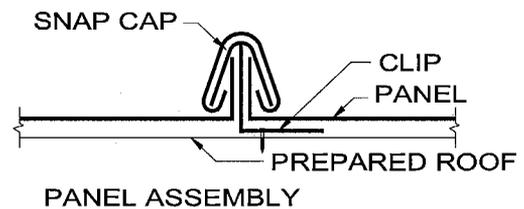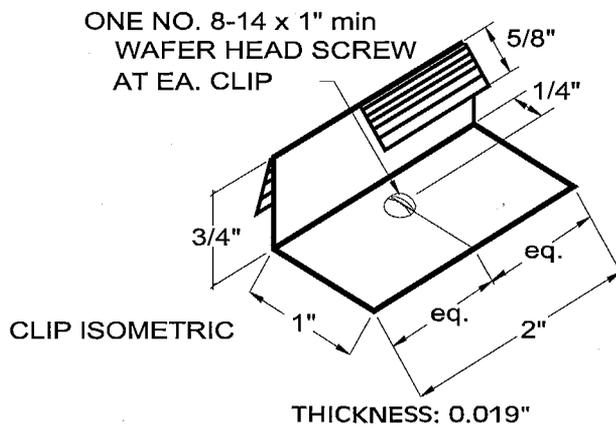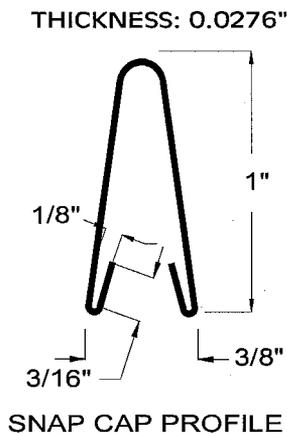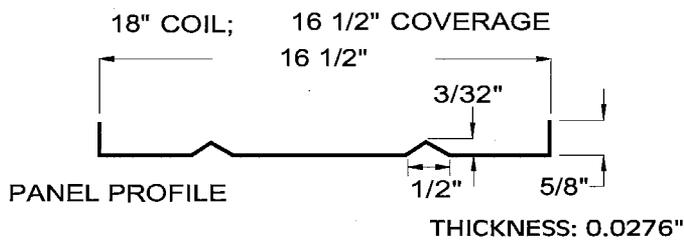


Frank Zuloaga, RRC
Roofing Product Control Examiner

NOTICE OF ACCEPTANCE STANDARD CONDITIONS

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
 - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
 - b) The product is no longer the same product (identical) as the one originally approved;
 - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
 - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
 - a) Unsatisfactory performance of this product or process;
 - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 2 through 6.

END OF THIS ACCEPTANCE



Frank Zuloaga, RRC
Roofing Product Control Examiner