



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908**

NOTICE OF ACCEPTANCE (NOA)

**All American Supply Company
12920 SW 120 Street
Miami, FL 33186**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Series 5001 Outswinging Decorative Glass Single Lite Wood French Door

APPROVAL DOCUMENT: Drawing No. 99003, titled "FBMA Series 5001 Wood Door", sheets 1 through 3, prepared by manufacturer, dated 12/6/99, bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: None

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.


ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA **renews NOA # 99-0505.04** and, consists of this page 1 as well as approval document mentioned above. The submitted documentation was reviewed by **Raul Rodriguez**.



**NOA No 02-0528.03
Expiration Date: July 1, 2007
Approval Date: June 11, 2002
Page 1**


DOOR AND FRAME SYSTEM			
ITEM #	DESCRIPTION		
1	STILE AND RAIL CONSTRUCTION		
1	DOOR MODEL 5001-MANUFACTURER(S)	ROGUE VALLEY	
2	JR300 T-ASTRAGAL WITH (2) 1/8" SCHED 40x 8 1/4" LONG STL PIPE SLEEVES BORED TO CLEAR #3. WITH GLUE, 7/16" X 2" STAPLES 15" OC, & (18) #8 X 2" FHWS (4 EA SIDE OF SLEEVE). WEATHERSTRIP - SCHLEGEL #QDS-650		
3	12" EXTENSION FLUSH BOLTS - QUALITY MFG #1358 1/2" x 1-1/2" LONG STEEL W/ 3/4" THROW @ ASTRAGAL TOP & BOTTOM. 0.77" THICK BRASS STRIKE AT FRAME HEADER ABOVE INACTIVE DOOR AT UPPER CONCEALED FLUSH BOLT. THERE ARE NO STRIKES AT THE BOTTOM OF DOORS. THE LOCKS ENGAGE HOLES DRILLED INTO THE ALUMINUM THRESHOLD.		
4	SINGLE SURFACE DEAD BOLTS - MFR & MODEL #. W/ A MODIFIED M.A.G. ENG. LOCK REINFORCER #20-PB W/ STRIKE ASSEMBLY CONSISTING OF A 0.062" THICK BRASS SURFACE STRIKE W/ A CONCEALED 0.120" THICK PLATED STEEL REINFORCEMENT PLATE.	SCHLAGE #B180N OR KWKSET #666	
5	PASSAGE LOCK - MFR & MODEL #. CENTER 36" FROM BOTTOM OF DOOR. 0.050" THICK BRASS STRIKE AT OPPOSITE SURFACE.	SCHLAGE #F10N OR KWKSET #200E	
6	SINGLE CYLINDER DEAD BOLT - MFR & MODEL #. (CENTER 6" ABOVE PASSAGE LOCK). W/ STRIKE ASSEMBLY CONSISTING OF A 0.062" THICK BRASS SURFACE STRIKE W/ A CONCEALED 0.120" THICK PLATED STEEL REINFORCEMENT PLATE.	SCHLAGE #B180N OR KWKSET #660	
7	4" X 4" BUTT HINGE WITH SAFETY STUD - HAGER #1843 & PENROD #MH40ALUAC (MIXED), CENTER 6-3/4" AND 84" FROM TOP OF DOOR. SCREWS - TO DOOR: (4) #9 X 3/4" FHWS. TO JAMB: (3) #9 X 3/4" FHWS & (1) #9 X 2-1/2" FHWS.		
8	4" X 4" BUTT HINGE - HAGER #1841 OR PENROD #MH40ALUWS (MIXED), CENTER 31-3/4" AND 58" FROM TOP OF DOOR. SCREWS - TO DOOR: (4) #9 X 3/4" FHWS. TO JAMB: (3) #9 X 3/4" FHWS & (1) #9 X 2-1/2" FHWS.		
9	THRESHOLD-MODEL #JR100 (DEPTH X NOSE HEIGHT) WITHRSTRIP-SCHLEGEL MODEL #	2-1/2" X 1-1/8" #QDS-650	2-1/2" X 7/8" #QDS-650
10	FRAME - 1-1/4" X (WOOD)	4-8/16" OR	5-1/4"
	RABBETTED AND KERFED FOR WEATHERSTRIP. EACH CORNER WAS CAULKED AND ATTACHED WITH (3) 3/4" X 2" LONG GUN DRIVEN STAPLES. WEATHERSTRIP - SCHLEGEL #QDS-650.		
11	HEAD PLATE TO MATCH FRAME - WITH 3/8" 3 PLY PLYWOOD ATTACHED W/ GLUE & 3/4" STAPLES 1" TO 1-1/4" FROM EACH EDGE & 8-3/4" (AVG) O.C. AND (3) STAPLES PER JAMB.		
	WEATHERSTRIP - SCHLEGEL MODEL #	#QDS-650	QEB-928
12	2" X 3" X 0.007" VINYL FLAP GLUED TO BOTTOM OF ASTRAGAL.		
13	FRAME SCREWS TO 2X WOOD BUCK - #10 X 2-1/2" FHWS. 6" FROM CORNERS & 24" OC (MAX). FRAME JAMBS AND 20" O.C. (MAX) FRAME HEAD.		
13a	FRAME SCREWS TO MASONRY - 3/16" FH TAPCON MINIMUM EMBEDMENT OF 1-1/4" INTO MASONRY. SAME SPACING AS ABOVE.		
14	PEMCO #S88 SELF ADHESIVE WEATHERSTRIP AT OUTSIDE EDGE AT TOP OF BOTH DOORS.		
	PEMCO #S88 AT OUTSIDE EDGE AT LOCK STILE OF ACTIVE DOOR.		
15	PEMCO #345AV RAIN DRIP & SWEEP ATTACHED WITH #6 X 5/8" RHSMs @ 6" O.C.		
18	PAD/DIVERTER AT BOTTOM OF EACH JAMB.	1" X 2" X 3/16"	
	PAD/DIVERTER AT BOTTOM OF ASTRAGAL.	SELF ADHESIVE PILE PAD.	
17	1/2" TOTAL THICKNESS INSULATED VISION GLASS CONSISTING OF TWO 1/8" TEMPERED LITES AND 1/4" AIR SPACE. DECORATIVE GLASS CAN BE INSERTED AND SEALED INSIDE AIR SPACE. 26-1/4" X 79" HIGH MAXIMUM DAYLIGHT OPENING.		
18	INTERIOR GLAZED SET IN AN ADHESIVE BEDDING COMPOUND. WOOD GLAZING STOPS ATTACHED WITH 5/8" LONG X 3/16" WIDE CROWN, GUN DRIVEN WIRE STAPLES (5 PER HORIZONTAL EDGE AND 9 PER VERTICAL EDGE).		

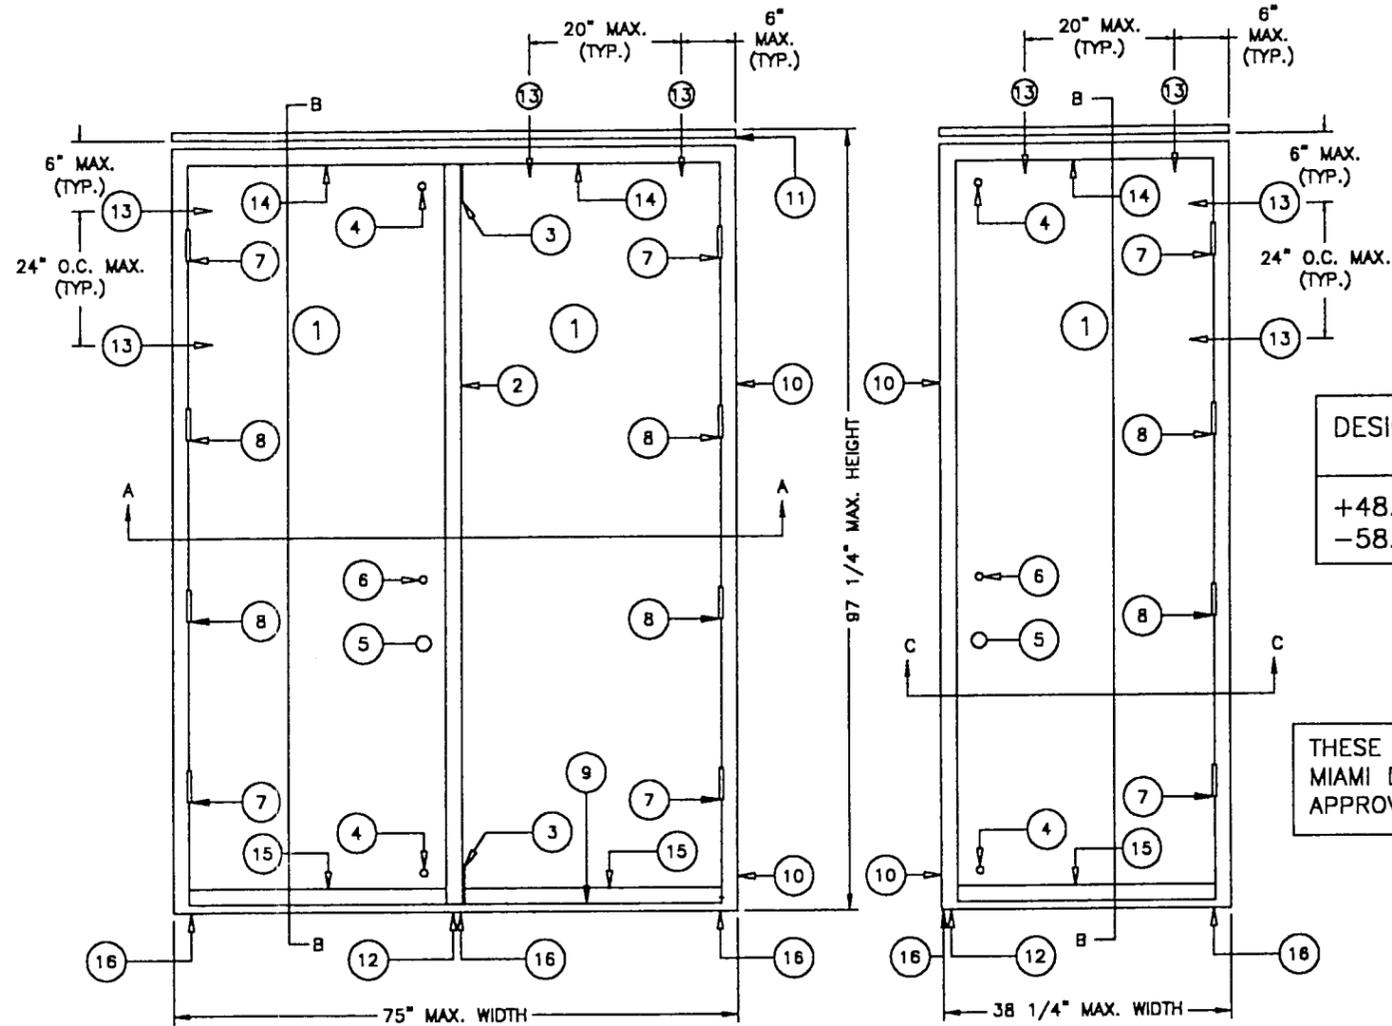


DESIGN PRESSURE RATING
+48.3 PSF
-58.5 PSF

THESE DOORS REQUIRE MIAMI DADE COUNTY APPROVED SHUTTERS.

ITEM #9
J-R #100 THRESHOLD
WOOD & ALUM W/ QDS WEATHERSTRIP

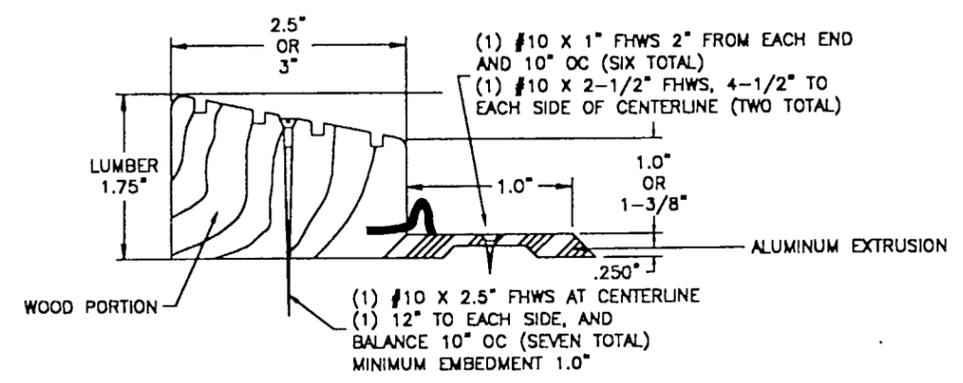


ITEM #2
J-R #300 ASTRAGAL W/ SLEEVES
& KERFED FOR WEATHERSTRIP

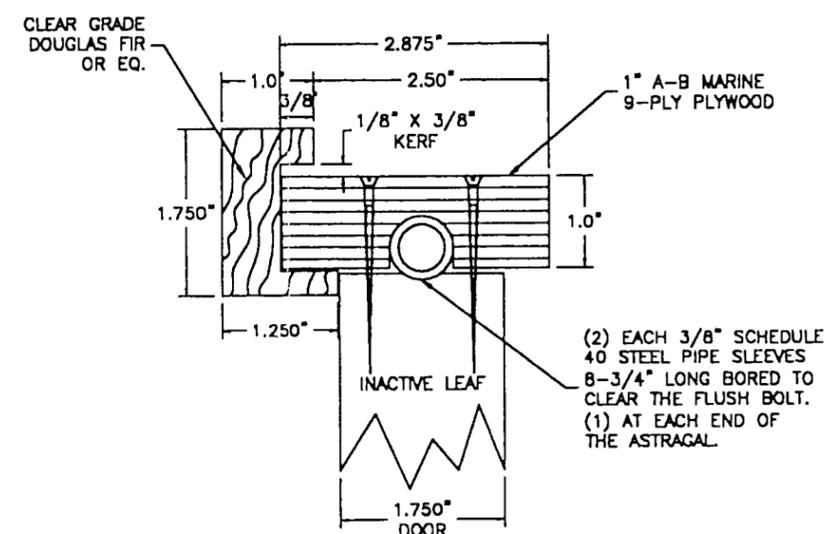


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 02-0528.03
Expiration Date July 1, 2007
By: *[Signature]*
Miami Dade Product Control
Division

Drawn by: E.D. & D.
Date: 12/6/99
Revisions:
Drawing #99003
Drawing Title:
FBMA SERIES 5001
WOOD DOOR
Page 1 of 3

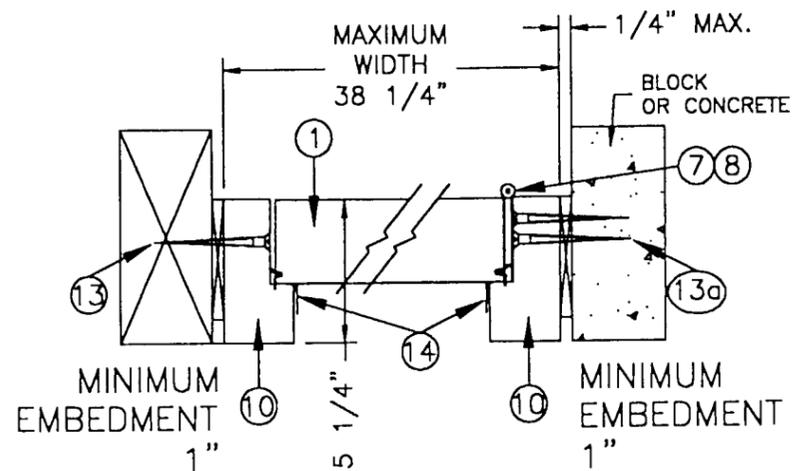


SECTION C-C

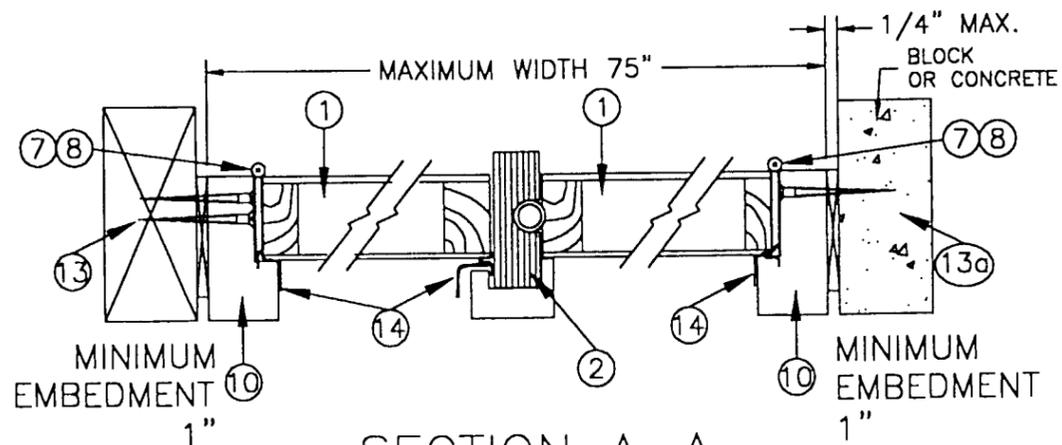



SECTION A-A

Typical installation into 2X buck or wood framing.

Typical installation in masonry.

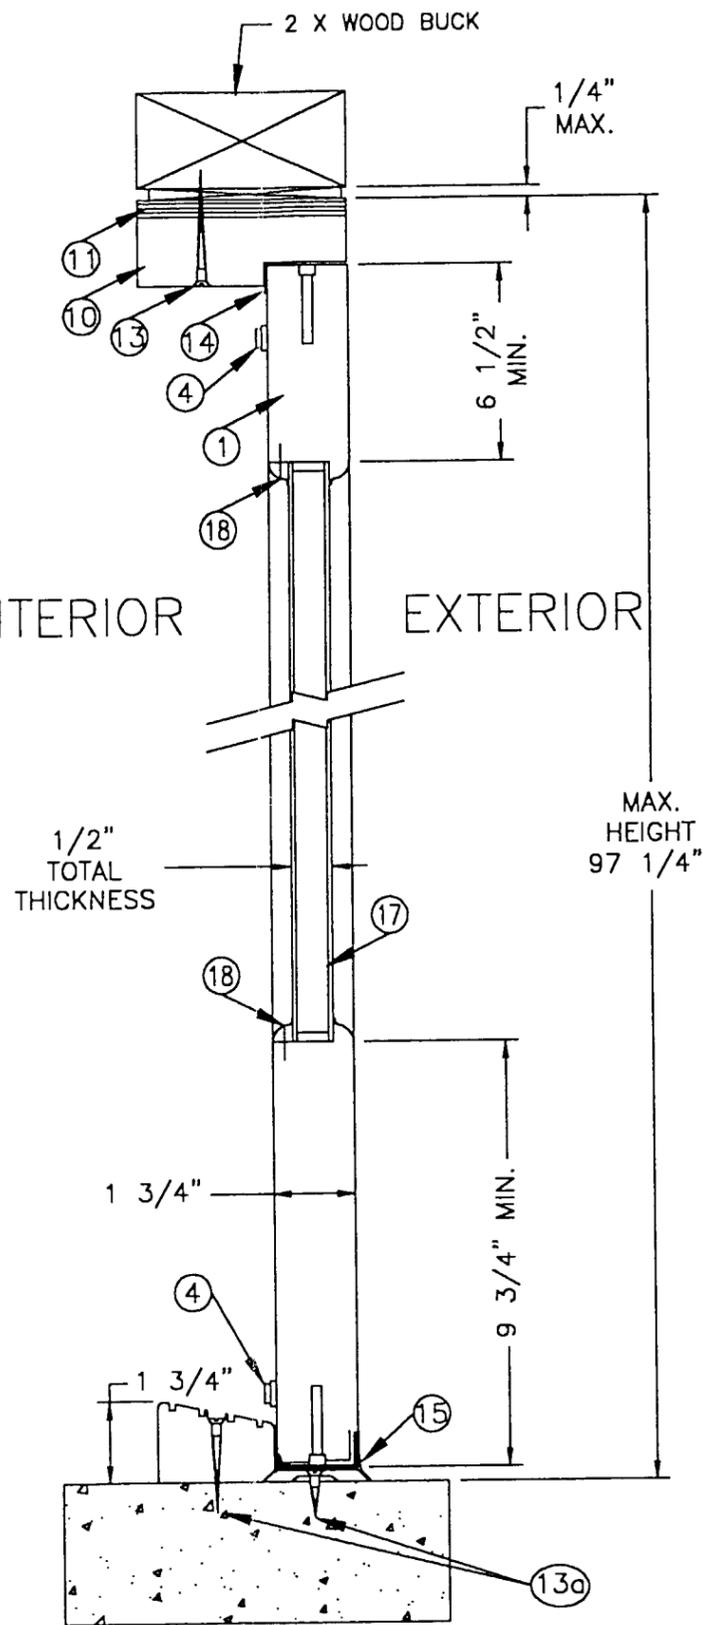

SECTION B-B

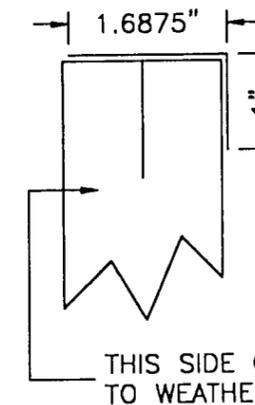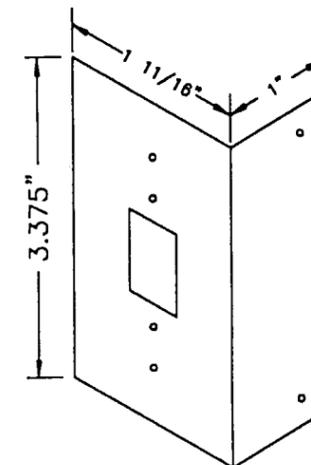

THIS SIDE OF DOOR TO WEATHERSTRIP

ITEM #4

LOCK REINFORCER BY M.A.G. ENG. MODIFIED

PRODUCT RENEWED
 as complying with the Florida
 Building Code
 Acceptance No. 02-0528-03
 Expiration Date July 1, 2007
 By: *[Signature]*
 Miami Dade Product Control
 Division

Drawn by: E.D. & D.

Date: 12/6/99

Revisions:

Drawing #99003

Drawing Title:

FBMA SERIES 5001
 WOOD DOOR

Page 2 of 3

1 3/4" FRONT ENTRANCE DOORS (EXTERIOR) - MODEL 5001

MAXIMUM PANEL WIDTH 36"


Minimum Dimensions

Stiles	4-1/2"
Lock rail.....	7-1/2"
Top rail.....	6-1/2"
Bottom rail.....	9-3/4"
Panels Raised.....	3/4"
Bars (2132-596).....	4-1/2"
Bars (000-606, 000-597).....	3-1/2"


CORNER CONSTRUCTION (AT TOP AND BOTTOM RAIL)

Butted and attached to stile with a minimum of (3) 5/8"Ø x 5" long wood dowels with a 2-3/4" penetration into rail.


CRYSTAL VIEW SERIES

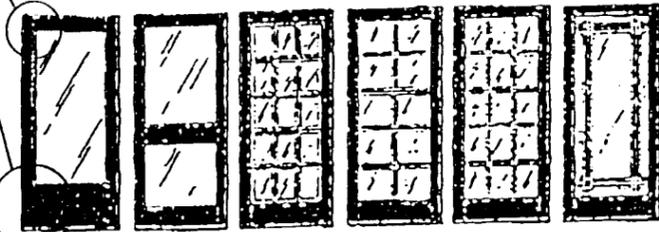


6037 6082 Brass Bar 6450 6060 6065 6069

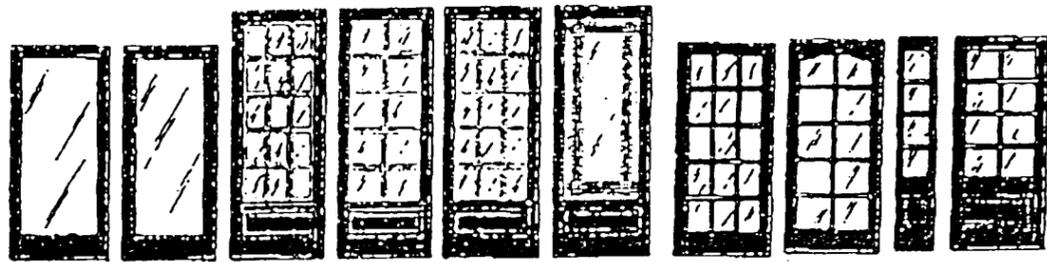


6001 6002 6450 8'-0" 6060 8'-0" 6065 8'-0" 6069 8'-0" 5015 5580 5804 5506

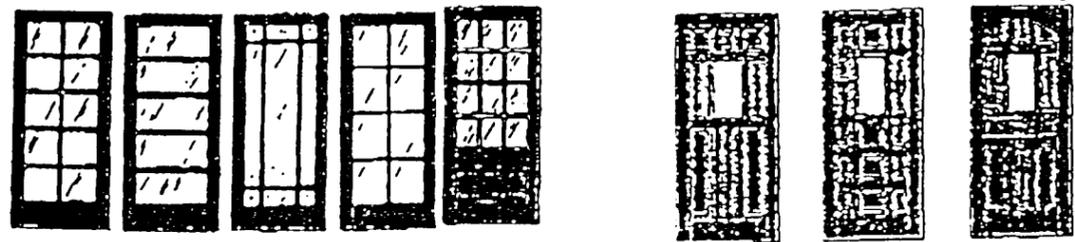


5010 5105 5109 5108 5512 Designer 9 Designer 17 Designer 10

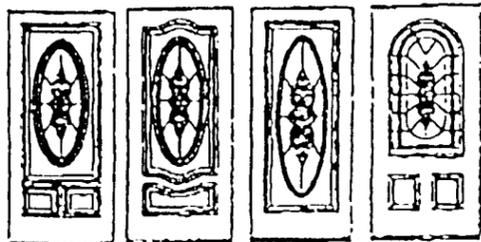


EG 291-OVR EG 291-OV EG 201-OV EG 301-A
R 20G-OV VC-OVAL L20G-V

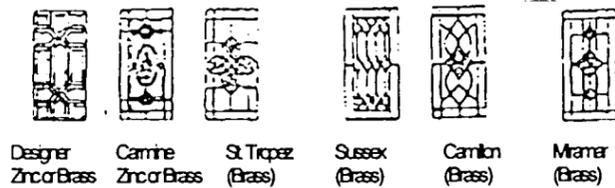


Designer Zinc or Brass Carmine Zinc or Brass St Tropez (Brass) Sussex (Brass) Camlin (Brass) Mirrer (Brass)

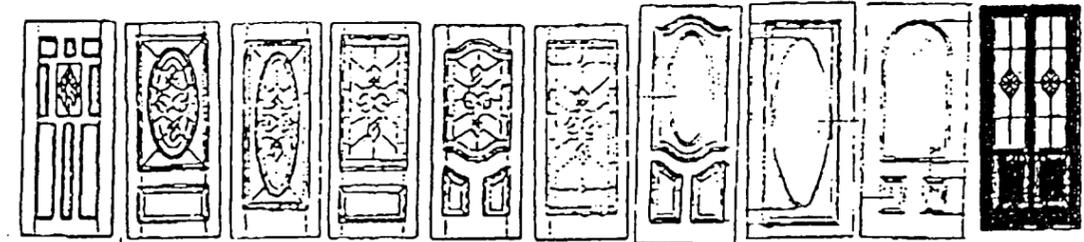

520 530 541 531 539 542 Wyndham 6522

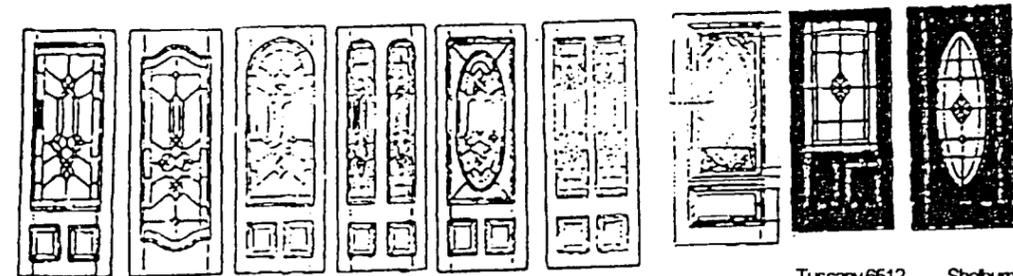

543 552 555 553 554 557 Tuscany 6512 Sheburne 6542

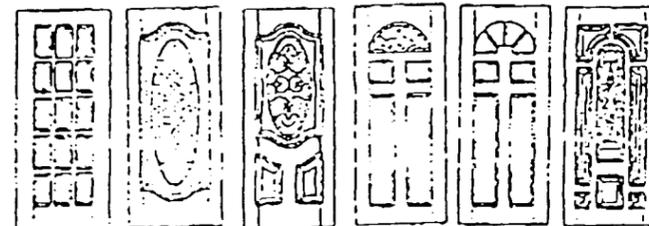

575 577 561 563 564 567



Diana Double Door
Style #160
6'-8" ONLY

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 02-0528.03
Expiration Date: July 4, 2007
By: *[Signature]*
Miami Dade Product Control
Division

Drawn by: E.D. & D.

Date: 12/6/99

Revisions:

Drawing #99003

Drawing Title:

FBMA SERIES 5001
WOOD DOOR

Page 3 of 3