



BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

LFF Systems, Inc.
11302 Memorial Drive
Houston, TX 77024

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by the BCCO and accepted by the Building Code and Product Review Committee to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Fast Felt Underlayment

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA No. 03-0701.04 and consists of pages 1 through 3.
The submitted documentation was reviewed by Jorge L. Acebo.



NOA No.: 06-0112.03
Expiration Date: 01/15/09
Approval Date: 03/02/06
Page 1 of 3

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub-Category: 07520 Underlayment
Material: Asphalt

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Fast Felt	36" x 72' rolls	ASTM D 226 Type II	Asphalt Saturated Felt underlayment with intergrated nylon fastening tabs.

EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
Underwriters Laboratories, Inc.	02NK49693	UL790	01/07/03
Exterior Research & Design, LLC	#01460.06.03 #01460.12.05	TAS 117	06/26/03 12/21/05

APPROVED ASSEMBLIES:

Deck Type 1: Wood, non-insulated, new construction

Deck Description: $1\frac{9}{32}$ " or greater plywood or wood plank

System E(1): Base sheet mechanically fastened deck.

Base Sheet: One or more plies of Fast Felt™ with a minimum 4" side lap and a 6" end lap mechanically fastened to deck with approved nails at a spacing of 6" o.c. at the laps and two staggered rows 12" o.c. the field of the roll.

Surfacing: Approved for Metal Roofing, Wood Shake & Shingles, and Asphaltic Shingle assemblies.


INSTALLATION REQUIREMENTS:

1. All nail fasteners securing Fast Felt® to the roof deck shall be nailed through the **center** of the Fast Felt® Nylon fastening tab ($\frac{1}{4}$ " maximum deviation) which is integrally attached to the Fast Felt® underlayment. See Detail "A".
2. The flat underside of the head of each nail fastener securing Fast Felt® to the roof deck shall be driven flush to the surface of the Fast Felt® Nylon fastening tab.
3. Fast Felt® underlayment shall be installed in accordance with Roofing Application Standard (RAS) 115.



NOA No.: 06-0112.03
Expiration Date: 01/15/09
Approval Date: 03/02/06
Page 2 of 3

FAST FELT®
NAIL FASTENING PATTERN DRAWING
(NOT TO SCALE)

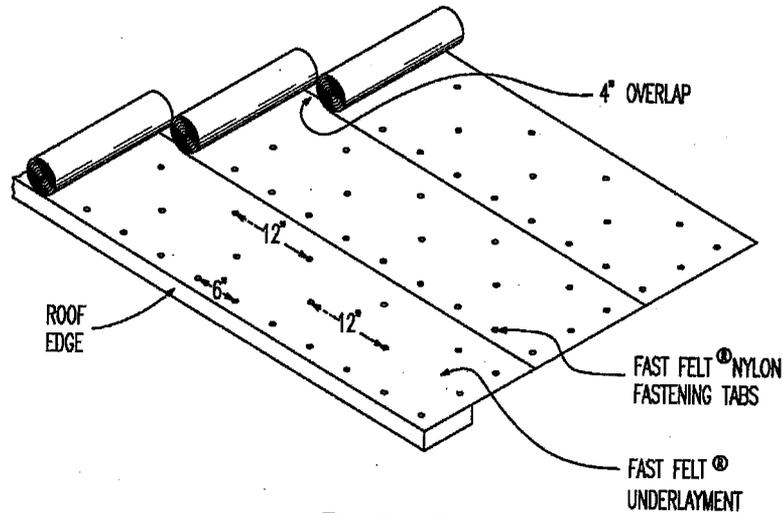

GENERAL LIMITATIONS:

1. Fire classification is not part of this acceptance.
2. This acceptance is for prepared roofing applications. Minimum deck requirements shall be in compliance with applicable building code. Fast Felt™ underlayment shall be installed in strict compliance with applicable Building Code.
3. Fast Felt™ underlayment shall be applied to a smooth, clean and dry surface with deck free of irregularities.
4. Fast Felt™ underlayment shall not be applied over an existing roof membrane.
5. Fast Felt™ underlayment shall not be left exposed as a temporary roof for longer than 30 days of application.
6. Fast Felt™ underlayment shall not be used for tile or hot mop applications.
7. Refer to Prepared Roofing system Product Control Notice of Acceptance for listed approval of this product with specific prepared roofing products.
8. Fast Felt™ underlayment may be used with any approved roof covering Notice of Acceptance listing Fast Felt™ underlayment as a component part of an assembly in the Notice of Acceptance. If Fast Felt™ underlayment is not listed; a request may be made to the Authority Having Jurisdiction (AHJ) or the Miami-Dade County Product Control Department for approval provided that appropriate documentation is provided to detail compatibility of the products, wind uplift resistance, and fire testing results.
9. All nails in the deck shall be carefully checked for protruding heads. Re-fasten any loose decking panels. Sweep the deck thoroughly to remove any dust and debris prior to application.
10. Flash vent pipes, stacks, chimneys and penetrations in compliance with Roof Assembly current Product Control Notice of Acceptance and applicable Building Code.
11. All membranes shall bear the imprint or identifiable marking of the manufacturer's name or logo, or following statement: "Miami-Dade County Product Control Approved" or the Miami-Dade logo.
12. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 9B-72 of the Florida Administrative Code.

END OF THIS ACCEPTANCE

