



MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING

BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

www.buildingcodeonline.com

Ceramica Cejatel LTDA
8678 NW 58 St
Miami, FL. 33166

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Ceramica Cejatel Portuguesa 'S' Clay Roof Tile

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews and revises NOA # 05-0204.02 and consists of pages 1 through 4.
The submitted documentation was reviewed by Alex Tigera.



NOA No 08-1202.02
Expiration Date: 10/12/13
Approval Date: 04/01/09
Page 1 of 4

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub Category: Roofing Tiles
Material: Clay

1. SCOPE

This approves a roofing system using **Ceramica Cejatel Portuguesa ‘S’ Clay Roof Tile**, as manufactured **Ceramica Cetajel Ltd. in Brazil** and distributed by **Direct Company**, as described in Section 2 of this Notice of Acceptance. For the locations where the pressure requirements, as determined by applicable Building Code, does not exceed the values listed in section 4 herein. The attachment calculations shall be done as a moment based system.

2. PRODUCT DESCRIPTION

<u>Manufactured by Applicant</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
‘S’ Clay Roof Tile	l = 16" w = 9.5” ½" thick	ASTM C 1167	High profile, interlocking, one piece, ‘S’ shaped, vitrified clay roof tile equipped with two nail holes. For direct deck adhesive set applications.
Trim Pieces	l = varies w = varies varying thickness	ASTM C 1167	Accessory trim, clay roof pieces for use at hips, rakes, ridges and valley terminations. Manufactured for each tile profile.

3. EVIDENCE SUBMITTED

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
Celotex Corporation Testing Services	520639	ASTM C 1167	June 2000
Celotex Corporation Testing Services	520639	Static Uplift Testing TAS 101	May 2000
IBA Consultants, Inc.	2947-1	ASTM C 1167	May 2003

4. LIMITATIONS

- 4.1 Fire classification is not part of this acceptance.
- 4.2 For mortar or adhesive set tile applications, a static field uplift test in accordance with RAS 106 may required, refer to applicable building code.
- 4.3 Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with TAS 112, appendix ‘A’. Such testing shall be submitted to the Building Code Compliance Office for review.
- 4.4 Minimum underlayments shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- 4.5 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- 4.6 This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with applicable building code.



5. INSTALLATION

5.1 Ceramica Cejatel 'S' Clay Roof Tile and its components shall be installed in strict compliance with Roofing Application Standard RAS 120.

5.2 Data For Attachment Calculations

Table 1: Average Weight (W) and Dimensions (l x w)			
Tile Profile	Weight-W (lbf)	Length - l (feet)	Width - w (feet)
'S' Clay Roof Tile	6.3	1.4	0.8

Table 2 Aerodynamic Multiplier ¶ (ft3)	
'S' Clay Roof Tile	0.245

Table 3 Restoring Moment due to Gravity Mg (lbf)					
Tile Profile	3:12	4:12	5:12	6:12	7:12 or greater
'S' Clay Roof Tile	4.53	4.46	4.37	4.27	4.15

Table 4: Attachment Resistance Expressed as a Uplift – F' (lbf) for Single Patty Adhesive Set Systems		
Tile Profile	Tile Application	Minimum Attachment Resistance
'S' Clay Roof Tile	Polyfoam PolyPro™	83.10
1 Medium paddy placement of 24grams of PolyPro™.		

6. LABELING

All tiles shall bear the imprint or identifiable marking of the manufacturer, name or logo as seen below, or following statement: "Miami-Dade County Product Control Approved".



7. BUILDING PERMIT REQUIREMENTS


7.1 Application for building permit shall be accompanied by copies of the following:

7.1.1 This Notice of Acceptance.

7.1.2 Any other documents required by the Building Official or the Florida Building Code (FBC) in order to properly evaluate the installation of this system.



PROFILE DRAWINGS

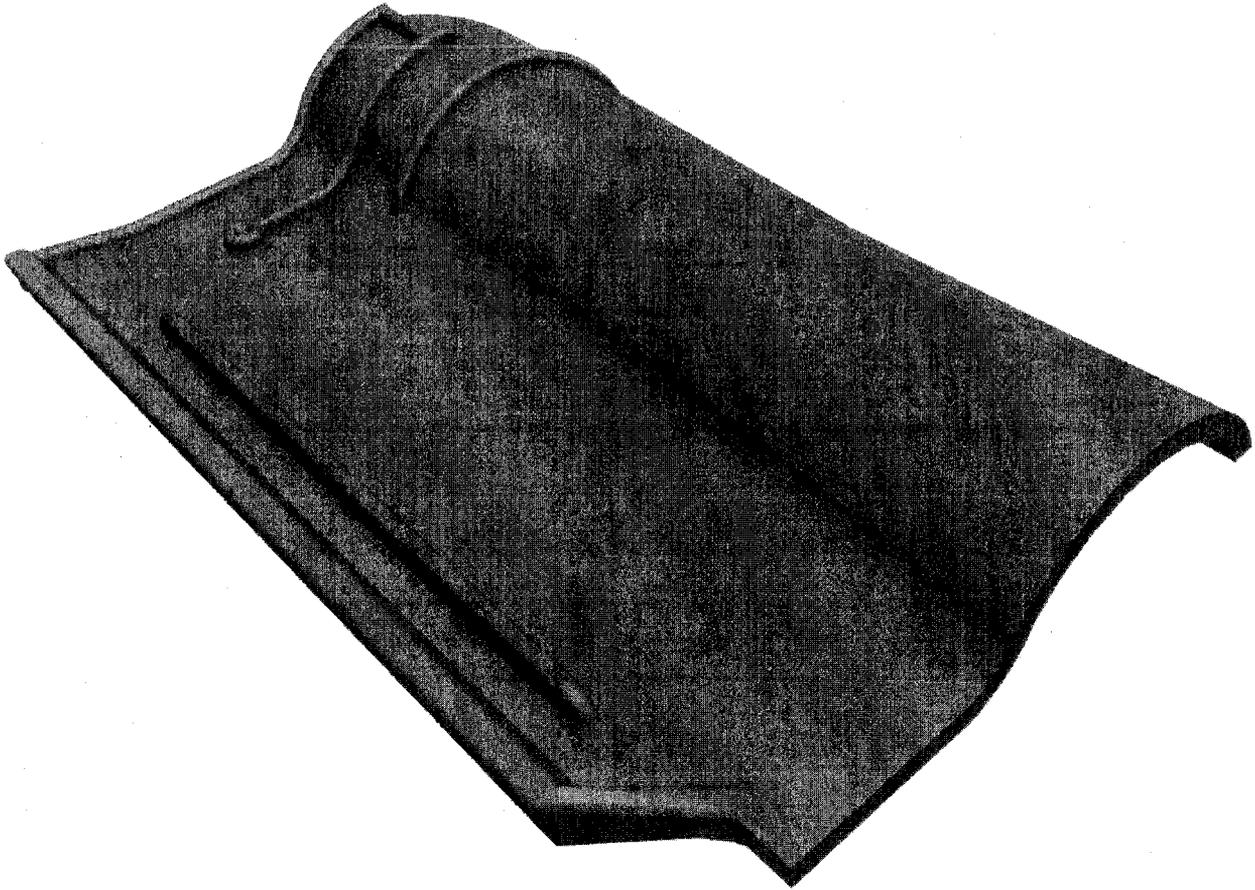

'S' CLAY ROOF TILE

END OF THIS ACCEPTANCE