



**BUILDING CODE COMPLIANCE OFFICE (BCCO)  
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908**

**NOTICE OF ACCEPTANCE (NOA)**

---

**Hanson Roof Tile  
1340 SW 34 Ave  
Deerfield Beach, FL. 33442**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION: Hanson Flat Tile**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This revises NOA #08-0804.12 and consists of pages 1 through 4.  
The submitted documentation was reviewed by Alex Tigera.



**NOA No.: 09-0928.04  
Expiration Date: 04/10/13  
Approval Date: 12/02/09  
Page 1 of 4**

## ROOFING ASSEMBLY APPROVAL

**Category:** Roofing  
**Sub-Category:** Flat Profile Roofing Tiles  
**Material:** Concrete

### 1. SCOPE

This is a new system using Hanson Flat Tile, as manufactured by Hanson Roof Tile Inc. in Deerfield Beach, Florida and described in Section 2 of this Notice of Acceptance. For locations where the pressure requirements, as determined by applicable Building Code does not exceed the design pressure values obtained by calculations in compliance with RAS 127 using the values listed in section 4 herein. The attachment calculations shall be done as a moment based system.

### 2. PRODUCT DESCRIPTION

<u>Manufactured by Applicant</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Hanson Flat Tile	l = 17.25" w = 13"	TAS 112	Flat, interlocking, concrete tile equipped with two nail holes. For direct deck or battened nail-on, mortar or adhesive set applications.
Trim Pieces	l = varies w = varies varying thickness	TAS 112	Accessory trim, concrete roof pieces for use at hips, rakes, ridges and valley terminations. Manufactured for each tile profile.

#### 2.1 SUBMITTED EVIDENCE:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
IBA Consultants, Inc.	2381-265	TAS 112	Feb. 2008
American Test Lab of South Florida	RT0922.01-09	TAS 102	09/22/09
American Test Lab of South Florida	RT1008.01-09	TAS 101	10/19/09
PRI Construction Materials	HRT-053-02-02	TAS 101	09/21/09

### 3. LIMITATIONS

- 3.1 Fire classification is not part of this acceptance.
- 3.2 For mortar or adhesive set tile applications, a static field uplift test shall be performed in accordance with RAS 106.
- 3.3 Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with TAS 112, appendix 'A'. Such testing shall be submitted to the Building Code Compliance Office for review.
- 3.4 Minimum underlayment shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- 3.5 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- 3.6 This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with applicable building code.



NOA No.: 09-0928.04  
 Expiration Date: 04/10/13  
 Approval Date: 12/02/09  
 Page 2 of 4

**4. INSTALLATION**

- 4.1 Hanson Flat Tile and its components shall be installed in strict compliance with Roofing Application Standard RAS 118, RAS 119, and RAS 120.
- 4.2 Data For Attachment Calculations

<b>Table 1: Average Weight (W) and Dimensions (l x w )</b>			
<b>Tile Profile</b>	<b>Weight-W (lbf)</b>	<b>Length-l (ft)</b>	<b>Width-w (ft)</b>
Hanson Flat Tile	11.6	1.4375	1.08

<b>Table 2: Aerodynamic Multipliers - <math>\square</math> (ft<sup>3</sup>)</b>		
<b>Tile Profile</b>	<b><math>\square</math> (ft<sup>3</sup>) Batten Application</b>	<b><math>\square</math> (ft<sup>3</sup>) Direct Deck Application</b>
Hanson Flat Tile	N/A	0.330

<b>Table 3: Restoring Moments due to Gravity - <math>M_g</math> (ft-lbf)</b>						
<b>Tile Profile</b>	<b>2":12"</b>	<b>3":12"</b>	<b>4":12"</b>	<b>5":12"</b>	<b>6":12"</b>	<b>7":12" or greater</b>
Hanson Flat Tile	Direct Deck					
	8.58	8.42	8.37	8.20	8.0	7.78

<b>Table 4: Attachment Resistance Expressed as a Moment - <math>M_f</math> (ft-lbf) For Nail-On Systems</b>				
<b>Tile Profile</b>	<b>Fastener Type</b>	<b>Direct Deck (min 15/32" plywood)</b>	<b>Direct Deck (min. 19/32" plywood)</b>	<b>Battens</b>
Hanson Flat Tile	Two (2). # 8 x 3" Screws	31.51	31.51	N/A

<b>Table 5: Attachment Resistance Expressed as a Moment - <math>M_f</math> (ft-lbf) For Two Patty Adhesive Set Systems</b>		
<b>Tile Profile</b>	<b>Tile Application</b>	<b>Minimum Attachment Resistance</b>
Hanson Flat Tile	Tile Bond	38.7 <sup>1</sup>

1 Dow Chemical Tile Bond™. Two patty's of 6g were installed as per Tile Bond NOA.


<b>Table 6: Attachment Resistance Expressed as a Moment - <math>M_f</math> (ft-lbf) For Single Patty Adhesive Set Systems</b>		
<b>Tile Profile</b>	<b>Tile Application</b>	<b>Minimum Attachment Resistance</b>
Hanson Flat Tile	Polyfoam PolyPro™	38.67 <sup>2</sup>

2 Medium paddy placement of 47grams of PolyPro™ AH-160.



**5. LABELING**

All tiles shall bear the imprint or identifiable marking of the manufacturer's name or logo (See **Detail Below**), or following statement: "Miami-Dade County Product Control Approved".



**HANSON FLAT TILE LABEL  
(LOCATED ON UNDERSIDE OF TILE)**


**6. BUILDING PERMIT REQUIREMENTS**

6.1 Application for building permit shall be accompanied by copies of the following:

6.1.1 This Notice of Acceptance.

6.1.2 Any other documents required by the Building Official or applicable building code in order to properly evaluate the installation of this system.

**PROFILE DRAWINGS**

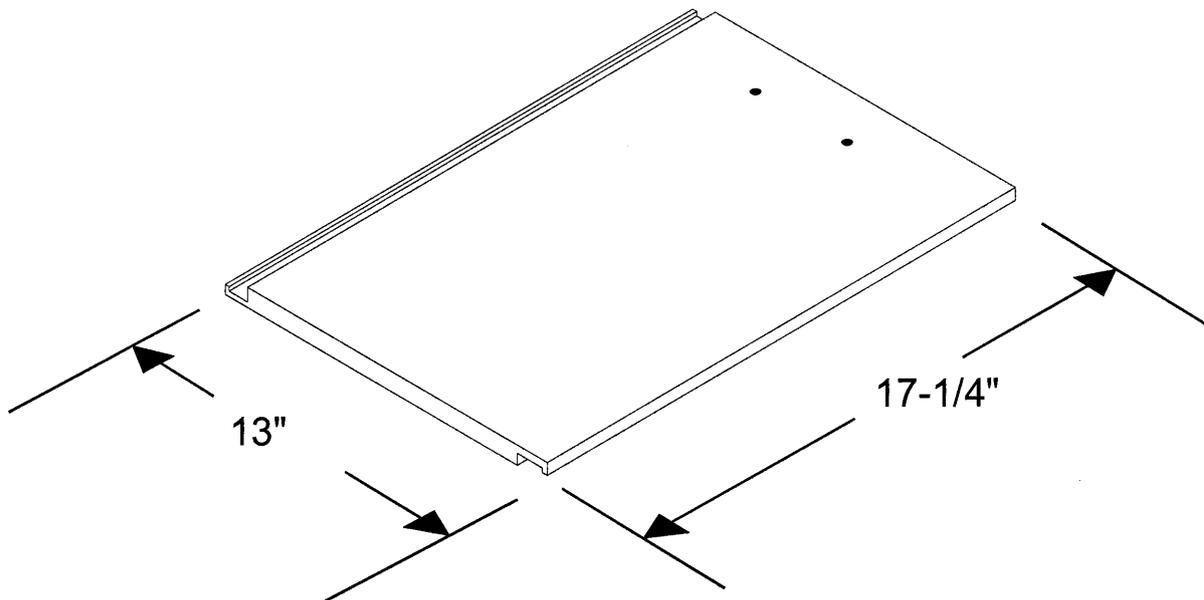

**HANSON FLAT TILE**

**END OF THIS ACCEPTANCE**

