

American Coolair Corporation P.O. Box 2300 Jacksonville, FL 32203

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Model CR_A and U_CA Aluminum Rooftop Fans

APPROVAL DOCUMENT: Drawing No. 23-184, titled "CR_A & U_CA Type Roof Mounted Capped Power Ventilators Hurricane Rated", sheets 1 through 22 of 22, dated 08/17/2023, prepared by Tilteco, Inc, signed and sealed by Walter A. Tillit, Jr., P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, city, state, model/ series, and following statement: "Miami-Dade County Product Control Approved", is to be located on each unit.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA # 20-0811.14** and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.

Atros

MIAMI-DADE COUNTY

NOA No. 23-0906.06 Expiration Date: April 22, 2025 Approval Date: October 26, 2023 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. Evidence submitted under previous NOA's

A. DRAWINGS "Submitted under NOA # 15-0603.10"

1. Drawing No. 15-124, titled "CR_A & U_CA Type Roof Mounted Capped Power Ventilators Hurricane Rated", sheets 1 through 22 of 22, dated 05/04/2015, prepared by Tilteco, Inc, signed and sealed by Walter A. Tillit, Jr., P.E.

B. TESTS "Submitted under NOA # 10-0303.03"

Test reports on 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94

along with marked-up drawings and installation diagram of CR-A Type Unit Size 30 Roof Mounted Capped Power Ventilator Hurricane Rated, prepared by American Test Lab of South Florida, Test Report No. **1006.02-09**, dated 02/24/2010, signed and sealed by Edmundo Largaespada, P.E.

Test reports on 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94
along with marked-up drawings and installation diagram of U-CA Type Unit Size 30
Roof Mounted Power Ventilator Hurricane Rated, prepared by American Test Lab of

South Florida, Test Report No. **1006.01-09**, dated 02/24/2010, signed and sealed by Edmundo Largaespada, P.E.

C. CALCULATIONS "Submitted under NOA # 10-0303.03"

1. Anchoring verification calculations, prepared by Tilteco, Inc, dated 07/31/2009, signed and sealed by Walter A. Tillit, Jr., P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS "Submitted under NOA # 15-0603.10"

1. Statement letter of code conformance to the 5th edition (2014) FBC issued by Tilteco, Inc, dated 05/05/2015, signed and sealed by Walter A. Tillit, Jr., P.E.

"Submitted under NOA # 10-0303.03"

2. Statement letter of no financial interest, issued by Tilteco, Inc, dated 02/15/2010, signed and sealed by Walter A. Tillit, Jr., P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 23-0906.06 Expiration Date: April 22, 2025 Approval Date: October 26, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. Evidence submitted under NOA # 20-0302.03

A. DRAWINGS

1. Drawing No. 17-133, titled "CR_A & U_CA Type Roof Mounted Capped Power Ventilators Hurricane Rated", sheets 1 through 22 of 22, dated 08/02/2017, with revision 2 dated 02/11/2020, prepared by Tilteco, Inc., signed and sealed by Walter A. Tillit, Jr., P.E.

B. TESTS

- 1. None.
- C. CALCULATIONS
 - 1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS "Submitted under NOA #18-0110.03

1. Statement letter of code conformance to 6th edition (2017) FBC, prepared by Tilteco, Inc., dated 08/02/2017, signed and sealed by Walter A. Tillit, Jr., P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 23-0906.06 Expiration Date: April 22, 2025 Approval Date: October 26, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. Evidence submitted under NOA # 20-0811.14 and new

A. DRAWINGS

1. Drawing No. 23-184, titled "CR_A & U_CA Type Roof Mounted Capped Power Ventilators Hurricane Rated", sheets 1 through 22 of 22, dated 08/17/2023, prepared by Tilteco, Inc., signed and sealed by Walter A. Tillit, Jr., P.E.

B. TESTS

- 1. None.
- C. CALCULATIONS
 - 1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

- 1. Statement letter of code conformance to the 8th edition (2023) of the FBC, prepared by Tilteco, Inc., dated 08/17/2023, signed and sealed by Walter A. Tillit, Jr., P.E.
- 2. Statement letter of code conformance to the 7th edition (2020) of the FBC, prepared by Tilteco, Inc., dated 07/22/2020, signed and sealed by Walter A. Tillit, Jr., P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 23-0906.06 Expiration Date: April 22, 2025 Approval Date: October 26, 2023

GENERAL NOTES:

1. CR_A & U_CA TYPE ROOF MOUNTED CAPPED POWER VENTILATORS HURRICANE RATED SHOWN ON THIS PRODUCT APPROVAL DOCUMENT (P.A.D.) HAVE BEEN VERIFIED FOR COMPLIANCE IN ACCORDANCE WITH THE 2023 (8th EDITION) AND THE 2020 (7th EDITION) OF THE FLORIDA BUILDING CODE. THESE VENTILATORS MAY BE INSTALLED AT HIGH VELOCITY HURRICANE ZONES. (MIAMI-DADE/BROWARD COUNTIES) DESIGN WIND LOADS SHALL BE DÉTERMINED AS PER SECTION 1620 OF THE ABOVE MENTIONED CODE, USING ASCE 7-22 (FBC 2023) AND ASCE 7-16 (FBC 2020) AND SHALL NOT EXCEED THE MAXIMUM (A.S.D.) DESIGN PRESSURE RATINGS INDICATED ON NOTE 2.

IN ORDER TO VERIFY THE ABOVE CONDITION, ULTIMATE DESIGN WIND LOADS DETERMINED PER ASCE 7-22 AND ASCE 7-16 SHALL BE FIRST REDUCED TO A.S.D. DESIGN LOADS BY MULTIPLYING THEM BY 0.6 IN ORDER TO COMPARE THESE W/ MAX. (A.S.D.) DESIGN PRESSURE RATING INDICATED ON NOTE 2.

IN ORDER TO VERIFY THAT ANCHORS ON THIS P.A.D. AS TESTED, WERE NOT OVER STRESSED, A 33% INCREASE IN ALLOWABLE STRESS FOR WIND LOADS WAS NOT USED IN THEIR ANALYSIS. FASTENERS SPACING TO WOOD HAS BEEN DETERMINED IN ACCORDANCE WITH N.D.S. 2018. VENTILATORS' ADEQUACY FOR IMPACT AND WIND RESISTANCE HAS BEEN VERIFIED IN ACCORDANCE WITH SECTION 1626 (EXCEPT CYCLIC TEST) OF THE ABOVE MENTIONED CODE AS PER AMERICAN TESTING LAB. OF SOUTH FL. REPORTS # 1006.01-09 & 1006.02-09, AS PER TAS-201 AND TAS-202 PROTOCOLS (INCLUDING PULL TEST TO VERIFY OVERTURNING CAPACITY).

- 2. MAXIMUM A.S.D. DESIGN PRESSURE RATING: +61.0, -61.0 p.s.f.
- .3 THESE VENTILATORS HAVE NOT BEEN TESTED FOR WIND DRIVEN RAIN PER FLORIDA BUILDING CODE, TAS 100(A).
- THESE VENTILATORS WERE TESTED FOR STRUCTURAL STRENGTH OF THE 4 OUTER HOUSING PARTS AND THE ABILITY OF THE VENTILATOR TO OPERATE AFTER TESTING.
- 5. THIS APPROVAL IS FOR THE STRUCTURAL PERFORMANCE AND IMPACT RESISTANCE ONLY. INTERIOR MECHANISM AND/OR ELECTRICAL CIRCUITRY ARE OUTSIDE THE SCOPE OF THIS APPROVAL.
- VENTILATORS ROOF CURB MUST BE ANCHORED DIRECTLY INTO ROOF 6. FRAMING MEMBERS AND NOT TO ROOFING SYSTEM. AFTER THIS INSTALLATION IS COMPLETED, TENANT MUST RE-ROOF ALL AROUND ROOF AREA WHERE VENTILATOR WAS INSTALLED TO PREVENT WATER INTRUSION. ALL ROOFING DETAILS SHALL COMPLY WITH CHAPTER 15, SECTIONS 1512 THRU 1525 OF THE FLORIDA BUILDING CODE.
- 7. ROOF STRUCTURE MUST BE DESIGNED TO WITHSTAND THE WEIGHT AND LOADING TRANSFERRED BY ROOF TOP VENTILATORS.
- FASTENERS SHALL BE AS SPECIFIED AND INSTALLED AS DETAILED ON SHEET 8 4 (FOR CR_A) & SHEET 16 (FOR U_CA). THESE VENTILATORS INCLUDE AN INLET BASE (FOR CR_A) AND BOTTOM HOUSING BASE ASSEMBLY (FOR U_CA) TO BE USED TO SECURE THE VENTILATOR TO THE ROOF CURB. THE ROOF CURB WILL BE ATTACHED TO THE BUILDING ROOF STRUCTURE TO ADEQUATELY SUPPLY A VENTILATOR-CURB ASSEMBLY TO RESIST HIGH VELOCITY HURRICANE ZONES WIND FORCES AND USING ANCHORS SPECIFIED ON NOTE 14.
- 9. THIS DRAWING REFERS TO CR_A & U_CA VENTILATORS, BOTH BELT DRIVE AND DIRECT DRIVE TYPE WHICH ARE MANUFACTURED WITH THE SAME OUTER HOUSING PARTS.
- 10. ALL ALUMINUM AND STEEL COMPONENTS SHALL BE AS INDICATED ON THIS DRAWING AT BILL OF MATERIALS ON SHEET 3 (FOR CR_A) AND ON SHEET 15 (FOR U CA).

- 11. BOLTS TO BE ASTM A 307, GALVANIZED OR ZINC PLATED PER ASTM B 633 WITH 36 k.s.i. MINIMUM YIELD STRENGTH.
- 12. ALL SCREWS USED FOR ASSEMBLY CONNECTIONS (METAL TO METAL) TO BE STAINLESS STEEL 304 OR 316 AISI SERIES OR CORROSION RESISTANT COATED CARBON STEEL AS PER DIN 50018 AND SECTION 2411.3.3.4 OF THE FLORIDA BUILDING CODE WITH 50 ksi YIELD STRENGTH AND 90 ksi TENSILE STRENGTH.
- 13. ALL POP RIVETS TO BE ZINC PLATED STEEL.
- 14. ANCHORS TO EXISTING BUILDING ROOF STRUCTURE SHALL BE AS FOLLOWS: SEE SHEET 4 (FOR CR_A) & SHEET 16 (FOR U_CA)
 - (A) TO EXISTING POURED CONCRETE (Min. f'c=3000 p.s.i.) .:
 - 3/8" ARGE DIAMETER TAPCON (LDT) ANCHOR AS MANUFACTURED BY ITW RED HEAD.
 - A.1) MINIMUM EMBEDMENT OF TAPCON ANCHOR INTO POURED CONCRETE SHALL BE 2 1/2", BEYOND ANY FINISH MATERIAL.
 - A.2) MINIMUM TAPCON ANCHOR SPACING SHALL BE 3".
 - A.3) MINIMUM EDGE DISTANCE (E.D.) OF TAPCON ANCHOR INTO POURED CONCRETE SHALL BE 1 3/4". EDGE DISTANCE IS BEYOND ANY FINISH MATERIAL.
 - (B) TO EXISTING MIN. 1/8" THICK STEEL (ASTM A-500, A-653 OR A-36):
 - 1/4"øx3/4" TEK SCREW AS MANUFACTURED BY ITW BUILDEX. INC.
 - B.1) MINIMUM TEK SCREW SPACING SHALL BE 1".
 - B.2) MINIMUM EDGE DISTANCE (E.D.) OF TEK SCREW INTO STEEL SHALL BE 1/2". EDGE DISTANCE IS BEYOND ANY FINISH MATERIAL.
 - (C) TO EXISTING WOOD (MIN. SPECIFIC GRAVITY, G = 0.55 MIN.):
 - 3/8"ø LAG SCREW, PER N.D.S. 2015.

- C.1) MINIMUM THREADED PENETRATION OF LAG SCREW, INTO THE WOOD FRAME UNIT SHALL BE 3", BEYOND ANY FINISH MATERIAL.
- C.2) MINIMUM LAG SCREW SPACING SHALL BE 1 1/2".
- C.3) MINIMUM EDGE DISTANCE (E.D.) OF LAG SCREW, INTO WOOD SHALL BE 3/4". EDGE DISTANCE IS BEYOND ANY FINISH MATERIAL.



(D) ANCHORS SHALL BE INSTALLED RECOMMENDATIONS AND SPECIFIC MANUFACTURER.	ATIONS OF THE ANOMOR'S THER A. TILL IT TER A. TILL IT TER A. TILL IT NO. 44167	
PRODUCT REVISED as complying with the Florida Building Code NOA-No. 23-0906.06	STATE OF A CANAL STATE	© 2023 TILTECO INC.
Expiration Date <u>04/22/2025</u> By	\$ 17/2023	LILIT TESTING & ENGINEERING COMPA 6355 N.W. 36th, St., Ste. 305, VIRGINA CARDENS, FI, 33 Phone: (305)871-1530 . Fox: (305)871-1531 e-mail: tilteco@aol.com CA-0006719
Miami-Dade Product Control	P.E. SEAL/SIGNATURE/DATE	WALTER A. TILLIT Jr., P.E.

- MODIFIED.
- REVIEW.
- PREPARED IT.
- CODE.

15. THE INSTALLATION CONTRACTOR IS TO SEAL/CAULK ALL VENTILATORS COMPONENT EDGES BETWEEN ROOF CURB & INLET BASE (FOR CR_A) AND ROOF CURB & BOTTOM HOUSING BASE ASSEMBLY (FOR U_CA) TO PREVENT WIND/RAIN INTRUSION.

16. THIS PRODUCT INSTALLATION SHALL COMPLY WITH SPECS INDICATED IN THIS DRAWING PLUS ANY BUILDING AND ZONING REGULATIONS PROVIDED BY THE JURISDICTION WHERE PERMIT IS APPLIED TO.

17. (A) THIS PRODUCT APPROVAL DOCUMENT (P.A.D.) PREPARED BY THIS ENGINEER IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT; i.e. WHERE THE SITE CONDITIONS DEVIATE FROM THE P.A.D.

(B) CONTRACTOR TO BE RESPONSIBLE FOR THE SELECTION, PURCHASE AND INSTALLATION INCLUDING LIFE SAFETY OF THIS PRODUCT BASED ON THIS P.A.D. PROVIDED HE/SHE DOES NOT DEVIATE FROM THE CONDITIONS DETAILED ON THIS DOCUMENT. CONSTRUCTION SAFETY AT SITE IS THE CONTRACTOR'S RESPONSIBILITY.

(C) THIS PRODUCT APPROVAL DOCUMENT WILL BE CONSIDERED INVALID IF

(D) SITE SPECIFIC PROJECTS SHALL BE PREPARED BY A FLORIDA REGISTERED ENGINEER OR ARCHITECT WHICH WILL BECOME THE ENGINEER OF RECORD (E.O.R.) FOR THE PROJECT AND WHO WILL BE RESPONSIBLE FOR THE PROPER USE OF THE P.A.D. ENGINEER OF RECORD, ACTING AS A DELEGATED ENGINEER TO THE P.A.D. ENGINEER, SHALL SUBMIT TO THIS LATTER THE SITE SPECIFIC DRAWINGS FOR

(E) ORIGINAL P.A.D. SHALL BEAR THE DATE AND ORIGINAL SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER OF RECORD THAT


18. VENTILATORS MANUFACTURER'S LABEL SHALL BE PLACED ON A READILY AND VISIBLE LOCATION AT PRODUCT.

ONE LABEL SHALL BE PLACED FOR EVERY VENTILATOR.

LABEL SHALL COMPLY WITH SECTION 1703.5 OF THE FLORIDA BULDING

THIS DRAWING SHALL ONLY BE USED TO OBTAIN PERMITS IN THE STATE OF FLORIDA


]	FLORI	DA B UILDIN	IG C O	DE (H	igh V elo	ocity	Hur	ricane Z one)
7		A & U_CA T OWER VENT	DRAWN BY: Y.M.					
		STREET	08/17/2023 DATE					
4PANY 1. 33166 331	(A)	32205 7-3449	23–184					
	REV. NO	DESCRIPTION	DATE	REV. Ho	DESCRIPTIC	4	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3				SHEET 1 OF 22
	2			4				SHEET I UT 22

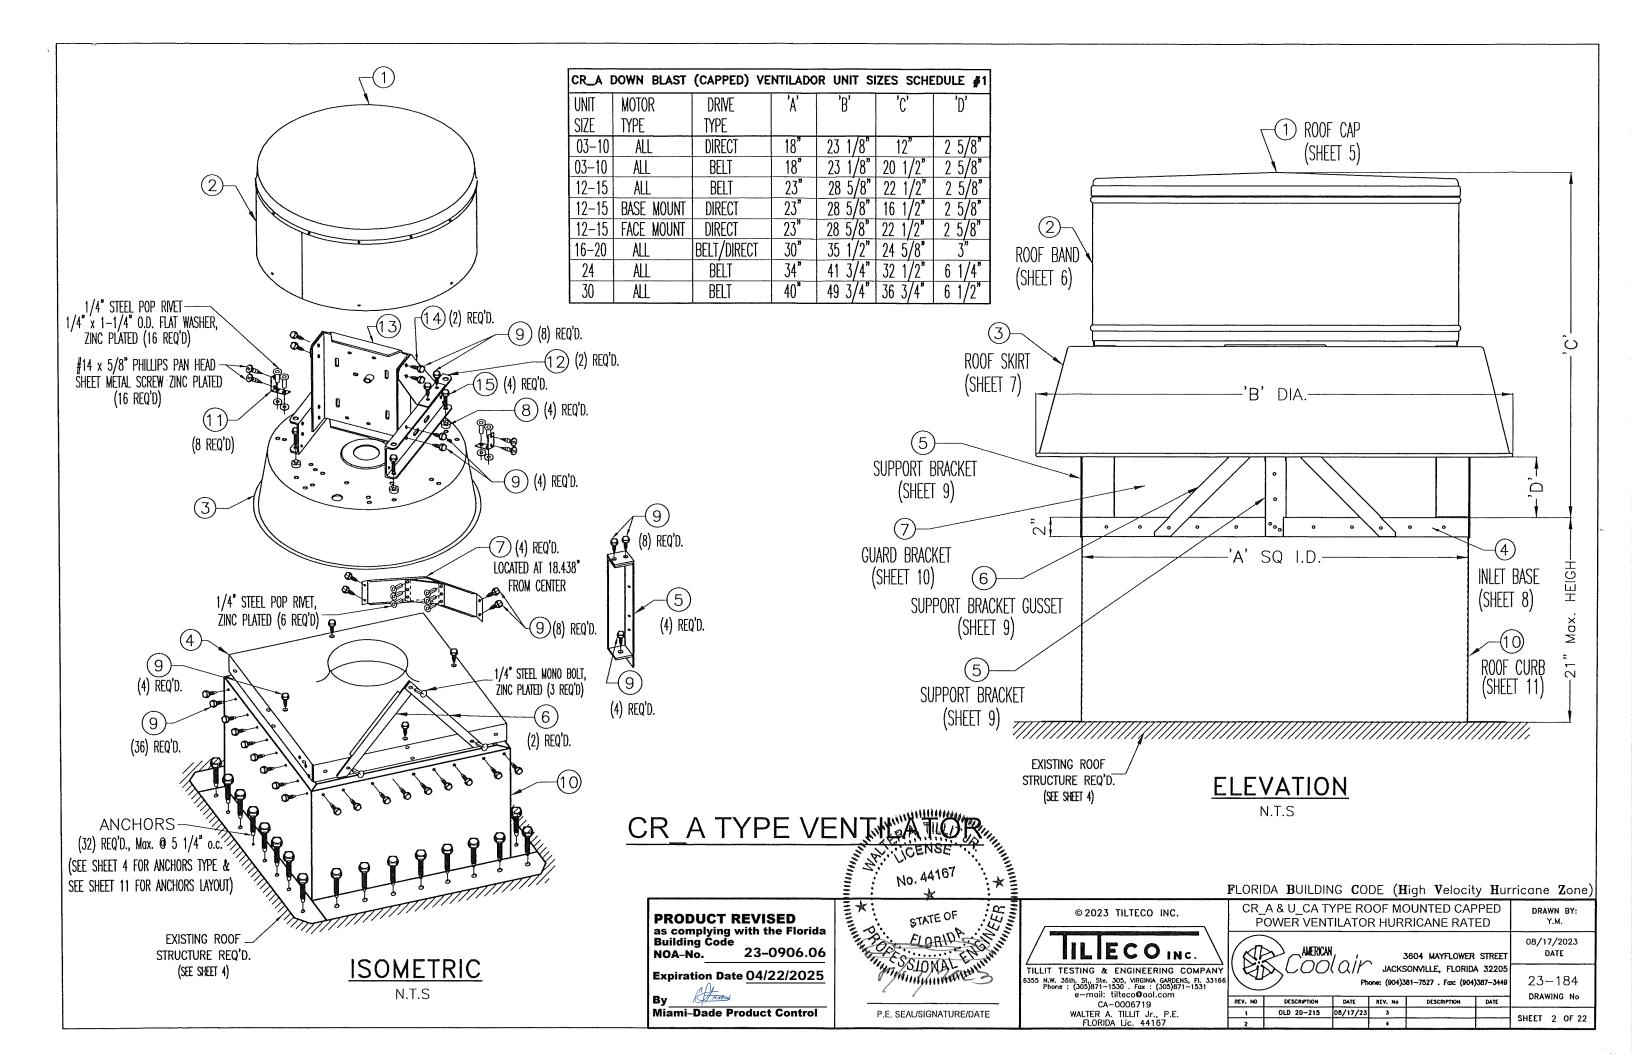


BILL OF MATERIALS

ITEM	DESCRIPTION	MATERIAL
	ROOF CAP	0.063" THK. 3003-0 ALUMINUM W/ Fu = 16 ksi. & Fy = 6 ksi.
2	ROOF BAND	0.063"THK. 5052-H32 ALUMINUM
3	ROOF SKIRT	0.080" THK. 3003-0 ALUMINUM W/ Fu = 16 ksi. & Fy = 6 ksi.
4	INLET BASE	0.080" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL OR 3003–0 ALUMINUM
5	SUPPORT BRACKET	0.126" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
6	SUPPORT BRACKETS GUSSET	0.071" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
7	GUARD BRACKET	0.096" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
8	VIBRATION ISOLATOR	RUBBER WITH SLEEVE
9	5/16" x 3/4" SELF TAPP SCREW	ZINC PLATED
(10)	ROOF CURB	0.071" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
(11)	ROOF BRACKET	0.071" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
(12)	SUPPORT RAILS	0.096" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
(13)	MOTOR/BEARING PLATES	0.096" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
(14)	SUPPORT GUSSET	0.096" THK. ASTM A653 GRADE 33 G90 GALVANIZED STEEL
(15)	5/16" x 1 3/4" SELF TAPP SCREW	ZINC PLATED


TOLERANCES UNLESS	OTHERWISE NOTED
0 TO 9-31/32"	– PLUS OR MINUS 1/16"
10" TO 23-31/32"	– PLUS OR MINUS 1/8"
24" TO 47-31/32"	– PLUS OR MINUS 3/16"
48" TO 96"	– PLUS OR MINUS 1/4"
GREATER THAN 96"	– PLUS OR MINUS 3/8"

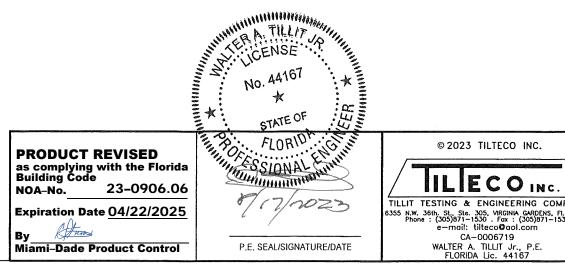

	FLORIC	A B UILDIN	1G C O	DE (H	igh V eloci	ty H ur	ricane Z one)
	CR_/ PC	DRAWN BY: Y.M.					
		r street	08/17/2023 DATE				
MPANY Fl. 33166 1531		A 32205 4)387-3449	23-184				
	REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3			SHEET 3 OF 22
	2			4			SHEET 3 OF 22

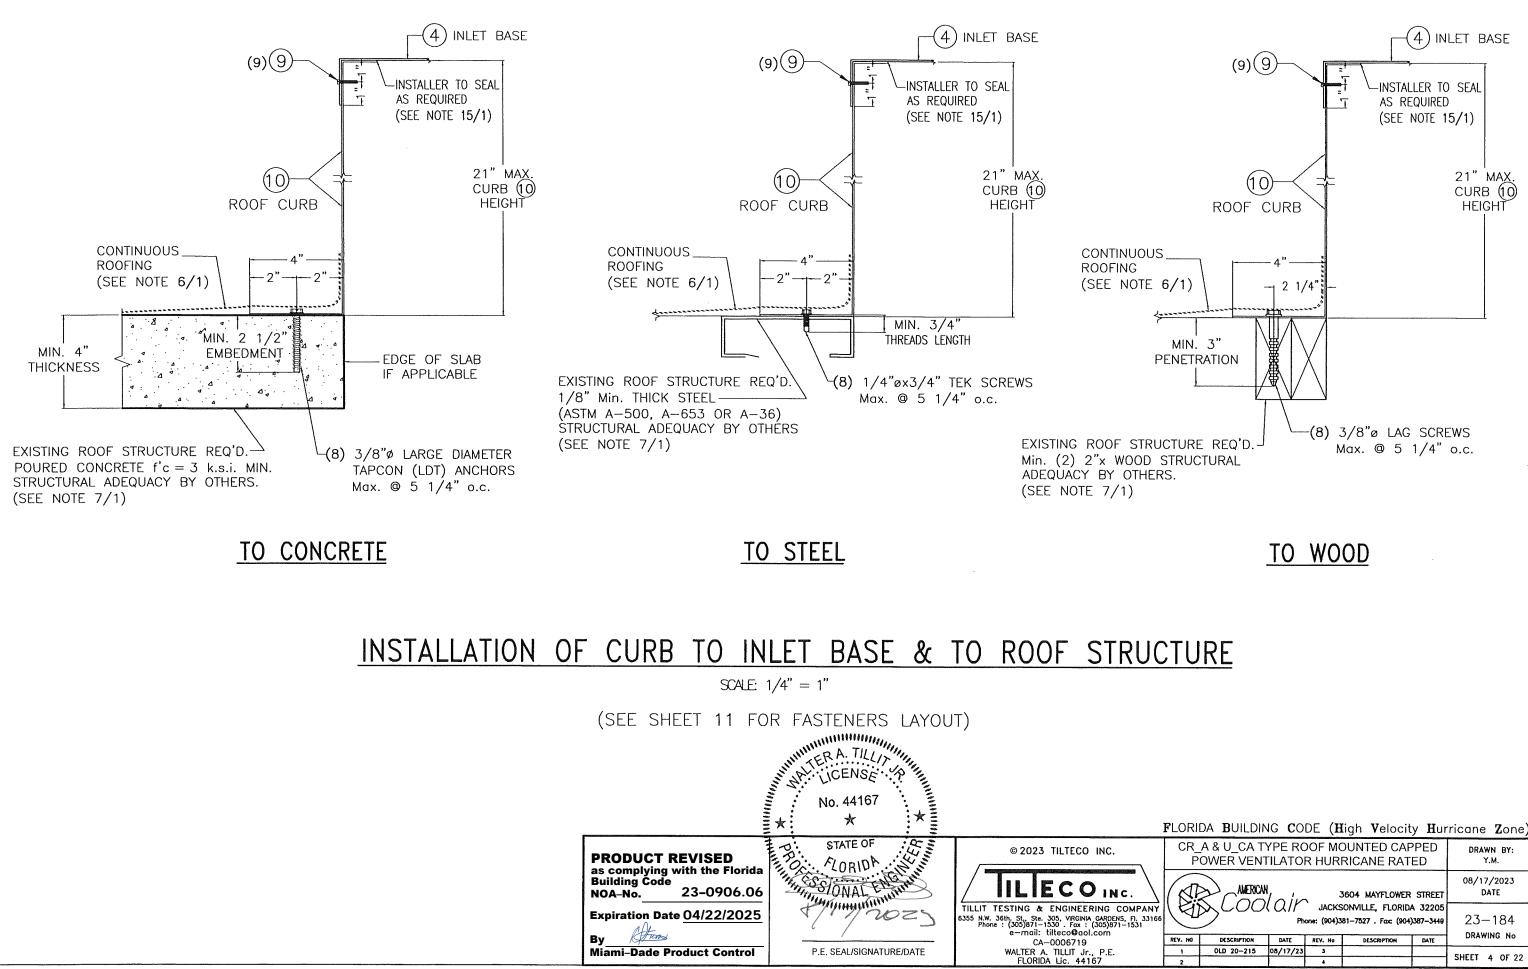


	F LORII	DA B UILDIN	1G C OI	de (H	igh V elocil	ty H ur	ricane Z one)
a \		A & U_CA T OWER VENT	DRAWN BY: Y.M.				
		street A 32205	08/17/2023 DATE				
MPANY FI, 33166 531		23–184					
	REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3			SHEET 4 OF 22
	2			4			SHELLI 4 UF 22

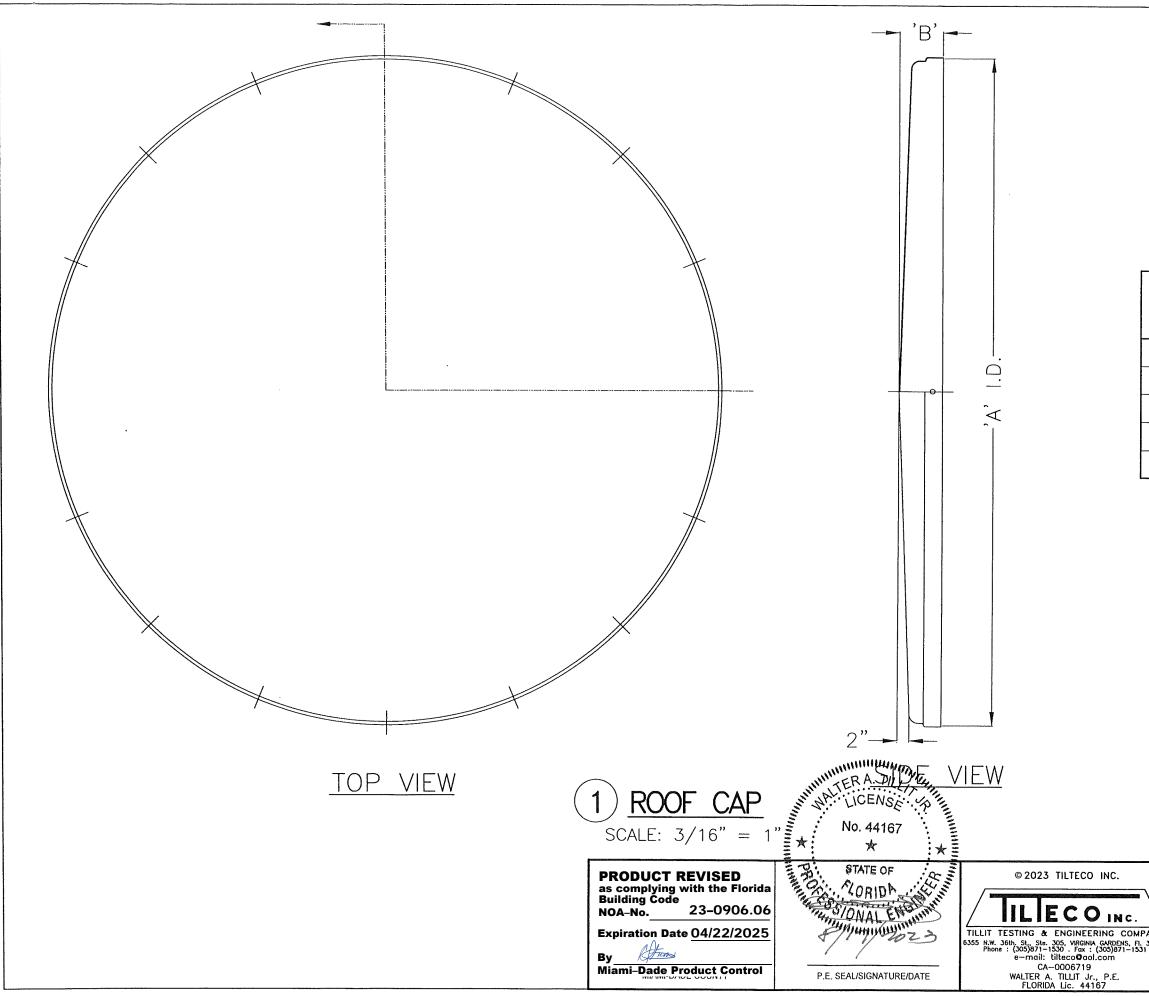


UNIT SIZE	'A'	'В'
03–10	18 3/8"	2 1/8"
12-15	20 1/2"	2 3/16"
16-20	25 9/16"	2 1/4"
24	29 13/16"	2 5/16"
30	38 3/16"	2 7/16"

	FLORI	da B uildin	NG C O	DE ((\mathbf{H}_{igh})	Velocity	Hur	ricane Z one)
7		A & U_CA T OWER VEN					DRAWN BY: Y.M.	
		TREET 32205	08/17/2023 DATE					
PANY 33166 31		32205 7- 3449	23-184 drawing no					
	REV. HO	DESCRIPTION	DATE	REV. N	0 DI	ESCRIPTION	DATE	DIAMING NO
	1	OLD 20-215	08/17/23	3				SHEET 5 OF 22
	2			4				JILLI J OF ZZ

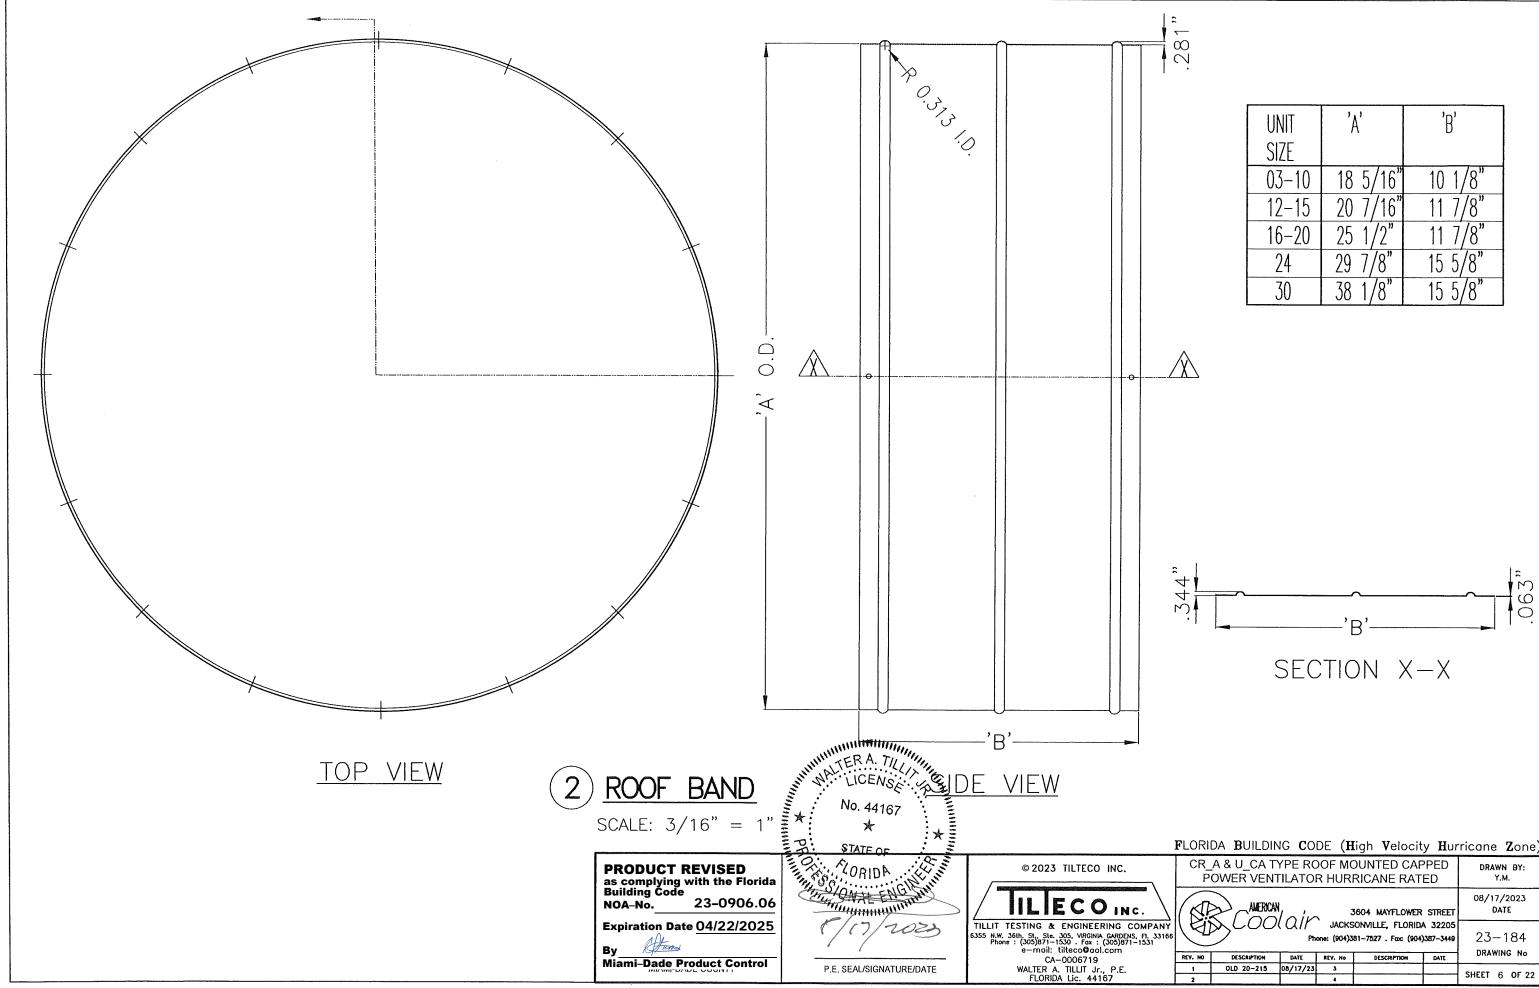


UNIT	'A'	'В'
SIZE		
03–10	18 5/16"	10 1/8"
12-15	20 7/16"	11 7/8"
16-20	25 1/2"	11 7/8"
24	29 7/8"	15 5/8"
30	38 1/8"	15 5/8"

	FLORI	DA B UILDIN	IG C O	DE (H	ligh	Velocit	y H ur	ricane Z one)
		A & U_CA T OWER VENT						DRAWN BY: Y.M.
			STREET	08/17/2023 DATE				
IPANY 1. 33166 31	(প্র	S Coo	23–184					
	REV. NO	DESCRIPTION	DATE	REV. No	D	ESCRIPTION	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3				SHEET 6 OF 22
	2			4				SHEET 6 OF 22

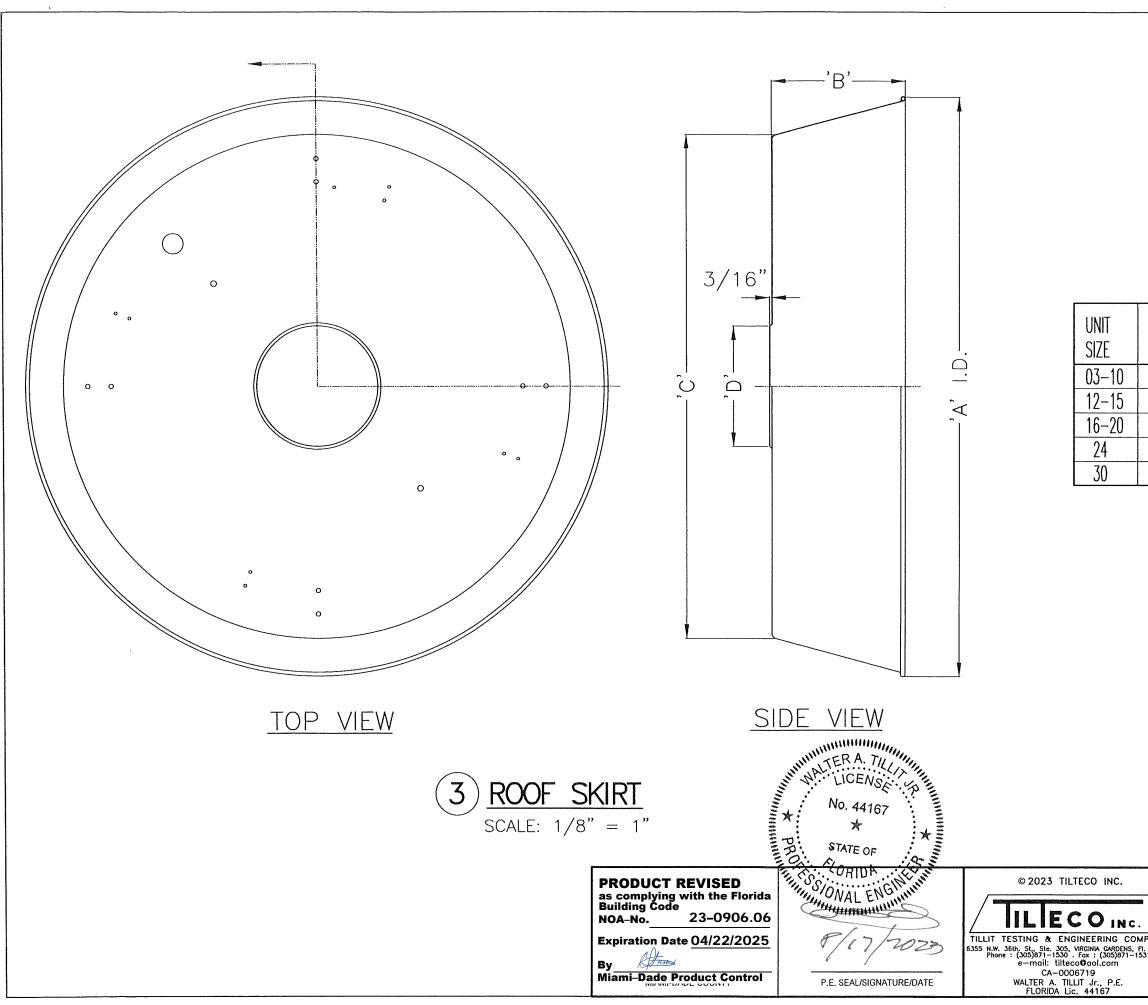


'A'	'Β'	'C'	'D'
23 1/2"	4 1/4"	21 1/1"	8 1/8"
28 5/8"	7 1/16"	24 5/8"	8 1/8"
35 1/2"	7 5/16"	31 3/16"	8 1/8"
41 3/4"	8 7/8"	37 5/8"	9 1/16"
49 3/4"	11 7/16"	43 5/16"	10 1/16"


]	FLORI	DA B UILDIN	IG C O	DE (H	ligh	Velocity	y H ur	ricane Z one)
7		A & U_CA T OWER VENT		DRAWN BY: Y.M.				
'\		STREET	08/17/2023 DATE					
PANY 1. 33166 31								23-184
	REV. HO	DESCRIPTION	DATE	REV. Ho	DE	SCRIPTION	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3				SHEET 7 OF 22
	2			4	L			SHELT / UP 22

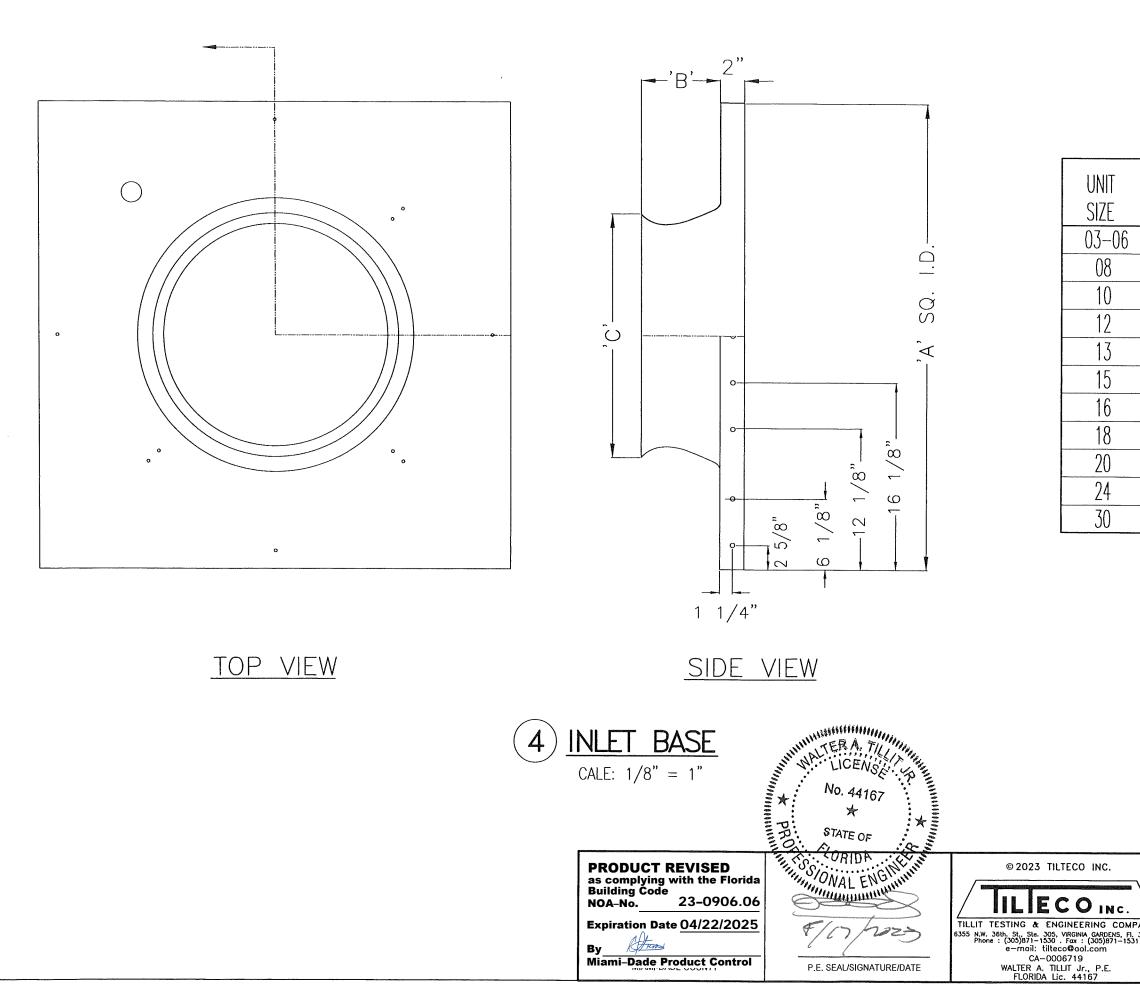


'A'	'В'	,C,
 18"	1 5/8"	4 19/32"
 18" 18"	1 5/8" 1 5/8"	5 21/32" 6 29/32"
18" 23" 23" 23" 23" 30" 30"	2 7/16"	8 9/16"
 23"	2 7/16"	9 7/16"
 25"	2 7/16" 3 1/8"	10 9/16"
 <u> </u>	3 1/8"	<u>11 1/2"</u> 12 3/4"
 30"	3 1/8"	14"
 34"	5 3/4"	17 1/8"
40"	7 1/4"	20 15/16"


	FLORI	da B uildin	IG CO	DE (1	High	Velocity	Hur	ricane Z one)
		A & U_CA T OWER VENT						DRAWN BY: Y.M.
		AMERICAN	1 1	`		AYFLOWER S		08/17/2023 DATE
4PANY 7. 33166 531	শি	200	lair Phi	0,101		E, FLORIDA :	1	23-184 DRAWING NO
	REV. NO	DESCRIPTION	DATE	REV. No	DE	SCRIPTION	DATE	DIAMING NO
1	1	OLD 20-215	08/17/23	3				SHEET 8 OF 22
	2			4				SHEET 8 OF 22

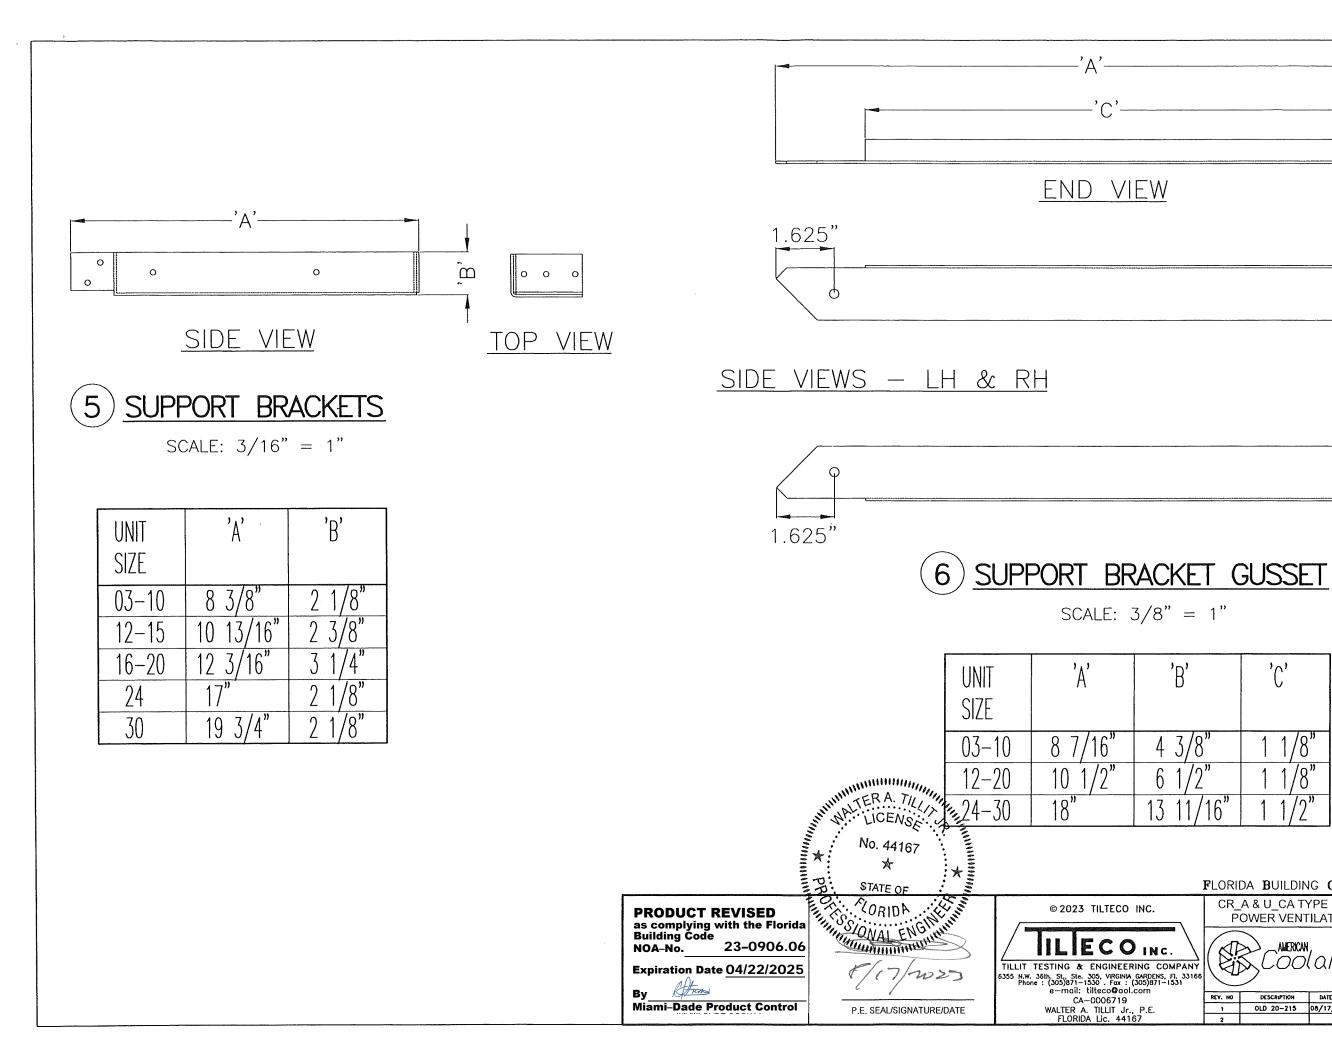

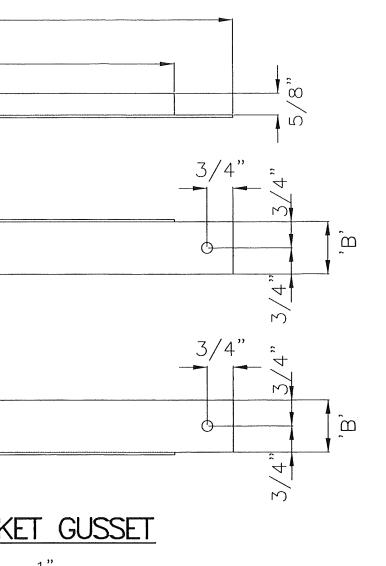





	FLORII	DA B UILDIN	ig c oi	DE (H	igh V elocil	y H ur	ricane Z one)
_	CR_ P	DRAWN BY: Y.M.					
			STREET	08/17/2023 DATE			
MPANY Fl. 33166 531							23-184 DRAWING No
	REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE	DRAWING NO
	1	OLD 20-215	08/17/23	3			SHEET 9 OF 22
	2			4			SHEET 9 OF 22

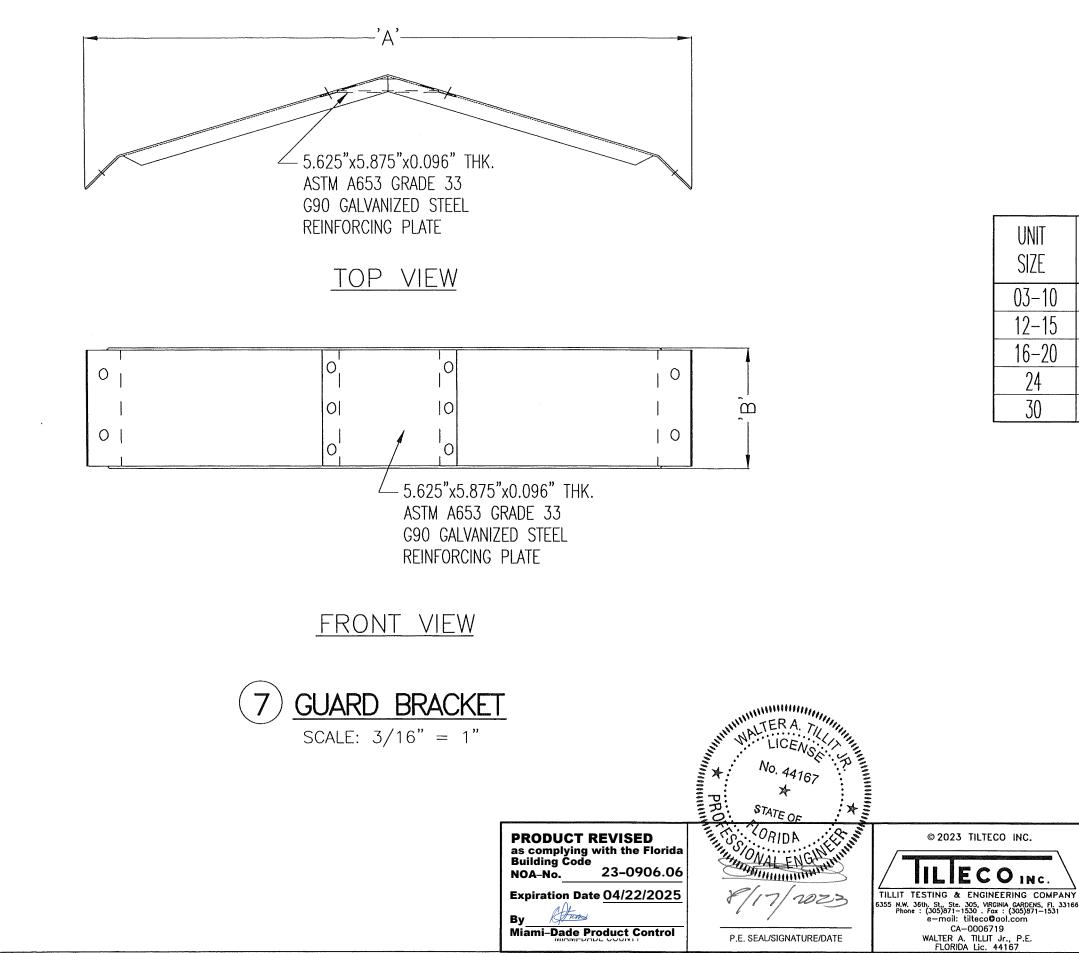


	'A'	'Β'
)	14 1/8"	1 7/8"
5	18 1/8"	1 7/8"
)	23"	2 1/8"
	25 7/8"	5 3/16"
	30 1/8"	6 3/16"


]	FLORI	DA B UILDIN	IG C O	DE (H	ligh	Velocity	/ Hur	ricane Z one)
`								DRAWN BY: Y.M.
\setminus								08/17/2023 DATE
PANY 33166								23–184
	REV. NO	DESCRIPTION	DATE	REV. No	DE	SCRIPTION	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3				SUFET 10 05 00
	2			4				SHEET 10 OF 22

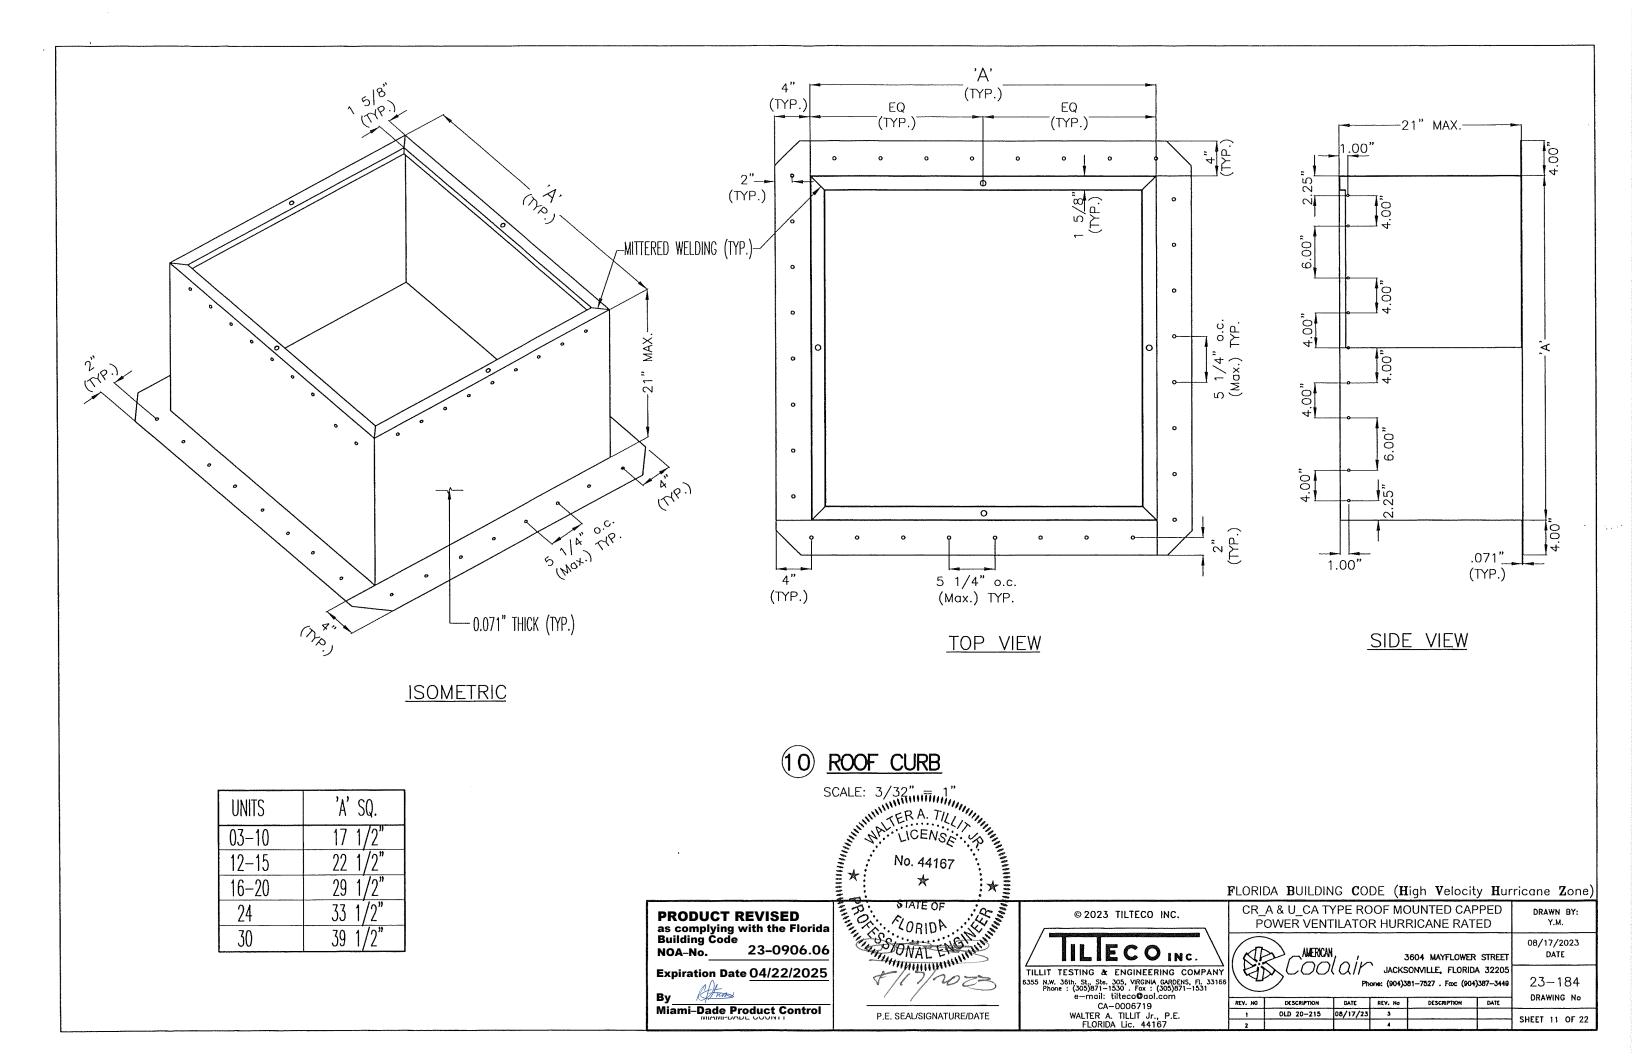


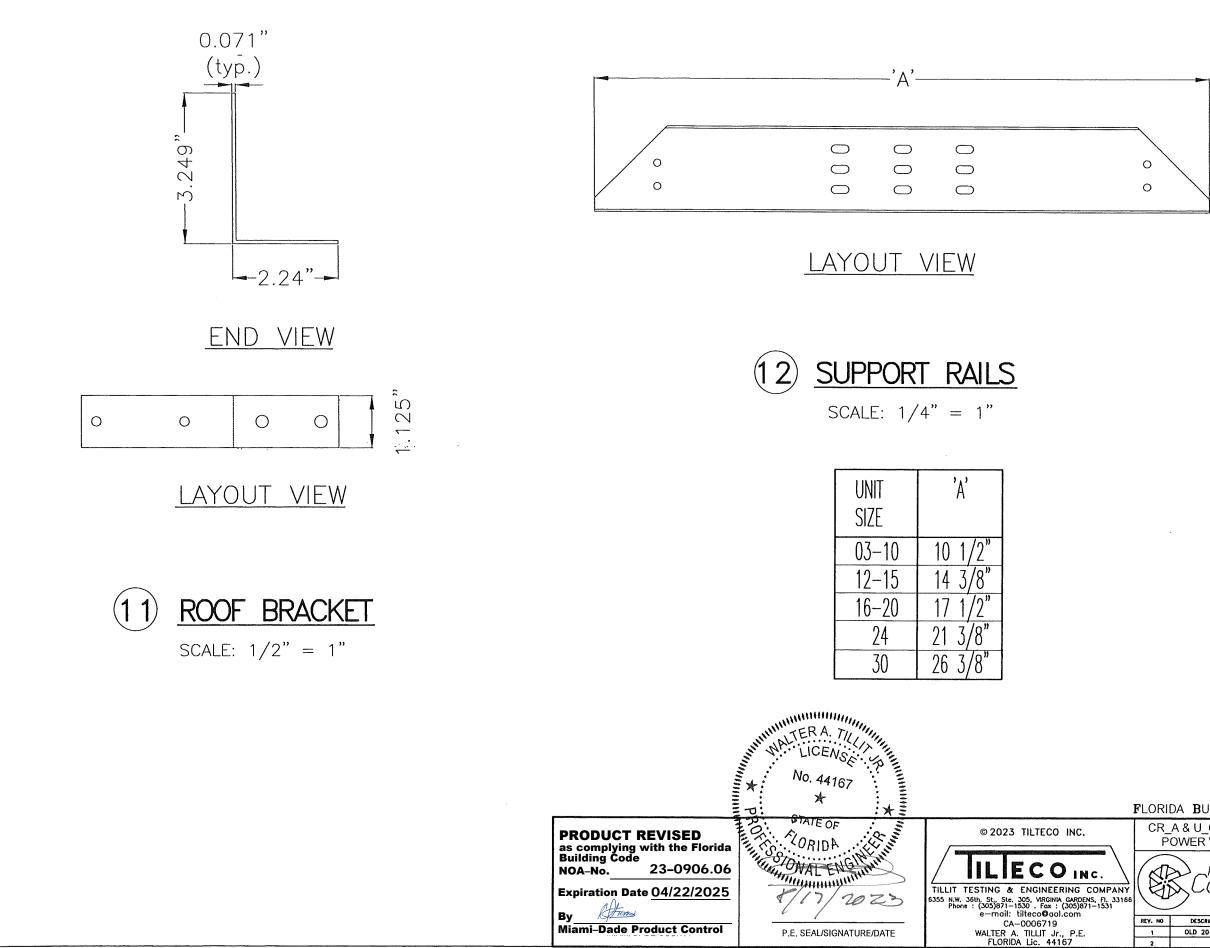



]	FLORI	DA B UILDIN	IG C OI	DE (H	ligh	Velocity	/ Hur	ricane Z one)
		A & U_CA T OWER VENT	DRAWN BY: Y.M.					
\setminus				、 3	5604 1	WAYFLOWER	STREET	08/17/2023 DATE
33166								23–184
	REV. NO	DESCRIPTION	DATE	REV. No	D	ESCRIPTION	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3				SUFET 10 OF 00
	2			4				SHEET 12 OF 22

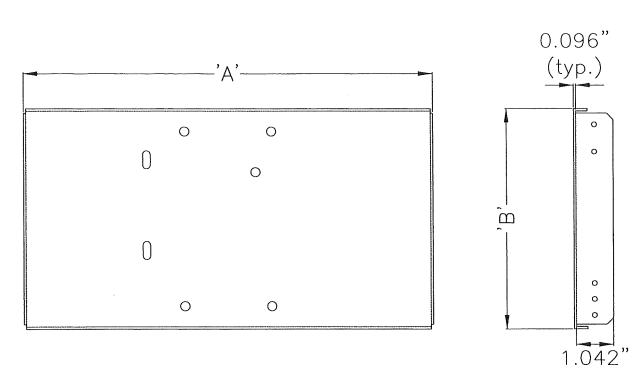

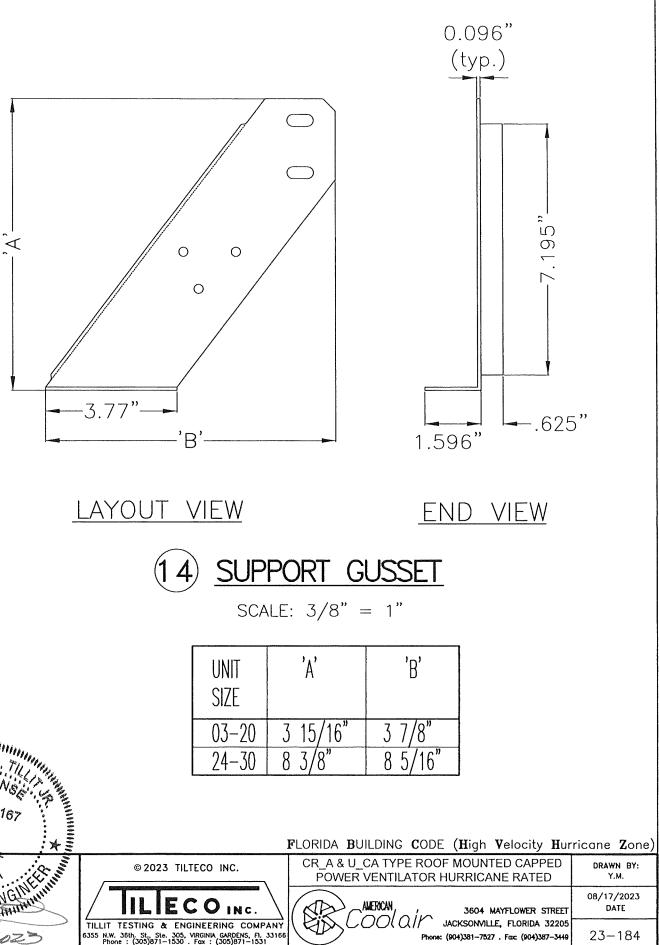

LAYOUT VIEW


13	MOTOR/	BEARIN	G PLATES	
\bigcirc	BELT	DRIVE	UNIT	


END VIEW


By

SCALE: 3/16" = 1"

	JNIT SIZE	'A'	'Β'
()3–10	8 1/4"	8"
1	12-15	11 7/16"	9 9/16"
1	6-20	14 9/16"	10 9/16"
	24	18 3/16"	12 1/16"
	30	23 3/16"	12 1/16"

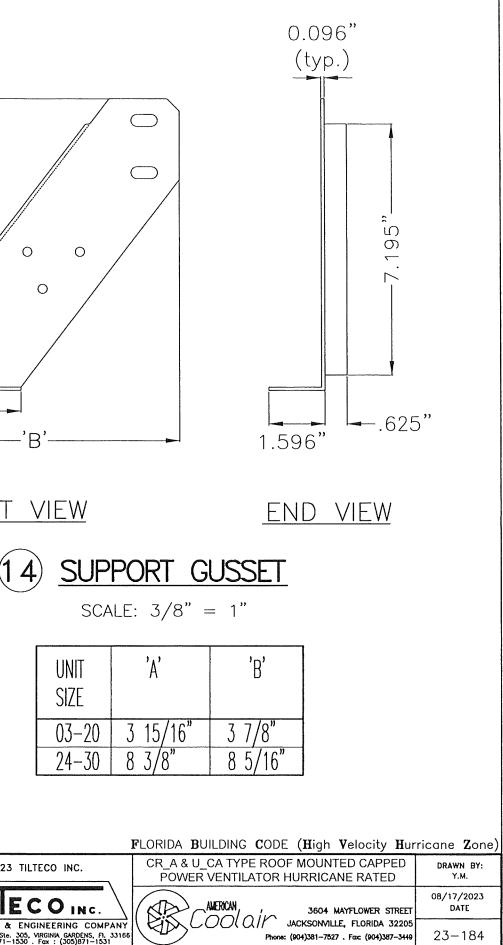

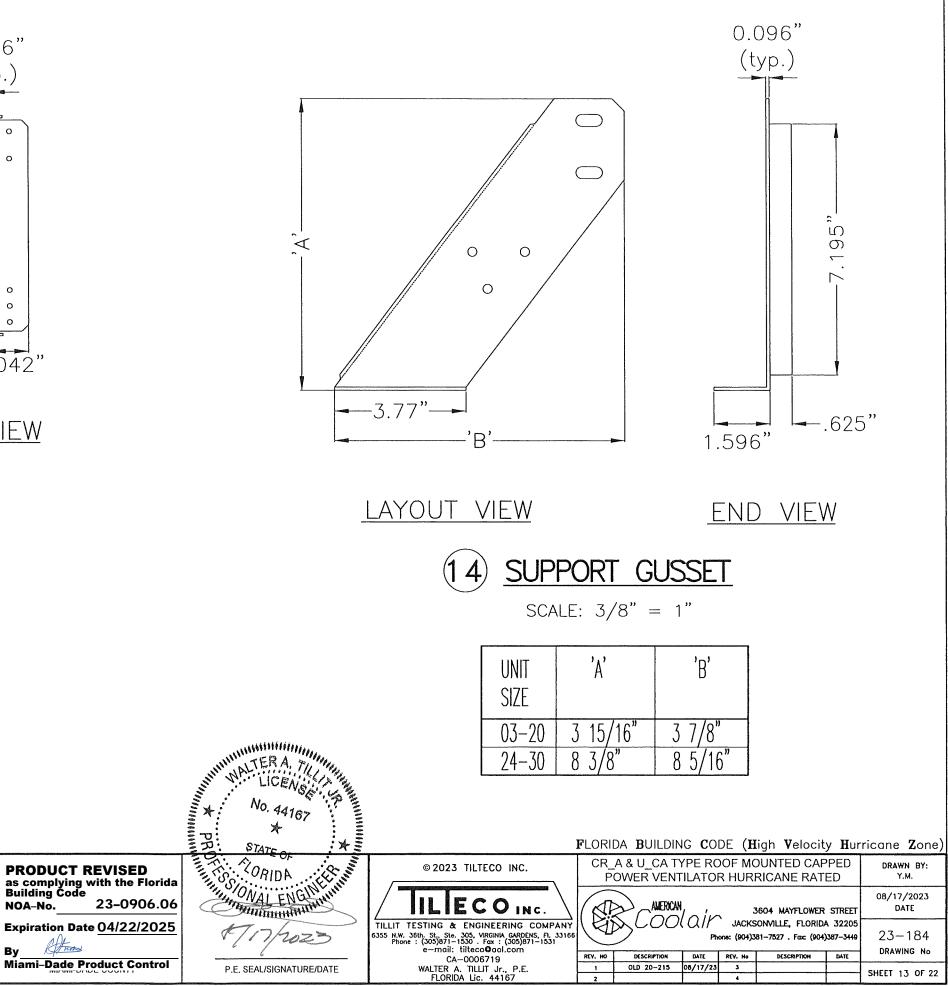


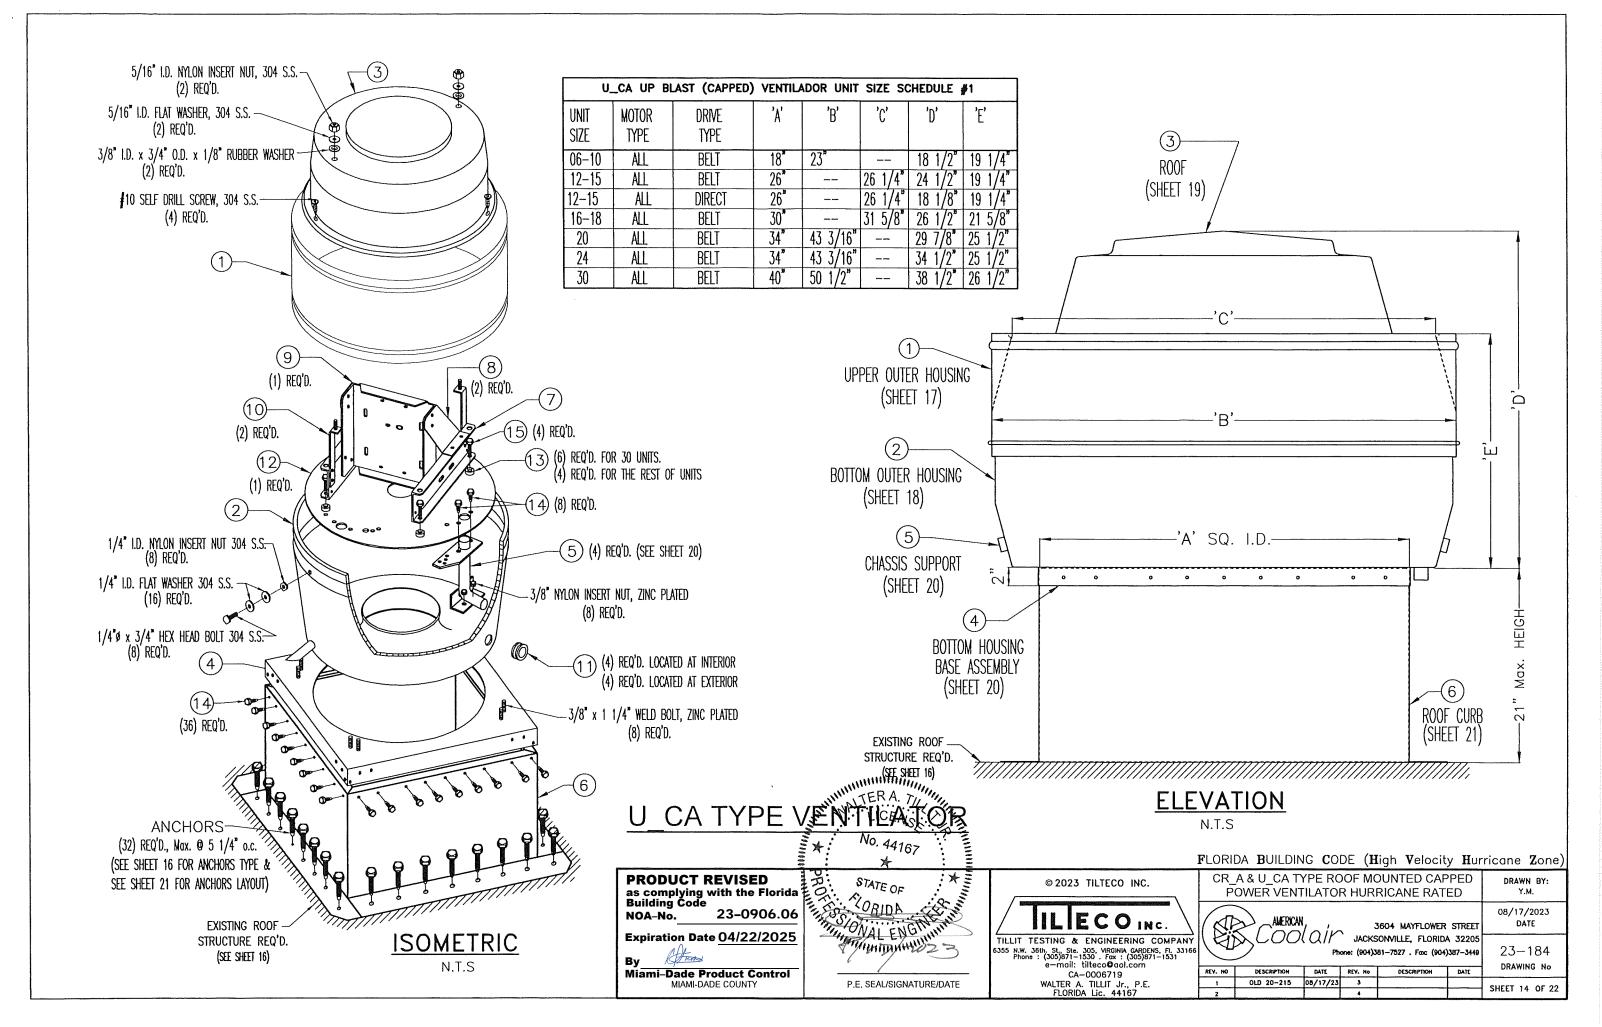

BILL OF MATERIALS


ITEM	DESCRIPTION	MATERIAL
	UPPER OUTER HOUSING	0.063" THK. 5052-H32 ALUMINUM
2	BOTTOM OUTER HOUSING	0.080" THK. 3003-0 ALUMINUM W/ Fu= 16 ksi. &
3	ROOF	0.063" THK. 3003-0 ALUMINUM W/ Fu= 16 ksi. &
4	BOTTOM HOUSING BASE ASSEMBLY	0.071" THK. ASTM A653 GRADE 33 G90 GALVANIZED
5	CHASSIS SUPPORT	0.063" THK. WALL PAINTED STEEL TUBING
6	ROOF CURB	0.071" THK. ASTM A653 GRADE 33 G90 GALVANIZED
7	SUPPORT RAIL	0.126" THK. ASTM A653 GRADE 33 G90 GALVANIZED
8	SUPPORT GUSSET	0.096" THK. ASTM A653 GRADE 33 G90 GALVANIZED
9	MOTOR/BEARING PLATES	0.096" THK. ASTM A653 GRADE 33 G90 GALVANIZED
10	ROOF BRACKETS	0.096" THK. ASTM A653 GRADE 33 G90 GALVANIZED
(11)	GROMMET	2 3/8" O.D. x 1 1/2" I.D. RUBBER
(12)	COMP DISC SUPPORT	0.125" THK. ASTM A653 GRADE 33 G90 GALVANIZED
(13)	VIBRATION ISOLATOR	RUBBER WITH SLEEVE
(14)	5/16" x 3/4" SELF TAPP SCREW	ZINC PLATED
(15)	5/16" x 1 3/4" SELF TAPP SCREW	ZINC PLATED


TOLERANCES UNLESS	OTHERWISE NOTED
0 TO 9-31/32"	– PLUS OR MINUS 1/16"
10" TO 23-31/32"	– PLUS OR MINUS 1/8"
24"TO 47-31/32"	– PLUS OR MINUS 3/16"
48" TO 96"	- PLUS OR MINUS 1/4"
GREATER THAN 96"	– PLUS OR MINUS 3/8"

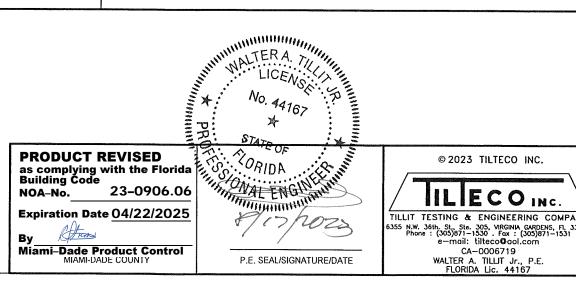

Fy= 6 ksi.
Fy= 6 ksi.
STEEL OR 3003-H14 ALUMINUM
STEEL
STEEL
n an

]	FLORI	da B uildin	NG C O	DE (H	igh N	Velocity	Hur	ricane Z one)
~		A & U_CA T OWER VENT		DRAWN BY: Y.M.				
\sum			TREET	08/17/2023 DATE				
PANY 33166 1								23-184
	REV. NO	DESCRIPTION	DATE	REV. No	DES	CRIPTION	DATE	DRAWING No
	,	OLD 20-215	08/17/23	3				SUFET 15 OF 20
	2			4				SHEET 15 OF 22

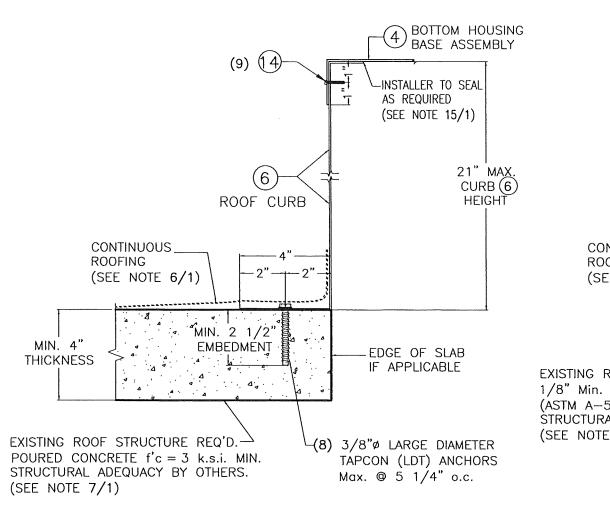

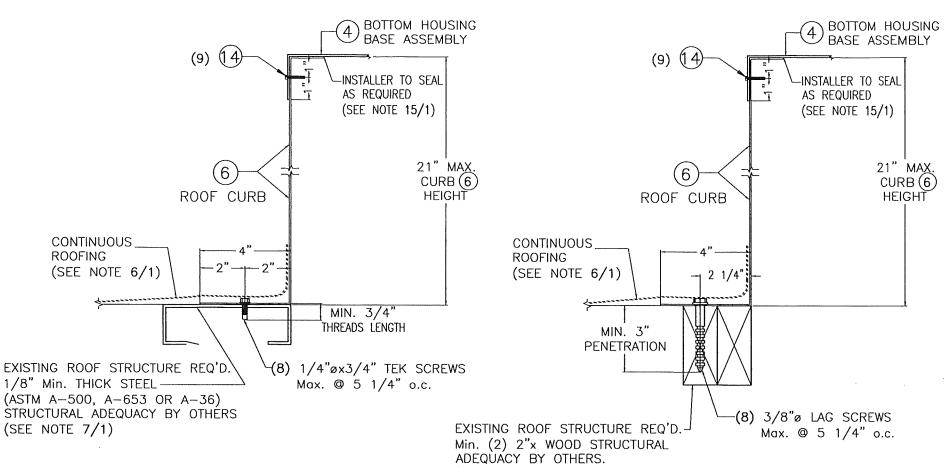


.

TO CONCRETE

TO STEEL


(SEE NOTE 7/1)

INSTALLATION OF CURB TO BOTTOM HOUSING BASE ASSEMBLY & TO ROOF STRUCTURE

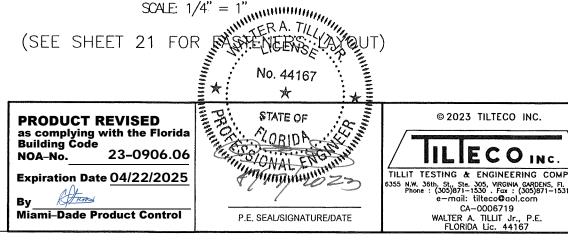


TO WOOD

	F LORII	da b uildin	ig c o	DE (H	I igh	Velocity	y H ur	ricane Z one)
-		A & U_CA T OWER VENT	DRAWN BY: Y.M.					
		AMERICAN 3604 MAYFLOWER STREET						08/17/2023 DATE
4PANY 1. 33166 531	(A)	$>^{coo}$	23-184 DRAWING No					
	REV. NO	DESCRIPTION	DATE	REV. No	D	ESCRIPTION	DATE	DRAWING NO
	1	OLD 20-215	08/17/23	3				SHEET 16 OF 22
	2			4				SHEET 10 01 22

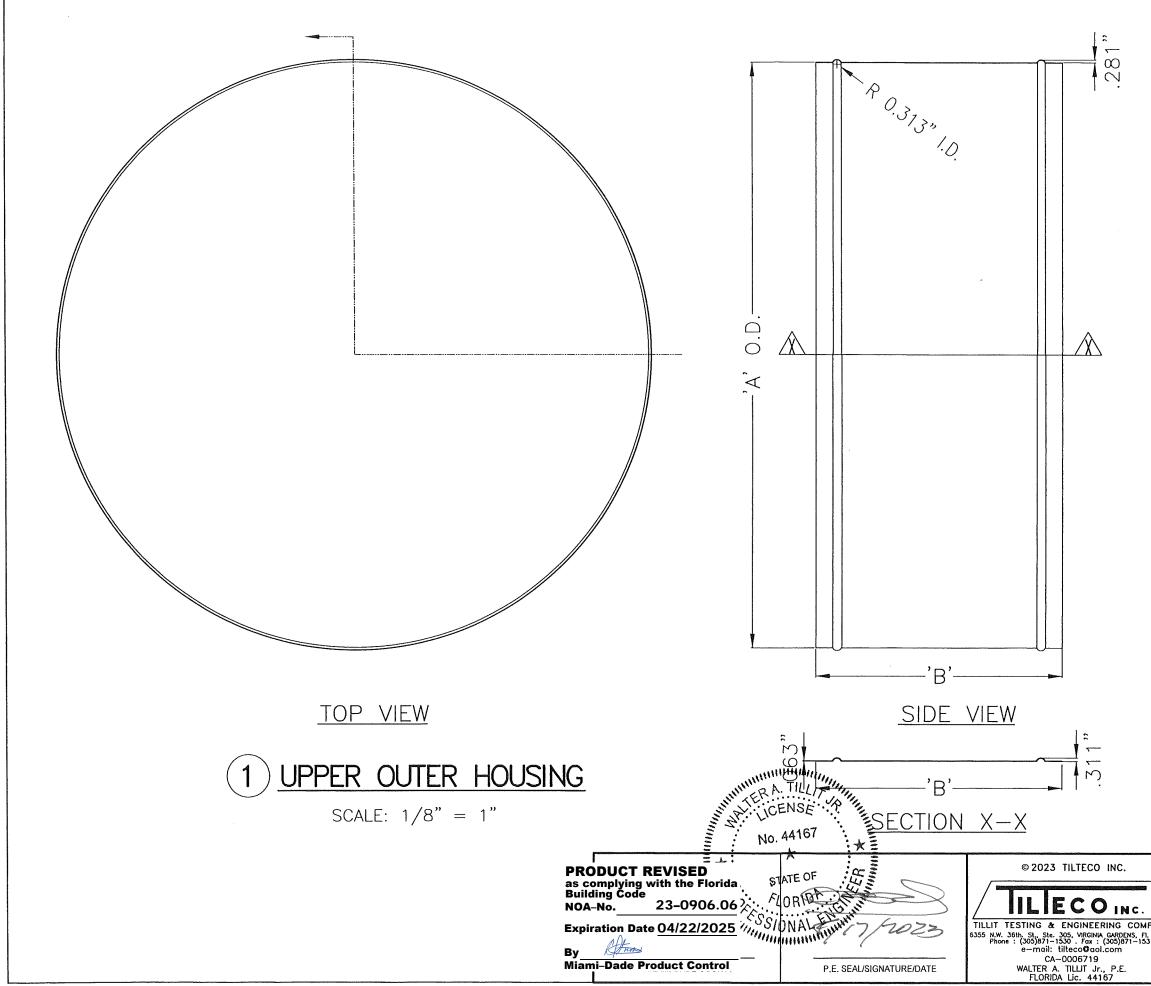


UNIT SIZE	'A'	'B'
06-10	23"	15"
12-15	29 1/8"	12 7/8"
16-18	35 1/4"	11 1/5"
20-24	43 3/16"	13 1/4"
30	50 1/2"	14 3/8"


]	FLORI	DA B UILDIN	IG C O	DE (H	Iigh	Velocity	/ Hur	ricane Z one)
		A & U_CA T OWER VENT		DRAWN BY: Y.M.				
	AMERICAN , 3604 MAYFLOWER STREET							08/17/2023 DATE
4PANY 1. 33166 531		>	23—184 DRAWING No					
	REV. NO	DESCRIPTION	DATE	REV. No	D	ESCRIPTION	DATE	DRAWING NO
	,	OLD 20-215	08/17/23	3	<u> </u>			SHEET 17 OF 22
	2			4	1			SHEET IT OF EE

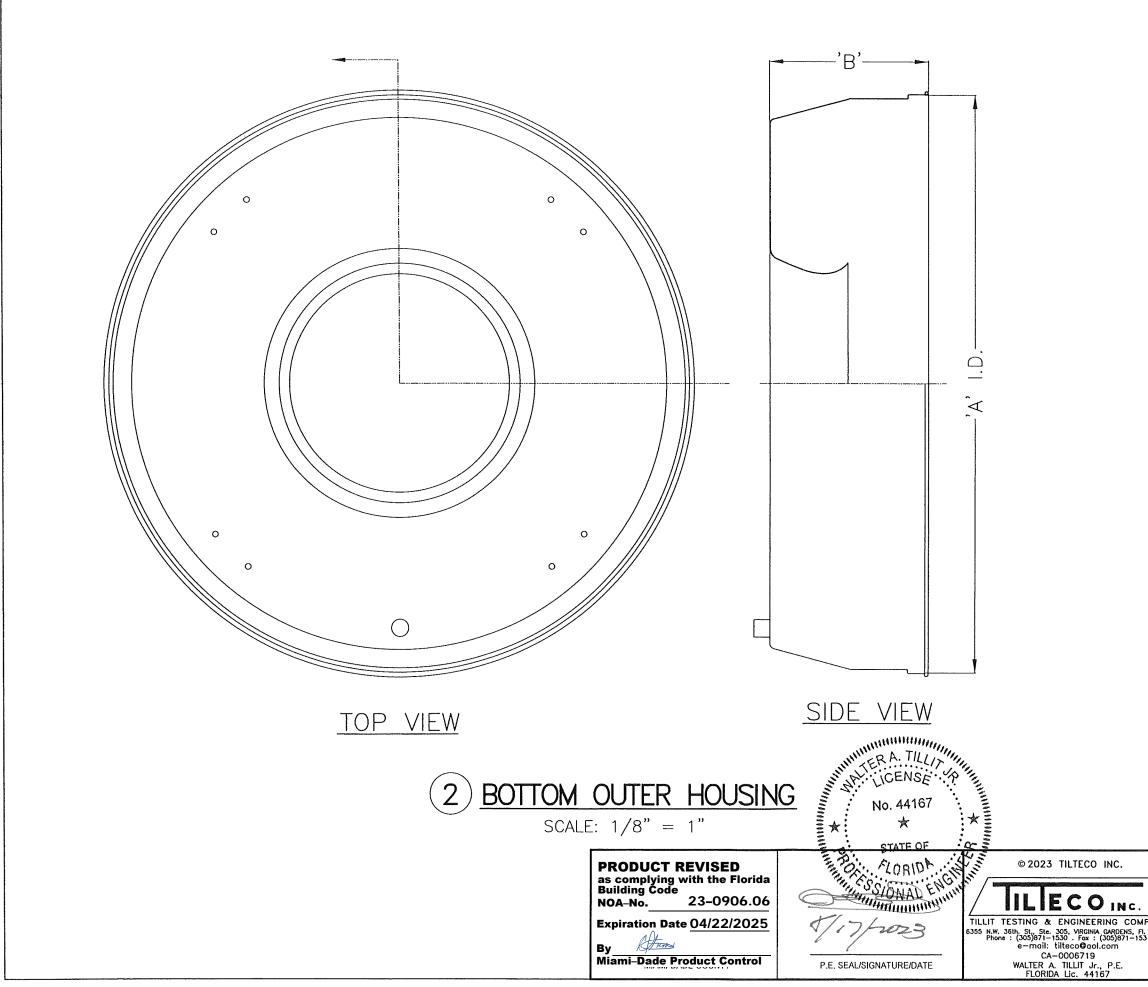


UNIT SIZE	Ϋ́,	,B,
06-10	23 3/4"	8"
12-15	29 1/16"	10 1/16"
16-18	35 1/8"	11 1/16"
20-24	43 1/8"	13 5/8"
30	51"	13 3/8"


	Flori	DA	BUILDIN	IG C O	DE (H	ligh	Velocit	y H ur	ricane ${f Z}$ one)
■ \		<u>A</u> & OW	PED ED	DRAWN BY: Y.M.					
	AMERICAN 3604 MAYFLOWER STREET							08/17/2023 DATE	
4PANY 1. 33166 531								23−184 drawing no	
	REV. HO		DESCRIPTION	DATE	REV. No	C	ESCRIPTION	DATE	
	1	0	LD 20-215	08/17/23	3				SHEET 18 OF 22
	2				4				SHEET 18 OF 22

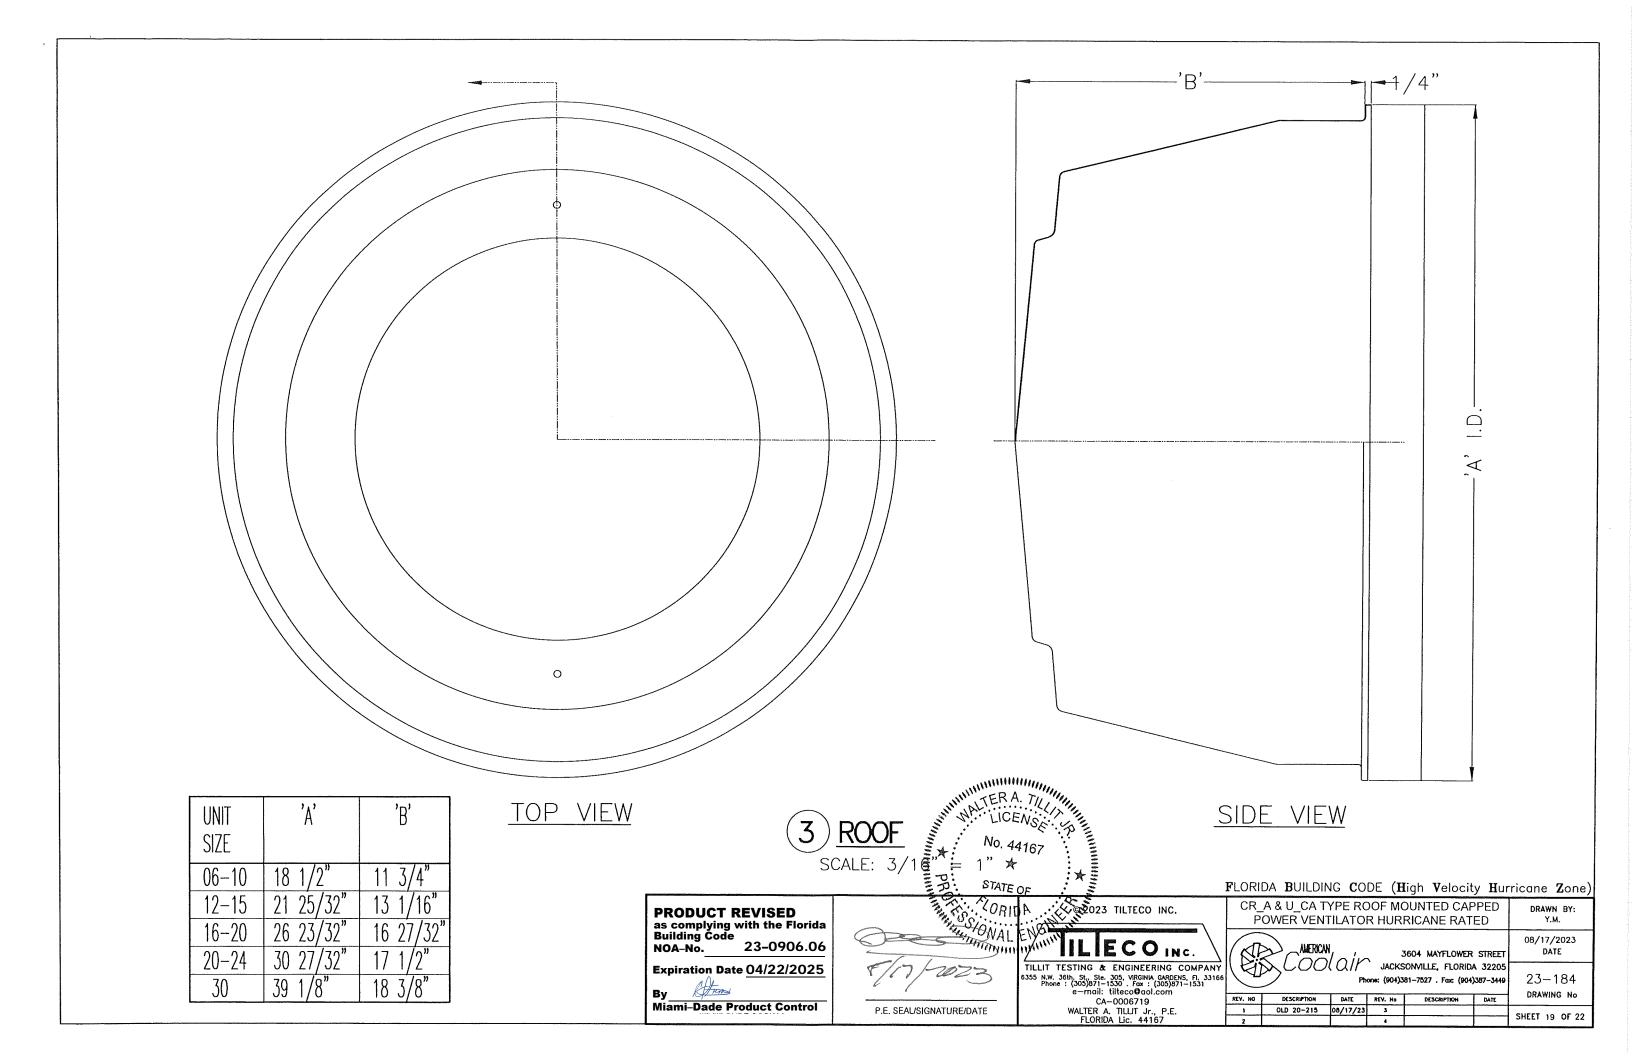

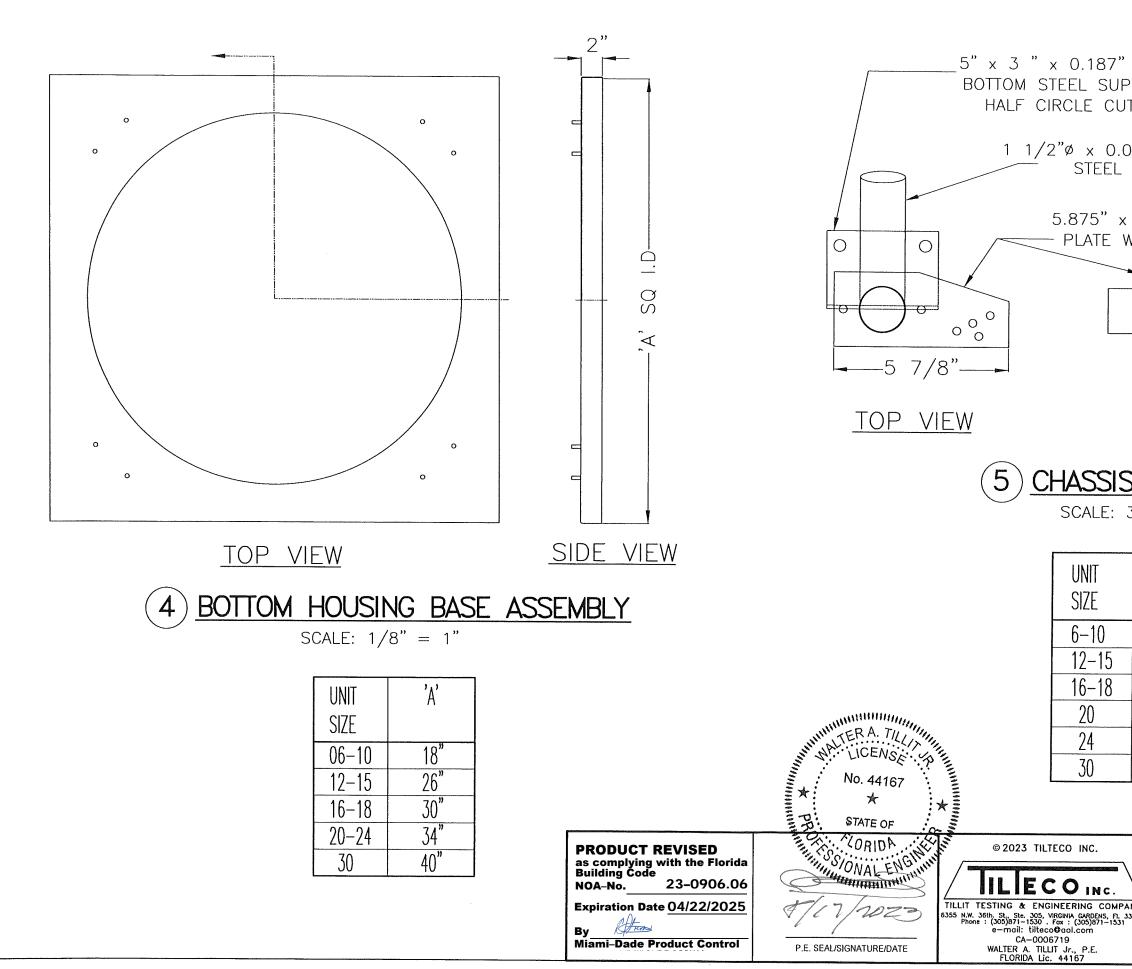

· · · · ·		
7" THK. x 5" LONG JPPORT ANGLE W/ OUT (1.59" O.D.)		
0.063" THK. WALL L TUBING		
x 2.5 " x 0.140" THK. W/ 1.59" O.D. HOLE.		
`A'		
SIDE VIEW		
$\frac{\text{IS SUPPORT}}{3/16"} = 1"$		
'A' 6 5/8" 9" 10 1/4" 10 1/4" 14 7/8" 18 3/16"		
FLORIDA BUILDING CODE (High Velocity Hur	ricane Z one)	
CR_A & U_CA TYPE ROOF MOUNTED CAPPED POWER VENTILATOR HURRICANE RATED	DRAWN BY: Y.M. 08/17/2023 DATE	
MPANY F3133166 COOLON JACKSONVILLE, FLORIDA 32205 F3133166 Phone: (904)381-7527 Foc: (904)387-3449 REV. NO DESCRIPTION DATE REV. NO DESCRIPTION DATE	23-184 DRAWING No	
1 OLD 20-215 08/17/23 3 2 4 4	SHEET 20 OF 22	

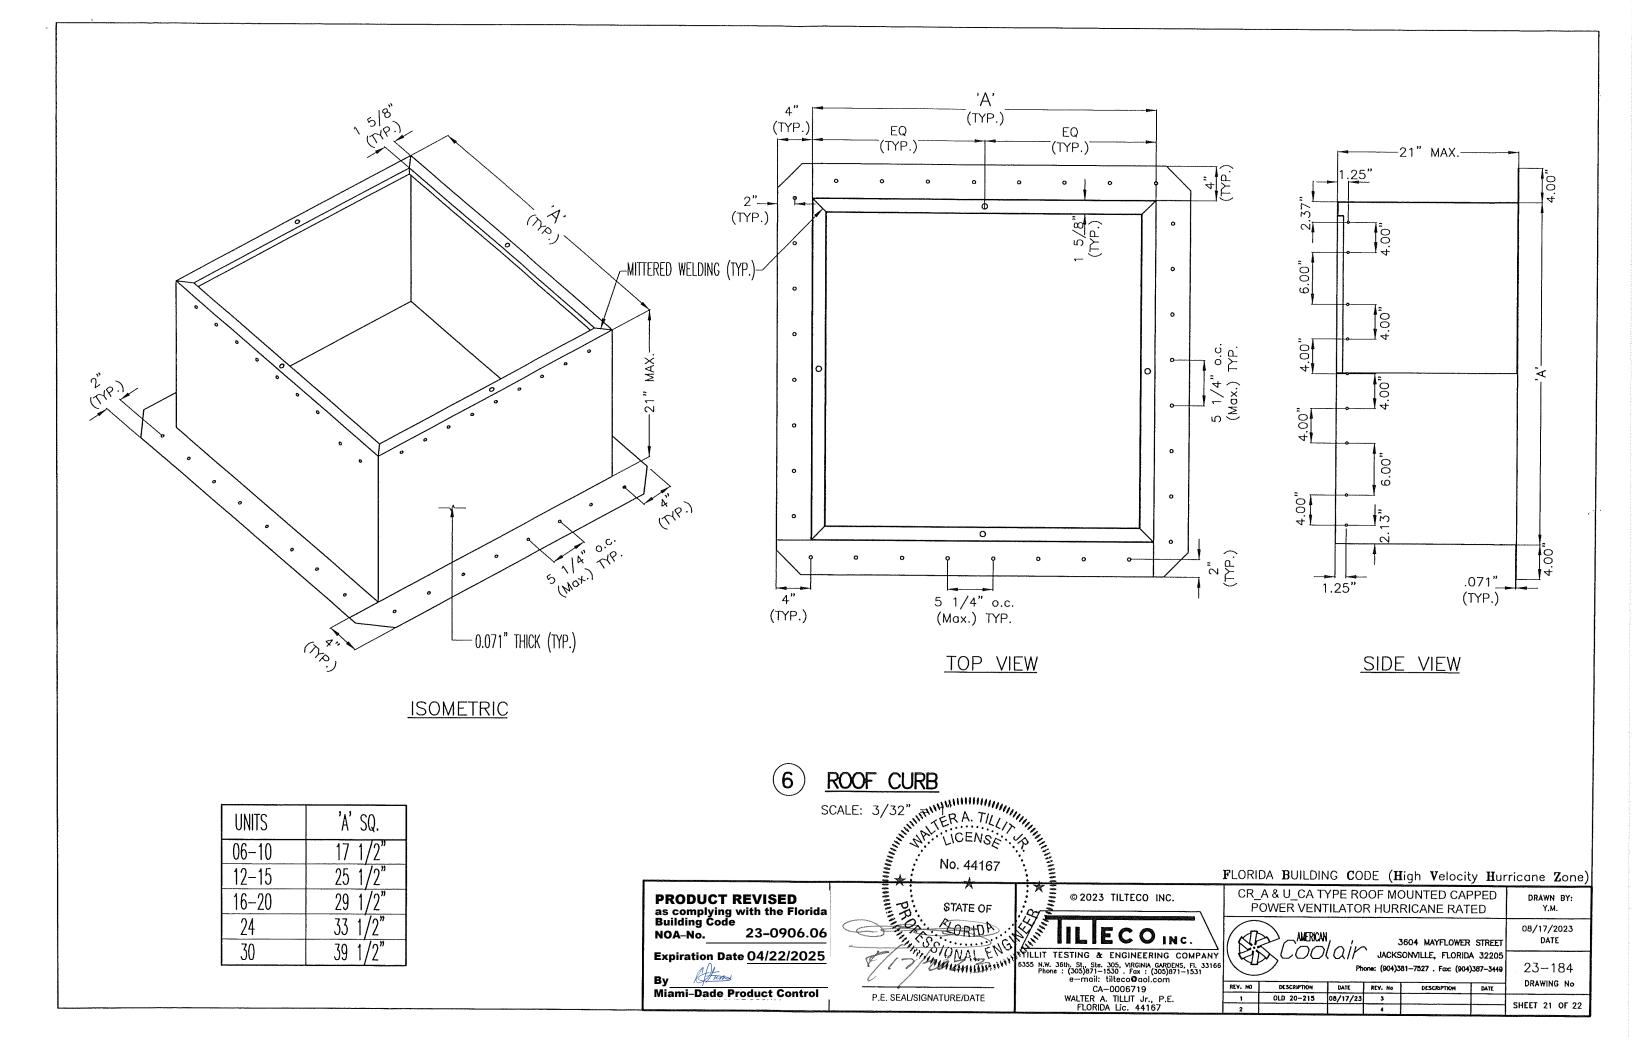

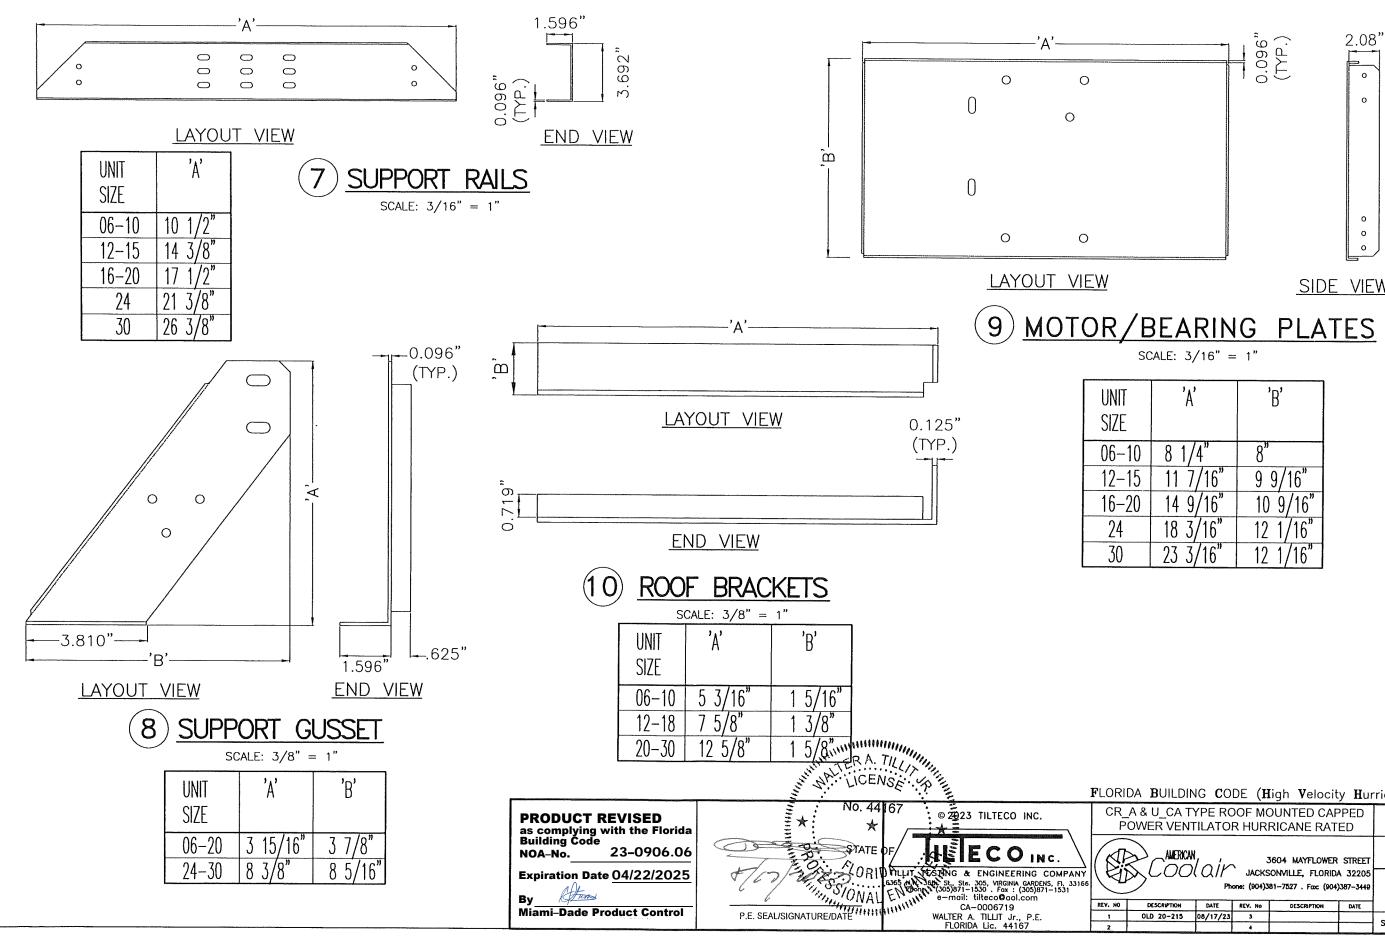

SIDE VIEW

UNIT SIZE	'A'	'В'			
06-10	8 1/4"	8"			
12-15	11 7/16"	9 9/16"			
16-20	14 9/16"	10 9/16"			
24	18 3/16"	12 1/16"			
30	23 3/16"	12 1/16"			

	FLORI	da b uildin	1G C O	DE (H	ligh	Velocit	y H ur	ricane Z one)
2		A & U_CA T OWER VENT						DRAWN BY: Y.M.
			STREET	08/17/2023 DATE				
PANY , 33166 31	JACKSONVILLE, FLORIDA 32205 Phone: (904)381-7527 . Fox (904)387-3449							23-184
	REV. NO	DESCRIPTION	DATE	REY. No	D	ESCRIPTION	DATE	DRAWING No
	1	OLD 20-215	08/17/23	3				
	2			4				SHEET 22 OF 22